

CCAMP Working Group  
Internet Draft  
Intended status: Standards Track  
Expires: July 12, 2018

J.E. Lopez de Vergara  
Universidad Autonoma de Madrid  
Daniel Perdices  
Naudit HPCN  
V. Lopez  
O. Gonzalez de Dios  
Telefonica I+D/GCTO  
D. King  
Lancaster University  
Y. Lee  
Huawei  
G. Galimberti  
Cisco Photonics Srl  
January 8, 2018

**YANG data model for Flexi-Grid Optical Networks  
draft-vergara-ccamp-flexigrid-yang-06.txt**

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#). This document may not be modified, and derivative works of it may not be created, except to publish it as an RFC and to translate it into languages other than English.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on July 12, 2018.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents

Lopez de Vergara, et al.

Expires July 12, 2018

[Page 1]

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

Abstract

This document defines a YANG model for managing flexi-grid optical Networks. The model described in this document defines a flexi-grid traffic engineering database. A complementary module is referenced to detail the flexi-grid media channels.

This module is grounded on other defined YANG abstract models.

Table of Contents

- [1. Introduction](#) ..... [2](#)
- [2. Conventions used in this document](#) ..... [3](#)
- [3. Flexi-grid network topology model overview](#) ..... [3](#)
- [4. Main building blocks of the Flexi-grid TED](#)..... [4](#)
  - [4.1 Formal Syntax](#) ..... [7](#)
- [5. Example of use](#) ..... [8](#)
- [6. Flexi-grid TED YANG Model](#)..... [9](#)
  - [6.1. YANG Model - Tree](#) ..... [9](#)
  - [6.2. YANG Model - Code](#) ..... [10](#)
  - [6.3. License](#) ..... [19](#)
- [7. Security Considerations](#) ..... [20](#)
- [8. IANA Considerations](#) ..... [20](#)
- [9. References](#) ..... [20](#)
  - [9.1. Normative References](#) ..... [20](#)
  - [9.2. Informative References](#) ..... [21](#)
- [10. Contributors](#) ..... [21](#)
- [11. Acknowledgments](#) ..... [22](#)
- [Authors' Addresses](#) ..... [22](#)

**1. Introduction**

Internet-based traffic is dramatically increasing every year. Moreover, such traffic is also becoming more dynamic. Thus, transport networks need to evolve from current DWDM systems towards elastic optical networks, based on flexi-grid transmission and switching technologies [[RFC7698](#)]. This technology aims at increasing both transport network scalability and flexibility, allowing the optimization of bandwidth usage.

This document presents a YANG model for flexi-grid objects in the dynamic optical network, including the nodes, transponders and links between them, as well as how such links interconnect nodes and transponders.

The YANG model for flexi-grid networks allows the representation of the flexi-grid optical layer of a network, combined with the underlying physical layer.

This document identifies the flexi-grid components, parameters and their values, characterizes the features and the performances of the flexi-grid elements. An application example is provided towards the end of the document to better understand their utility.

## **2. Conventions used in this document**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#).

In this document, these words will appear with that interpretation only when in ALL CAPS. Lower case uses of these words are not to be interpreted as carrying [RFC-2119](#) significance.

In this document, the characters ">>" preceding an indented line(s) indicates a compliance requirement statement using the key words listed above. This convention aids reviewers in quickly identifying or finding the explicit compliance requirements of this RFC.

## **3. Flexi-grid network topology model overview**

YANG is a data modeling language used to model configuration data manipulated by the NETCONF protocol. Several YANG models have already been specified for network configurations. For instance, the work in [\[I-D.draft-ietf-i2rs-yang-network-topo\]](#) has proposed a generic YANG model for network/service topologies and inventories. The work in [\[I-D.draft-ietf-teas-yang-te-topo\]](#) presents a data model to represent, retrieve and manipulate Traffic Engineering (TE) Topologies. These models serve as base models that other technology specific models can augment. A YANG model has also been proposed in [\[I-D.draft-dharini-ccamp-dwdm-if-yang\]](#) to manage single channel optical interface parameters of DWDM applications, and in

[I-D.draft-ietf-ccamp-wson-yang] another model has been specified for the routing and wavelength assignment TE topology in wavelength switched optical networks (WSONs). None of them are specific for flexi-grid technology.

Then, as stated before, we propose a model to describe a flexi-grid topology that is split in two YANG sub-modules:

- o Flexi-grid-TED: In order to be compatible with existing proposals, we augment the definitions contained in [I-D.draft-ietf-i2rs-yang-network-topo] and [I-D.draft-ietf-teas-yang-te-topo], by defining the different elements we can find in a flexi-grid network: a node, a transponder and a link. For that, each of those elements is defined as a container that includes a group of attributes. References to the elements are provided to be later used in the definition of a media channel. It also includes the data types for the type of modulation, the flexi-grid technology, the FEC, etc.
- o Media-channel: This module defines the whole path from a source transponder to the destination through a number of intermediate nodes and links. For this, it takes the information defined before in the flexi-grid TED. This module is described in [I-D.draft-vergara-ccamp-flexigrid-media-channel-yang]

The following section provides a detailed view of the first module.

#### **4. Main building blocks of the Flexi-grid TED**

This section details the defined YANG module. It is listed below in section 6.

The description of the three main components, flexi-grid-node, flexi-grid-transponder and flexi-grid-link is provided below. flexi-grid-sliceable-transponders are also defined.

```
<flexi-grid-node> ::= <config> <state>
```

<flexi-grid-node>: This element designates a node in the network.

```
<config> ::= <flexi-grid-node-attributes-config>
```

```
<config>: Contains the configuration of a node.  
<flexi-grid-node-attributes-config> ::= <list-interface>  
<connectivity_matrix>
```

<flexi-grid-node-attributes-config>: Contains all the

attributes related to the node configuration, such as its interfaces or its management addresses.

```
<list-interface> ::= <name> <port-number>  
<input-port> <output-port> <description>  
<interface-type>  
[<numbered-interface> / <unnumbered-interface>]
```

<list-interface>: The list containing all the information of the interfaces.

<name>: Determines the interface name.

<port-number>: Port number of the interface.

<input-port>: Boolean value that defines whether the interface is input or not.

<output-port>: Boolean value that defines whether the interface is output or not.

<description>: Description of the usage of the interface.

<interface-type>: Determines if the interface is numbered or unnumbered.

```
<numbered-interface> ::= <n-i-ip-address>  
<numbered-interface>: An interface with its own IP address.
```

<n-i-ip-address>: Only available if <interface-type> is "numbered-interface". Determines the IP address of the interface.

```
<unnumbered-interface> ::= <u-i-ip-address>  
<label>
```

<unnumbered-interface>: A interface that needs a label to be unique.

<u-i-ip-address>: Only available if <interface-type> is "numbered-interface". Determines the node IP address, which with the label defines the interface.

<label>: Label that determines the interface, joint with the node IP address.

```
<connectivity-matrix> ::= <connections>
```

<connectivity-matrix>: Determines whether a connection port in/port out exists.

```
<connections> ::= <input-port-id>  
<output-port-id>
```



<flexi-grid-transponder> ::= <transponder-type> <config> <state>

<flexi-grid-transponder>: This item designates a transponder of a node.

<config> ::= <flexi-grid-transponder-attributes-config>

<config>: Contains the configuration of a transponder.

<flexi-grid-transponder-attributes-config> ::=  
<available-operational-mode> <operational-mode>

<flexi-grid-transponder-attributes>: Contains all the attributes related to the transponder.

<available-operational-mode>: It provides a list of the operational modes available at this transponder.

<operational-mode>: Determines the type of operational mode in use.

<state> ::= <flexi-grid-transponder-attributes-config>  
<flexi-grid-transponder-attributes-state>

<state>: Contains the state of a transponder.

<flexi-grid-transponder-attributes-config>: See above.

<flexi-grid-transponder-attributes-state>: Contains the state of a transponder.

<link> ::= <config> <state>

<link>: This element describes all the information of a link.

<config> ::= <flexi-grid-link-attributes-config>

<config>: Contains the configuration of a link.

```
<flexi-grid-link-attributes-config> ::= <technology-type>  
<available-label-flexi-grid> <N-max> <base-frequency>  
<nominal-central-frequency-granularity>  
<slot-width-granularity>
```

<flexi-grid-link-attributes>: Contains all the attributes related to the link, such as its unique id, its N value, its latency, etc.

<link-id>: Unique id of the link.

<available-label-flexi-grid>: Array of bits that determines, with each bit, the availability of each interface for flexi-grid technology.

<N-max>: The max value of N in this link, being N the number of slots.

<base-frequency>: The default central frequency used in the link.

<nominal-central-frequency-granularity>: It is the spacing between allowed nominal central frequencies and it is set to 6.25 GHz (note: sometimes referred to as 0.00625 THz).

<slot-width-granularity>: 12.5 GHz, as defined in G.694.1.

```
<state> ::= <flexi-grid-link-attributes-config>  
<flexi-grid-link-attributes-state>
```

<state>: Contains the state of a link.

<flexi-grid-link-attributes-config>: See above.

<flexi-grid-link-attributes-state>: Contains all the the information related to the state of a link.

#### **4.1. Formal Syntax**

The previous syntax specification uses the augmented Backus-Naur Form (BNF) as described in [\[RFC5234\]](#).

5. Example of use

In order to explain how this model is used, we provide the following example. An optical network usually has multiple transponders, switches (nodes) and links between them. Figure 1 shows a simple topology, where two physical paths interconnect two optical transponders.

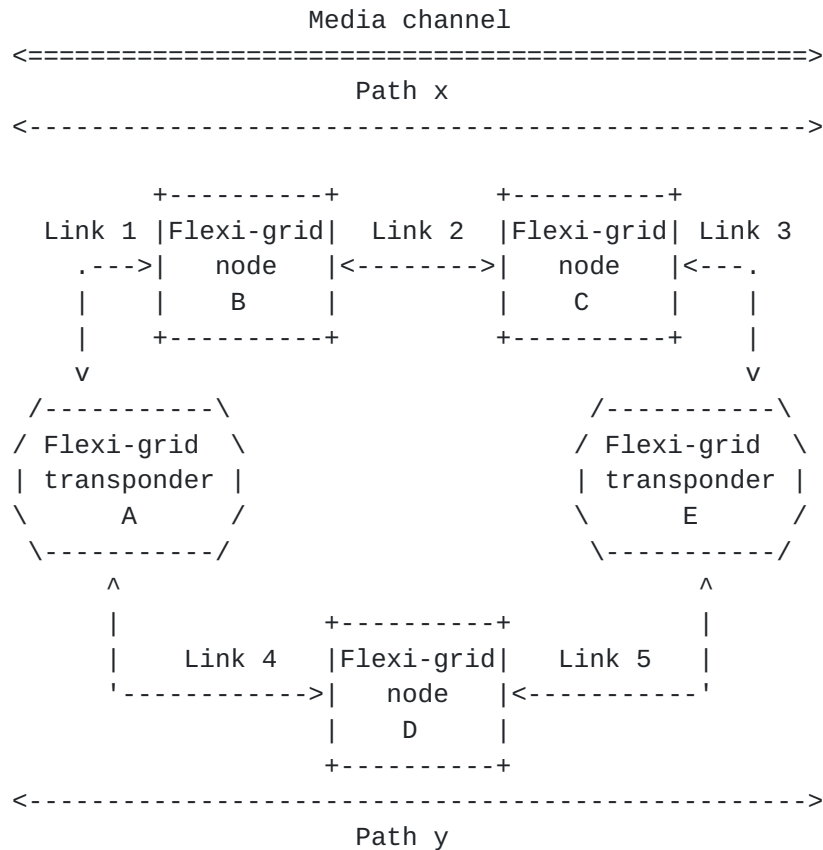


Figure 1. Topology example.

In order to configure a media channel to interconnect transponders A and E, first of all we have to populate the flexi-grid TED YANG model with all elements in the network:

1. We define the transponders A and E, including their FEC type, if enabled, and modulation type. We also provide node identifiers and addresses for the transponders, as well as interfaces included in the transponders. Sliceable transponders can also be defined if needed.
2. We do the same for the nodes B, C and D, providing their identifiers, addresses and interfaces, as well as the internal connectivity matrix between interfaces.

3. Then, we also define the links 1 to 5 that interconnect nodes and transponders, indicating which flexi-grid labels are available. Other information, such as the slot frequency and granularity are also provided.

Next, we can configure the media channel from the information we have stored in the flexi-grid TED, by querying which elements are available, and planning the resources that have to be provided on each situation. Note that every element in the flexi-grid TED has a reference, and this is the way in which they are called in the media channel. We refer to [\[I-D.draft-vergara-ccamp-flexigrid-media-channel-yang\]](#) to complete this example.

## 6. Flexi-grid TED YANG Model

### 6.1. Yang Model - Tree Structure

```

module: ietf-flexi-grid-topology
  augment /nd-s:networks/nd-s:network/nd-s:node/tet-s:te/
  tet-s:te-node-attributes:
    +--ro interfaces* [name]
      +--ro name                string
      +--ro port-number?       uint32
      +--ro input-port?        boolean
      +--ro output-port?       boolean
      +--ro description?       string
      +--ro type?              interface-type
      +--ro numbered-interface
      | +--ro n-i-ip-address?   inet:ip-address
      +--ro unnumbered-interface
          +--ro u-i-ip-address? inet:ip-address
          +--ro label?          uint32
  flexi-grid-connectivity-matrix-attributes
  augment /nd:networks/nd:network/nd:node/tet:te/
  tet:te-node-attributes/tet:connectivity-matrices/
  tet:connectivity-matrix:
    +--rw connections* [input-port-id]
      +--rw input-port-id     flexi-grid-node-port-ref
      +--rw output-port-id?   flexi-grid-node-port-ref
  flexi-grid-connectivity-matrix-attributes
  augment /nd-s:networks/nd-s:network/nd-s:node/tet-s:te/
  tet-s:te-node-attributes/tet-s:connectivity-matrices/
  tet-s:connectivity-matrix:
    +--ro connections* [input-port-id]
      +--ro input-port-id     flexi-grid-node-port-ref
      +--ro output-port-id?   flexi-grid-node-port-ref
  flexi-grid-transponder
  augment /nd:networks/nd:network/nd:node/tet:te/
  tet:tunnel-termination-point:
    +--rw available-operational-mode* operational-mode
    +--rw operational-mode?         operational-mode
  flexi-grid-transponder

```

```
augment /nd-s:networks/nd-s:network/nd-s:node/tet-s:te/  
tet-s:tunnel-termination-point:  
  +-ro available-operational-mode*  operational-mode  
  +-ro operational-mode?             operational-mode
```

**A.2. YANG Model - Code**

```
<CODE BEGINS> file "ietf-flexi-grid-ted@2018-01-08.yang"
module ietf-flexi-grid-ted {
  yang-version 1.1;

  namespace "urn:ietf:params:xml:ns:yang:ietf-flexi-grid-ted";
  prefix "fg-ted";

  import ietf-network {
    prefix "nd";
  }
  import ietf-network-state {
    prefix "nd-s";
  }
  import ietf-network-topology {
    prefix "lnk";
  }
  import ietf-network-topology-state {
    prefix "lnk-s";
  }
  import ietf-te-topology {
    prefix "tet";
  }
  import ietf-te-topology-state {
    prefix "tet-s";
  }
  import ietf-inet-types {
    prefix "inet";
  }

  organization
    "IETF CCAMP Working Group";

  contact
    "Editor: Jorge Lopez de Vergara
      <jorge.lopez_vergara@uam.es>";
  description
    "This module contains a collection of YANG definitions for
      a Flexi-Grid Traffic Engineering Database (TED).

      Copyright (c) 2018 IETF Trust and the persons identified as
      authors of the code. All rights reserved."
```

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Simplified BSD License set forth in [Section 4.c](#) of the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>).";

```
revision 2018-01-08 {
  description
    "version 5.";

  reference
    "RFC XXX: A Yang Data Model for
    Flexi-Grid Optical Networks ";
}

/*
  Typedefs
*/

typedef operational-mode {
  type string;
  description
    "Vendor-specific mode that guarantees interoperability.
    It must be an string with the following format:
    B-DScW-ytz(v) where all these attributes are conformant
    to the ITU-T recomendation";
  reference "ITU-T G.698.2 (11/2009) Section 5.3";
}

typedef interface-type {
  type enumeration {
    enum numbered-interface {
      description "The interface is numbered";
    }
    enum unnumbered-interface {
      description "The interface is unnumbered";
    }
  }
  description
    "Enumeration that defines if an interface is numbered or
    unnumbered";
}
```



```
/*
Typedef related to references
*/
typedef flexi-grid-link-ref {
  type leafref {
    path
      "/nd:networks/nd:network/lnk:link/lnk:link-id";
  }

  description
    "This type is used by data models that need to reference
    a flexi-grid optical link.";
}

typedef flexi-grid-node-port-ref {
  type leafref {
    path "/nd:networks/nd:network/nd:node/tet:te/"
      +"tet:te-node-attributes/fg-ted:interfaces/"
      +"fg-ted:port-number";
  }
  description
    "This type is used by data models that need to reference
    a flexi-grid port.";
}

typedef flexi-grid-transponder-ref {
  type leafref {
    path "/nd:networks/nd:network/nd:node/tet:te/"
      +"tet:tunnel-termination-point/tet:tunnel-tp-id";
  }
  description
    "This type is used by data models that need to reference
    a trasponder.";
}

/*
Groupings of attributes
*/
grouping flexi-grid-network-type {
  container flexi-grid-network {
    presence "indicates a flexi-grid optical network";
    description "flexi-grid optical network";
  }
  description "If present, it indicates a flexi-grid
  optical TED network";
}
```



```
grouping flexi-grid-node-attributes {
  description "Set of attributes of an optical node.";

  list interfaces {
    key "name";
    unique "port-number"; // TODO Puerto y TP ID
    description "List of interfaces contained in the node";
    leaf name {
      type string;
      description "Interface name";
    }
    leaf port-number {
      type uint32;
      description "Number of the port used by the interface";
    }

    leaf input-port {
      type boolean;
      description "Determines if the port is an input port";
    }
    leaf output-port {
      type boolean;
      description
        "Determines if the port is an output port";
    }
    leaf description {
      type string;
      description "Description of the interface";
    }
    leaf type {
      type interface-type;
      description "Determines the type of the interface";
    }
  }
  container numbered-interface {
    when "../fg-ted:type =
'numbered-interface'" {
      description
        "If the interface is a numbered interface";
    }
    description "Container that defines an numbered
interface with an ip-address";
    leaf n-i-ip-address{
      type inet:ip-address;
      description "IP address of the numbered interface";
    }
  }
}
```

```
    container unnumbered-interface {
      when "../fg-ted:type =
        'unnumbered-interface'" {
        description
          "If the interface is an unnumbered interface";
      }
      description "Container that defines an unnumbered
        interface with an ip-address and a label";
      leaf u-i-ip-address{
        type inet:ip-address;
        description "IP address of the interface";
      }
      leaf label {
        type uint32;
        description "Number as label for the interface";
      }
    }
  }
}
```

```
grouping flexi-grid-link-attributes {
  description "Set of attributes of an optical link";
  leaf-list available-label-flexi-grid {
    type bits {
      bit is-available{
        description "Set to 1 when it is available";
      }
    }
  }
  description
    "Array of bits that determines whether a spectral
    slot is available or not.";
}

leaf N-max {
  type int32;
  description "Maximum number of channels available.";
}

leaf base-frequency {
  type decimal64 {
    fraction-digits 5;
  }
  units THz;
  default 193.1;
  description "Default central frequency";
  reference "rfc7698";
}
```



```
leaf nominal-central-frequency-granularity {
  type decimal64 {
    fraction-digits 5;
  }
  units GHz;
  default 6.25;
  description
    "It is the spacing between allowed nominal central
    frequencies and it is set to 6.25 GHz";
  reference "rfc7698";
}

leaf slot-width-granularity {
  type decimal64 {
    fraction-digits 5;
  }
  units GHz;
  default 12.5;
  description "Minimum space between slot widths";
  reference "rfc7698";
}
}

grouping flexi-grid-transponder-attributes {
  description "Configuration of an optical transponder";
  //TODO Validate attributes
  leaf-list available-operational-mode {
    type operational-mode;
    description "List of all vendor-specific supported
    mode identifiers";
  }

  leaf operational-mode {
    type operational-mode;
    description "Vendor-specific mode identifier";
  }
}
}
```

```

grouping flexi-grid-connectivity-matrix-attributes {
  description "Connectivity matrix between the input and
    output ports";
  list connections {
    key "input-port-id";
    leaf input-port-id {
      type flexi-grid-node-port-ref;
      description "Identifier of the input port";
    }
    leaf output-port-id {
      type flexi-grid-node-port-ref;
      description "Identifier of the output port";
    }
  }
  description "List of connections between input and
    output ports";
}
}

/*
  Augments
*/
augment "/nd:networks/nd:network/nd:network-types" {
  uses flexi-grid-network-type;
  description "Augment network-types including flexi-grid
    topology";
}
augment "/nd-s:networks/nd-s:network/nd-s:network-types" {
  uses flexi-grid-network-type;
  description "Augment network-types including flexi-grid
    topology";
}
augment "/nd:networks/nd:network/lnk:link/tet:te" +
  "/tet:te-link-attributes" {
  when "/nd:networks/nd:network/nd:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }
  description "Augment link configuration";
  uses flexi-grid-link-attributes;
}

augment "/nd-s:networks/nd-s:network/lnk-s:link/tet-s:te" +
  "/tet-s:te-link-attributes" {
  when "/nd-s:networks/nd-s:network/nd-s:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }
}

```

```
description "Augment link state";  
uses flexi-grid-link-attributes;  
}
```



```

augment "/nd:networks/nd:network/nd:node/tet:te" +
"/tet:te-node-attributes" {
  when "/nd:networks/nd:network/nd:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }
  uses flexi-grid-node-attributes;
  description "Augment node config with flexi-grid attributes";
}

augment "/nd-s:networks/nd-s:network/nd-s:node/tet-s:te" +
"/tet-s:te-node-attributes" {
  when "/nd-s:networks/nd-s:network/nd-s:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }

  uses flexi-grid-node-attributes;
  description "Augment node state with flexi-grid attributes";
}

augment "/nd:networks/nd:network/nd:node/tet:te"+
"/tet:te-node-attributes/tet:connectivity-matrices/"+
"tet:connectivity-matrix" {
  when "/nd:networks/nd:network/nd:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }

  uses flexi-grid-connectivity-matrix-attributes;
  description "Augment node connectivity-matrix for node config";
}

augment "/nd-s:networks/nd-s:network/nd-s:node/tet-s:te"+
"/tet-s:te-node-attributes/tet-s:connectivity-matrices/"+
"tet-s:connectivity-matrix" {
  when "/nd-s:networks/nd-s:network/nd-s:network-types/
fg-ted:flexi-grid-network"{
    description "Augment only for Flexigrid network.";
  }

  uses flexi-grid-connectivity-matrix-attributes;
  description "Augment node connectivity-matrix for node config";
}

```

```
augment "/nd:networks/nd:network/nd:node/tet:te"+
  "/tet:tunnel-termination-point" {
  when "/nd:networks/nd:network/nd:network-types/
  fg-ted:flexi-grid-network"{
    description "Augment only for Flexigrid network.";
  }
  uses flexi-grid-transponder-attributes;
  description "Augment node state with transponder attributes";
}

augment "/nd-s:networks/nd-s:network/nd-s:node/tet-s:te"+
  "/tet-s:tunnel-termination-point" {
  when "/nd-s:networks/nd-s:network/nd-s:network-types/
  fg-ted:flexi-grid-network"{
    description "Augment only for Flexigrid network.";
  }

  uses flexi-grid-transponder-attributes;
  description "Augment node state with transponder attributes";
}
}

<CODE ENDS>
```

### **A.3. License**

Copyright (c) 2018 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- o Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- o Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- o Neither the name of Internet Society, IETF or IETF Trust, nor the names of specific contributors, may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## **7. Security Considerations**

The transport protocol used for sending the managed information MUST support authentication and SHOULD support encryption.

The defined data-model by itself does not create any security implications.

## **8. IANA Considerations**

The namespace used in the defined models is currently based on the METRO-HAUL project URI. Future versions of this document could register a URI in the IETF XML registry [[RFC3688](#)], as well as in the YANG Module Names registry [[RFC6020](#)].

## **9. References**

### **9.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC5234] Crocker, D. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, [RFC 5234](#), January 2008, <<http://www.rfc-editor.org/info/rfc5234>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), October 2010.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), January 2004.

## **9.2. Informative References**

- [RFC7698] Gonzalez de Dios, O., Casellas, R., Eds. "Framework and Requirements for GMPLS-Based Control of Flexi-Grid Dense Wavelength Division Multiplexing (DWDM) Networks", [RFC7698](#), November 2015.
- [I-D.draft-ietf-i2rs-yang-network-topo] Clemm, A., Medved, J., Varga, R., Bahadur, N., Ananthakrishnan, H., Liu, X., "A Data Model for Network Topologies", Internet Draft [draft-ietf-i2rs-yang-network-topo-20.txt](#), 2017.
- [I-D.draft-ietf-teas-yang-te-topo] Liu, X., Bryskin, I., Pavan Beeram, V., Saad, T., Shah, H., Gonzalez De Dios, O., "YANG Data Model for TE Topologies", Internet Draft [draft-ietf-teas-yang-te-topo-13.txt](#), 2017
- [I-D.draft-dharini-ccamp-dwdm-if-yang] Galimberti, G., Kunze, R., Lam, K., Hiremagalur, D., Grammel, G., Fang, L., Ratterree, G., Eds., "A YANG model to manage the optical interface parameters for an external transponder in a WDM network", Internet Draft, [draft-dharini-ccamp-dwdm-if-param-yang-03.txt](#), 2016.
- [I-D.draft-ietf-ccamp-wson-yang] Lee, Y. Dhody, D., Zhang, X., Guo, A., Lopez, V., King, D., Yoon, B., "A Yang Data Model for WSON Optical Networks", Internet Draft, [draft-ietf-ccamp-wson-yang-09.txt](#), 2017.
- [I-D.draft-vergara-ccamp-flexigrid-media-channel-yang] Lopez de Vergara, J., Perdices, D., Lopez, V., Gonzalez de Dios, O., King, D., Lee, Y., Galimberti, G., "YANG data model for Flexi-Grid media-channels", Internet Draft, [draft-vergara-ccamp-flexigrid-media-channel-yang-01](#), 2017.

## **10. Contributors**

The model presented in this paper was contributed to by more people than can be listed on the author list. Additional contributors include:

- o Zafar Ali, Cisco Systems
- o Daniel Michaud Vallinoto, Universidad Autonoma de Madrid

## **11. Acknowledgments**

The work presented in this Internet-Draft has been partially funded by the European Commission under the project H2020 METRO-HAUL (Metro High bandwidth, 5G Application-aware optical network, with edge storage, compUte and low Latency), Grant Agreement number: 761727, and by the Spanish Ministry of Economy and Competitiveness under the project TRAFICA, MINECO/FEDER TEC2015-69417-C2-1-R.

### Authors' Addresses

Jorge E. Lopez de Vergara  
Universidad Autonoma de Madrid  
Escuela Politecnica Superior  
C/Francisco Tomas y Valiente, 11  
E-28049 Madrid, Spain

Email: [jorge.lopez\\_vergara@uam.es](mailto:jorge.lopez_vergara@uam.es)

Daniel Perdices Burrero  
Naudit High Performance Computing and Networking, S.L.  
C/Faraday, 7  
E-28049 Madrid, Spain

Email: [daniel.perdices@naudit.es](mailto:daniel.perdices@naudit.es)

Victor Lopez  
Telefonica I+D/GCTO  
Distrito Telefonica  
E-28050 Madrid, Spain

Email: [victor.lopezalvarez@telefonica.com](mailto:victor.lopezalvarez@telefonica.com)

Oscar Gonzalez de Dios  
Telefonica I+D/GCTO  
Distrito Telefonica  
E-28050 Madrid, Spain

Email: [oscar.gonzalezdedios@telefonica.com](mailto:oscar.gonzalezdedios@telefonica.com)

Daniel King  
Lancaster University

Email: [d.king@lancaster.ac.uk](mailto:d.king@lancaster.ac.uk)

Young Lee  
Huawei Technologies

Email: [leeyoung@huawei.com](mailto:leeyoung@huawei.com)

Gabriele Galimberti  
Cisco Photonics Srl

Email: ggalimbe@cisco.com

Lopez de Vergara, et al. Expires July 12, 2018

[Page 22]