

6TiSCH  
Internet-Draft  
Intended status: Informational  
Expires: September 21, 2016

Q. Wang, Ed.  
Univ. of Sci. and Tech. Beijing  
X. Vilajosana  
Universitat Oberta de Catalunya  
March 20, 2016

6top Protocol (6P)  
[draft-wang-6tisch-6top-protocol-00](#)

## Abstract

This document defines the 6top Protocol (6P), which enables distributed scheduling in 6TiSCH networks. 6P allows neighbor nodes in a 6TiSCH network to add/delete TSCH cells to one another. 6P is part of the 6TiSCH Operation Sublayer (6top), the next higher layer of the IEEE802.15.4 TSCH medium access control layer. The 6top Scheduling Function (SF) decides when to add/delete cells, and triggers 6P transactions. Several SFs can be defined, each identified by a different 6top Scheduling Function Identifier (SFID). This document lists the requirements for an SF, but leaves the definition of the SF out of scope. Different SFs are expected to be defined in future companion specifications.

## Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 21, 2016.

## Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	TEMPORARY EDITORIAL NOTES . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">3.</a>	6TiSCH Operation Sublayer (6top) . . . . .	<a href="#">5</a>
<a href="#">3.1.</a>	Hard/Soft Cells . . . . .	<a href="#">5</a>
<a href="#">3.2.</a>	Using 6top with the Minimal 6TiSCH Configuration . . . . .	<a href="#">5</a>
<a href="#">4.</a>	6top Protocol (6P) . . . . .	<a href="#">6</a>
<a href="#">4.1.</a>	6top Transaction . . . . .	<a href="#">6</a>
<a href="#">4.1.1.</a>	2-step 6top Transaction . . . . .	<a href="#">6</a>
<a href="#">4.1.2.</a>	3-step 6top Transaction . . . . .	<a href="#">7</a>
<a href="#">4.2.</a>	Message Format . . . . .	<a href="#">8</a>
<a href="#">4.2.1.</a>	6top Information Element . . . . .	<a href="#">8</a>
<a href="#">4.2.2.</a>	General Message Format . . . . .	<a href="#">9</a>
<a href="#">4.2.3.</a>	6P Command Identifiers . . . . .	<a href="#">9</a>
<a href="#">4.2.4.</a>	6P Return Codes . . . . .	<a href="#">10</a>
<a href="#">4.2.5.</a>	6P Cell Format . . . . .	<a href="#">10</a>
<a href="#">4.2.6.</a>	6P ADD Request Format . . . . .	<a href="#">11</a>
<a href="#">4.2.7.</a>	6P DELETE Request Format . . . . .	<a href="#">11</a>
<a href="#">4.2.8.</a>	6P COUNT Request Format . . . . .	<a href="#">12</a>
<a href="#">4.2.9.</a>	6P LIST Request Format . . . . .	<a href="#">12</a>
<a href="#">4.2.10.</a>	6P CLEAR Request Format . . . . .	<a href="#">12</a>
<a href="#">4.2.11.</a>	6P Response Format . . . . .	<a href="#">12</a>
<a href="#">4.2.12.</a>	6P Confirmation Format . . . . .	<a href="#">13</a>
<a href="#">4.3.</a>	Protocol Behavior . . . . .	<a href="#">13</a>
<a href="#">4.3.1.</a>	Version Checking . . . . .	<a href="#">13</a>
<a href="#">4.3.2.</a>	SFID Checking . . . . .	<a href="#">13</a>
<a href="#">4.3.3.</a>	Concurrent 6P Transactions . . . . .	<a href="#">13</a>
<a href="#">4.3.4.</a>	Timeout . . . . .	<a href="#">14</a>
<a href="#">4.3.5.</a>	SeqNum Mismatch . . . . .	<a href="#">14</a>
<a href="#">4.3.6.</a>	Adding cells . . . . .	<a href="#">14</a>
<a href="#">4.3.7.</a>	Aborting a 6P Transaction . . . . .	<a href="#">15</a>
<a href="#">4.3.8.</a>	Deleting cells . . . . .	<a href="#">15</a>



4.3.9.	Handling error responses . . . . .	15
4.4.	Security . . . . .	16
5.	Guidelines for 6top Scheduling Functions (SF) . . . . .	16
5.1.	SF Identifier (SFID) . . . . .	16
5.2.	Requirements for an SF . . . . .	16
5.3.	Recommended Structure of an SF Specification . . . . .	17
6.	Implementation Status . . . . .	17
7.	Security Considerations . . . . .	18
8.	IANA Consideration . . . . .	18
9.	References . . . . .	19
9.1.	Normative References . . . . .	19
9.2.	Informative References . . . . .	19
Appendix A.	[TEMPORARY] IETF IE . . . . .	20
Appendix B.	[TEMPORARY] IEEE Liaison Considerations . . . . .	20
Appendix C.	[TEMPORARY] Terms for the Terminology Draft . . . . .	20
Appendix D.	[TEMPORARY] Changelog . . . . .	21
Authors' Addresses	. . . . .	23

## 1. TEMPORARY EDITORIAL NOTES

This document is an Internet Draft, so work-in-progress by nature. It contains the following work-in-progress elements:

- o "TODO" statements are elements which have not yet been written by the authors for some reason (lack of time, ongoing discussions with no clear consensus yet, etc). The statement does indicate that the text will be written.
- o "TEMPORARY" Appendices are there to capture current ongoing discussions or the changelog of the document. These appendices will be removed in the final text.
- o "IANA\_" identifiers are placeholders for numbers assigned by IANA. These placeholders are to be replaced by the actual values they represent after their assignment by IANA.
- o This section will be removed in the final text.

## 2. Introduction

All communication in a 6TiSCH network is orchestrated by a schedule [RFC7554]. This specification defines the 6top Protocol (6P), part of the 6TiSCH Operation Sublayer (6top) sublayer. 6P allow a node to communicate with a neighbor to add/remove a TSCH cell to one another. 6P hence enables distributed scheduling in a 6TiSCH network.






Figure 1: A simple 6TiSCH network.

For example, node C in Figure 1 monitors the communication cells to node A it has in its schedule.

- o If node C determines the number of frames it is sending to A per unit of time is larger than the capacity offered by the TSCH cells it has scheduled to A, it triggers a 6P transaction with node A to add one or more cells to A in the TSCH schedule.
- o If the traffic is lower than the capacity, node C triggers a 6P transaction with node A to delete one or more cells to A in the TSCH schedule.
- o Node C might also monitor statistics to determine whether collisions are happening on a particular cell to node A. If this feature is enabled, node C communicates with node A to add a new cell and delete the cell which suffered from collisions. This conceptually results in "relocating" the cell which suffered from collisions to a different slotOffset/channelOffset location in the TSCH schedule. The mechanism to handle cell relocation is out of the scope of this document and might be defined in a future document.

This results in distributed schedule management in a 6TiSCH network.

The 6top Scheduling Function (SF) defines when to add/delete a cell to a neighbor. The SF functions as a (required) add-on to 6P. Different applications require different SFs, so the SF is left out of scope of this document. Different SFs are expected to be defined in future companion specifications. A node MAY implement multiple SFs and run them at the same time. The SFID field contained in all 6P messages allows a node to switch between SFs on a per-transaction basis.

[Section 3](#) describes the 6TiSCH Operation Sublayer (6top). [Section 4](#) defines the 6top Protocol (6P). [Section 5](#) provides guidelines on how to design an SF.



### 3. 6TiSCH Operation Sublayer (6top)

As depicted in Figure 2, the 6TiSCH Operation Sublayer (6top) is the next higher layer to the IEEE802.15.4 TSCH medium access control layer [[IEEE802154-2015](#)].

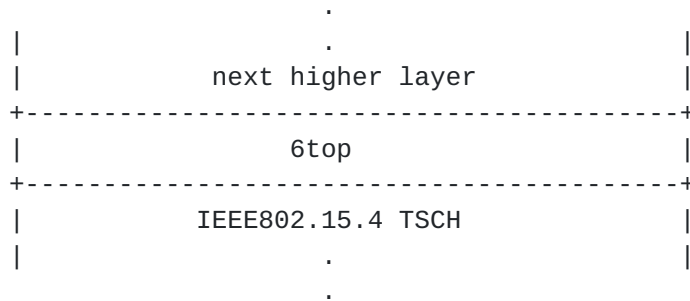


Figure 2: The 6top sublayer in the protocol stack.

The roles of the 6top sublayer are:

- o Implement and terminate the 6top Protocol (6P), which allows neighbor nodes to communicate to add/delete cells to one another.
- o Run one or more 6top Scheduling Function (SF), which define the algorithm to decide when to add/delete cells.

#### 3.1. Hard/Soft Cells

6top qualifies each cell in the schedule as either "hard" or "soft":

- o a Soft Cell can be read, added, deleted or updated by 6top.
- o a Hard Cell is read-only for 6top.

In the context of this specification, all the cells used by 6top are Soft Cells. Hard cells can be used for example when "hard-coding" a scheduling. This is done, for example, in the Minimal 6TiSCH Configuration [[I-D.ietf-6tisch-minimal](#)].

#### 3.2. Using 6top with the Minimal 6TiSCH Configuration

6top MAY be used alongside the Minimal 6TiSCH Configuration [[I-D.ietf-6tisch-minimal](#)]. In this case, it is RECOMMENDED to use 2 slotframes, as depicted in Figure 3:

- o Slotframe 0 is used for traffic defined in the Minimal 6TiSCH Configuration. In Figure 3, this slotframe is 5 slots long, but it can be of any length.
- o Slotframe 1 is used by 6top to allocate cells from. In Figure 3, this slotframe is 10 slots long, but it can be of any length.





Slotframe 0 SHOULD be of higher priority than Slotframe 1. 6top MAY support further slotframes; how to use more slotframes is out of the scope for this document.

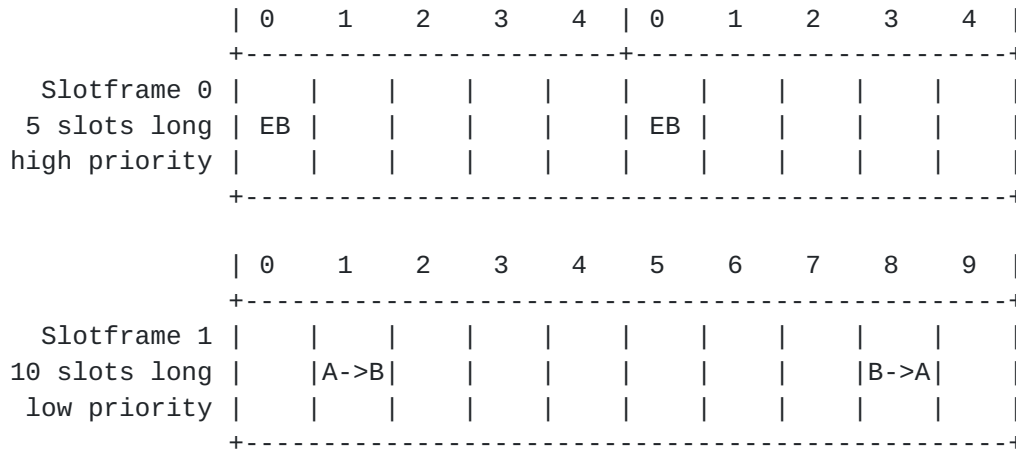


Figure 3: 2-slotframe structure when using 6top alongside the Minimal 6TiSCH Configuration.

#### 4. 6top Protocol (6P)

The 6top Protocol (6P) allows two neighbor nodes to communicate to add/delete cells to their TSCH schedule. Conceptually, two neighbor nodes "negotiate" the location of the cell(s) to add/delete.

##### 4.1. 6top Transaction

We call "6top Transaction" a complete negotiation between two neighbor nodes. A transaction starts when a node wishes to add/remove one or more cells to one of its neighbors; it ends when the cell(s) have been added removed from the schedule of both neighbor, or when the transaction has failed.

A transaction can consist of 2 or 3 steps. It is the SF which determines whether to use 2-step or 3-step transactions. An SF MAY use both 2-step and 3-step transactions.

We reuse the topology in Figure 1 to illustrate 2-step and 3-step transactions.

##### 4.1.1. 2-step 6top Transaction

6P supports both 2- and 3-step transactions; the SF determinisms which to use. Without loss of generality, this section illustrates 2-step transaction through an example.



Figure 4 is a sequence diagram to help understand the core principle of 6P (several elements are left out to simplify understanding). We assume the SF running on node A determines 2 extra cells need to be scheduled to node B. In this example, node A proposes the cells to use.

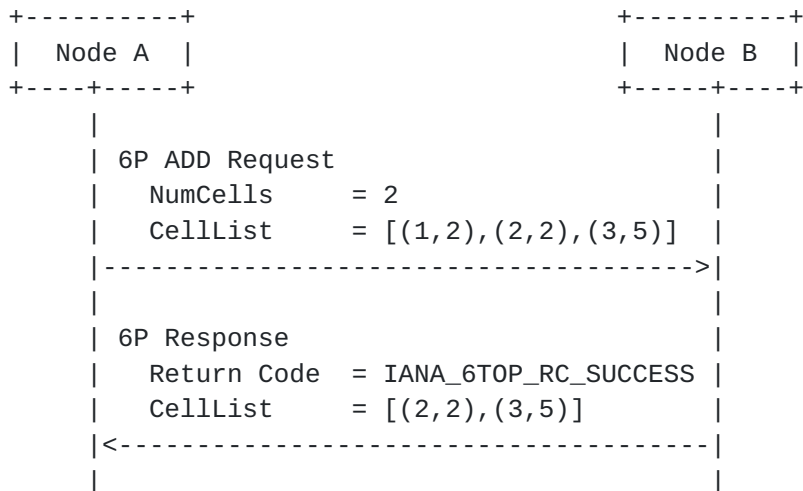


Figure 4: A 2-step 6P transaction.

In this example, the 2-step transaction occurs as follows:

1. The SF running on node A selects 3 candidate cells.
2. Node A sends a 6P ADD Request to node B, indicating it wishes to add 2 cells (the "NumCells" value), and specifying the list of 3 candidate (the "CellList" value). Each cell in the CellList is a (slotOffset, channelOffset) tuple.
3. The SF running on node B selects 2 of the 3 cells in the CellList of the 6P ADD Request. Node B sends back a 6P Response to node A, indicating the cells it selected.
4. The result of this 6P transaction is that 2 cells from A to B have been added to the TSCH schedule of both nodes A and B.

#### **4.1.2. 3-step 6top Transaction**

6P supports both 2- and 3-step transactions; the SF determinisms which to use. Without loss of generality, this section illustrates 3-step transaction through an example.

Figure 5 is a sequence diagram to help understand the core principle of 6P (several elements are left out to simplify understanding). We assume the SF running on node A determines 2 extra cells need to be scheduled to node B. In this example, node B proposes the cells to use.



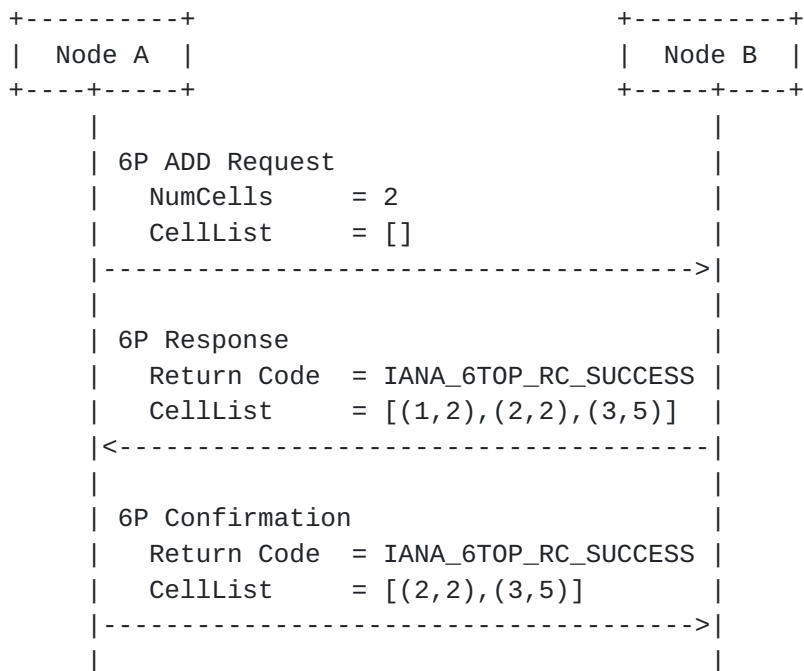


Figure 5: A 3-step 6P transaction.

In this example, the 3-step transaction occurs as follows:

1. The SF running on node A determines 2 extra cells need to be scheduled to node B, but does not select candidate cells.
2. Node A sends a 6P ADD Request to node B, indicating it wishes to add 2 cells (the "NumCells" value), with an empty "CellList".
3. The SF running on node B selects 3 candidate cells. Node B sends back a 6P Response to node A, indicating the 3 cells it selected.
4. The SF running on node B selects 2 cells. Node A sends back a 6P Confirmation to node B, indicating the cells it selected.
5. The result of this 6P transaction is that 2 cells from A to B have been added to the TSCH schedule of both nodes A and B.

## 4.2. Message Format

### 4.2.1. 6top Information Element

6P messages are carried as payload of IEEE802.15.4 Information Elements (IE) [[IEEE802154-2015](#)]. 6p messages travel over a single hop.



```

          1                      2                      3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
| Payload IE Length |GroupID|T|    Sub-ID    |6top IE Content
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
| Payload Termination IE          |
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

The 6top IE is an IETF IE with GroupID IANA\_IETF\_IE\_GROUP\_ID. The Sub-ID used by the 6top IE is IANA\_6TOP\_SUBIE\_ID. The length of the 6top IE content is variable. The content of the 6top IE is specified in [Section 4.2](#). The Payload Termination IE is defined by the IEEE802.15.4 standard [[IEEE802154-2015](#)]. TODO: IETF IE specified in [Appendix A](#) for now, but to be specified in a separate draft in the future.

#### 4.2.2. General Message Format

In all 6P messages, the 6top IE content has the following format:

```

          1                      2                      3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|Version| Code  |    SFID    |    SeqNum    | Other Fields...
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Version (6P Version): The version of the 6P protocol. Only version IANA\_6TOP\_6P\_VERSION is defined in this document. Future specifications MIGHT define further version of the 6P protocol.

Code: Command to carry out or response code. The list of command identifiers and return codes is defined only for version IANA\_6TOP\_6P\_VERSION in this document.

SFID (6top Scheduling Function Identifier): The identifier of the SF to use to handle this message. The SFID is defined in [Section 5.1](#).

SeqNum: An identifier of the packet, used to match request and response. The value of SeqNum MUST increment by exactly one at each new 6P request issued to the same neighbor.

Other Fields: The list of other fields depends on the value of the code field, as detailed below.

#### 4.2.3. 6P Command Identifiers

Figure 6 lists the 6P command identifiers.





Value	Command ID	Description
IANA_6TOP_CMD_ADD	CMD_ADD	add one or more cells
IANA_6TOP_CMD_DELETE	CMD_DELETE	delete one or more cells
IANA_6TOP_CMD_COUNT	CMD_COUNT	count scheduled cells
IANA_6TOP_CMD_LIST	CMD_LIST	list the scheduled cells
IANA_6TOP_CMD_CLEAR	CMD_CLEAR	clear all cells
TODO-0xf	reserved	

Figure 6: 6P Command Identifiers

#### 4.2.4. 6P Return Codes

Figure 7 lists the 6P Return Codes and their meaning.

Value	Return Code	Description
IANA_6TOP_RC_SUCCESS	RC_SUCCESS	operation succeeded
IANA_6TOP_RC_VER_ERR	RC_VER_ERR	unsupported 6P version
IANA_6TOP_RC_SFID_ERR	RC_SFID_ERR	unsupported SFID
IANA_6TOP_RC_BUSY	RC_BUSY	handling previous request
IANA_6TOP_RC_RESET	RC_RESET	abort 6P transaction
IANA_6TOP_RC_ERR	RC_ERR	operation failed
TODO-0xf	reserved	

Figure 7: 6P Return Codes

#### 4.2.5. 6P Cell Format

The 6P Cell is an element which is present in several messages. It is a 4-byte field, its RECOMMENDED format is:



```

          1                      2                      3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|          slotOffset          |          channelOffset          |
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

slotOffset: The slot offset of the cell.

channelOffset: The channel offset of the cell.

The CellList is an opaque set of bytes, sent unmodified to the SF.  
The SF MAY redefine the format of the CellList field.

#### [4.2.6.](#) 6P ADD Request Format

```

          1                      2                      3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|Version| Code |   SFID   |   SeqNum   |   NumCells   |
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|          Metadata          | CellList ...
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Version: Set to IANA\_6TOP\_6P\_VERSION.

Code: Set to IANA\_6TOP\_CMD\_ADD for a 6P ADD Request.

SFID: Identifier of the SF to be used by the receiver to handle the message.

SeqNum: Packet identifier to match 6P Request and 6P Response.

NumCells: The number of additional TX cells the sender wants to schedule to the receiver.

Metadata: Metadata used as extra signaling to the SF. One example use can be to specify which slotframe to schedule the cells to. The contents of the Metadata field is an opaque set of bytes, and passed unmodified to the SF. The meaning of this field depends on the SF, and is hence out of scope of this document.

CellList: A list of 0, 1 or multiple 6P Cells. The RECOMMENDED format of each 6P Cell is defined in [Section 4.2.5](#). The CellList is an opaque set of bytes, sent unmodified to the SF. The SF MAY redefine the format of the CellList field.

#### [4.2.7.](#) 6P DELETE Request Format

The 6P DELETE Request has the exact same format as the 6P ADD Request, except for the code which is set to IANA\_6TOP\_CMD\_DELETE.



Other Fields: The fields depends on what command the request is for:



Response to an ADD, DELETE or LIST command: A list of 0, 1 or multiple 6P Cells. The format of a 6P Cell is defined in [Section 4.2.5](#).

Response to COUNT command: The number of cells scheduled from the requesting node to the receiver node by the 6P protocol, encoded as a 2-octet unsigned integer.

Response to CLEAR command: No other fields are present in the response.

#### [4.2.12](#). 6P Confirmation Format

A 6P Confirmation is only used in a 3-step transaction, as the third step. A 6P Confirmation Message has the exact same format as a 6P Response Message. It is only the fact that it appears as the third step in a 3-step transaction that distinguishes it from a 6P Response. In particular, the same Return Codes are used in both 6P Response and 6P Confirmation messages.

### [4.3](#). Protocol Behavior

For illustration, we assume we use the topology in Figure 1, and that node A negotiates to add/delete cells to node B.

#### [4.3.1](#). Version Checking

All messages contain a Version field. If multiple Versions of the 6P protocol have been defined (in future specifications for Version values different than IANA\_6TOP\_6P\_VERSION), a node MAY implement multiple protocol versions at the same time. When receiving a 6P message with a Version number it does not implement, a node MUST reply with a 6P Response and a return code of IANA\_6TOP\_RC\_VER\_ERR. The Version field in the 6P Response MUST be the same as the Version field in the corresponding 6P Request.

#### [4.3.2](#). SFID Checking

All messages contain a SFID field. If multiple SFs has been defined, a node MAY support multiple SFs at the same time. When receiving a 6P message with an unsupported SFID, a node MUST reply with a 6P Response and a return code of IANA\_6TOP\_RC\_SFID\_ERR. The Version field in the 6P Response MUST be the same as the Version field in the corresponding 6P Request.

#### [4.3.3](#). Concurrent 6P Transactions

Only a single 6P Transaction between two neighbors, in a given direction, can take place at the same time. That is, a node MUST NOT issue a new 6P Request to a given neighbor before having received the





6P Response for a previous request to that neighbor. The only exception to this rule is when the previous 6P Transaction has timed out. If a node receives a 6P Request from a given neighbor before having sent the 6P Response to the previous 6P Request from that neighbor, it MUST send back a 6P Response with a return code of IANA\_6TOP\_RC\_ERR.

A node MAY support concurrent 6P Transactions from different neighbors. In this case, in Figure 1, node C can have a different ongoing 6P Transaction with nodes B and E. In case a node does not have enough resources to handle concurrent 6P Transactions from different neighbors, when it receives a 6P Request from a neighbor while already handling a different request from a different neighbor, it MUST reply to that second request with a 6P Response with return code IANA\_6TOP\_RC\_BUSY.

#### **4.3.4. Timeout**

A timeout happens when the node sending the 6P Request has not received the 6P Response. The value of the timeout is coupled with how the cells between the nodes are scheduled. The SF determines the value of the timeout. The value of the timeout is out of scope of this document.

#### **4.3.5. SeqNum Mismatch**

When a node receives a 6P Response with SeqNum value different from the SeqNum value in the 6P Request, it MUST drop the packet and consider the 6P Transaction as having failed.

#### **4.3.6. Adding cells**

We assume the topology in Figure 1 where the SF on node C decides to add NumCell cells to node A.

Node C's SF selects NumCandidate $\geq$ NumCell cells from its schedule as candidate transmit cells to node A. NumCandidate MUST be larger or equal to NumCell. How many cells it selects (NumCandidate) and how that selection is done is specified in the SF and out of scope of this document. Node C sends a 6P ADD Request to node A which contains the value of NumCells and the NumCandidate cells in the CellList.

Upon receiving the request, node A's SF verifies which of the cells in the CellList it can add as receive cells from node C in its own schedule. How that selection is done is specified in the SF and out of scope of this document. That verification can succeed (NumCell cells from the CellList can be used), fail (none of the cells from



the CellList can be used) or partially succeed (less than NumCell cells from the CellList can be used). In all cases, node A MUST send a 6P Response with return code set to IANA\_6TOP\_RC\_SUCCESS, and which specifies the list of cells that were scheduled as receive cells from C. That can contain 0 elements (when the verification failed), NumCell elements (succeeded) or between 0 and NumCell elements (partially succeeded).

Upon receiving the response, node C adds the cells specified in the CellList as transmit cells to node A.

#### **4.3.7. Aborting a 6P Transaction**

In case the receiver of a 6top request fails during a 6P Transaction and is unable to complete it, it SHOULD reply to that request with a 6P Response with return code IANA\_6TOP\_RC\_RESET. Upon receiving this 6top reply, the initiator of the 6P Transaction MUST consider the 6P Transaction as failed.

#### **4.3.8. Deleting cells**

The behavior for deleting cells is equivalent to that of adding cells except that:

- o The nodes delete the cells they agree upon rather than adding them.
- o All cells in the CellList MUST be already scheduled between the two nodes.
- o If the CellList in the 6P Request is empty, the SF on the receiving node is free to delete any cell from the sender.
- o The CellList MUST either be equal, contain exactly NumCell cells, or more than NumCell cells. The case where the CellList is not empty but contains less than NumCell cells is not supported.

#### **4.3.9. Handling error responses**

A return code with a name starting with "RC\_ERR" in Figure 7 indicates an error. When a node receives a 6P Response with such an error, it MUST consider the 6P Transaction failed. In particular, if this was a response to a 6P ADD/DELETE Request, the node MUST NOT add/delete any of the cells involved in this 6P Transaction. Similarly, a node sending a 6P Response with an "RC\_ERR" return code MUST NOT add/delete any cells as part of that 6P Transaction. The SF defines what to do after an error has occurred. Defining what to do after an error has occurred is out of scope of this document.



#### 4.4. Security

6P messages are secured through link-layer security. When link-layer security is enabled, the 6P messages MUST be secured. This is possible because 6P messages are carried as Payload IE.

### 5. Guidelines for 6top Scheduling Functions (SF)

#### 5.1. SF Identifier (SFID)

Each SF has an identifier. The identifier is encoded as a 1-byte field. The identifier space is divided in the following ranges.

Range	Meaning
+-----+	+-----+
0x00-0xef	managed
+-----+	+-----+
0xf0-0xfe	unmanaged
+-----+	+-----+
0xff	reserved
+-----+	+-----+

Figure 8: SFID range.

SF identifiers in the managed space MUST be managed by IANA.

#### 5.2. Requirements for an SF

The specification for an SF

- o MUST specify an identifier for that SF.
- o MUST specify the rule for a node to decide when to add/delete one or more cells to a neighbor.
- o MUST specify the rule for a Transaction source to select cells to add to the CellList field in the 6P ADD Request.
- o MUST specify the rule for a Transaction destination to select cells from CellList to add to its schedule.
- o MUST specify a value for the 6P Timeout, or a rule/equation to calculate it.
- o MUST specify a meaning for the "Metadata" field in the 6P ADD Request.
- o MUST specify the behavior of a node when it boots.
- o MUST specify what to do after an error has occurred (either the node sent a 6P Response with an error code, or received one).
- o MUST specify the list of statistics to gather. An example statistic is the number of transmitted frames to each neighbor. In case the SF requires no statistics to be gathered, the specific of the SF MUST explicitly state so.



- o SHOULD clearly state the application domain the SF is created for.
- o SHOULD contain examples which highlight normal and error scenarios.
- o SHOULD contain a list of current implementations, at least during the I-D state of the document, per [[RFC6982](#)].
- o SHOULD contain a performance evaluation of the scheme, possibly through references to external documents.
- o MAY redefine the format of the CellList field.

### **5.3. Recommended Structure of an SF Specification**

The following section structure for a SF document is RECOMMENDED:

- o Introduction
- o Scheduling Function Identifier
- o Rules for Adding/Deleting Cells
- o Rules for CellList
- o 6P Timeout Value
- o Meaning of the Metadata Field
- o Node Behavior at Boot
- o 6P Error Handling
- o Examples
- o Implementation Status
- o Security Considerations
- o IANA Considerations

## **6. Implementation Status**

This section records the status of known implementations of the protocol defined by this specification at the time of posting of this Internet-Draft, and is based on a proposal described in [[RFC6982](#)]. The description of implementations in this section is intended to assist the IETF in its decision processes in progressing drafts to RFCs. Please note that the listing of any individual implementation here does not imply endorsement by the IETF. Furthermore, no effort has been spent to verify the information presented here that was supplied by IETF contributors. This is not intended as, and must not be construed to be, a catalog of available implementations or their features. Readers are advised to note that other implementations may exist.

According to [[RFC6982](#)], "this will allow reviewers and working groups to assign due consideration to documents that have the benefit of running code, which may serve as evidence of valuable experimentation and feedback that have made the implemented protocols more mature. It is up to the individual working groups to use this information as they see fit".





ETSI 6TiSCH #2 plugtests: 6P was one of two protocols addressed during the ETSI 6TiSCH #2 plugtests organized on 2-4 February 2016 in Paris, France. 14 entities participated in this event, verifying the compliance and interoperability of their implementation of 6P. This event happened under NDA, so neither the name of the entities nor the test results are public. This event is, however, a clear indication of the maturity of 6P, and the interest it generates. More information about the event at <http://www.etsi.org/news-events/events/1022-6TiSCH-2-plugtests>.

OpenWSN: 6P is implemented in the OpenWSN project [[OpenWSN](#)] under a BSD open-source license. The authors of this document are collaborating with the OpenWSN community to gather feedback about the status and performance of the protocols described in this document. Results from that discussion will appear in this section in future revision of this specification. More information about this implementation at <http://www.openwsn.org/>.

Wireshark Dissector: A Wireshark dissector for 6P is implemented under a BSD open-source license. It is not yet merged into the main Wireshark build, but can be downloaded at <https://github.com/openwsn-berkeley/dissectors/>.

## 7. Security Considerations

TODO: explicit risks

6P messages are carried inside IEEE802.15.4 Payload Information Elements (IEs). Those Payload IEs are encrypted and authenticated at the link layer through CCM\*. 6P benefits from the same level of security as any other Payload IE. The 6P protocol does not define its own security mechanisms. A key management solution is out of scope for this document. The 6P protocol will benefit for the key management solution used in the network.

## 8. IANA Consideration

TODO: write out this section as soon as the discussion with the IEEE about a possible IETF IE ID has concluded.

- o TODO: IANA\_IETF\_IE\_GROUP\_ID
- o TODO: IANA\_6TOP\_SUBIE\_ID
- o TODO: IANA\_6TOP\_6P\_VERSION
- o TODO: IANA\_6TOP\_CMD\_ADD
- o TODO: IANA\_6TOP\_CMD\_DELETE
- o TODO: IANA\_6TOP\_CMD\_LIST
- o TODO: IANA\_6TOP\_CMD\_COUNT
- o TODO: IANA\_6TOP\_CMD\_CLEAR
- o TODO: IANA\_6TOP\_RC\_SUCCESS
- o TODO: IANA\_6TOP\_RC\_VER\_ERR



- o TODO: IANA\_6TOP\_RC\_SFID\_ERR
- o TODO: IANA\_6TOP\_RC\_BUSY
- o TODO: IANA\_6TOP\_RC\_RESET
- o TODO: IANA\_6TOP\_RC\_ERR

## **9. References**

### **9.1. Normative References**

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

[IEEE802154-2015]  
IEEE standard for Information Technology, "IEEE Std 802.15.4-2015 - IEEE Standard for Low-Rate Wireless Personal Area Networks (WPANs)", October 2015.

### **9.2. Informative References**

[RFC7554] Watteyne, T., Ed., Palattella, M., and L. Grieco, "Using IEEE 802.15.4e Time-Slotted Channel Hopping (TSCH) in the Internet of Things (IoT): Problem Statement", [RFC 7554](#), DOI 10.17487/RFC7554, May 2015, <<http://www.rfc-editor.org/info/rfc7554>>.

[RFC6982] Sheffer, Y. and A. Farrel, "Improving Awareness of Running Code: The Implementation Status Section", [RFC 6982](#), DOI 10.17487/RFC6982, July 2013, <<http://www.rfc-editor.org/info/rfc6982>>.

[I-D.ietf-6tisch-minimal]  
Vilajosana, X. and K. Pister, "Minimal 6TiSCH Configuration", [draft-ietf-6tisch-minimal-15](#) (work in progress), February 2016.

[I-D.ietf-6tisch-terminology]  
Palattella, M., Thubert, P., Watteyne, T., and Q. Wang, "Terminology in IPv6 over the TSCH mode of IEEE 802.15.4e", [draft-ietf-6tisch-terminology-06](#) (work in progress), November 2015.

[OpenWSN] Watteyne, T., Vilajosana, X., Kerkez, B., Chraim, F., Weekly, K., Wang, Q., Glaser, S., and K. Pister, "OpenWSN: a Standards-Based Low-Power Wireless Development Environment", Transactions on Emerging Telecommunications Technologies , August 2012.



## **Appendix A. [TEMPORARY] IETF IE**

This section contains a proposal for the specification of an IETF IE. If this proposal is supported by the 6TiSCH WG, the authors of this draft recommend for the specification of the IETF IE to be its own draft, possibly developed in the 6TiSCH WG. The reason for having it a separated document is that the scope of the IETF IE is wider than the 6P protocol defined in this document.

The proposal is to use an IETF IE, a IEEE802.15.4 Payload Information Element with the Group ID set to IANA\_IETF\_IE\_GROUP\_ID. The value of IANA\_IETF\_IE\_GROUP\_ID is defined by the IEEE, communicated to the IETF, and noted by IANA. The format of the IETF IE is exactly the same as the format of an MLME Information Element, as specified in [IEEE802154-2015], Section 5.2.4.5. The difference is that the space of Sub-IDs is managed by the IETF/IANA. The Sub-ID used by 6top commands is IANA\_6TOP\_SUBIE\_ID with value 0x00.

Other options are being discussed between the IETF 6TiSCH WG and the IEEE 6TiSCH IG, and listed in <https://www.ietf.org/mail-archive/web/6tisch/current/msg04469.html>. These options concern the way 6P Messages are transported as IEEE802.15.4 IEs, and do not impact the format of those messages.

## **Appendix B. [TEMPORARY] IEEE Liaison Considerations**

If the specification described in this document is supported by the 6TiSCH WG, the authors of this document ask the 6TiSCH WG chairs to liaise with the IEEE to request a Payload Information Element Group ID to be assigned to the IETF (Group ID IANA\_IETF\_IE\_GROUP\_ID described in [Appendix A](#)).

## **Appendix C. [TEMPORARY] Terms for the Terminology Draft**

Terms introduced by this document, and which needs to be added to [\[I-D.ietf-6tisch-terminology\]](#):

- 6top:       The "6TiSCH Operation Sublayer" (6top) is the next highest layer of the IEEE802.15.4 TSCH medium access control layer. It implements and terminates the "6top Protocol" (6P), and contains one or more "6top Scheduling Function" (SF). It is defined in TODO\_LINK\_draft-wang-6tisch-6top-protocol.
- SF:         The "6top Scheduling Function" (SF) is the policy inside the "6TiSCH Operation Sublayer" (6top) which decides when to add/remove cells. It is defined in TODO\_LINK\_draft-wang-6tisch-6top-protocol.



- SFID: The "6top Scheduling Function Identifier" (SFID) is a 1-byte field identifying a SF. It is defined in TODO\_LINK\_draft-wang-6tisch-6top-protocol.
- 6P: The "6top Protocol" (6P) allows neighbor nodes to communicate to add/delete cells to one another in their TSCH schedule. It is defined in TODO\_LINK\_draft-wang-6tisch-6top-protocol.
- 6P Transaction: Part of the "6top Protocol" (6P), we call "6top Transaction" a complete negotiation between two neighbor nodes. A transaction starts when a node wishes to add/remove one or more cells to one of its neighbors; it ends when the cell(s) have been added removed from the schedule of both neighbor, or when the transaction has failed. It is defined in TODO\_LINK\_draft-wang-6tisch-6top-protocol.

#### [Appendix D.](#) [TEMPORARY] Changelog

- o [draft-wang-6tisch-6top-protocol-00](#)
  - \* Editorial overhaul: fixing typos, increasing readability, clarifying figures.
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/47>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/54>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/55>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/49>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/53>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/44>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/48>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/43>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/52>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/45>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/51>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/50>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/46>





- \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/41>
- \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/42>
- \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/39>
- \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/40>
- o [draft-wang-6tisch-6top-sublayer-05](#)
  - \* Specifies format of IE
  - \* Adds token in messages to match request and response
- o [draft-wang-6tisch-6top-sublayer-04](#)
  - \* Renames IANA\_6TOP\_IE\_GROUP\_ID to IANA\_IETF\_IE\_GROUP\_ID.
  - \* Renames IANA\_CMD and IANA\_RC to IANA\_6TOP\_CMD and IANA\_6TOP\_RC.
  - \* Proposes IANA\_6TOP\_SUBIE\_ID with value 0x00 for the 6top sub-IE.
- o [draft-wang-6tisch-6top-sublayer-03](#)
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/32/missing-command-list>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/31/missing-command-count>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/30/missing-command-clear>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/37/6top-atomic-transaction-6p-transaction>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/35/separate-opcode-from-rc>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/36/add-length-field-in-ie>
  - \* [https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/27/differentiate-rc\\_err\\_busy-and](https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/27/differentiate-rc_err_busy-and)
  - \* [https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/29/missing-rc-rc\\_reset](https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/29/missing-rc-rc_reset)
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/28/the-sf-must-specify-the-behavior-of-a-mote>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/26/remove-including-their-number>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/34/6of-sf>
  - \* <https://bitbucket.org/6tisch/draft-wang-6tisch-6top-protocol/issues/33/add-a-figure-showing-the-negotiation>
- o [draft-wang-6tisch-6top-sublayer-02](#)
  - \* introduces the 6P protocol and the notion of 6top Transaction.
  - \* introduces the concept of 6OF and its 6OFID.



Authors' Addresses

Qin Wang (editor)  
Univ. of Sci. and Tech. Beijing  
30 Xueyuan Road  
Beijing, Hebei 100083  
China

Phone: +86 (10) 6233 4781  
Email: wangqin@ies.ustb.edu.cn

Xavier Vilajosana  
Universitat Oberta de Catalunya  
156 Rambla Poblenou  
Barcelona, Catalonia 08018  
Spain

Phone: +34 (646) 633 681  
Email: xvilajosana@uoc.edu

