

Network Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: August 26, 2021

Y. Wang  
S. Zhuang  
Y. Gu  
Huawei  
R. Pang  
China Unicom  
February 22, 2021

BGP Extension for Advertising In-situ Flow Information Telemetry (IFIT)  
Capabilities  
[draft-wang-idr-bgp-ifit-capabilities-02](#)

Abstract

This document defines extensions to BGP to advertise the In-situ Flow Information Telemetry (IFIT) capabilities. Within an IFIT domain, IFIT-capability advertisement from the tail node to the head node assists the head node to determine whether a particular IFIT Option type can be encapsulated in data packets. Such advertisement would be useful for mitigating the leakage threat and facilitating the deployment of IFIT measurements on a per-service and on-demand basis.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 26, 2021.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1.](#) Introduction . . . . . [2](#)
- [2.](#) Definitions and Acronyms . . . . . [3](#)
- [3.](#) IFIT Capabilities . . . . . [3](#)
- [4.](#) Option 1: Extension to BGP Extended Community for IFIT-Capability Advertisement . . . . . [4](#)
  - [4.1.](#) IPv4-Address-Specific IFIT Tail Community . . . . . [4](#)
  - [4.2.](#) IPv6-Address-Specific IFIT Tail Community . . . . . [5](#)
- [5.](#) Option 2: Extension to BGP Next-Hop Capability for IFIT-Capability Advertisement . . . . . [5](#)
- [6.](#) IANA Considerations . . . . . [6](#)
- [7.](#) Security Considerations . . . . . [7](#)
- [8.](#) Contributors . . . . . [7](#)
- [9.](#) Acknowledgements . . . . . [7](#)
- [10.](#) References . . . . . [7](#)
  - [10.1.](#) Normative References . . . . . [7](#)
  - [10.2.](#) Informative References . . . . . [8](#)
- Authors' Addresses . . . . . [8](#)

**1. Introduction**

In-situ Flow Information Telemetry (IFIT) denotes a family of flow-oriented on-path telemetry techniques, including In-situ OAM (IOAM) [[I-D.ietf-ippm-ioam-data](#)] and Alternate Marking [[RFC8321](#)]. It can provide flow information on the entire forwarding path on a per-packet basis in real time.

IFIT is a solution focusing on network domains. The "network domain" consists of a set of network devices or entities within a single administration. One network domain MAY consists of multiple IFIT domain. The family of emerging on-path flow telemetry techniques MAY be selectively or partially implemented in different vendors' devices



as an emerging feature for various use cases of application-aware network operations, in addition, for some usecases, the IFIT Features are deployed on a per-service and on-demand basis. Within the IFIT domain, one or more IFIT-options are added into packet at the IFIT-enabled head node that is referred to as the IFIT encapsulating node. Then IFIT data fields MAY be updated by IFIT transit nodes that the packet traverses. Finally, the data fields are removed at a device that is referred to as the IFIT decapsulating node. Hence, a head node needs to know if the IFIT decapsulating node is able to support the IFIT capabilities.

This document defines extensions to Border Gateway Protocol (BGP) to advertise the IFIT capabilities of a tail node to a head node in an IFIT domain. Then the head node can learn the IFIT capabilities and determine whether a particular IFIT Option type can be encapsulated in traffic packets. Such advertisement would be useful for avoiding IFIT data leaking from the IFIT domain and facilitating the deployment of IFIT measurements on a per-service and on-demand basis.

**2. Definitions and Acronyms**

- o IFIT: In-situ Flow Information Telemetry
- o OAM: Operation Administration and Maintenance
- o NLRI: Network Layer Reachable Information, the NLRI advertised in the BGP UPDATE as defined in [[RFC4271](#)] and [[RFC4760](#)].

**3. IFIT Capabilities**

This document defines the IFIT Capabilities formed of a 16-bit bitmap. The following format is used:

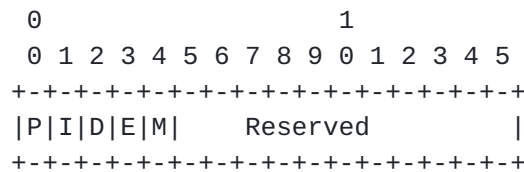


Figure 1. IFIT Capabilities

- o P-Flag: IOAM Pre-allocated Trace Option Type flag. When set, this indicates that the router is capable of IOAM Pre-allocated Trace [[I-D.ietf-ippm-ioam-data](#)].
- o I-Flag: IOAM Incremental Trace Option Type flag. When set, this indicates that the router is capable of IOAM Incremental Tracing [[I-D.ietf-ippm-ioam-data](#)].



- o D-Flag: IOAM DEX Option Type flag. When set, this indicates that the router is capable of IOAM DEX [[I-D.ioamteam-ippm-ioam-direct-export](#)].
- o E-Flag: IOAM E2E Option Type flag. When set, this indicates that the router is capable of IOAM E2E processing [[I-D.ietf-ippm-ioam-data](#)].
- o M-Flag: Alternate Marking flag. When set, this indicates that the router is capable of processing Alternative Marking packets [[RFC8321](#)].
- o Reserved: Reserved for future use. They MUST be set to zero upon transmission and ignored upon receipt.

**4. Option 1: Extension to BGP Extended Community for IFIT-Capability Advertisement**

**4.1. IPv4-Address-Specific IFIT Tail Community**

For IPv4 networks [[RFC4360](#)], this section defines a new type of BGP extended community called IPv4-Address-Specific IFIT Extended Community. The IPv4-Address-Specific IFIT Tail Community can be used by the IFIT decapsulation node to notify the IFIT Capabilities to its partner (as the IFIT encapsulation node). It is a transitive extended community with type 0x01 and sub-type TBA1.

The format of this extended community is shown in Figure 2.

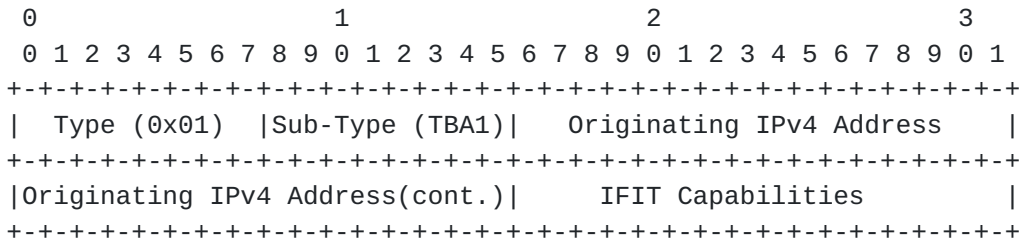


Figure 2. IPv4-Address-Specific IFIT Tail Community

- o Originating IPv4 Address field: A 4 octets field. A IPv4 address of the IFIT decapsulation node. It is an IPv4 unicast address assigned by one of the Internet registries
- o IFIT Capabilities: A 2 octets field. as defined in previous section.



**4.2. IPv6-Address-Specific IFIT Tail Community**

For IPv6 networks [[RFC5701](#)], this section defines a new type of BGP extended community called IPv6-Address-Specific IFIT Extended Community. The IPv6-Address-Specific IFIT Tail Community can be used by the IFIT decapsulation node to notify the IFIT Capabilities to its partner (as the IFIT encapsulation node). It is a transitive IPv6 address specific extended community with type 0x00 and sub-type TBA2.

The format of this extended community is shown in Figure 3.

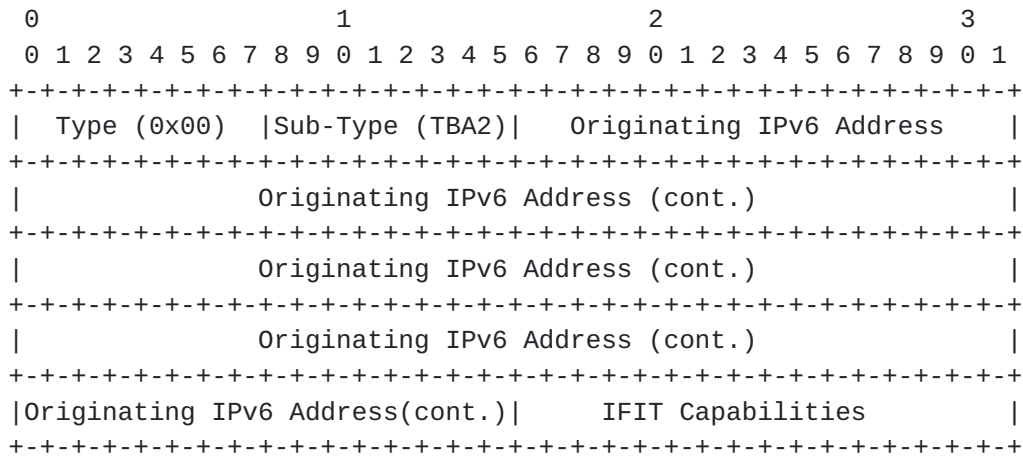


Figure 3. IPv6-Address-Specific IFIT Tail Community

- o Originating IPv6 Address field: A IPv6 address of the IFIT decapsulation node. It is an IPv6 unicast address assigned by one of the Internet registries.
- o IFIT Capabilities: as defined in previous section.

In this option, the Originating IP Address (include IPv4 and IPv6) in the extended community attribute is used as the IFIT decapsulation node.

**5. Option 2: Extension to BGP Next-Hop Capability for IFIT-Capability Advertisement**

The BGP Next-Hop Capability Attribute [[I-D.ietf-idr-next-hop-capability](#)] is a non-transitive BGP attribute, which is modified or deleted when the next-hop is changed, to reflect the capabilities of the new next-hop. The attribute consists of a set of Next-Hop Capabilities.

A IFIT Next-Hop Capability is a triple (Capability Code, Capability Length, Capability Value) aka a TLV:





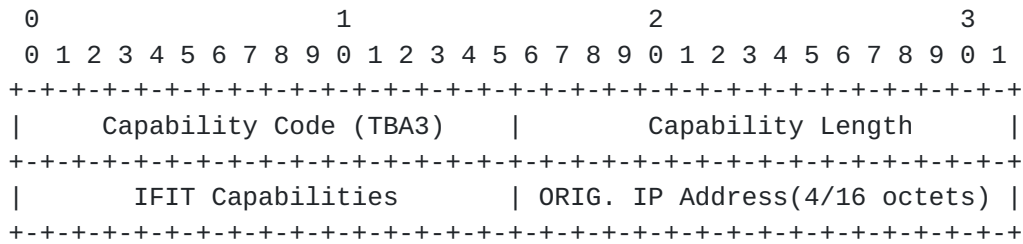


Figure 4. BGP Next-Hop Capability

- o Capability Code: a two-octets unsigned binary integer which indicates the type of "Next-Hop Capability" advertised and unambiguously identifies an individual capability. This document defines a new Next-Hop Capability, which is called IFIT Next-Hop Capability. The Capability Code is TBA3.
- o Capability Length: a two-octets unsigned binary integer which indicates the length, in octets, of the Capability Value field. A length of 0 indicates that no Capability Value field is present.
- o IFIT Capabilities: as defined in previous setion.
- o ORIG. IP Address: An IPv4 or IPv6 Address of the IFIT decapsulation node. It is an IPv4 or IPv6 unicast address assigned by one of the Internet registries.

A BGP speaker S that sends an UPDATE with the BGP Next-Hop Capability Attribute MAY include the IFIT Next-Hop Capability. The inclusion of the IFIT Next-Hop Capability with the NLRI advertised in the BGP UPDATE indicates that the BGP Next-Hop can act as the IFIT decapsulating node and it can process the specific IFIT encapsulation format indicated per the capability value. This is applied for all routes indicated in the same NRLI.

## 6. IANA Considerations

The IANA is requested to make the assignments for IPv4-Address-Specific IFIT Tail Community and IPv6-Address-Specific IFIT Tail Community:

Value	Description	Reference
TBA1	IPv4-Address-Specific IFIT Tail Community	This document
TBA2	IPv6-Address-Specific IFIT Tail Community	This document



The IANA is requested to make the assignments for IFIT Next-Hop Capability:

Value	Description	Reference
TBA3	IFIT Capabilities	This document

## 7. Security Considerations

This document defines extensions to BGP Extended Community and BGP Next-Hop Capability to advertise the IFIT capabilities. It does not introduce any new security risks to BGP.

## 8. Contributors

The following people made significant contributions to this document:

Weidong Li  
Huawei  
Email: poly.li@huawei.com

Haibo Wang  
Huawei  
Email: rainsword.wang@huawei.com

Tianran Zhou  
Huawei  
Email: zhoutianran@huawei.com

## 9. Acknowledgements

TBD

## 10. References

### 10.1. Normative References

[I-D.ietf-idr-next-hop-capability]  
Decraene, B., Kompella, K., and W. Henderickx, "BGP Next-Hop dependent capabilities", [draft-ietf-idr-next-hop-capability-06](#) (work in progress), October 2020.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.



- [RFC4360] Sangli, S., Tappan, D., and Y. Rekhter, "BGP Extended Communities Attribute", [RFC 4360](#), DOI 10.17487/RFC4360, February 2006, <<https://www.rfc-editor.org/info/rfc4360>>.
- [RFC5701] Rekhter, Y., "IPv6 Address Specific BGP Extended Community Attribute", [RFC 5701](#), DOI 10.17487/RFC5701, November 2009, <<https://www.rfc-editor.org/info/rfc5701>>.

## **10.2. Informative References**

- [I-D.ietf-ippm-ioam-data]  
Brockners, F., Bhandari, S., and T. Mizrahi, "Data Fields for In-situ OAM", [draft-ietf-ippm-ioam-data-11](#) (work in progress), November 2020.
- [I-D.ioamteam-ippm-ioam-direct-export]  
Song, H., Gafni, B., Zhou, T., Li, Z., Brockners, F., Bhandari, S., Sivakolundu, R., and T. Mizrahi, "In-situ OAM Direct Exporting", [draft-ioamteam-ippm-ioam-direct-export-00](#) (work in progress), October 2019.
- [RFC4271] Rekhter, Y., Ed., Li, T., Ed., and S. Hares, Ed., "A Border Gateway Protocol 4 (BGP-4)", [RFC 4271](#), DOI 10.17487/RFC4271, January 2006, <<https://www.rfc-editor.org/info/rfc4271>>.
- [RFC4760] Bates, T., Chandra, R., Katz, D., and Y. Rekhter, "Multiprotocol Extensions for BGP-4", [RFC 4760](#), DOI 10.17487/RFC4760, January 2007, <<https://www.rfc-editor.org/info/rfc4760>>.
- [RFC8321] Fioccola, G., Ed., Capello, A., Cociglio, M., Castaldelli, L., Chen, M., Zheng, L., Mirsky, G., and T. Mizrahi, "Alternate-Marking Method for Passive and Hybrid Performance Monitoring", [RFC 8321](#), DOI 10.17487/RFC8321, January 2018, <<https://www.rfc-editor.org/info/rfc8321>>.

### Authors' Addresses

Yali Wang  
Huawei  
Beijing  
China

Email: wangyali11@huawei.com



Shunwan Zhuang  
Huawei  
Beijing  
China

Email: [zhuangshunwan@huawei.com](mailto:zhuangshunwan@huawei.com)

Yunan Gu  
Huawei  
Beijing  
China

Email: [guyunan@huawei.com](mailto:guyunan@huawei.com)

Ran Pang  
China Unicom  
Beijing  
China

Email: [pangran@chinaunicom.cn](mailto:pangran@chinaunicom.cn)



