

i2rs
Internet-Draft
Intended status: Informational
Expires: January 5, 2015

R. White
Ericsson
S. Hares
Huawei
A. Retana
Cisco Systems, Inc.
July 4, 2014

Protocol Independent Use Cases for an Interface to the Routing System
draft-white-i2rs-use-case-06

Abstract

Programmatic interfaces to provide control over individual forwarding devices in a network promise to reduce operational costs while improving scaling, control, and visibility into the operation of large scale networks. To this end, several programmatic interfaces have been proposed. OpenFlow, for instance, provides a mechanism to replace the dynamic control plane processes on individual forwarding devices throughout a network with off box processes that interact with the forwarding tables on each device. Another example is NETCONF, which provides a fast and flexible mechanism to interact with device configuration and policy.

There is, however, no proposal which provides an interface to all aspects of the routing system as a system. Such a system would not interact with the forwarding system on individual devices, but rather with the control plane processes already used to discover the best path to any given destination through the network, as well as interact with the routing information base (RIB), which feeds the forwarding table the information needed to actually switch traffic at a local level.

This document describes a set of use cases such a system could fulfill. It is designed to provide underlying support for the framework, policy, and other drafts describing the Interface to the Routing System (I2RS).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Draft

I2RS Use Cases

July 2014

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 5, 2015.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
1.1.	Requirements Language	3
2.	Summary of Requirements	3
3.	Distributed Reaction to Network Based Attacks	5
4.	Remote Service Routing	7
5.	Within Data Center Routing	9
6.	Temporary Overlays between Data Centers	11
7.	Comparison of I2RS requirements with I2RS RIB Information Model	12
8.	References	15
8.1.	Normative References	15
8.2.	Informative References	15
	Authors' Addresses	15

[1.](#) Introduction

The Architecture for the Interface to the Routing System [[I-D.ietf-i2rs-architecture](#)] allows for a mechanism where the distributed control plane can be augmented by an outside control

plane through an open, accessible interface, including the Routing Information Base (RIB), in individual devices to solve issues described in [[I-D.ietf-i2rs-problem-statement](#)]. The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)] specifies the information elements accessible by the I2RS system in the RIB.

This represents a "halfway point" between completely replacing the traditional distributed control plane and directly configuring devices to distribute policy or modifications to routing through off-board processes. This draft proposes a set of use cases that explain where the work described utilizing the RIB information model will be useful. The goal is to inform not only the community's understanding of where I2RS fits in the larger scheme of SDN proposals, but also to inform the requirements, framework, and specification of I2RS to provide the best fit for the purposes which make the most sense for this type of programmatic interface.

Towards this end the authors have searched for a number of different use cases representing not only complex modifications of the control plane, including interaction with applications and network conditions, but also simpler use cases. The array of use cases presented here should provide the reader with a solid understanding of the power of an SDN solution that will augment, rather than replace, traditional distributed control planes.

[1.1](#). Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

[2](#). Summary of Requirements

Each use case is presented in its own section with a list of requirements. The full list of requirements is below. Each requirement in these lists has an identifier PI-REQnn where PI-REQ standard for protocol independent requirements and nn is a requirement number. Each unique requirement has been given a number so in some use cases the numbers may skip numbers. For example, use case 2 has requirements PI-REQ01, PI-REQ06, and PI-REQ07.

At the end of this document, these use case requirements are compared

against the current I2RS RIB informational model (RIB IM) ([\[I-D.ietf-i2rs-rib-info-model\]](#)). In this section, the RIB Inform requirements are numbered PI-RIB_IM-nn where nn is the requirement number.

- o PI-REQ01: The ability to monitor the available routes installed in the RIB of each forwarding device, including near real time notification of route installation and removal. This information must include the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), the metric of the installed route, and an identifier indicating the installing process.

- o PI-REQ02: The ability to install source and destination based routes in the local RIB of each forwarding device. This must include the ability to supply the destination prefix (NLRI), the source prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.
- o PI-REQ03: The ability to install a route to a null destination, effectively filtering traffic to this destination.
- o PI-REQ04: The ability to interact with various policies configured on the forwarding devices, in order to inform the policies implemented by the dynamic routing processes. This interaction should be through existing configuration mechanisms, such as NETCONF, and should be recorded in the configuration of the local device so operators are aware of the full policy implemented in the network from the running configuration.
- o PI-REQ05: The ability to interact with traffic flow and other network traffic level measurement protocols and systems, in order to determine path performance, top talkers, and other information required to make an informed path decision based on locally configured policy.
- o PI-REQ06: The ability to install destination based routes in the local RIB of each forwarding device. This must include the ability to supply the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding

instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.

- o PI-REQ07: The ability to read the local RIB of each forwarding device, including the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), the metric of each installed route, a route preference, and an identifier indicating the installing process.
- o PI-REQ08: The ability to read the tables of other local protocol processes running on the device. This reading action should be supported through an import/export interface which can present the information in a consistent manner across all protocol implementations, rather than using a protocol specific model for each type of available process.
- o PI-REQ09: The ability to inject information directly into the local tables of other protocol processes running on the forwarding device. This injection should be supported through an import/

export interface which can inject routing information in a consistent manner across all protocol implementations, rather than using a protocol specific model for each type of available process.

- o PI-REQ10: The ability to interact with policies and configurations on the forwarding devices using time based processing, either through timed auto-rollback or some other mechanism. This interaction should be through existing configuration mechanisms, such as NETCONF, and should be recorded in the configuration of the local device so operators are aware of the full policy implemented in the network from the running configuration.

[3.](#) Distributed Reaction to Network Based Attacks

Quickly modifying the control plane to reroute traffic for one destination while leaving a standard configuration in place (filters, metrics, and other policy mechanisms) is a challenge --but this is precisely the challenge of a network engineer attempting to deal with a network incursion. The ability to redirect specific flows of information or specific classes of traffic into, through, and back out of traffic analyzers on the fly is crucial in these situations.

The following network diagram provides an illustration of the problem.


```

Valid Source---\  /---R2-----\
                  R1                      R3---Valid Destination
Attack Source--/  \--Monitoring Device-----/

```

Modifying the cost of the link between R1 and R2 to draw the attack traffic through the monitoring device in the distributed control plane will, of necessity, also draw the valid traffic through the monitoring device. Drawing valid traffic through a monitoring device introduces delay, jitter, and other quality of service issues, as well as posing a problem for the monitoring device itself in terms of traffic load and management.

An I2RS controller could stand between the detection of the attack and the control plane to facilitate the rapid modification of control and forwarding planes to either block the traffic or redirect it to analysis devices connected to the network.

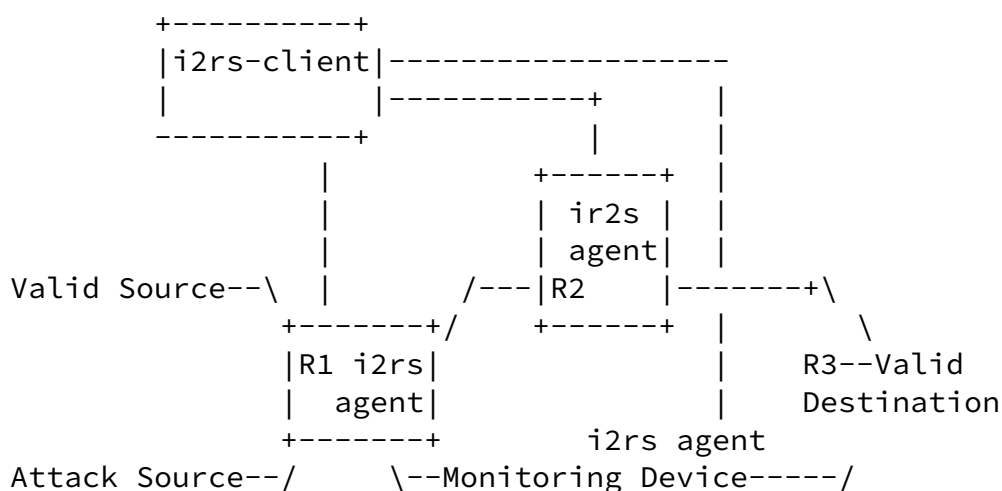

Summary of I2RS Capabilities and Interactions:

In the lists below, the REQnn in which nn is a number indicates a unique requirement from the use cases.

- o PI-REQ01: The ability to monitor the available routes installed in the RIB of each forwarding device, including near real time notification of route installation and removal. The information pulled from the RIB must include the destination prefix (NLRI), the table identifier (if the forwarding device has multiple forwarding instances), the metric of the installed route, and the identifier for the installing process.
- o PI-REQ02: The ability to install source and destination based routes in the local RIB of each forwarding device. This must include the ability to supply the destination prefix (NLRI), the source prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.
- o PI-REQ03: The ability to install a route to a null destination, effectively filtering traffic to this destination.
- o PI-REQ04: The ability to interact with various policies configured on the forwarding devices, in order to inform the policies implemented by the dynamic routing processes. This interaction should be through existing configuration mechanisms, such as NETCONF, and should be recorded in the configuration of the local device so operators are aware of the full policy implemented in the network from the running configuration.
- o PI-REQ5: The ability to interact with traffic flow and other network traffic level measurement protocols and systems, in order

to determine path performance, top talkers, and other information required to make an informed path decision based on locally configured policy.


[4.](#) Remote Service Routing

In hub and spoke overlay networks, there is always an issue with balancing between the information held in the spoke routing table,

optimal routing through the network underlying the overlay, and mobility. Most solutions in this space use some form of centralized route server that acts as a directory of all reachable destinations and next hops, a protocol by which spoke devices and this route server communicate, and caches at the remote sites.

An I2RS solution would use the same elements, but with a different control plane. Remote sites would register (or advertise through some standard routing protocol, such as BGP), the reachable destinations at each site, along with the address of the router (or other device) used to reach that destination. These would, as always, be stored in a route server (or several redundant route servers) at a central location.

When a remote site sends a set of packets to the central location that are eventually destined to some other remote site, the central location can forward this traffic, but at the same time simply directly insert the correct routing information into the remote site's routing table. If the location of the destination changes, the route server can directly modify the routing information at the remote site as needed.

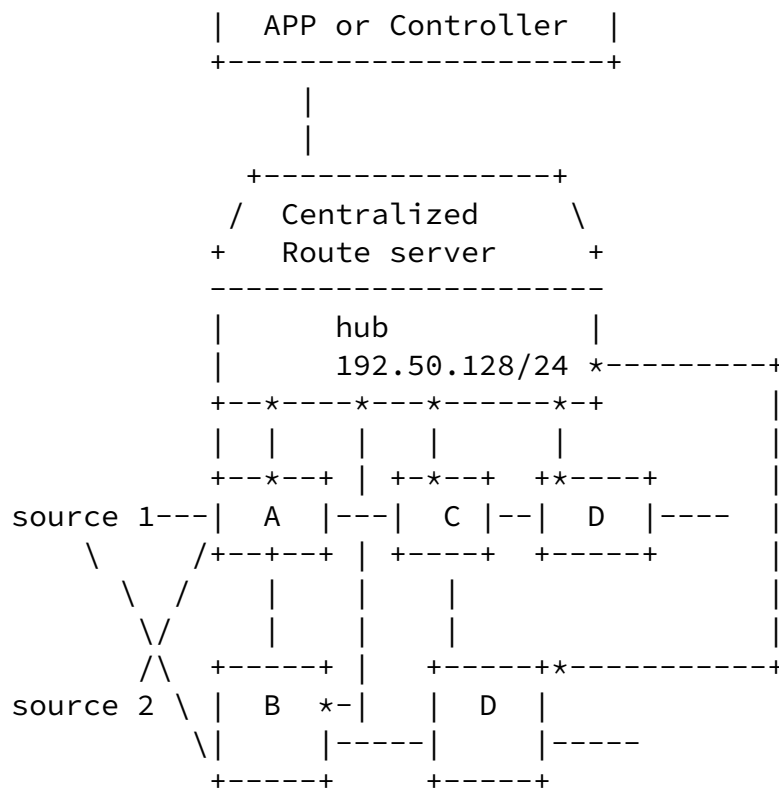

*- are RS connections
 |- are hub/spoke connects

An interesting aspect of this solution is that no new and specialized protocols are needed between the remote sites and the centralized route server(s). Normal routing protocols can be used to notify the centralized route server(s) of modifications in reachability information, and the route server(s) can respond as needed, based on local algorithms optimized for a particular application or network. For instance, short lived flows might be allowed to simply pass through the hub site with no reaction, while longer lived flows might warrant a specific route to be installed in the remote router. Algorithms can also be developed that would optimize traffic flow through the overlay, and also to remove routing entries from remote devices when they are no longer needed based on far greater intelligence than simple non-use for some period of time.

Summary of I2RS Capabilities and Interactions:

- o PI-REQ01: The ability to monitor the available routes installed in the RIB of each forwarding device, including near real time notification of route installation and removal. This information must include the destination prefix (NLRI), a table identifier (if

the forwarding device has multiple forwarding instances), the metric of the installed route, and an identifier indicating the installing process.

- o PI-REQ06: The ability to install destination based routes in the local RIB of each forwarding device. This must include the ability to supply the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.
- o PI-REQ07: The ability to read the local RIB of each forwarding device, including the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), the metric of each installed route, a route preference, and an identifier indicating the installing process.

5. Within Data Center Routing

Data Centers have evolved into massive topologies with thousands of server racks and millions of hosts. Data Centers use BGP with ECMP, ISIS (with multiple LAGs), or other protocols to tie the data center together. Data centers are currently designed around a three or four tier structure with: server, top-of-rack switches, aggregation switches, and router interfacing the data center to the Internet. [[I-D.lapukhov-bgp-routing-large-dc](#)] examines many of these elements of data center design.

One element of these Data Center routing infrastructures is the ability to quickly read topology information and execute configuration from a centralized location. Key to this environment is the tight feedback loop between learning about topology changes or loading changes, and instantiating new routing policy. Without I2RS, many Data Centers are using extra physical topologies or logical topologies to work around the features.

An I2RS solution would use the same elements, but with a different control plane. The I2RS enabled control plane could provide the Data Center 4 tier infrastructure the quick access to topology and data flow information needed for traffic flow optimization. Changes to the Data Center infrastructure done via I2RS could have a tight feedback loop.

Again, this solution would reduce the need for new and specialized protocols while giving the Data Center the control it desire. The I2RS routing interface could be extended to virtual routers.

Summary of I2RS Capabilities and Interactions:

White, et al.

Expires January 5, 2015

[Page 9]

Internet-Draft

I2RS Use Cases

July 2014

- o PI-REQ01: The ability to monitor the available routes installed in the RIB of each forwarding device, including near real time notification of route installation and removal. This information must include the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), the metric of the installed route, and an identifier indicating the installing process.
- o PI-REQ04: The ability to interact with various policies configured on the forwarding devices, in order to inform the policies implemented by the dynamic routing processes. This interaction should be through existing configuration mechanisms, such as NETCONF, and should be recorded in the configuration of the local device so operators are aware of the full policy implemented in the network from the running configuration.
- o PI-REQ05: The ability to interact with traffic flow and other network traffic level measurement protocols and systems, in order to determine path performance, top talkers, and other information required to make an informed path decision based on locally configured policy.
- o PI-REQ06: The ability to install destination based routes in the local RIB of each forwarding device. This must include the ability to supply the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.
- o PI-REQ07: The ability to read the local RIB of each forwarding device, including the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), the metric of each installed route, a route preference, and an identifier indicating the installing process.
- o PI-REQ08: The ability to read the tables of other local protocol processes running on the device. This reading action should be supported through an import/export interface which can present the information in a consistent manner across all protocol

implementations, rather than using a protocol specific model for each type of available process.

- o PI-REQ09: The ability to inject information directly into the local tables of other protocol processes running on the forwarding device. This injection should be supported through an import/export interface which can inject routing information in a consistent manner across all protocol implementations, rather than

using a protocol specific model for each type of available process.

[6.](#) Temporary Overlays between Data Centers

Data Centers within one organization may operate as one single entity even though they may be geographically distributed. Applications are load balanced within Data Centers and between data centers to take advantage of cost economics in power, storage, and server availability for compute resources. Applications are also transfer to alternate data centers in case of failures within a data center. To reduce time during failure, Data Centers often replicate user storage between two or more data centers. During the transfer of stored information prior to a Data Center to Data Center move, the Data Center controllers need to dynamically acquire a large amount of inter-data center bandwidth through an overlay network, often during off hours.

I2RS could provide the connection between the overlay network configuration, local policies, and the control plane to dynamically bring a large bandwidth inter-data center overlay or channel into use, and then to remove it from use when the data transfer is completed.

Similarly, during a fail-over, a control process within data centers interacts with a group host process and the network to seamless move the processing to another data center. During the fail-over case, additional process state may need to be moved as well to restart the system. The difference between these data-to-data center moves is immediate and urgent need to move systems. If an application (such as medical or banking services) pays to have this type of fail-over, it is likely the network service this application uses will pay for

the preemption on network bandwidth and a Quality of Service (QoS) on the data transfer to allow the failover traffic to flow quickly to the remote datacenter. I2RS can allow the Data Center network and the Network connecting the data center to preempt other best-effort traffic to send this priority data flow and to set a QoS that will allow quick data transfer. After the high priority data flow has finished, networks can return to their previous condition.

Summary of I2RS Capabilities and Interactions:

- o PI-REQ01: The ability to monitor the available routes installed in the RIB of each forwarding device, including near real time notification of route installation and removal. This information must include the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), the

metric of the installed route, and an identifier indicating the installing process.

- o PI-REQ02: The ability to install source and destination based routes in the local RIB of each forwarding device. This must include the ability to supply the destination prefix (NLRI), the source prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.
- o PI-REQ05: The ability to interact with traffic flow and other network traffic level measurement protocols and systems, in order to determine path performance, top talkers, and other information required to make an informed path decision based on locally configured policy.
- o PI-REQ06: The ability to install destination based routes in the local RIB of each forwarding device. This must include the ability to supply the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.
- o PI-REQ07: The ability to read the local RIB of each forwarding

device, including the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), the metric of each installed route, a route preference, and an identifier indicating the installing process.

- o PI-REQ10: The ability to interact with policies and configurations on the forwarding devices using time based processing, either through timed auto-rollback or some other mechanism. This interaction should be through existing configuration mechanisms, such as NETCONF, and should be recorded in the configuration of the local device so operators are aware of the full policy implemented in the network from the running configuration.

7. Comparison of I2RS requirements with I2RS RIB Information Model

Comparison of I2RS Capabilities versus the I2RS RIB

In summary, the I2RS client/agent architecture and protocol SHOULD support the following requirements:

PI-RIB_IM-REQ01: The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)] specifies the routes as associated with routing-instance, interface-list and RIBs within a Router (virtual or physical)

identified by Router_ID. Each route has a prefixes, route attributes, family attributes (IPv4, Ipv6, MPLS, MAC, interface), and next-hop list. The RIB info model does not keep information on the FIB the route was installed in, the metric of the installed route, or the identifier of the installing process. The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)] does provide a notification for route change with an installed in FIB flag, active flag, and reason (for non-installation).

PI-RIB_IM-REQ02: The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)] supports installing source-destination routes for IPv4 and IPv6 for a RIB associated with set of RIBs within a route instance of a Router (virtual or physical). If there is policy that links RIBs within a route instance of router to a specific FIB, it is not clearly stated in the RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)]. The source-destination is only for IPv4 and IPv6 NLRI. PI-RIB_IM-REQ02: The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)]. does has a route_preference

(ROUTE_PREFERENCE), but not a route metric. The nexthop field does have a primary/back preference, a load balancing weight, and an egress (outbound) interface per nexthop, and a RIB_ID. It is unclear if the RIB_ID serves the same purpose as the multiple forwarding instances.

PI-RIB_IM-REQ03: The RIB Info Model does not provide a specific indication that the default (zero length prefix) route can be installed, but this can be implied from the different match lengths.

PI-RIB_IM-REQ04: The ability to interact with various policies via existing configuration functions such as NETCONF has not been specified directly in RIB Informational Model [[I-D.ietf-i2rs-rib-info-model](#)] or any other informational model.

PI-TED-REQ01/PI-RIB_IM-REQ05: The PI-REQ05 use case requirement requires the ability to interact with traffic flow and other network traffic level measurement protocols and systems is not included in the I2RS RIB information model. The traffic flow and traffic level measurement does not need to be in the I2RS RIB, but in some Traffic Engineering Information model.

PI-RIB_IM-REQ06: The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)] supports installing destination routes in a RIB for all RIB families from a route-instance. The route_instance is identified by the tuple of INSTANCE_NAME and ROUTER_ID. Each route may contain a route preference and multiple next hops, but it does not contain a metric per route. Each nexthop may contain a RIB_ID to look-up nexthop, an egress-interface, tunnel nexthop (logical or

encapsulated). This must include the ability to supply the destination prefix (NLRI), a table identifier (if the forwarding device has multiple forwarding instances), a route preference, a route metric, a next hop, an outbound interface, and a route process identifier.

PI-RIB_IM-REQ07: The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)] supports the ability to read the RIBs associated with each routing-instance. The routing instance is identified by tuple of ROUTE_INSTANCE plus optionally interface_list and router ID. The RIBs are identified by NAME and RIB_FAMILY. The routes within the

RIB Can be identified by route-match that identifies destination (IPv4, IPv6, IEEE MAC, MPLS, interface). The information read per route is the destination prefix (NLRI), route preference and multiple nexthops (each with associated metric and RIB). However, it does not indicate the metric of an installed route and the identifier of the installing process.

PI-RIB_IM-REQ08: The ability to read the tables of other local protocol processes running on the device. This reading action should be supported through an import/export interface which can present the information in a consistent manner across all protocol implementations, rather than using a protocol specific model for each type of available process.

PI-RIB_IM-REQ09: No informational model supports the ability to inject information of other protocol processing running on the forwarding device. The RIB Info Model [[I-D.ietf-i2rs-rib-info-model](#)] inserts the routes with RIB with a The ability to inject information directly into the local tables of other protocol processes running on the forwarding device. This injection should be supported through an import/export interface which can inject routing information in a consistent manner across all protocol implementations, rather than using a protocol specific model for each type of available process.

PI-RIB_IM-REQ10: The ability to interact with policies and configurations on the forwarding devices using time based processing, either through timed auto-rollback or some other mechanism. This interaction should be through existing configuration mechanisms, such as NETCONF, and should be recorded in the configuration of the local device so operators are aware of the full policy implemented in the network from the running configuration.

[8.](#) References

[8.1.](#) Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[8.2](#). Informative References

[I-D.ietf-i2rs-architecture]

Atlas, A., Halpern, J., Hares, S., Ward, D., and T. Nadeau, "An Architecture for the Interface to the Routing System", [draft-ietf-i2rs-architecture-04](#) (work in progress), June 2014.

[I-D.ietf-i2rs-problem-statement]

Atlas, A., Nadeau, T., and D. Ward, "Interface to the Routing System Problem Statement", [draft-ietf-i2rs-problem-statement-04](#) (work in progress), June 2014.

[I-D.ietf-i2rs-rib-info-model]

Bahadur, N., Folkes, R., Kini, S., and J. Medved, "Routing Information Base Info Model", [draft-ietf-i2rs-rib-info-model-03](#) (work in progress), May 2014.

[I-D.lapukhov-bgp-routing-large-dc]

Lapukhov, P., Premji, A., and J. Mitchell, "Use of BGP for routing in large-scale data centers", [draft-lapukhov-bgp-routing-large-dc-06](#) (work in progress), August 2013.

Authors' Addresses

Russ White
Ericsson

Email: russw@riw.us

Susan Hares
Huawei

Email: shares@ndzh.com

Alvaro Retana
Cisco Systems, Inc.
7025 Kit Creek Road
Research Triangle Park, NC 27617
USA

Email: aretana@cisco.com

