

IDR
Internet-Draft
Intended status: Standards Track
Expires: 7 September 2022

Q. Xiong
H. Wu
ZTE Corporation
J. Zhao
CAICT
March 2022

BGP Flow Specification for DetNet and TSN Flow Mapping
draft-xiong-idr-detnet-flow-mapping-02

Abstract

This document proposes extensions to BGP Flow Specification for the flow mapping of Deterministic Networking (DetNet) when interconnected with IEEE 802.1 Time-Sensitive Networking (TSN). The BGP flowspec is used for the filtering of the packets that match the DetNet networks and the mapping between TSN streams and DetNet flows in the control plane.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 2 September 2022.

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction	2
2.	Conventions used in this document	3
2.1.	Terminology	3
2.2.	Requirements Language	3
3.	The Requirements for DetNet Control Plane	3
3.1.	Functions for DetNet Flow to TSN Stream Mapping	3
3.2.	Aggregation during DetNet Flow to TSN Stream Mapping	5
4.	BGP Extensions for Flow Specification Encoding	5
4.1.	Filtering Rules for TSN Streams	5
4.2.	Traffic Action for TSN Streams	6
4.3.	Filtering Rules for DetNet Flows	7
4.4.	Traffic Action for DetNet Flows	8
5.	Security Considerations	9
6.	Acknowledgements	9
7.	IANA Considerations	9
8.	Normative References	10
	Authors' Addresses	11

[1.](#) Introduction

[RFC8655] specifies the architecture of Deterministic Networking (DetNet), which provide a capability for the delivery of data flows with extremely low packet loss rates and bounded end-to-end delivery latency. DetNet-enabled end systems and DetNet nodes can be interconnected by sub-networks, i.e., Layer 2 technologies such as IEEE 802.1 Time-Sensitive Networking (TSN).

As defined in [[RFC8655](#)], the DetNet IP and MPLS flows can be carried over TSN sub-networks. DetNet needs to be mapped to the sub-networks technology used to interconnect DetNet nodes. For example, a TSN node may be used to interconnect DetNet-aware nodes, and these DetNet nodes can map DetNet flows to TSN streams. When the Detnet provide

the deterministic service for the TSN end system, a DetNet edge node may be used to interconnect the TSN end system, and the DetNet nodes can map the TSN streams to DetNet flows.

As described in [\[RFC8938\]](#), one of the primary requirements of the DetNet Controller Plane is restricting flows to IEEE 802.1 TSN and the requirement could use the centralized network management provisioning mechanisms such as BGP protocol. As defined in [\[RFC8955\]](#), the Flow Specifications for BGP is an n-tuple consisting of several matching criteria which is comprised of traffic filtering rules and is associated with actions that can be applied to the traffic flows. The DetNet edge nodes can provide the capability to process the traffic including classifying, shaping, rate limiting, filtering, and redirecting packets based on the policies configured by the BGP Flow Specification.

BGP flow specification version 1 (FSv1) has been defined in [\[RFC8955\]](#) and version 2 of the BGP flow specification (FSv2) protocol has been proposed in [\[I-D.hares-idr-flowspec-v2\]](#). This document proposes extensions to BGP FSv2 for the interconnection of DetNet and TSN. The BGP flowspec is used for the filtering of the packets that match the DetNet networks and the mapping between TSN streams and DetNet flows in the control plane.

[2.](#) Conventions used in this document

[2.1.](#) Terminology

The terminology is defined as [\[RFC8655\]](#), [\[RFC8938\]](#), [\[RFC8955\]](#) and [\[I-D.hares-idr-flowspec-v2\]](#).

[2.2.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [\[RFC2119\]](#) [\[RFC8174\]](#) when, and only when, they appear in all capitals, as shown here.

[3.](#) The Requirements for DetNet Control Plane


3.1. Functions for DetNet Flow to TSN Stream Mapping


As described in [RFC9024], TSN networks can be interconnected over a DetNet MPLS Network. And as discussed in [RFC9023] and [RFC9037], DetNet IP or MPLS networks can be operating over a TSN sub-network. The mapping between TSN Streams and DetNet flows is required for the service proxy function at DetNet Edge nodes. And the mapping table can be configured and maintained in the control plane. When a DetNet Edge Node receives a packet, it MUST identify and check whether such flow is present in its mapping table and decide to drop (when not match) or to forward the packet (when match) to the associated

service.

As Figure 1 shows, it is required to configure the identification information when mapping received TSN Streams to the DetNet flows at Edge Node-1. Mechanisms and Parameters of TSN stream identification (e.g.,Mask-and-Match Stream identification) defined in [IEEE8021CB] and [IEEEP8021CBdb] can be used for service proxy function. After the identification of the TSN stream, it need to map the packet to the DetNet flow information such as S-Label, d-CW when in DetNet MPLS data plane and handle the packet as defined in [RFC8964].

When the DetNet Edge Node-2 receives a DetNet flow, it MUST identify the DetNet flow-ID information such as IP 6-tuple in DetNet IP data plane or S-Label and d-CW information in DetNet MPLS data plane. Then the Service proxy function need to map the DetNet flow-ID and flow related parameters to the associated TSN Stream IDs and streams related parameters.

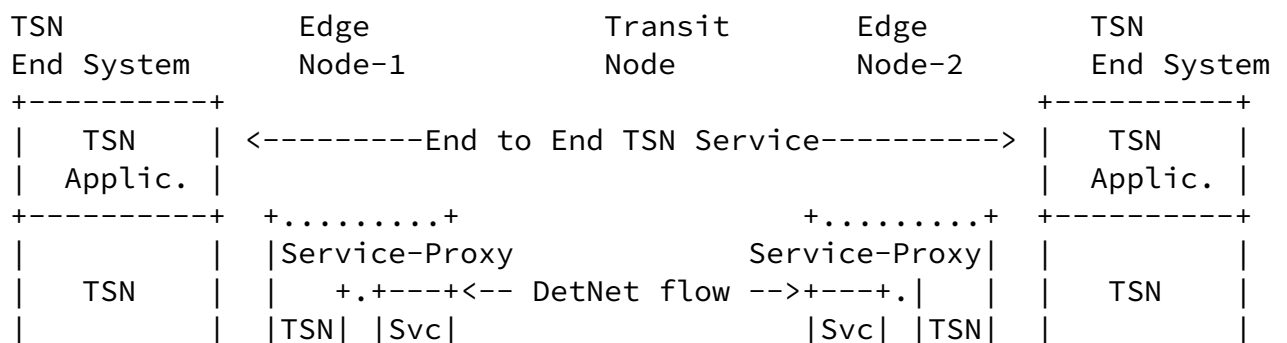

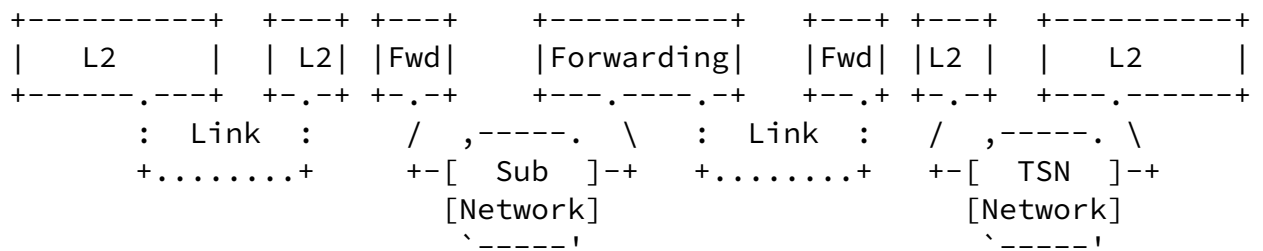

Flow Mapping:

|TSN : DetNet|<----- DetNet ----->|DetNet : TSN|

Figure 1: Figure 1: Flow Mapping in TSN over DetNet Network

3.2. Aggregation during DetNet Flow to TSN Stream Mapping

As described in [RFC8938], the DetNet data plane allows for the aggregation of DetNet flows, which should also be accomplished in the control plane. IP, MPLS and TSN aggregation has both data plane and controller Plane aspects. Bandwidth reservations, resource assignment, path computation, delay, delay variation and aggregate number should be taken into considerations in the controller plane. Moreover, as defined in [RFC9023] and [RFC9037], 1:1 and N:1 mapping (aggregating multiple TSN Streams in a single DetNet flow) MUST be supported.

4. BGP Extensions for Flow Specification Encoding

As defined in [RFC8955], the nodes that applied a Flow Specification can filter the received packets according to the matching criteria and can forward the flows based on the associated actions. This document proposes extensions to BGP Flow Specification for the mapping of DetNet flows and TSN streams by using the traffic filtering rules to identify the packet and using the associated action to map the packet to the related service.

4.1. Filtering Rules for TSN Streams

As IEEE Std 802.1Q defined, a Stream ID is a 64-bit field that uniquely identifies a stream and can be generated by the system offering the stream, or possibly a device controlling that system. But it is not carried in the header of the TSN Stream. As defined in [IEEE8021CB] and [IEEE8021CBdb], five specific Stream identification functions are described: Null Stream identification, Source MAC and VLAN Stream identification, Active Destination MAC and VLAN Stream identification, and IP Stream identification, and Mask-and-match Stream identification. It needs to examine the header of the streams such as destination_address, vlan_identifier, IP source address, IP destination address, DSCP, IP next protocol, source port, destination port and mac_service_data_unit.

As defined in [I-D.ietf-idr-flowspec-l2vpn], the Ethernet Layer 2 (L2) related fields have been covered by the L2 traffic filtering rules except the mac_service_data_unit in Mask-and-Match Stream identification. A mac_service_data_unit mask is defined to identify communication flows supported by various higher-layer protocols. L2 Traffic Rules and L2 header TLV in BGP FSV2 have been defined in [I-D.hares-idr-flowspec-v2] section 3.4. This document proposes a new L2 SubTLV for TSN Streams in L2 Flow Specification Component shown in Figure 2.

```
+-----+
| SubTLV type = TBD1 (1 octet) |
+-----+
| length (1 octet) |
+-----+
| Mac Service Data Unit (6 octets) |
+-----+
```

Figure 2: Figure 2: TSN SubTLV

SubTLV type = TBD1: Mac Service Data Unit

Encoding: <type (1 octet), length (1 octet), [op, value]+>

Defines a list of {operation, value} pairs used to match 6-octet Mac Service Data Unit field. Values are encoded as 6-octet quantities. op is encoded as specified in [Section 4.2.1.1 of \[RFC8955\]](#).

4.2. Traffic Action for TSN Streams

The action for an TSN traffic filtering flowspec is to accept the TSN streams that matches that particular rule and map the streams to the DetNet flows. The action for L3 traffic with extended communities types per [RFC8955] and [RFC8956] such as traffic-rate, traffic-marking, traffic-action, and redirect can be used for TSN to DetNet IP flow mapping. The Wide Community has been proposed for FSv2 actions in [I-D.hares-idr-flowspec-v2] section 3.2.

The DetNet flow is identified by a S-Label and the DetNet Header consists of d-CW and F-Labels. The MPLS label related action for an TSN stream mapping to a DetNet MPLS network can use the Label-action defined in [\[I-D.ietf-idr-bgp-flowspec-label\]](#). And the action for the sequence in d-CW field, this document proposes a new Action SubTLV in BGP FSv2 Wide Community for TSN Streams as following shown.

```

+=====+=====+=====+
| type | Wide Community | encoding |
+=====+=====+=====+
| TBD2 | Sequence Action | bitmask |
+-----+-----+-----+

```

Table 1

The The Sequence Action SubTLV is shown in Figure 3.

0		15
<hr/>		
	SubTLV type = TBD2 (2 octet)	
<hr/>		
	length (2 octet)	
<hr/>		
+--+		
	Type Sequence Number	
<hr/>		
+--+--+--+--+--+		




Figure 3: Figure 3: Sequence Action

Type: 4 bits, indicates the length type of the sequence number:

0: 0 bits

1: 16 bits

2: 28 bits

Sequence Number: 28 bits, an unsigned value implementing the DetNet sequence number.

4.3. Filtering Rules for DetNet Flows

The L3 traffic filtering rules defined in [[RFC8955](#)] and [[RFC8956](#)] can be used for DetNet IP flow.

As defined in [RFC8964](#), the MPLS-based DetNet data plane encapsulation consists of d-CW, S-Label and F-Labels. The MPLS label filtering rules have been defined in [[I-D.ietf-idr-flowspec-mpls-match](#)]. IP header TLV in BGP FSV2 of has been defined in [[I-D.hares-idr-flowspec-v2](#)] [section 3.1](#).

This document proposes a new IP header SubTLV for DetNet MPLS flows shown in Figure 4.

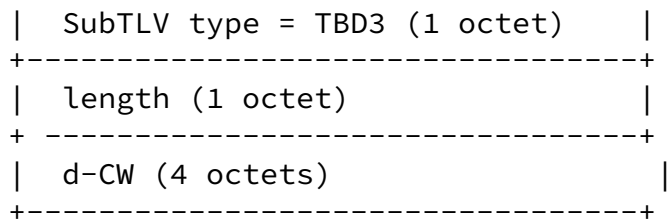


Figure 4: Figure 4: DetNet SubTLV

MPLS Match Type TBD3: d-CW , indicates Sequence in Label stack.

Encoding: <type (1 octet), length (1 octet), [op, value]+>

Defines a list of {operation, value} pairs used to match Sequence. Values are encoded as 4-octet quantities, where the four most significant bits are set to zero and ignored for matching and the 28 least significant bits contain the sequence value. op is encoded as specified in [Section 4.2.1.1 of \[RFC8955\]](#).

4.4. Traffic Action for DetNet Flows

The extended action for an DetNet traffic filtering flowspec is to accept the DetNet flows that matches that particular rule and map the flows to the TSN streams. This document proposes a new Action SubTLV in BGP FSv2 Wide Community for DetNet flows as the following shown.

type	Wide Community	encoding
TBD4	TSN Action	bitmask

Table 2

The TSN Action SubTLV is shown in Figure 3.

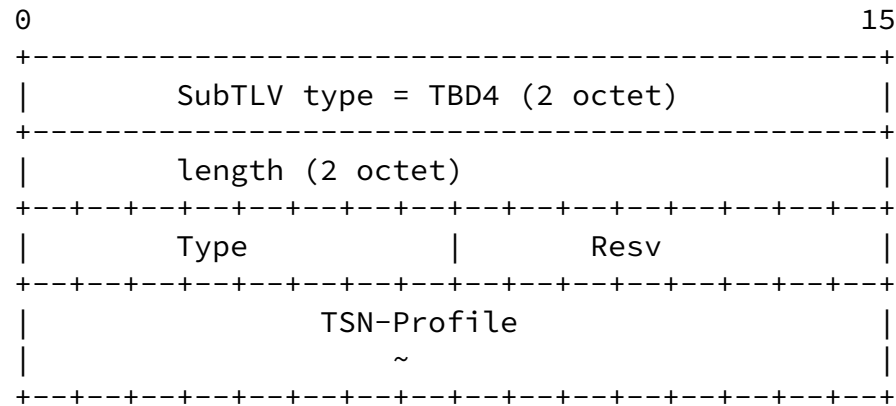


Figure 5: Figure 5: TSN Action

Type: 1-octet, indicates the type of TSN profiles. The value of the types is TBD:

Resv: 1-octet, reserved for future use. MUST be sent as zero and ignored on receipt.

TSN-profile: 4-octet, can be converted to the TSN Stream ID and stream related parameters and requirements as the following shown.

stream_handle: identifying the Stream to which the packet belongs in TSN networks.

sequence_number: identifying the order in which the packet was transmitted relative to other packets in the same Compound Stream in TSN networks.

traffic_scheduling: identifying the traffic scheduling mechanisms including traffic policy, queuing and forwarding methods in TSN networks.

5. Security Considerations

TBA

6. Acknowledgements

TBA

7. IANA Considerations

8. Normative References

[I-D.hares-idr-flowspec-v2]

Hares, S., Eastlake, D., Yadlapalli, C., and S. Maduschke, "BGP Flow Specification Version 2", Work in Progress, Internet-Draft, [draft-hares-idr-flowspec-v2-05](https://www.ietf.org/internet-drafts/draft-hares-idr-flowspec-v2-05), 4 February 2022, <<https://www.ietf.org/internet-drafts/draft-hares-idr-flowspec-v2-05.txt>>.

[I-D.ietf-idr-bgp-flowspec-label]

Liang, Q., Hares, S., You, J., Raszuk, R., and D. Ma, "Carrying Label Information for BGP FlowSpec", Work in Progress, Internet-Draft, [draft-ietf-idr-bgp-flowspec-label-01](https://www.ietf.org/archive/id/draft-ietf-idr-bgp-flowspec-label-01), 6 December 2016, <<https://www.ietf.org/archive/id/draft-ietf-idr-bgp-flowspec-label-01.txt>>.

[I-D.ietf-idr-flowspec-l2vpn]

Hao, W., Eastlake, D. E., Litkowski, S., and S. Zhuang, "BGP Dissemination of L2 Flow Specification Rules", Work in Progress, Internet-Draft, [draft-ietf-idr-flowspec-l2vpn-18](https://www.ietf.org/archive/id/draft-ietf-idr-flowspec-l2vpn-18), 24 October 2021, <<https://www.ietf.org/archive/id/draft-ietf-idr-flowspec-l2vpn-18.txt>>.

[I-D.ietf-idr-flowspec-mpls-match]

Yong, L., Hares, S., Liang, Q., and J. You, "BGP Flow Specification Filter for MPLS Label", Work in Progress, Internet-Draft, [draft-ietf-idr-flowspec-mpls-match-01](https://www.ietf.org/archive/id/draft-ietf-idr-flowspec-mpls-match-01), 6 December 2016, <<https://www.ietf.org/archive/id/draft-ietf-idr-flowspec-mpls-match-01.txt>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](https://www.rfc-editor.org/info/rfc2119), [RFC 2119](https://www.rfc-editor.org/info/rfc2119), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](https://www.rfc-editor.org/info/rfc2119) Key Words", [BCP 14](https://www.rfc-editor.org/info/rfc8174), [RFC 8174](https://www.rfc-editor.org/info/rfc8174), DOI 10.17487/RFC8174,

May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

- [RFC8655] Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", [RFC 8655](#), DOI 10.17487/RFC8655, October 2019, <<https://www.rfc-editor.org/info/rfc8655>>.

Xiong, et al.

Expires 7 September 2022

[Page 10]

Internet-Draft BGP Flow Specification for DetNet and TS

March 2022

- [RFC8938] Varga, B., Ed., Farkas, J., Berger, L., Malis, A., and S. Bryant, "Deterministic Networking (DetNet) Data Plane Framework", [RFC 8938](#), DOI 10.17487/RFC8938, November 2020, <<https://www.rfc-editor.org/info/rfc8938>>.
- [RFC8955] Loibl, C., Hares, S., Raszuk, R., McPherson, D., and M. Bacher, "Dissemination of Flow Specification Rules", [RFC 8955](#), DOI 10.17487/RFC8955, December 2020, <<https://www.rfc-editor.org/info/rfc8955>>.
- [RFC8956] Loibl, C., Ed., Raszuk, R., Ed., and S. Hares, Ed., "Dissemination of Flow Specification Rules for IPv6", [RFC 8956](#), DOI 10.17487/RFC8956, December 2020, <<https://www.rfc-editor.org/info/rfc8956>>.
- [RFC8964] Varga, B., Ed., Farkas, J., Berger, L., Malis, A., Bryant, S., and J. Korhonen, "Deterministic Networking (DetNet) Data Plane: MPLS", [RFC 8964](#), DOI 10.17487/RFC8964, January 2021, <<https://www.rfc-editor.org/info/rfc8964>>.
- [RFC9023] Varga, B., Ed., Farkas, J., Malis, A., and S. Bryant, "Deterministic Networking (DetNet) Data Plane: IP over IEEE 802.1 Time-Sensitive Networking (TSN)", [RFC 9023](#), DOI 10.17487/RFC9023, June 2021, <<https://www.rfc-editor.org/info/rfc9023>>.
- [RFC9024] Varga, B., Ed., Farkas, J., Malis, A., Bryant, S., and D. Fedyk, "Deterministic Networking (DetNet) Data Plane: IEEE 802.1 Time-Sensitive Networking over MPLS", [RFC 9024](#), DOI 10.17487/RFC9024, June 2021, <<https://www.rfc-editor.org/info/rfc9024>>.

[RFC9037] Varga, B., Ed., Farkas, J., Malis, A., and S. Bryant,
"Deterministic Networking (DetNet) Data Plane: MPLS over
IEEE 802.1 Time-Sensitive Networking (TSN)", [RFC 9037](#),
DOI 10.17487/RFC9037, June 2021,
<<https://www.rfc-editor.org/info/rfc9037>>.

Authors' Addresses

Quan Xiong
ZTE Corporation
No.6 Huashi Park Rd
Wuhan
Hubei, 430223
China
Email: xiong.quan@zte.com.cn

Xiong, et al.

Expires 7 September 2022

[Page 11]

Internet-Draft BGP Flow Specification for DetNet and TS

March 2022

Haisheng Wu
ZTE Corporation
Nanjing
Jiangsu,
China
Email: wu.haisheng@zte.com.cn

Junfeng Zhao
CAICT
China
Email: zhaojunfeng@caict.ac.cn

