

Internet Engineering Task Force
Internet Draft

R. Yan
Y. Jiang
L. Gui
Alcatel Shanghai Bell
X. Duan
China Mobile

Expiration: January 2006

File: [draft-yan-dhc-dhcpv6-opt-dnszone-03.txt](#)

Domain Suffix Option for DHCPv6
<Draft-yan-dhc-dhcpv6-opt-dnszone-03.txt>

July 8, 2005

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on January 6, 2006.

Copyright Notice

Copyright (C) The Internet Society (2005). All Rights Reserved.

Abstract

This document specifies a new DHCPv6 (DHCP for IPv6) option which is passed from a DHCPv6 server to a DHCPv6 client to specify the domain suffix name used to perform domain name update.

Type: 16-bits identifier of the type of option (TBD).

Length: Length of the "domain suffix" field in octets.

Domain suffix: The specification of a domain suffix.

The domain suffix in the 'domain suffix' MUST include only one item, and MUST be encoded as specified in section "Representation and use of domain names" of [RFC3315](#).


2.1 Usage

In stateful DHCPv6 [2], the DHCPv6 server MAY place a domain suffix option in the options field of IA_PD option [3] in an outgoing DHCPv6 message. The DHCPv6 server MUST NOT place a domain suffix option in any other portion of a stateful DHCPv6 message.

In stateless DHCPv6 [9], the DHCPv6 server MAY place a domain suffix option in the main option buffer of any DHCPv6 message sent to a client.

A DHCPv6 server may provide different values for the domain suffix option to different clients. This is useful to avoid domain name confliction in large-scale network. The mechanism for choosing which suffix to assign to which client is a matter of implementation and administrative policy, and is therefore not specified in this document.

3.0 Example

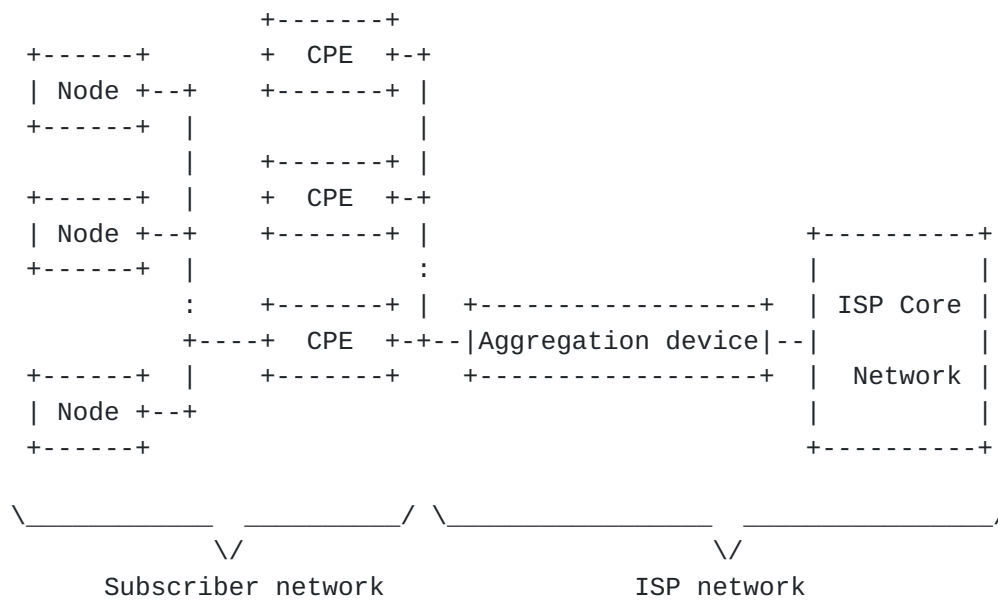

The above figure shows a typical usage of the domain suffix option. In this model, ISP has the ISP level domain name suffix (e.g. example.com). CPE in subscriber network may include a DNS server for name resolution for local hosts.

The CPE in the subscriber network, which acts as a requesting router, initiates a DHCPv6 session with the ISP's aggregation device, acting as a delegation route. During the DHCP session, an IPv6 prefix, along with the corresponding domain suffix name (i.e. example.com) will be transferred to the CPE.

The domain suffix name can then be used to construct the domain name for the hosts in subscriber network, using mechanisms defined in [6] or [10].

To avoid frequent domain name conflicts, aggregation device might allocate different domain suffix name for the CPEs. An example way can be selection based on an external authority such as a RADIUS server, in which a unique domain suffix name prefix, called "home name", is negotiated between user and ISP when subscribing. For example, "user1.example.com" and "user2.example.com".

4.0 Security Considerations

Security considerations in DHCP are described in [section 23](#), "Security Considerations" of [RFC 3315](#).

A rogue DHCP server can issue bogus domain suffix to a client. This may cause wrong domain name update.

A malicious client may be able to mount a denial of service attack by repeated DHCP requests for domain suffix, thus exhausts the DHCP server's resource.

Currently, it is difficult for DHCP servers to develop much confidence in the identities of its clients, given the absence of entity authentication from the DHCP protocol itself. To guard against attack, DHCP Authentication as described in [section 21 of RFC 3315](#) can be used.

Copyright notice

Copyright (C) The Internet Society (2004). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

References

- [1] Deering, S. and R. Hiden, "Internet Protocol, Version 6 (IPv6) Specification", [RFC2460](#), December 1998.
- [2] Bound, J., Carney, M., Perkins, C., Lemon, T., Volz, B. and R. Droms (ed.), "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3315](#), May 2003.
- [3] O. Troan, R. Droms, "IPv6 prefix option for DHCPv6", [RFC3363](#), December 2003.
- [4] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [5] P. Vixie, S. Thomson, Y. Rekhter and J. Bound, "Dynamic Updates in the Domain Name System (DNS UPDATE)", [RFC2136](#), April 1997.
- [6] B. Volz, "The DHCPv6 Client FQDN Option", [draft-ietf-dhc-dhcpv6-fqdn-00.txt](#), September, 2004.
- [7] Wellington, B., "Secure Domain Name System (DNS) Dynamic Update", [RFC 3007](#), November 2000.
- [8] Mockapetris, P., "Domain names - concepts and facilities", STD 13, [RFC 1034](#), November 1987.
- [9] R. Droms, "Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6", [RFC3736](#), April 2004.
- [10] R. Yan, "DNS update in IPv6 stateless configuration", [draft-yan-ipv6-ra-dns-01.txt](#), June 2005.

Author Information:

Renxiang Yan
Yinglan Jiang
Luoning Gui
Research & Innovation Center
Alcatel Shanghai Bell Co., Ltd.
388#, NingQiao Road, Pudong Jinqiao,
Shanghai 201206 P.R. China
Phone: +86 (21) 5854-1240, ext. 7169

Email: renxiang.yan@alcatel-sbell.com.cn
Yinglan.jiang@alcatel-sbell.com.cn
Luoning.gui@alcatel-sbell.com.cn

Xiaodong Duan
Research & Development Center
China Mobile Communications Corporation
53A, Xibianmennei Ave., Xuanwu District,
Beijing, 100053 P.R. China
Phone: +86 (10) 6600-6688, ext. 3062

Email: duanxiaodong@chinamobile.com

