

Network Working Group
Internet-Draft
Intended status: Informational
Expires: September 22, 2016

J. You
M. Zhang
Huawei Technologies
N. Leymann
C. Heidemann
Deutsche Telekom AG
March 21, 2016

Traffic Distribution for GRE Tunnel Bonding
draft-you-traffic-distribution-for-bonding-00

Abstract

GRE (Generic Routing Encapsulation) Tunnel Bonding as an L3 overlay tunneling mechanism is used for Hybrid Access (HA) bonding between HCPE (Hybrid Customer Premises Equipment) and HAG (Hybrid Access Gateway). The bonding performance depends upon the performance for each individual link. This document specifies a trying overflow mechanism to avoid the bonding performance downgrading due to the situation that an individual link is disrupted or its quality downgrades too much so that the bonding is no longer applicable.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 22, 2016.

Internet-Draft

Traffic Distribution

March 2016

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	Terminology	3
2.1.	Abbreviations and acronyms	3
2.2.	Definitions	3
3.	TCP Throughput Measurement and Issues	4
4.	Traffic Distribution Algorithm	4
5.	Trying Overflow Mechanism	6
6.	Overbooking Considerations	7
7.	Security Considerations	7
8.	References	7
8.1.	Normative References	7
8.2.	Informative References	7
	Authors' Addresses	8

[1.](#) Introduction

Service providers want to supply a higher throughput for their subscribers to provide a better customer experience, especially in those cases where customers can only be offered with a low bitrate DSL access. Bonding of fixed broadband and 3GPP access networks becomes desirable. [[I-D.zhang-gre-tunnel-bonding](#)] proposes a GRE (Generic Routing Encapsulation) tunnel bonding mechanism for bonding of DSL (Digital Subscriber Line) connection and LTE (Long Term Evolution) connection. An example of deployment scenario is illustrated in Figure 1. The Hybrid Access (HA) bonded connection is established between the HCPE (Hybrid Customer Premises Equipment), in

the customer premises network, and the HAG (Hybrid Access Gateway), on the service provider's network [WT-348].

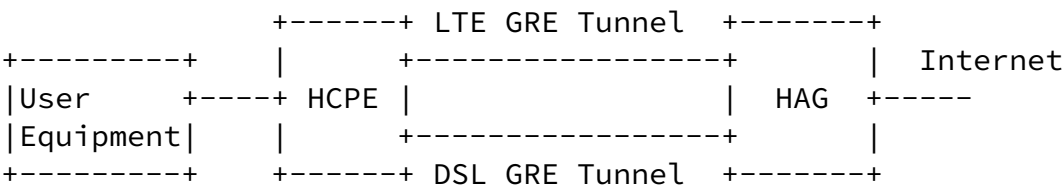


Figure 1: GRE Tunnel Bonding

The bonding should not be enabled if the bonding performance is worse than DSL only. This document proposes a traffic distribution algorithm named trying overflow to improve the bonding performance.

2. Terminology

2.1. Abbreviations and acronyms

- BRAS: Broadband Remote Access Server
- CAR: Commit Access Rate
- CIR: Committed Information Rate
- HA: Hybrid Access
- HAG: Hybrid Access Gateway
- HCPE: Hybrid Customer Premises Equipment
- LTE: Long Term Evolution

2.2. Definitions

- Hybrid Access: The bonding of two access paths based on heterogeneous technologies (e.g., DSL and LTE).
- Hybrid Access Gateway: A logical function in the operator network

implementing a bonding mechanism for customer access services.

Hybrid Customer Premises Equipment: A CPE enhanced to support the simultaneous use of both fixed broadband and 3GPP access networks.

Hybrid Access Gateway: A logical function in the operator network implementing a bonding mechanism for customer access services.

You, et al.

Expires September 22, 2016

[Page 3]

Internet-Draft

Traffic Distribution

March 2016

[3.](#) TCP Throughput Measurement and Issues

The Quality of Experience (QoE) on a hybrid access service depends upon the performance of each individual link. Generally, TCP Throughput (T) for a link can be measured as:

$$\text{Throughput} \leq \min(\text{BW}, \text{WindowSize}/\text{RTT}, \text{MSS}/(\text{RTT} \times \sqrt{p}))$$

While for hybrid access,

$$\text{RTT} = \max(\text{RTT1}, \text{RTT2})$$
$$p = w1 \times p1 + w2 \times p2$$

Therein,

BW: maximum bandwidth

WindowSize: congestion window size

RTT: Round Trip Time; RTT1 for DSL link, RTT2 for LTE link

MSS: maximum segment size (fixed for each Internet path, typically 1460 Bytes)

p: packet loss rate; p1 for DSL link, p2 for LTE link

w: distribution factor; w1 refers to the percentage of total traffic on DSL link; w2 refers to the percentage of total traffic on LTE link.

When LTE link becomes congested, the latency may reach up to 400 ms; while the normal latency on DSL may only be 10 ms. According to the formula above, the TCP throughput for the hybrid access would be worse than DSL link only assuming $p_1 = p_2$.

4. Traffic Distribution Algorithm

Principle: Traffic distribution over DSL is prior to traffic distribution over LTE. The bonding mode would be enabled if the bonding performance is better than DSL only. Otherwise the bonding should not be enabled.

CAR (Committed Access Rate) with two token buckets is used to distribute traffic flows on HA-compliant nodes.

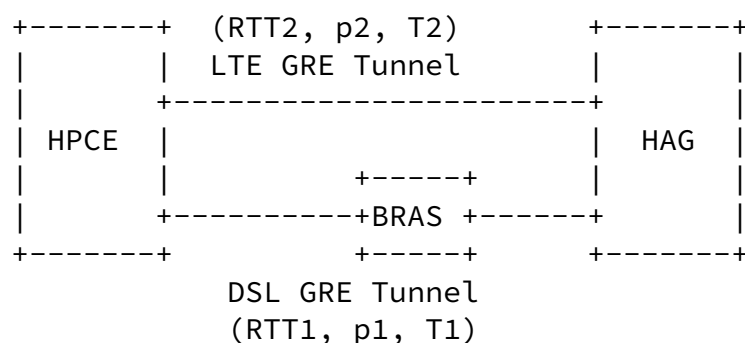


Figure 2: Deployment Scenario

1. Start DSL only, and measure RTT_1 , p_1 and T_1 periodically; get $\langle RTT_{1_min}, p_{1_min} \rangle$, $\langle T_{1_max}, RTT_{1_t1max}, p_{1_t1max} \rangle$. Here RTT_{1_t1max} refers to the RTT when the throughput reaches maximum (T_{1_max}) in a period. Likewise, p_{1_t1max} refers to the p when the throughput reaches maximum (T_{1_max}) in a period.

2. Estimate the usage of DSL according to RTT_1 and P_1 ; If there's no congestion (i.e. $RTT_1 = RTT_{1_min}$ and $p_1 = p_{1_min}$), bonding is not enabled.

3. If DSL is congested (i.e. $RTT1 > RTT1_min$ or $p1 > p1_min$), start the "trying overflow" procedure (detailed in [Section 5](#)).

1) The bonding mode is on. Tentatively distribute a small amount of traffic onto the LTE link at the initial stage, assuming $CIR2 = LTE_MIN$ (minimum committed access rate). LTE_MIN is configurable and its default value is 64Kbps.

2) Measure the throughput of the bonded links ($T12$) periodically.

a) If $T12 < T1_max$ and the DSL link is not congested, the bonding mode should be off.


b) If $T12 < T1_max$ and the DSL link is congested, the bonding mode is open, the CIR adjustment (i.e. decreasing) of the DSL link is triggered.

c) Otherwise, the bonding mode is on. Set $CIR1 = T1_max$, the overflow traffic is distributed to LTE tunnel.

i. If the DSL link is not congested and $T12$ is increasing rapidly, the CIR adjustment (i.e. increasing) of the DSL link is triggered.

[5.](#) Trying Overflow Mechanism

The "Trying Overflow" mechanism is implemented using the token bucket mechanism on, as shown in Figure 3.

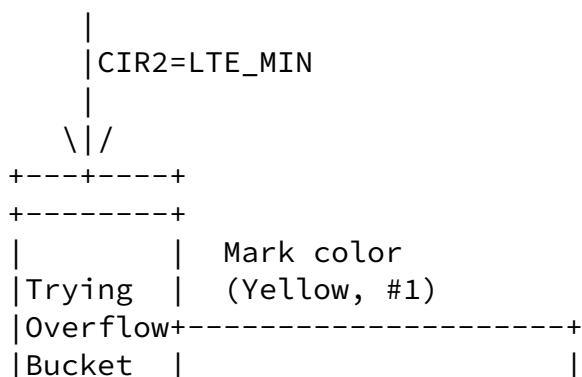

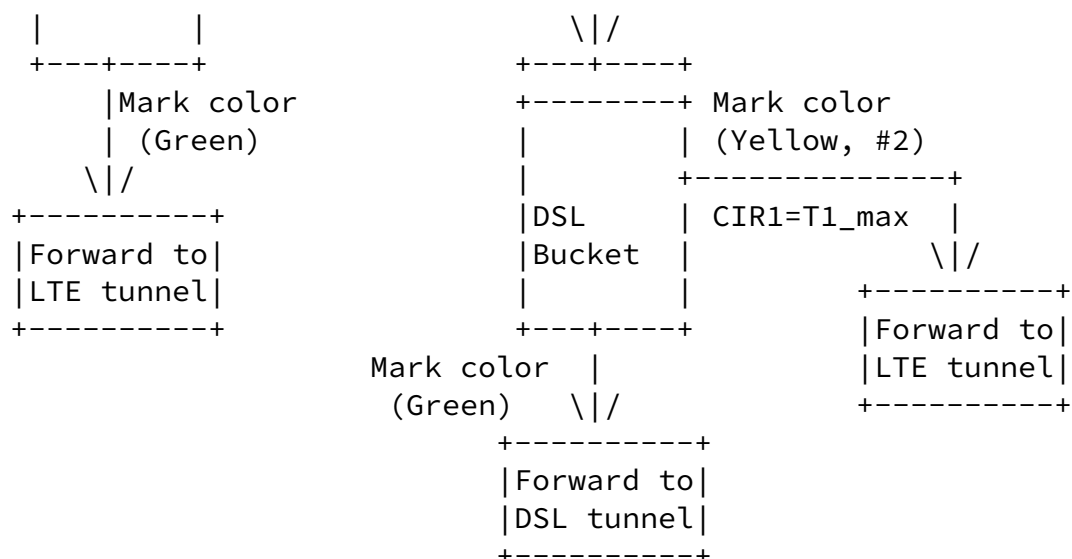


Figure 3: Trying Overflow

o Trying Overflow Bucket: In this step, all the incoming traffic will be distributed to the trying overflow bucket. Its CIR can be set to LTE_MIN.

HA node has no knowledge of the quality of the LTE tunnel at first. If the LTE tunnel is congested, the bonding may impair the customer experience. So trying overflow is performed. If the trying is successful, then it means the LTE tunnel can be used for bonding.

The green packets will be distributed into the LTE tunnel, while yellow packets of #1 will be put into the DSL bucket.

o DSL Bucket: Its CIR can be set to T1_max. The green packets will be distributed into DSL tunnel, and yellow packets of #2 will be distributed into LTE tunnel.

Theoretically, if the LTE tunnel is suitable for bonding, the bonding TCP throughput T12 will increase continuously; and will exceed T1_max immediately. Yellow packets of #2 can be continuously observed obviously in a period of time.

6. Overbooking Considerations

DSL bandwidth can be overbooked on the BRAS (Broadband Remote Access Server). Overbooking may cause long delay or high packet loss rate.

When bandwidth downgrading happens on the BRAS due to overbooking, the CIR of the DSL link needs to be decreased. At that time, the bonding performance is worse than using DSL only and the DSL link is congested.

When the bandwidth is restored, the CIR of the DSL link needs to be increased. At that time, the bonding performance improves, and the congestion on the DSL link can be relieved.

7. Security Considerations

TBD.

8. References

8.1. Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

8.2. Informative References

[I-D.zhang-gre-tunnel-bonding]
Leymann, N., Heidemann, C., Zhang, M., Sarikaya, B., and M. Cullen, "GRE Tunnel Bonding", [draft-zhang-gre-tunnel-bonding-01](#) (work in progress), October 2015.

[WT-348] "BBF WT-348 Part-A: Hybrid Access for Broadband Networks", 12 2015.

Jianjie You
Huawei Technologies
101 Software Avenue, Yuhuatai District
Nanjing 210012
China

Email: youjianjie@huawei.com

Mingui Zhang
Huawei Technologies
No.156 Beiqing Rd. Haidian District
Beijing 100095
China

Email: zhangmingui@huawei.com

Nicolai Leymann
Deutsche Telekom AG
Winterfeldtstrasse 21-27
Berlin 10781
Germany

Email: n.leymann@telekom.de

Cornelius Heidemann
Deutsche Telekom AG
Heinrich-Hertz-Strasse 3-7
Darmstadt 64295
Germany

Email: heidemannc@telekom.de