

**July 1, 2015**

Deterministic Networking Use Case in Mobile Network  
[draft-zha-detnet-use-case-00](#)

Abstract

This document describes some high level use cases and scenarios with requirements on delay sensitive and deterministic networking. Not only the telecom industry but also vertical industries have been investigated. In addition to the 5G networking, industrial automation, automotive industry, media and gaming industry are typical related industries believed to be representative for the technical requirements on ultra-fast and ultra-reliability communications.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on January 1, 2016.

## Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction .....</a>	<a href="#">2</a>
<a href="#">2.</a>	<a href="#">Conventions used in this document .....</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">Critical Delay Requirements .....</a>	<a href="#">4</a>
<a href="#">4.</a>	<a href="#">Coordinated multipoint processing (CoMP) .....</a>	<a href="#">5</a>
<a href="#">4.1.</a>	<a href="#">CoMP Architecture .....</a>	<a href="#">5</a>
<a href="#">4.2.</a>	<a href="#">Delay Sensitivity in CoMP .....</a>	<a href="#">6</a>
<a href="#">5.</a>	<a href="#">Industrial Automation .....</a>	<a href="#">6</a>
<a href="#">6.</a>	<a href="#">Vehicle to Vehicle .....</a>	<a href="#">7</a>
<a href="#">7.</a>	<a href="#">Gaming, Media and Virtual Reality .....</a>	<a href="#">7</a>
<a href="#">8.</a>	<a href="#">Security Considerations .....</a>	<a href="#">8</a>
<a href="#">9.</a>	<a href="#">IANA Considerations .....</a>	<a href="#">8</a>
<a href="#">10.</a>	<a href="#">Acknowledgments .....</a>	<a href="#">8</a>
<a href="#">11.</a>	<a href="#">References .....</a>	<a href="#">8</a>
<a href="#">11.1.</a>	<a href="#">Normative References .....</a>	<a href="#">8</a>
<a href="#">11.2.</a>	<a href="#">Informative References .....</a>	<a href="#">8</a>

## [1. Introduction](#)

The rapid growth of the today's communication system and its access into almost all aspects of daily life has led to great dependency on services it provides. The communication network, as it is today, has applications such as multimedia and peer-to-peer file sharing distribution that require Quality of Service (QoS) guarantees in terms of delay and jitter to maintain a certain level of performance. Meanwhile, mobile wireless communications has become an important part to support modern sociality with increasing importance over the last years. A communication network



of hard real-time and high reliability is essential for the next concurrent and next generation mobile wireless networks as well as its bearer network for E-2-E performance requirements.

Conventional transport network is IP-based because of the bandwidth and cost requirements. However the delay and jitter guarantee becomes a challenge in case of contention since the service here is not deterministic but best effort. With more and more rigid demand in latency control in the future network [[METIS](#)], deterministic networking [[I-D.finn-detnet-architecture](#)] is a promising solution to meet the ultra low delay applications and use cases. There are already typical issues for delay sensitive networking requirements in midhaul and backhaul network to support LTE and future 5G network [[5G](#)]. And not only in the telecom industry but also other vertical industry has increasing demand on delay sensitive communications as the automation becomes critical recently.

More specifically, CoMP techniques, D-2-D, industrial automation and gaming/media service all have great dependency on the low delay communications as well as high reliability to guarantee the service performance. Note that the deterministic networking is not equal to low latency as it is more focused on the worst case delay bound of the duration of certain application or service. It can be argued that without high certainty and absolute delay guarantee, low delay provisioning is just relative [[RFC3393](#)], which is not sufficient to some delay critical service since delay violation in an instance cannot be tolerated. Overall, the requirements from vertical industries seem to be well aligned with the expected low latency and high determinist performance of future networks

This document describes several use cases and scenarios with requirements on deterministic delay guarantee within the scope of the deterministic network [[I-D.finn-detnet-problem-statement](#)].

## **[2. Conventions used in this document](#)**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)]. In this document, these words will appear with that interpretation only when in ALL CAPS. Lower case uses of these words are not to be interpreted as carrying [[RFC2119](#)] significance.



### 3. Critical Delay Requirements

Delay and jitter requirement has been taken into account as a major component in QoS provisioning since the birth of Internet. The delay sensitive networking with increasing importance becomes the root of mobile wireless communications as well as the applicable areas which are all greatly relied on low delay communications. Due to the best effort feature of the IP networking, mitigate contention and buffering is the main solution to serve the delay sensitive service. More bandwidth is assigned to keep the link low loaded or in another word, reduce the probability of congestion. However, not only lack of determinism but also has limitation to serve the applications in the future communication system, keeping low loaded cannot provide deterministic delay guarantee.

Take the [\[METIS\]](#) that documents the fundamental challenges as well as overall technical goal of the 5G mobile and wireless system as the starting point. It should support:

- 1000 times higher mobile data volume per area,
- 10 times to 100 times higher typical user data rate,
- 10 times to 100 times higher number of connected devices,
- 10 times longer battery life for low power devices, and
- 5 times reduced End-to-End (E2E) latency,

at similar cost and energy consumption levels as today's system. Taking part of these requirements related to latency, current LTE networking system has E2E latency less than 20ms [LTE-Latency] which leads to around 5ms E2E latency for 5G networks. It has been argued that fulfill such rigid latency demand with similar cost will be most challenging as the system also requires 100 times bandwidth as well as 100 times of connected devices. As a result to that, simply adding redundant bandwidth provisioning can be no longer an efficient solution due to the high bandwidth requirements more than ever before. In addition to the bandwidth provisioning, the critical flow within its reserved resource should not be affected by other flows no matter the pressure of the network. Robust defense of critical flow is also not depended on redundant bandwidth allocation.

Deterministic networking techniques in both layer-2 and layer-3 using IETF protocol solutions can be promising to serve these scenarios.



#### 4. Coordinated multipoint processing (CoMP)

In the wireless communication system, Coordinated multipoint processing (CoMP) is considered as an effective technique to solve the inter-cell interference problem to improve the cell-edge user throughput [CoMP].

##### 4.1. CoMP Architecture

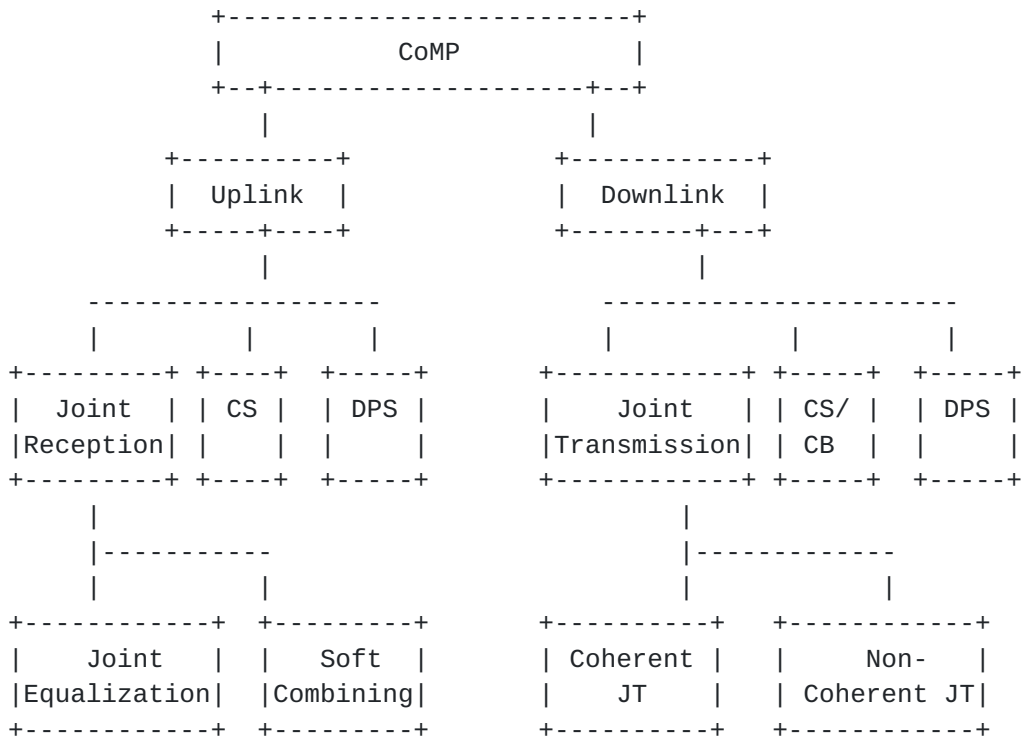


Figure 1: Framework of CoMP Technology

As shown in figure 1, CoMP reception and transmission is a framework that multiple geographically distributed antenna nodes cooperate to improve the performance of the users served in the common cooperation area. The design principal of CoMP is to extend the current single-cell to multi-UEs transmission to a multi-cell-to-multi-UEs transmission by base station cooperation. In contrast



to single-cell scenario, CoMP has critical issues such as: Backhaul latency, CSI (Channel State Information) reporting and accuracy and Network complexity. Clearly the first two requirements are very much delay sensitive and will be discussed in next section.

#### **4.2. Delay Sensitivity in CoMP**

As the essential feature of CoMP, signaling is exchanged between eNBs, the backhaul latency is the dominating limitation of the CoMP performance. Generally, JT and JP may benefit from coordinating the scheduling (distributed or centralized) of different cells in case that the signaling exchanging between eNBs is limited to 4-10ms. For C-RAN the backhaul latency requirement is 250us while for D-RAN it is 4-15ms. And this delay requirement is not only rigid but also absolute since any uncertainty in delay will down the performance significantly. Note that, some operator's transport network is not build to support Layer-3 transfer in aggregation layer. In such case, the signaling is exchanged through EPC which means delay is supposed to be larger.

CoMP has high requirement on delay and reliability which is lack by current mobile network systems and may impact the architecture of the mobile network.

### **5. Industrial Automation**

Traditional "industrial automation" terminology usually refers to automation of manufacturing, quality control and material processing. "Industrial internet" and "industrial 4.0" [[EA12](#)] is becoming a hot topic based on the Internet of Things. This high flexible and dynamic engineering and manufacturing will result in a lot of so-called smart approaches such as Smart Factory, Smart Products, Smart Mobility, and Smart Home/Buildings. No doubt that ultra high reliability and robustness is a must in data transmission, especially in the closed loop automation control application where delay requirement is below 1ms and packet loss less than  $10E-9$ . All these critical requirements on both latency and loss cannot be fulfilled by current 4G communication networks. Moreover, the collaboration of the industrial automation from remote campus with cellular and fixed network has to be built on an integrated, cloud-based platform. In this way, the deterministic flows should be guaranteed regardless of the amount of other flows in the network. The lack of this mechanism becomes the main obstacle in deployment on of industrial automation.



## **6. Vehicle to Vehicle**

V2V communication has gained more and more attention in the last few years and will be increasingly growth in the future. Not only equipped with direct communication system which is short ranged, V2V communication also requires wireless cellular networks to cover wide range and more sophisticated services. V2V application in the area autonomous driving has very stringent requirements of latency and reliability. It is critical that the timely arrival of information for safety issues. In addition, due to the limitation of processing of individual vehicle, passing information to the cloud can provide more functions such as video processing, audio recognition or navigation systems. All of those requirements lead to a highly reliable connectivity to the cloud. On the other hand, it is natural that the provisioning of low latency communication is one of the main challenges to be overcome as a result of the high mobility, the high penetration losses caused by the vehicle itself. As result of that, the data transmission with latency below 5ms and a high reliability of PER below  $10E-6$  are demanded. It can benefit from the deployment of deterministic networking with high reliability.

## **7. Gaming, Media and Virtual Reality**

Online gaming and cloud gaming is dominating the gaming market since it allow multiple players to play together with more challenging and competing. Connected via current internet, the latency can be a big issue to degrade the end users' experience. There different types of games and FPS (First Person Shooting) gaming has been considered to be the most latency sensitive online gaming due to the high requirements of timing precision and computing of moving target. Virtual reality is also receiving more interests than ever before as a novel gaming experience. The delay here can be very critical to the interacting in the virtual world. Disagreement between what is seeing and what is feeling can cause motion sickness and affect what happens in the game. Supporting fast, real-time and reliable communications in both PHY/MAC layer, network layer and application layer is main bottleneck for such use case.

The media content delivery has been and will become even more important use of Internet. Not only high bandwidth demand but also critical delay and jitter requirements have to be taken into



account to meet the user demand. To make the smoothness of the video and audio, delay and jitter has to be guaranteed to avoid possible interruption which is the killer of all online media on demand service. Now with 4K and 8K video in the near future, the delay guarantee become one of the most challenging issue than ever before. 4K/8K UHD video service requires 6Gbps-100Gbps for uncompressed video and compressed video starting from 60Mbps. The delay requirement is 100ms while some specific interactive applications may require 10ms delay [[UHD-video](#)].

## **8. Security Considerations**

TBD

## **9. IANA Considerations**

This document has no actions for IANA.

## **10. Acknowledgments**

This document has benefited from reviews, suggestions, comments and proposed text provided by the following members, listed in alphabetical order: Jing Huang, Junru Lin, Lehong Niu and Oilver Huang.

## **11. References**

### **11.1. Normative References**

- [RFC2119] S. Bradner, "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3393] C. Demichelis, "IP Packet Delay Variation Metric for IP Performance Metrics (IPPM) ", [RFC 3393](#), November 2002.

### **11.2. Informative References**

[I-D.finn-detnet-problem-statement]

Finn, N. and P. Thubert, "Deterministic Networking Problem Statement", [draft-finn-detnet-problem-statement-01](#) (work in progress), October 2014.

[I-D.finn-detnet-architecture]

Finn, N., Thubert, P., and M. Teener, "Deterministic Networking Architecture", [draft-finn-detnet-architecture-01](#) (work in progress), March 2015.

[METIS] METIS Document Number: ICT-317669-METIS/D1.1, Scenarios, requirements and KPIs for 5G mobile and wireless system, April 29, 2013. Available on line at: <[https://www.metis2020.com/wp-content/uploads/deliverables/METIS\\_D1.1\\_v1.pdf](https://www.metis2020.com/wp-content/uploads/deliverables/METIS_D1.1_v1.pdf)>

[5G] Ericsson white paper, "5G Radio Access, Challenges for 2020 and Beyond." June 2013. Available at: <<http://www.ericsson.com/res/docs/whitepapers/wp-5g.pdf>>

[CoMP] NGMN Alliance, "RAN EVOLUTION PROJECT COMP EVALUATION AND ENHANCEMENT ", MARCH 2015, <[https://www.ngmn.org/uploads/media/NGMN\\_RANEV\\_D3\\_CoMP\\_Evaluation\\_and\\_Enhancement\\_v2.0.pdf](https://www.ngmn.org/uploads/media/NGMN_RANEV_D3_CoMP_Evaluation_and_Enhancement_v2.0.pdf)>

[LTE-Latency]Samuel Johnston, "LTE Latency: How does it compare to other technologies?" report of OpenSignal March 10, 2014. <<http://opensignal.com/blog/2014/03/10/lte-latency-how-does-it-compare-to-other-technologies/>>

[EA12] P. C. Evans, M. Annunziata, "Industrial Internet: Pushing the Boundaries of Minds and Machines", General Electric White paper, November 2012.

[UHD-video] Petr Holub, "Ultra-High Definition Videos and Their Applications over the Network", The 7th International Symposium on VICTORIES Project, OCTOBER 8, 2014. <[http://www.aist-victories.org/jp/7th\\_sympto\\_ws/PetrHolub\\_presentation.pdf](http://www.aist-victories.org/jp/7th_sympto_ws/PetrHolub_presentation.pdf)>

Authors' Addresses

Yiyong Zha  
Huawei Technologies  
Email: zhayiyong@huawei.com