

Network Working Group
Internet-Draft
Intended status: Standards Track

Fatai Zhang
Xian Zhang
Huawei
Adrian Farrel
Old Dog Consulting
Oscar Gonzalez de Dios
Telefonica
D. Ceccarelli
Ericsson
June 25, 2013

Expires: December 24, 2013

RSVP-TE Signaling Extensions in support of Flexible Grid

[draft-zhang-ccamp-flexible-grid-rsvp-te-ext-02.txt](#)

Abstract

This memo describes the extensions to RSVP-TE signaling to support Label Switched Paths in a GMPLS-controlled network that includes devices using the new flexible optical grid.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on December 24, 2013.

Table of Contents

1.	Introduction	2
2.	Terminology	3
2.1.	Conventions used in this document	3
3.	Requirements for Flexible Grid Signaling	3
3.1.	Slot Width	4
3.2.	Frequency Slot	4
4.	Protocol Extensions	5
4.1.	Traffic Parameters.....	5
4.1.1.	Applicability to Fixed Grid Networks	6
4.2.	Generalized Label.....	6
4.3.	Signaling Procedures.....	6
5.	IANA Considerations	7
5.1.	RSVP Objects Class Types.....	7
6.	Manageability Considerations.....	7
7.	Security Considerations.....	7
8.	References	7
8.1.	Normative References.....	7
8.2.	Informative References.....	8
9.	Contributors' Address.....	8
10.	Authors' Addresses	9

[1.](#) Introduction

[G.694.1] defines the Dense Wavelength Division Multiplexing (DWDM) frequency grids for Wavelength Division Multiplexing (WDM) applications. A frequency grid is a reference set of frequencies used to denote allowed nominal central frequencies that may be used for defining applications. The channel spacing is the frequency spacing between two allowed nominal central frequencies. All of the wavelengths on a fiber use different central frequencies and occupy a fixed bandwidth of frequency.

Fixed grid channel spacing is selected from 12.5 GHz, 25 GHz, 50 GHz, 100 GHz and integer multiples of 100 GHz. But [[G.694.1](#)] also defines 'flexible grids', known as 'flexi-grid'. The terms 'frequency slot (i.e. the frequency range allocated to a specific channel and unavailable to other channels within a flexible grid)' and 'slot width' (i.e. the full width of a frequency slot in a flexible grid) are introduced to define a flexible grid.

[FLEX-FWK] defines a framework and the associated control plane requirements for the GMPLS based control of flexi-grid DWDM networks.

[draft-zhang-ccamp-flexible-grid-rsvp-te-ext-02.txt](#)

June 2013

[RFC6163] provides a framework for GMPLS and Path Computation Element (PCE) control of Wavelength Switched Optical Networks (WSONs), and [[WSON-SIG](#)] describes the requirements and protocol extensions for signaling to set up Label Switched Paths (LSPs) in WSONs.

This document describes the additional requirements and protocol extensions for signaling to set up LSPs in networks that support the flexi-grid.

[2. Terminology](#)

For terminology related to flexi-grid, please refer to [[FLEX-FWK](#)] and [[G.694.1](#)].

[2.1. Conventions used in this document](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [[RFC2119](#)].

[3. Requirements for Flexible Grid Signaling](#)

The architecture for establishing LSPs in a flexi-grid network is described in [[FLEX-FWK](#)].

A optical spectrum LSP occupies a specific frequency slot, i.e. a range of frequencies. The process of computing a route and the allocation of a frequency slot is referred to as RSA (Routing and Spectrum Assignment). [[FLEX-FWK](#)] describes three types of architecture approaches to RSA: combined RSA, separated RSA and distributed SA. The first two approaches are referred to as 'centralized SA', because both routing and spectrum (frequency slot) assignment are performed by centralized entity before the signaling procedure.

In the case of centralized SA, the assigned frequency slot is specified in the Path message during LSP setup. In the case of

distributed SA, the slot width of the flexi-grid LSP is specified in the Path message, allowing the involved network elements to select the frequency slot to be used.

If the capability of switching or converting the whole optical spectrum allocated to an optical spectrum LSP is not available at nodes along the path of the LSP, the LSP is subject to the Optical 'Spectrum Continuity Constraint', as described in [[FLEX-FWK](#)].

The remainder of this section states the additional requirements for signaling in a flexi-grid network.

[3.1. Slot Width](#)

The slot width is an end-to-end parameter representing how much frequency resource is requested for a flexi-grid LSP. It is equivalent of optical bandwidth, although the amount of bandwidth associated with a slot width will depend on the encoding.

Different LSPs may request different amounts of frequency resource in flexible grid networks, so the slot width needs to be carried in the signaling message during LSP establishment. This enables the nodes along the LSP to know how much frequency resource has been requested (in a Path message) and has been allocated (by a Resv message) for the LSP.

[3.2. Frequency Slot](#)

The frequency slot information identifies which part of the frequency spectrum is allocated on each link for a flexi-LSP.

This information is required in Resv message to indicate, hop-by-hop, the central frequency of the allocated resource. In combination with the slot width indicated in a Resv message (see [Section 3.1](#)) the central frequency carried in a Resv message identifies the resources reserved for the LSP (known as the frequency slot).

The frequency slot can be represented by the two parameters as follows:

$$\text{Frequency slot} = [(\text{central frequency}) - (\text{slot width})/2] \sim [(\text{central frequency}) + (\text{slot width})/2]$$

As is common with other resource identifiers (i.e., labels) in GMPLS signaling, it must be possible for the head-end LSP to suggest or require the central frequency to be used for the LSP. Furthermore, for bidirectional LSPs, the Path message must be able to specify the central frequency to be used for reverse direction traffic.

As described in [[G.694.1](#)], the allowed frequency slots for the flexible DWDM grid have a nominal central frequency (in THz) defined by:

$$193.1 + n * 0.00625$$

where n is zero or a positive or negative integer.

The slot width (in GHz) is defined as:

$$12.5 * m$$

where m is a positive integer.

It is possible that implementing a subset of the possible slot widths and central frequencies are supported. For example, an implementation could be built where the nominal central frequency granularity is 12.5 GHz (by only requiring values of n that are even) and that only supports slot widths as a multiple of 25 GHz (by only allowing values of m that are even).

Further details can be found in [[FLEX-FWK](#)].

[4. Protocol Extensions](#)

This section defines the extensions to RSVP-TE signaling for GMPLS [[RFC3473](#)] to support flexible grid networks.

[4.1. Traffic Parameters](#)

In RSVP-TE, the SENDER_TSPEC object in the Path message indicates the requested resource reservation. The FLOWSPEC object in the Resv message indicates the actual resource reservation.

As described in [Section 3.1](#), the slot width represents how much frequency resource is requested for a flexi-grid LSP. That is, it describes the end-to-end traffic profile of the LSP. Therefore, the traffic parameters for a flexi-grid LSP encode the slot width.

This document defines new C-Types for the SENDER_TSPEC and FLOWSPEC objects to carry Spectrum Switched Optical Network (SSON) traffic parameters:

SSON SENDER_TSPEC: Class = 12, C-Type = TBD1.

SSON FLOWSPEC: Class = 9, C-Type = TBD2.

The SSON traffic parameters carried in both objects have the same format as shown in Figure 1.

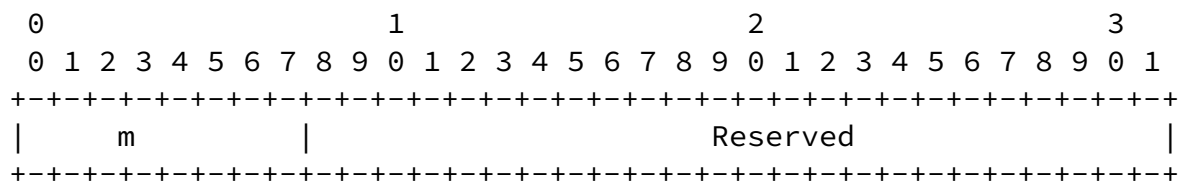


Figure 1: The SSON Traffic Parameters

m (8 bits): the slot width is specified by $m \times 12.5$ GHz.

The Reserved bits MUST be set to zero and ignored upon receipt.

[4.1.1](#). Applicability to Fixed Grid Networks

Note that the slot width (i.e., traffic parameters) of a fixed grid defined in [\[G.694.1\]](#) can also be specified by using the SSON traffic parameters. The fixed grid channel spacings (12.5 GHz, 25 GHz, 50 GHz, 100 GHz and integer multiples of 100 GHz) are also the multiple of 12.5 GHz, so the m parameter can be used to represent these slot widths.

Therefore, it is possible to consider using the new traffic parameter object types in common signaling messages for flexi-grid

and legacy DWDM networks.

[4.2. Generalized Label](#)

In the case of a flexible grid network, the labels that have been requested or allocated as signaled in the RSVP-TE objects are encoded as described in [FLEX-LBL]. This new label encoding can appear in any RSVP-TE object or sub-object that can carry a label.

As noted in [Section 4.2](#) of [FLEX-LBL], the m parameter forms part of the label as well as part of the traffic parameters.

[4.3. Signaling Procedures](#)

There are no differences between the signaling procedure described for LSP control in [FLEX-FWK] and those required for use in a fixed-grid network [WSON-SIG]. Obviously, the TSpec, FlowSpec and label formats described in [Section 3](#) are used. The signaling procedures for distributed SA and centralized SA can be applied.

Zhang

Expires December 2013

[Page 6]

[draft-zhang-ccamp-flexible-grid-rsvp-te-ext-02.txt](#)

June 2013

[5. IANA Considerations](#)

[5.1. RSVP Objects Class Types](#)

This document introduces two new Class Types for existing RSVP objects. IANA is requested to make allocations from the "Resource ReSerVation Protocol (RSVP) Parameters" registry using the "Class Names, Class Numbers, and Class Types" sub-registry.

Class Number	Class Name	Reference
9	FLOWSPEC	[RFC2205]
	Class Type (C-Type):	
	(TBD2) SSON FLOWSPEC	[This.I-D]
Class Number	Class Name	Reference

Class Type (C-Type):

(TBD1) SSON SENDER_TSPEC

[This.I-D]

IANA is requested to assign the same value for TBD1 and TBD2, and a value of 8 is suggested.

[6.](#) Manageability Considerations

This document makes minor modifications to GMPLS signaling, but does not change the manageability considerations for such networks. Clearly, protocol analysis tools and other diagnostic aids (including logging systems and MIB modules) will need to be enhanced to support the new traffic parameters and label formats.

[7.](#) Security Considerations

This document introduces no new security considerations to [[RFC3473](#)].

[8.](#) References

[8.1.](#) Normative References

[RFC2119] S. Bradner, "Key words for use in RFCs to indicate requirements levels", [RFC 2119](#), March 1997.

Zhang

Expires December 2013

[Page 7]

[draft-zhang-ccamp-flexible-grid-rsvp-te-ext-02.txt](#)

June 2013

[RFC3473] L. Berger, Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003.

[G.694.1] ITU-T Recommendation G.694.1 (revision 2), "'Spectral grids for WDM applications: DWDM frequency grid'", February 2012.

[FLEX-LBL] King, D., Farrel, A. and Y. Li, "'Generalized Labels for the Flexi-Grid in Lambda Switched Capable (LSC) Label Switching Routers'", [draft-farrkingel-ccamp-flexigrid-lambda-label](#), work in progress.

[8.2.](#) Informative References

- [RFC2205] Braden, R., Zhang L., Berson, S., Herzog, S. and S. Jamin, 'Resource ReServation Protocol (RSVP) - Version 1, Functional Specification', [RFC2205](#), September 1997.
- [RFC6163] Y. Lee, G. Bernstein and W. Imajuku, "Framework for GMPLS and Path Computation Element (PCE) Control of Wavelength Switched Optical Networks (WSONs)", [RFC 6163](#), April 2011.
- [FLEX-FWK] Gonzalez de Dios, O., Casellas R., Zhang, F., Fu, X., Ceccarelli, D., and I. Hussain, 'Framework and Requirements for GMPLS based control of Flexi-grid DWDM networks', [draft-ogrcetal-camp-flexi-grid-fwk](#), work in progress.
- [WSON-SIG] G. Bernstein, Sugang Xu, Y. Lee, G. Martinelli and Hiroaki Harai, "Signaling Extensions for Wavelength Switched Optical Networks", [draft-ietf-ccamp-wson-signaling](#), work in progress.

9. Contributors' Address

Ramon Casellas
CTTC
Av. Carl Friedrich Gauss n7
Castelldefels, Barcelona 08860
Spain

Email: ramon.casellas@cttc.es

Zhang

Expires December 2013

[Page 8]

[draft-zhang-ccamp-flexible-grid-rsvp-te-ext-02.txt](#)

June 2013

Felipe Jimenez Arribas
Telefonica Investigacion y Desarrollo
Emilio Vargas 6
Madrid, 28045
Spain
Email: felipej@tid.es

Yi Lin
Huawei Technologies Co., Ltd.

F3-5-B R&D Center, Huawei Base,
Bantian, Longgang District
Shenzhen 518129 P.R.China

Phone: +86-755-28972914
Email: yi.lin@huawei.com

10. Authors' Addresses

Fatai Zhang
Huawei Technologies
Email: zhangfatai@huawei.com

Xian Zhang
Huawei Technologies
Email: zhang.xian@huawei.com

Adrian Farrel
Old Dog Consulting
Email: adrian@olddog.co.uk

Oscar Gonzalez de Dios
Telefonica Investigacion y Desarrollo
Emilio Vargas 6
Madrid, 28045
Spain

Phone: +34 913374013
Email: ogondio@tid.es

Daniele Ceccarelli
Ericsson
Via A. Negrone 1/A
Genova - Sestri Ponente
Italy
Email: daniele.ceccarelli@ericsson.com

Zhang

Expires December 2013

[Page 9]

[draft-zhang-ccamp-flexible-grid-rsvp-te-ext-02.txt](#)

June 2013

Intellectual Property

The IETF Trust takes no position regarding the validity or scope of

any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in any IETF Document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights.

Copies of Intellectual Property disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement any standard or specification contained in an IETF Document. Please address the information to the IETF at ietf-ipr@ietf.org.

The definitive version of an IETF Document is that published by, or under the auspices of, the IETF. Versions of IETF Documents that are published by third parties, including those that are translated into other languages, should not be considered to be definitive versions of IETF Documents. The definitive version of these Legal Provisions is that published by, or under the auspices of, the IETF. Versions of these Legal Provisions that are published by third parties, including those that are translated into other languages, should not be considered to be definitive versions of these Legal Provisions.

For the avoidance of doubt, each Contributor to the IETF Standards Process licenses each Contribution that he or she makes as part of the IETF Standards Process to the IETF Trust pursuant to the provisions of [RFC 5378](#). No language to the contrary, or terms, conditions or rights that differ from or are inconsistent with the rights and licenses granted under [RFC 5378](#), shall have any effect and shall be null and void, whether published or posted by such Contributor, or included with or in such Contribution.

Disclaimer of Validity

All IETF Documents and the information contained therein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION THEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Full Copyright Statement

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.