

IDR Working Group
Internet Draft
Expires: May 2006

zhifeng Zhang
(Huawei)

Nov 2005

[draft-zhang-idr-bgp-extcommunity-qos-00.txt](#)

ExtCommunity map and carry TOS value of IP header

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on May 16, 2006.

Copyright Notice

Copyright (C) The Internet Society (2005). All Rights Reserved.

Abstract

This document defines a new BGP Extended Community, which can map the value of IP TOS. Then, the Extended Community can be classified the route information at the same time can carry the value of TOS which will apply into the IP packet. Then BGP and QoS have correlation when we apply the QoS policy based on BGP, it will be simple.

Internet Draft ExtCommunity map and carry TOS value of IP header Nov 2005

Table of Contents

1.	Introduction.....	2
2.	The BGP Extended Community map value of TOS.....	2
3.	Format of BGP ExtCommunity.....	2
4.	Security Considerations.....	5
5.	References.....	5
6.	Author's Addresses.....	5
7.	Full Copyright Statement.....	6

[1.](#) Introduction

Since BGP community can only classify routing information,if you want to apply QoS policy based on BGP ,you can use BGP community to classify route information, then apply the TOS or some other QoS policy based on the classified route information.

If BGP Extended Community can map TOS value of IP header at the same time and keep the ability for classifying route information,the QoS policy based on BGP will be simple.

[2.](#) The BGP Extended Community map value of TOS

In this document, we define the capability of Extended Community map and carry the TOS value of IP header. When BGP import route information, this Extended Community can be push or be apply by route policy, then BGP route information can carry the TOS value of IP header.

[3.](#) Format of BGP ExtCommunity

The BGP Extended Community is encoded as an eight octet quantity.

Internet Draft ExtCommunity map and carry TOS value of IP header Nov 2005

In this document, we define the Format of the BGP Extended Community


as follows:

- Type Field : 1 octets
- TOS Value Field : 1 octets
- Value Field : Remaining octets

Type Field - the value mark the IANA regist information of BGP Extended Community and the format of the Value Field


TOS Value Field - the value mark the TOS value that will be carried by the stream matched correlation networking information

Value Field - the value mark the classified route imformatin

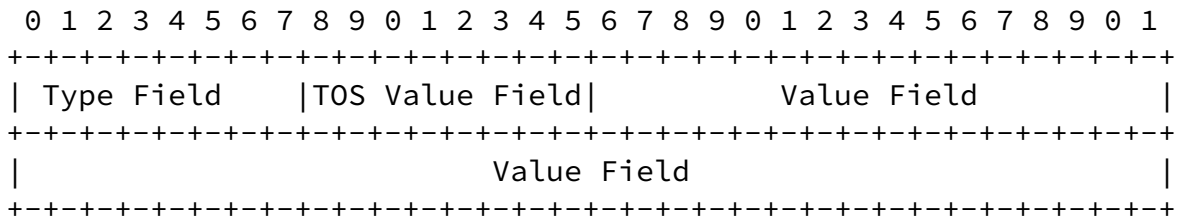

3.1 The Type Field

The size of Type Field for Regular types is 1 octet£-as shown below£°



I - IANA authority bit

T - TOS bit

Value 0: The TOS Value Field mark the default value 0

value 1: The TOS Value Field mark the value which would be remarked the IP packet

V - The value of this bit which can identify the format of the Value Field

Value 0: The high-order two octets of the Value Field is administrator Field, the remaining octets is sub-administrator Field

Value 1: The high-order four octets of the Value Field is administrator Field, the remaining octets is sub-administrator Field

[3.2](#) TOS Value Field

The default value of TOS Value Field is 0. When the route information be imported into BGP, we can define the TOS Field value that the route informatin should carried.

According to defined DSCP value, we will define such BGP Extended Community:

ExtCommunity name	the high-order six bits of TOS Value Field	DSCP classes	DSCP values
ExtCom-EF	101110	EF	101110
ExtCom-AF41	100010	AF41	100010
ExtCom-AF42	100100	AF42	100100
ExtCom-AF43	100110	AF43	100110
ExtCom-AF31	011010	AF31	011010
ExtCom-AF32	011100	AF32	011100
ExtCom-AF33	011110	AF33	011110
ExtCom-AF21	010010	AF21	010010
ExtCom-AF22	010100	AF22	010100
ExtCom-AF23	010110	AF23	010110
ExtCom-AF11	001010	AF11	001010
ExtCom-AF12	001100	AF12	001100
ExtCom-AF13	001110	AF13	001110
ExtCom-BF	000000	BF	000000

The remaining bits of TOS Value Field use 0 as value.

[3.3](#) Value Field

The Value Field used for identifying the route infomation which belong to different community.

We can set and change the value of the Value Field, and can't impact the other Field.

[4.](#) Security Considerations

This document does not introduce new security issues.

[5.](#) References

[IP] Postel "INTERNET PROTOCOL (IP)", [RFC 791](#), September 1981.

[DS Field] K. Nichols, S. Blake, F. Baker, and D. Black, "Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers", [RFC 2474](#), December 1998.

[Architecture for DS] S. Blake, D. Black, M. Carlson, E. Davies, Z. Wang and W. Weiss "An Architecture for Differentiated Services" [RFC 2475](#), December 1998.

[6.](#) Author's Addresses

zhifeng Zhang
Huawei Technologies
No. 3 Xinxu Road, Shangdi,
Haidian District,
Beijing, China
Email: zhangzhifeng@huawei.com

Zhang zhifeng

[Page 5]

Internet Draft ExtCommunity map and carry TOS value of IP header Nov 2005

[7.](#) Full Copyright Statement

Copyright (C) The Internet Society (2005).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and translations of it MAY be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation MAY be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this

document itself MAY not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process MUST be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.