

IDR  
Internet-Draft  
Intended status: Standards Track  
Expires: 2 September 2022

Y. Liu  
S. Peng  
ZTE  
1 March 2022

BGP Extension for SR-MPLS Entropy Label Position  
draft-zhou-idr-bgp-srmpls-elp-04

## Abstract

This document proposes extensions for BGP to indicate the entropy label position in the SR-MPLS label stack when delivering SR Policy via BGP.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 2 September 2022.

## Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Conventions used in this document . . . . .	<a href="#">3</a>
<a href="#">2.1.</a>	Requirements Language . . . . .	<a href="#">3</a>
<a href="#">2.2.</a>	Terminology and Acronyms . . . . .	<a href="#">3</a>
<a href="#">3.</a>	Entropy Label Position in SR-MPLS with the Controller . . . . .	<a href="#">3</a>
<a href="#">4.</a>	BGP Extensions for ELP in SR Policy . . . . .	<a href="#">5</a>
<a href="#">5.</a>	Operations . . . . .	<a href="#">5</a>
<a href="#">6.</a>	IANA Considerations . . . . .	<a href="#">5</a>
<a href="#">7.</a>	Security Considerations . . . . .	<a href="#">6</a>
<a href="#">8.</a>	References . . . . .	<a href="#">6</a>
<a href="#">8.1.</a>	Normative References . . . . .	<a href="#">6</a>
<a href="#">8.2.</a>	Informative References . . . . .	<a href="#">6</a>
	Authors' Addresses . . . . .	<a href="#">7</a>

[1.](#) Introduction

Segment Routing (SR) leverages the source routing paradigm. Segment Routing can be instantiated on MPLS data plane which is referred to as SR-MPLS [[RFC8660](#)]. SR-MPLS leverages the MPLS label stack to construct the SR path.

Entropy labels (ELs) [[RFC6790](#)] are used in the MPLS data plane to provide entropy for load-balancing. The idea behind the entropy label is that the ingress router computes a hash based on several fields from a given packet and places the result in an additional label named "entropy label". Then, this entropy label can be used as part of the hash keys used by an LSR. Using the entropy label as part of the hash keys reduces the need for deep packet inspection in the LSR while keeping a good level of entropy in the load-balancing.

[RFC8662] proposes to use entropy labels for SR-MPLS networks and multiple <ELI, EL> pairs may be inserted in the SR-MPLS label stack. The ingress node may decide the number and position of the ELI/ELs which need to be inserted into the label stack, that is termed as ELP (Entropy Label Position) in this document. But in some cases, the controller (e.g. PCE) can be used to perform the TE path computation as well as the Entropy Label Position which is useful for inter-domain scenarios.

[I-D.ietf-idr-segment-routing-te-policy] specifies the way to use BGP to distribute one or more of the candidate paths of an SR Policy to

the headend of that policy.

This document proposes extensions for BGP to indicate the ELP in the segment list when delivering SR Policy via BGP in SR-MPLS networks.

## [2.](#) Conventions used in this document

### [2.1.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

### [2.2.](#) Terminology and Acronyms

EL: Entropy Label

ELI: Entropy Label Indicator

ELC: Entropy Label Capability

ERLD: Entropy Readable Label Depth

ELP: Entropy Label Position

MSD: Maximum SID Depth

## [3.](#) Entropy Label Position in SR-MPLS with the Controller

As described in [[RFC8662](#)] [section 7](#), ELI/EL placement is not an easy decision, multiple criteria may be taken into account.

First is the Maximum SID Depth (MSD), it defines the maximum number of labels that a particular node can impose on a packet, and it is a limit when the ingress node imposing ELI/EL pairs on the SR label stack.

The Entropy Readable Label Depth(ERLD) value is another important parameter to consider when inserting an ELI/EL. The ERLD is defined as the number of labels a router can both read in an MPLS packet received on its incoming interface(s) and use in its load-balancing

function. An ELI/EL pair must be within the ERLD of the LSR in order for the LSR to use the EL during load-balancing. It's necessary to get the ERLD of the nodes along the SR path to achieve efficient load-balancing.

An implementation MAY try to evaluate if load-balancing is really expected at a particular node based on the segment type of its label, which also influences the ELP of a segment list.

Other criteria includes maximizing number of LSRs that will load-balance, preference for a part of the path, and etc. Using which criteria and how to decide the ELP based on the criteria is a matter of implementation.

As shown in Figure 1, in the inter-domain scenario, a path from A to Z is required, a centralized controller performs the computation of the end-to-end path, along which traffic load-balancing is required.

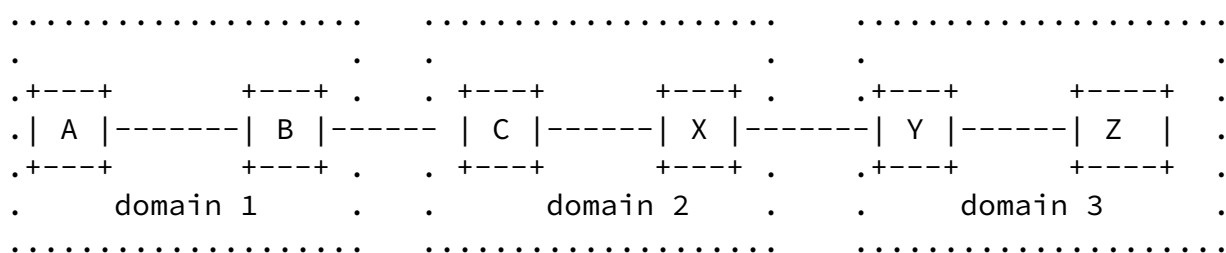


Figure 1: Entropy Labels in SR-MPLS Inter-Domain Scenario

When the headend node in the first domain can't get the information of the nodes/SIDs in other domains, e.g, the ERLD of each node or the type of the SID bounded to a node/link, it's difficult for the headend node to decide the ELP of the segment list for the path.

Performing the computation of the ELP by the controller is an alternate, since it's easier for the controller to get the required information along the segment list prescribed by itself.

For example, the ERLD value can be advertised via IS-

IS[I-D.ietf-isis-mpls-enc] and OSPF[I-D.ietf-ospf-mpls-enc] within the domain, in each domain, one or more nodes are configured with BGP-LS so the controller can get the ERLD value of all the nodes through BGP-LS[RFC9085]. The controller can acquire the MSD of the headend node or the Binding SID anchor node via BGP-LS[RFC8814] or PCEP[RFC8664].

Another benefit of utilizing the controller to calculate ELP is that if the criteria or calculation algorithm is changed, the corresponding modification only needs to be made on the controller instead of each headend node in the network.

When the controller performs the computation of the the ELP for a segment list, the considerations for the placement of ELI/ELs introduced in [RFC8662] are still applicable. How the controller computes the ELP is out of scope of the document.

After the ELP of an SR path is decided, the controller SHOULD inform the result to the headend node of the path, so the node knows where to insert the ELI/ELs when needed. [Section 4](#) proposes the detailed extensions for BGP to carry this information.

#### [4.](#) BGP Extensions for ELP in SR Policy

The Segment Flags for Segment Sub-TLVs are defined in Section 2.4.4.2.12 of [I-D.ietf-idr-segment-routing-te-policy]. In this document, the ELP information is transmitted by extending the flags of Segment Sub-TLVs.

```

 0 1 2 3 4 5 6 7
+---+---+---+---+
|V|A|S|B|E|   |
+---+---+---+---+
```

E-Flag: This flag, when set, indicates that presence of < ELI, EL> label pairs which are inserted after this segment. E-Flag is applicable to Segment Types A, C, D, E, F, G and H. If E-Flag appears with Segment Types B, I, J and K, it MUST be ignored.

## 5. Operations

Node A receives an SR Policy NLRI with an Segment List sub-TLV from the controller. The Segment List sub-TLV contains multiple Segment sub-TLVs, e.g, <S1, S2, S3, S4, S5, S6>, the E-Flags of S3 and S6 are set, it indicates that if load-balancing is required, two <ELI, EL> pairs SHOULD be inserted into the label stack of the SR-TE forwarding entry, respectively after the Label for S3 and Label for S6.

The value of EL is supplemented by the ingress node according to load-balancing function of the appropriate keys extracted from a given packet. After inserting ELI/ELs, the label stack on the ingress node would be <S1, S2, S3, ELI, EL, S4, S5, S6, ELI, EL>.

## 6. IANA Considerations

This document requests bit 4 for Entropy Label Flag in "SR Policy Segment Flags" under the "BGP Tunnel Encapsulation" registry.

Bit	Description	Reference
4	Entropy Label Position Flag(E-Flag)	This document

## 7. Security Considerations

Procedures and protocol extensions defined in this document do not introduce any new security considerations beyond those already listed in [[RFC8662](#)] and [[I-D.ietf-idr-segment-routing-te-policy](#)].

## 8. References

### 8.1. Normative References

[I-D.ietf-idr-segment-routing-te-policy]  
Previdi, S., Filsfils, C., Talaulikar, K., Mattes, P., Jain, D., and S. Lin, "Advertising Segment Routing Policies in BGP", Work in Progress, Internet-Draft, [draft-ietf-idr-segment-routing-te-policy-14](#), 10 November 2021,

<<https://datatracker.ietf.org/doc/html/draft-ietf-idr-segment-routing-te-policy-14>>.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC4360] Sangli, S., Tappan, D., and Y. Rekhter, "BGP Extended Communities Attribute", [RFC 4360](#), DOI 10.17487/RFC4360, February 2006, <<https://www.rfc-editor.org/info/rfc4360>>.
- [RFC6790] Kompella, K., Drake, J., Amante, S., Henderickx, W., and L. Yong, "The Use of Entropy Labels in MPLS Forwarding", [RFC 6790](#), DOI 10.17487/RFC6790, November 2012, <<https://www.rfc-editor.org/info/rfc6790>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8662] Kini, S., Kompella, K., Sivabalan, S., Litkowski, S., Shakir, R., and J. Tantsura, "Entropy Label for Source Packet Routing in Networking (SPRING) Tunnels", [RFC 8662](#), DOI 10.17487/RFC8662, December 2019, <<https://www.rfc-editor.org/info/rfc8662>>.

## [8.2](#). Informative References

[I-D.ietf-isis-mpls-elc]

Xu, X., Kini, S., Psenak, P., Filsfils, C., Litkowski, S., and M. Bocci, "Signaling Entropy Label Capability and Entropy Readable Label Depth Using IS-IS", Work in

Progress, Internet-Draft, [draft-ietf-isis-mpls-elc-13](#), 28 May 2020, <<https://datatracker.ietf.org/doc/html/draft-ietf-isis-mpls-elc-13>>.

[I-D.ietf-ospf-mpls-elc]

Xu, X., Kini, S., Psenak, P., Filsfils, C., Litkowski, S., and M. Bocci, "Signaling Entropy Label Capability and Entropy Readable Label Depth Using OSPF", Work in

Progress, Internet-Draft, [draft-ietf-ospf-mpls-elc-15](#), 1 June 2020, <<https://datatracker.ietf.org/doc/html/draft-ietf-ospf-mpls-elc-15>>.

- [RFC8476] Tantsura, J., Chunduri, U., Aldrin, S., and P. Psenak, "Signaling Maximum SID Depth (MSD) Using OSPF", [RFC 8476](#), DOI 10.17487/RFC8476, December 2018, <<https://www.rfc-editor.org/info/rfc8476>>.
- [RFC8491] Tantsura, J., Chunduri, U., Aldrin, S., and L. Ginsberg, "Signaling Maximum SID Depth (MSD) Using IS-IS", [RFC 8491](#), DOI 10.17487/RFC8491, November 2018, <<https://www.rfc-editor.org/info/rfc8491>>.
- [RFC8660] Bashandy, A., Ed., Filsfils, C., Ed., Previdi, S., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing with the MPLS Data Plane", [RFC 8660](#), DOI 10.17487/RFC8660, December 2019, <<https://www.rfc-editor.org/info/rfc8660>>.
- [RFC8664] Sivabalan, S., Filsfils, C., Tantsura, J., Henderickx, W., and J. Hardwick, "Path Computation Element Communication Protocol (PCEP) Extensions for Segment Routing", [RFC 8664](#), DOI 10.17487/RFC8664, December 2019, <<https://www.rfc-editor.org/info/rfc8664>>.
- [RFC8814] Tantsura, J., Chunduri, U., Talaulikar, K., Mirsky, G., and N. Triantafyllis, "Signaling Maximum SID Depth (MSD) Using the Border Gateway Protocol - Link State", [RFC 8814](#), DOI 10.17487/RFC8814, August 2020, <<https://www.rfc-editor.org/info/rfc8814>>.
- [RFC9085] Previdi, S., Talaulikar, K., Ed., Filsfils, C., Gredler, H., and M. Chen, "Border Gateway Protocol - Link State (BGP-LS) Extensions for Segment Routing", [RFC 9085](#), DOI 10.17487/RFC9085, August 2021, <<https://www.rfc-editor.org/info/rfc9085>>.

Authors' Addresses

Liu & Peng

Expires 2 September 2022

[Page 7]

---

Internet-Draft

BGP Extension for ELP

March 2022

Yao Liu



ZTE  
Nanjing  
China  
Email: liu.yao71@zte.com.cn

Shaofu Peng  
ZTE  
Nanjing  
China  
Email: peng.shaofu@zte.com.cn