

MULTIMOB Group  
Internet Draft  
Intended status: Standards Track  
Expires: July 14, 2010

JC.Zuniga  
G.Lu  
A.Rahman  
InterDigital Communications, LLC  
January 14, 2010

Support Multicast Services Using Proxy Mobile IPv6  
draft-zuniga-multimob-smspmip-01.txt

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on July 14,2010.

Copyright Notice

Copyright (c) 2009 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents in effect on the date of publication of this document (<http://trustee.ietf.org/license-info>). Please review these documents carefully, as they describe your rights and restrictions with respect to this document.

Internet-Draft

Multicast Services using PMIPv6

January 2010

## Abstract

This document describes how multicast mobility services can be supported with Proxy Mobile IPv6 [[RFC5213](#)], Multicast Listener Discovery (MLD) [[RFC3810](#)], and Internet Group Management Protocol (IGMP) [[RFC3376](#)]. Specifically, this document analyzes scenarios for multicast listener mobility. It proposes the use of a dedicated Local Mobility Anchor as the topological anchor point for multicast traffic, while the Mobile Access Gateway serves as an IGMP/MLD proxy. There are no impacts to the Mobile Node to support multicast listener mobility.

## Table of Contents

<a href="#">1.</a>	Introduction.....	<a href="#">2</a>
<a href="#">2.</a>	Conventions and Terminology.....	<a href="#">3</a>
<a href="#">3.</a>	Solution.....	<a href="#">3</a>
<a href="#">3.1.</a>	Architecture.....	<a href="#">3</a>
<a href="#">3.2.</a>	Multicast Establishment.....	<a href="#">5</a>
<a href="#">3.3.</a>	Multicast Mobility.....	<a href="#">6</a>
<a href="#">3.4.</a>	Advantages.....	<a href="#">7</a>
<a href="#">4.</a>	Security Considerations.....	<a href="#">11</a>
<a href="#">5.</a>	IANA Considerations.....	<a href="#">11</a>
<a href="#">6.</a>	References.....	<a href="#">11</a>
<a href="#">6.1.</a>	Normative References.....	<a href="#">11</a>
<a href="#">6.2.</a>	Informative References.....	<a href="#">12</a>
<a href="#">7.</a>	Acknowledgments.....	<a href="#">12</a>

## [1.](#) Introduction

Proxy Mobile IPv6 [[RFC5213](#)] is a network-based approach to solving the IP mobility problem. In a Proxy Mobile IPv6 (PMIPv6) domain, the Mobile Access Gateway (MAG) behaves as a proxy mobility agent in the network and does the mobility management on behalf of the Mobile Node (MN). The Local Mobility Anchor (LMA) is the home agent for the MN and the topological anchor point. PMIPv6 was originally designed for unicast traffic.

The Internet Group Management Protocol (IGMPv3) [[RFC3376](#)] is used by IPv4 hosts to report their IP multicast group memberships to neighboring multicast routers. Multicast Listener Discovery (MLDv2) [[RFC3810](#)] is used in a similar way by IPv6 routers to discover the

presence of IPv6 multicast hosts. Also, the IGMP/MLD proxy [[RFC4605](#)] allows an intermediate (edge) node to appear as a multicast router to downstream hosts, and as a host to upstream multicast routers. IGMP and MLD related protocols were not originally designed to address IP

mobility of multicast listeners (i.e. IGMP and MLD protocols were originally designed for fixed networks).

Supporting mobility of multicast traffic has been under discussions within the MULTIMOB working group. This document focuses on addressing multicast listener mobility using the PMIPv6 and IGMP/MLD protocols. It proposes the use of a dedicated LMA as the topological mobility anchor point for multicast traffic, while the MAG serves as an IGMP/MLD proxy.

## [2.](#) Conventions and Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC-2119](#)].

This document uses the terminology defined in [[RFC5213](#)], [[RFC3775](#)], and [[RFC3810](#)].

## [3.](#) Solution

A PMIPv6 domain may receive data from both unicast and multicast sources. A dedicated LMA can be used to serve as the mobility anchor for multicast traffic. Unicast traffic will go normally to the other LMAs in the PMIPv6 domain. This section describes how the multicast LMA works in scenarios of mobile node attachment and multicast mobility.


### [3.1.](#) Architecture

Figure 1 shows an example of a PMIPv6 domain supporting multicast mobility. LMA1 is dedicated to unicast traffic, and LMA2 is dedicated to multicast traffic. Note that there can be multiple LMAs dedicated to unicast traffic (not shown in Figure 1) in a given PMIPv6 domain. However, we assume a single LMA dedicated to multicast traffic in a PMIPv6 domain (as shown in Figure 1).

Also in this architecture, all MAGs that are connected to the

multicast LMA must support the MLD proxy [RFC4605] function. Specifically in Figure 1, each of the MAG1-LMA2 and MAG2-LMA2 tunnel interface defines an MLD proxy domain. The MNs are considered to be on the downstream interface of the MLD proxy (in the MAG), and LMA2 is considered to be on the upstream interface (of the MAG) as per [RFC4605]. Note that MAG could also be an IGMP proxy. For brevity this document will refer primarily to MLD proxy, but all references to "MLD proxy" should be understood to also include "IGMP/MLD proxy" functionality.

As shown in Figure 1, MAG1 may connect to both unicast and multicast LMAs. Thus, a given MN may simultaneously receive both unicast and multicast traffic. In Figure 1, MN1 and MN2 receive unicast traffic, multicast traffic, or both, whereas MN3 receives multicast traffic only.

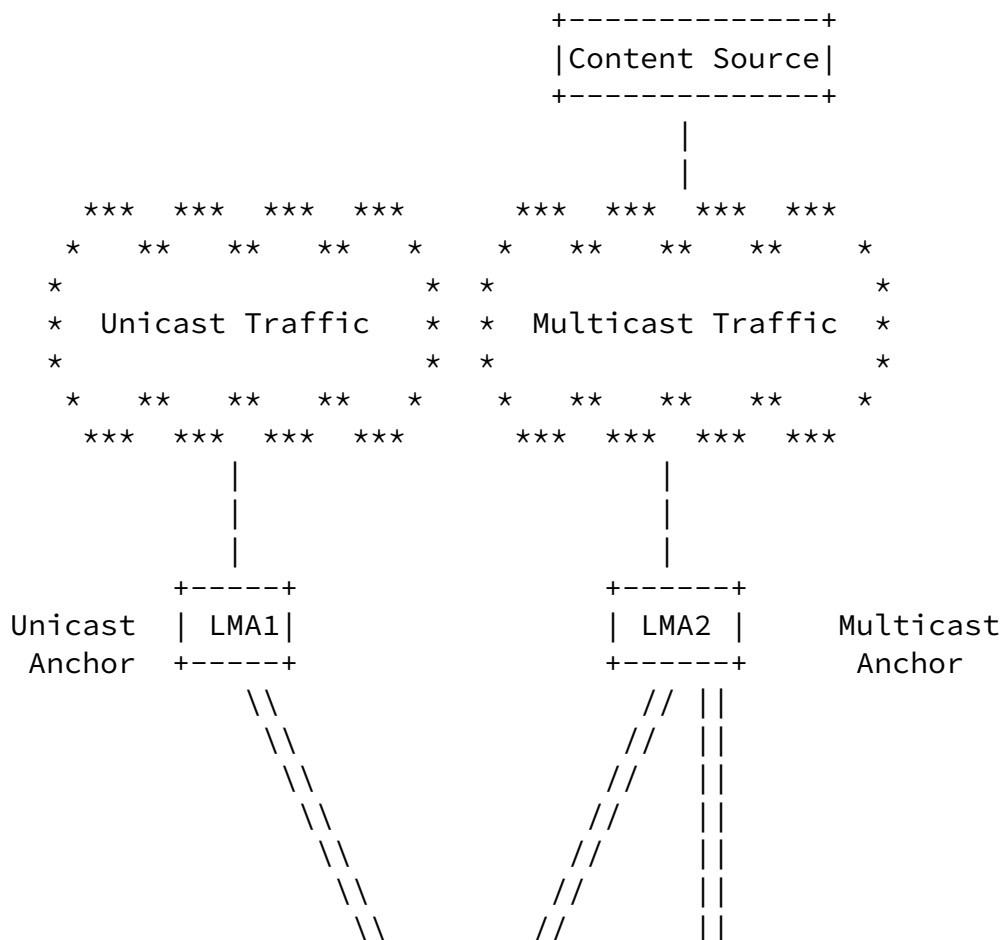

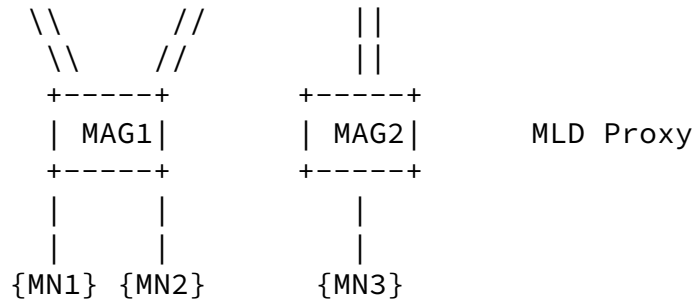
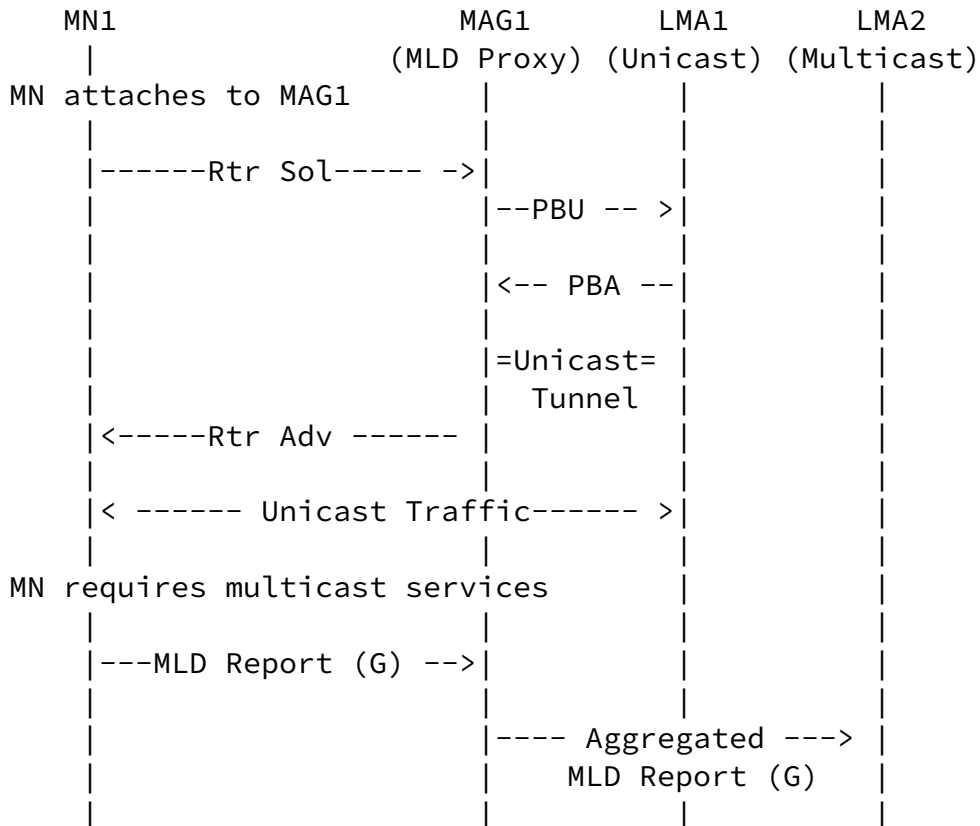


Figure 1 Architecture of Dedicated LMA as Multicast Anchor

### 3.2. Multicast Establishment

Figure 2 shows the procedure when MN1 attaches to MAG1, and establishes associations with LMA1 (unicast) and LMA2 (multicast).



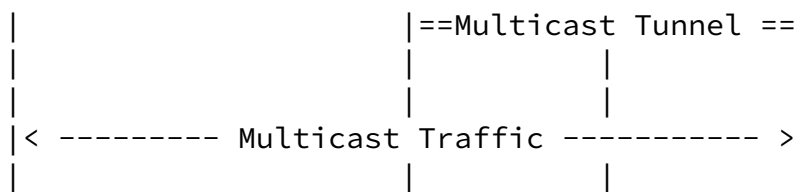


Figure 2 MN Attachment and Multicast Service Establishment


In Figure 2, MAG1 first establishes the PMIPv6 tunnel with LMA1 for unicast traffic as defined in [RFC5213] after being triggered by the Router Solicitation message from MN1. Also, MN1 sends the MLD report message (when required by its upper layer applications) as defined in [RFC3810]. MAG1 acting as a MLD Proxy as defined in [RFC4605] will then send an Aggregated MLD Report to the multicast anchor, LMA2. This will then trigger establishment of a multicast tunnel between MAG1 and LMA2.

### [3.3. Multicast Mobility](#)

Figure 3 illustrates the mobility scenario for multicast traffic. Specifically, MN2 with ongoing multicast subscription moves from MAG1 to MAG2. Note that in this scenario MAG2 is connected only to LMA2 (multicast) and does not receive unicast traffic. Of course, if it was desired to support unicast traffic, the architecture will easily allow MAG2 to also connect to LMA1 to support unicast traffic.

After MN2 mobility, MAG2 acting in its role of MLD proxy will send an MLD Query to the newly observed MN on its downlink. Assuming that the subsequent MLD Report from MN2 requests membership of a new multicast group (from MAG2's point of view), this will then result in an Aggregated MLD Report being sent to LMA2 from MAG2.

When MN2 detaches, MAG1 may keep the multicast tunnel with the multicast LMA2 if there are still other MNs using the multicast tunnel. Even if there are no MNs currently on the multicast tunnel, MAG1 may decide to keep the multicast tunnel for potential future use.

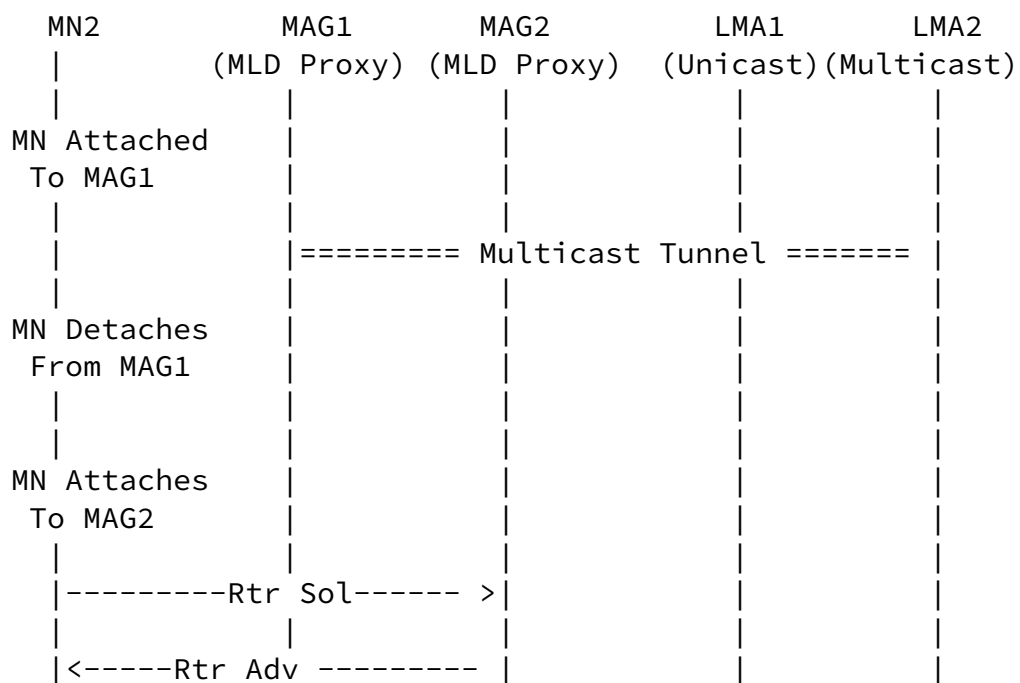

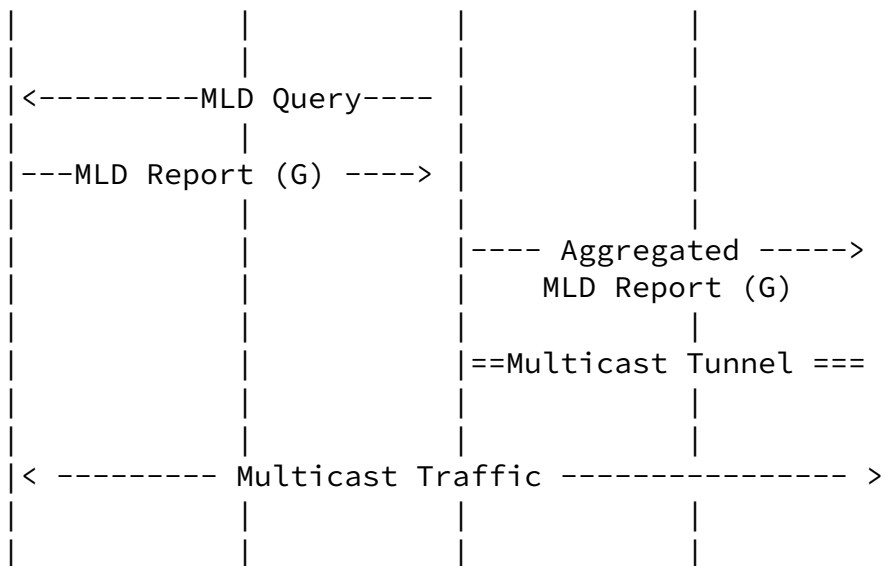


Figure 3 Multicast Mobility Signaling

### 3.4. Advantages

One of the main advantages of the proposed architecture of a dedicated multicast LMA, and MAGs acting as a Proxy MLD, is that it allows a PMIPv6 domain to closely follow a simple multicast tree topology for Proxy MLD forwarding (cf., sections [1.1](#) and [1.2](#) of [\[RFC4605\]](#)).

Another major advantage is that a dedicated multicast LMA minimizes replication of multicast packets compared to a combined unicast/multicast LMA as proposed in [\[I-D.schmidt-multimob-pmipv6-](#)


mcast-deployment]. Figures 4 and 5 illustrate this point visually. For this simple scenario, it can be observed that the dedicated multicast LMA topology (Figure 4) generates 6 packets for one input multicast packet. In comparison, the combined unicast/multicast LMA topology (Figure 5) generates 8 packets for one input multicast packet.

In general, it can be seen that the extra multiplication of packets in the combined unicast/multicast LMA topology will be proportional to the number of LMAs, and the number of MNs (in a given MAG) associated to different LMAs. The packet multiplication problem aggravates as more MNs associated to different LMAs receive the same multicast traffic when attached to the same MAG. Hence, the



dedicated multicast architecture significantly decreases the network capacity requirements.

(Note that in Figure 4, it is assumed that MN1 and MN2 are associated with MAG1-LMA1, and MN3 is associated with MAG2-LMA2 for multicast traffic. In Figure 5, it is assumed that MN1 is associated with MAG1-LMA1, MN2 is associated with MAG1-LMA2, and MN3 is associated with MAG2-LMA2 for multicast traffic. In both Figures 4 and 5, it is assumed that the packets are transmitted point to point on the last hop wireless link.)

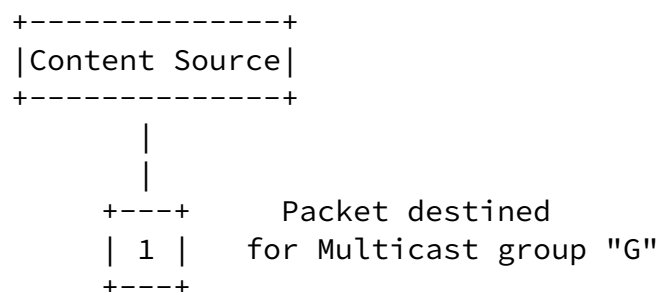

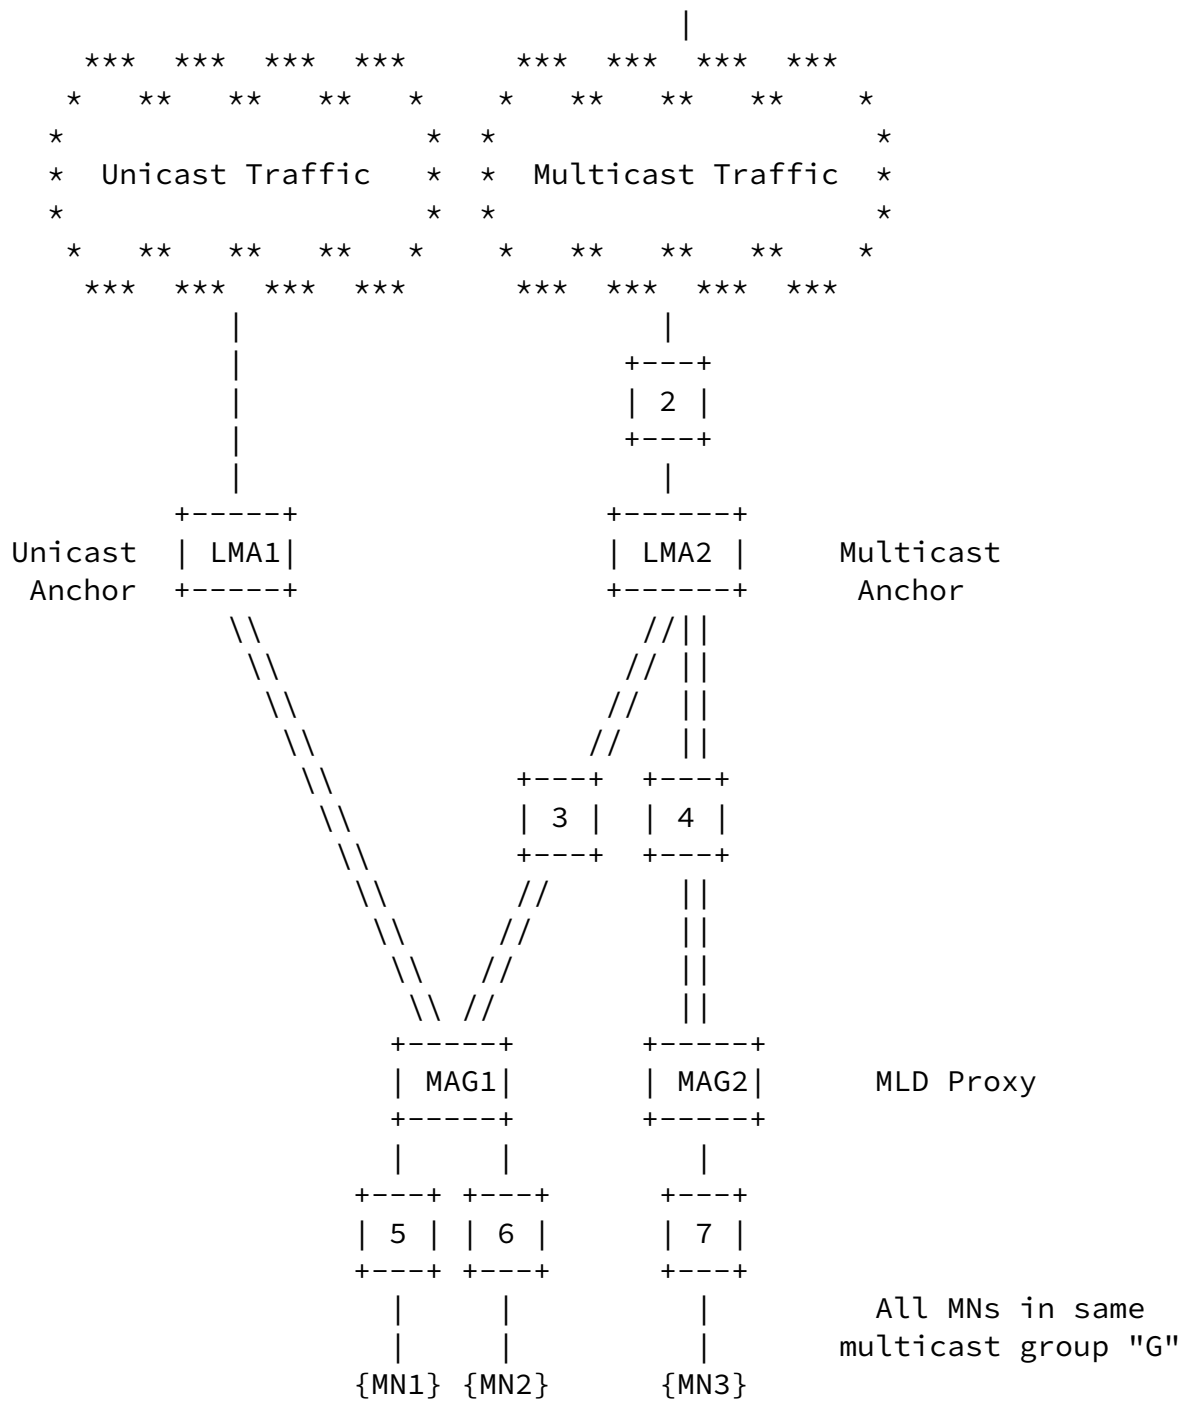


Figure 4 Packet Flow in a Dedicated Multicast LMA

```

+-----+
|Content Source|
+-----+

```

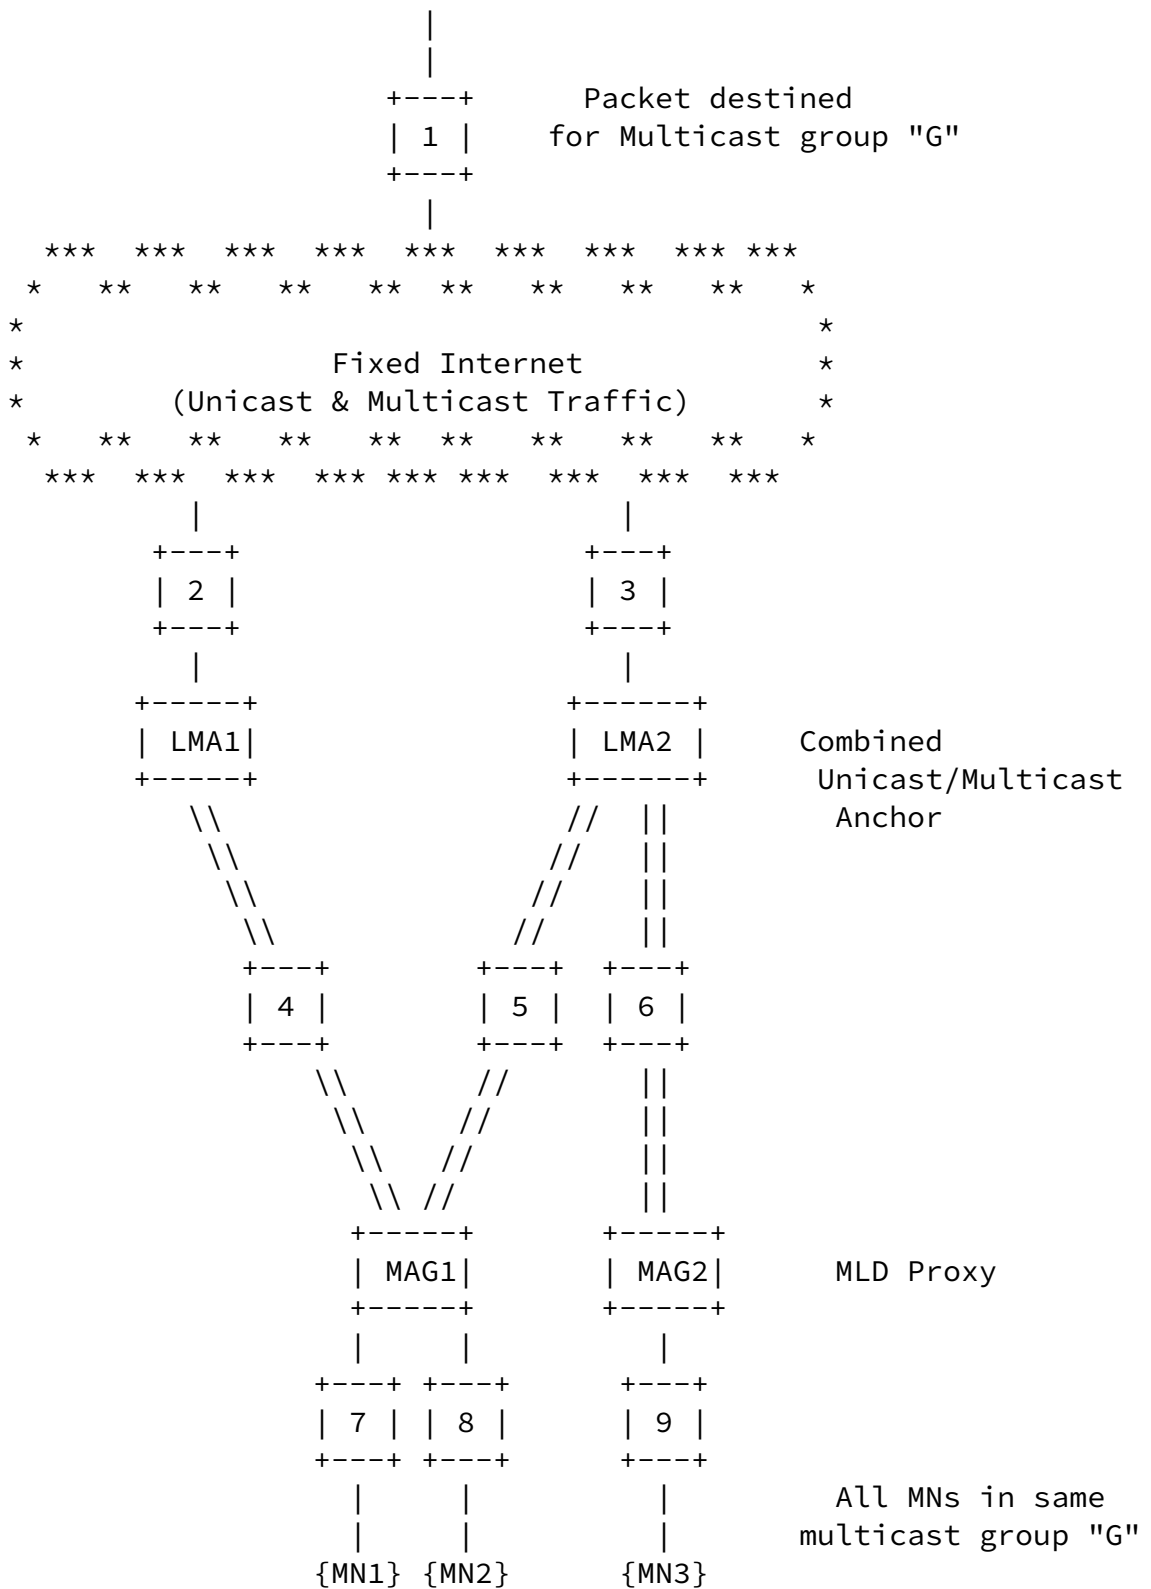


Figure 5 Packet Flow in a Combined Unicast/Multicast LMA

#### [4. Security Considerations](#)

This draft discusses the operations of existing protocols without modifications. It does not introduce new security threats beyond the current security considerations of PMIPv6 [[RFC5213](#)], MLD [[RFC3810](#)], IGMP [[RFC3376](#)] and IGMP/MLD Proxying [[RFC4605](#)].

#### [5. IANA Considerations](#)

This document makes no request of IANA.

#### [6. References](#)

##### [6.1. Normative References](#)

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2234] Crocker, D. and Overell, P.(Editors), "Augmented BNF for Syntax Specifications: ABNF", [RFC 2234](#), Internet Mail Consortium and Demon Internet Ltd., November 1997.
- [RFC5213] Gundavelli, S., Leung, K., Devarapalli, V., Chowdhury, K., and B. Patil, "Proxy Mobile IPv6", [RFC 5213](#), August 2008.
- [RFC3775] Johnson, D., Perkins, C., and J. Arkko, "Mobility Support in Ipv6", [RFC 3775](#), June 2004.
- [RFC3810] Vida, R. and L.Costa, "Multicast Listener Discovery Version 2 (MLDv2) for IPv6", [RFC 3810](#), June 2004.
- [RFC3376] Cain, B., Deering, S., Kouvelas, I., Fenner, B., and A. Thyagarajan, "Internet Group Management Protocol, Version 3", [RFC 3376](#), October 2002.
- [RFC4605] Fenner, B., He, H., Haberman, B., and H. Sandick, "Internet Group Management Protocol (IGMP)/ Multicast Listener Discovery (MLD)-Based Multicast Forwarding ("IGMP/MLD Proxying")", [RFC 4605](#), August 2006.

Internet-Draft

Multicast Services using PMIPv6

January 2010

## [6.2](#). Informative References

[I-D.deng-multimob-pmip6-requirement]

Deng, H., Schmidt, T., Seite, P., and P.Yang, "Multicast Support Requirements for Proxy Mobile IPv6", [draft-deng-multimob-pmip6-requirements-02](#) (Work in progress), July 13, 2009.

[I-D.schmidt-multimob-pmipv6-mcast-deployment-03] Schmidt, TC., Waehlich, M., Sarikaya, B., and S.Krishnan, "A Minimal Deployment Option for Multicast Listeners in PMIPv6 Domains", [draft-schmidt-multimob-pmipv6-mcast-deployment-03](#) (Work in progress), December 16, 2009.

## [7](#). Acknowledgments

This document was prepared using 2-Word-v2.0.template.dot.

## Authors' Addresses

Juan Carlos Zuniga  
InterDigital Communications, LLC  
Email: JuanCarlos.Zuniga@InterDigital.com

Guang Lu  
InterDigital Communications, LLC  
Email: Guang.Lu@InterDigital.com

Akbar Rahman  
InterDigital Communications, LLC  
Email: Akbar.Rahman@InterDigital.com

