

Internet Draft
Category: Experimental
Expiration Date: May 17, 2009

Lou Berger (LabN)
Attila Takacs (Ericsson)
Diego Caviglia (Ericsson)
Don Fedyk (Nortel)
Julien Meuric (France Telecom)

November 17, 2008

GMPLS Asymmetric Bandwidth Bidirectional Label Switched Paths (LSPs)

[draft-ietf-ccamp-asymm-bw-bidir-lsps-02.txt](#)

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on May 17, 2009.

Copyright Notice

Copyright (C) The IETF Trust (2008).

Abstract

This document defines a method for the support of GMPLS Asymmetric Bandwidth Bidirectional Label Switched Paths (LSPs). The presented approach is applicable to any switching technology and builds on the original RSVP model for the transport of traffic related parameters. The procedures described in this document are experimental.

Internet-Draft [draft-ietf-ccamp-asymm-bw-bidir-lsps-02.txt](#) November 17, 2008

Table of Contents

1	Introduction	3
1.1	Background	3
1.2	Approach Overview	4
1.3	Conventions used in this document	5
2	Generalized Asymmetric Bandwidth Bidirectional LSPs	5
2.1	UPSTREAM_FLOWSPEC Object	5
2.1.1	Procedures	5
2.2	UPSTREAM_TSPEC Object	6
2.2.1	Procedures	6
2.3	UPSTREAM_ADSPEC Object	6
2.3.1	Procedures	6
3	Packet Formats	7
4	Compatibility	8
5	IANA Considerations	8
5.1	UPSTREAM_FLOWSPEC Object	8
5.2	UPSTREAM_TSPEC Object	9
5.3	UPSTREAM_ADSPEC Object	9
6	Security Considerations	9
7	References	9
7.1	Normative References	9
7.2	Informative References	10
8	Authors' Addresses	11
A.	Appendix A : Alternate Approach Using ADSPEC Object	11
A.1.	Applicability	11
A.2.	Overview	12
A.3.	Procedures	13
A.4.	Compatibility	14
	Full Copyright Statement	14
	Intellectual Property	14

Internet-Draft [draft-ietf-ccamp-asymm-bw-bidir-lsps-02.txt](#) November 17, 2008

1. Introduction

GMPLS, see [[RFC3473](#)], introduced explicit support for bidirectional Label Switched Paths (LSPs). The defined support matched the switching technologies covered by GMPLS, notably Time Division Multiplexing (TDM) and lambdas, and specifically only supported bidirectional LSPs with symmetric bandwidth allocation. Symmetric bandwidth requirements are conveyed using the semantics objects defined in [[RFC2205](#)] and [[RFC2210](#)].

Recent work, see [[GMPLS-PBBTE](#)] and [[MEF-TRAFFIC](#)], has looked at extending GMPLS to control Ethernet switching. In this context there has been discussion of the support of bidirectional LSPs with asymmetric bandwidth. (That is, bidirectional LSPs that have different bandwidth reservations in each direction.) This discussion motivated the extensions defined in this document, which may be used with any switching technology to signal asymmetric bandwidth bidirectional LSPs. The procedures described in this document are experimental.

1.1. Background

Bandwidth parameters are transported within RSVP (see [[RFC2210](#)], [[RFC3209](#)] and [[RFC3473](#)]) via several objects that are opaque to RSVP. While opaque to RSVP, these objects support a particular model for the communication of bandwidth information between an RSVP session sender (ingress) and receiver (egress). The original model of communication defined in [[RFC2205](#)] and maintained in [[RFC3209](#)] used the SENDER_TSPEC and ADSPEC objects in Path messages and the FLOWSPEC object in Resv messages. The SENDER_TSPEC object was used to indicate a sender's data generation capabilities. The FLOWSPEC object was issued by the receiver and indicated the resources that should be allocated to the associated data traffic. The ADSPEC object was used to inform the receiver and intermediate hops of the actual resources allocated for the associated data traffic.

With the introduction of bidirectional LSPs in [[RFC3473](#)] the model of communication of bandwidth parameters was implicitly changed. In the context of [[RFC3473](#)] bidirectional LSPs, the SENDER_TSPEC object

indicates the desired resources for both upstream and downstream directions. The FLOWSPEC object is simply confirmation of the allocated resources. The definition of the ADSPEC object is either unmodified, and only has meaning for downstream traffic, or is implicitly or explicitly (see [RFC4606] and [MEF-TRAFFIC]) irrelevant.

1.2. Approach Overview

The approach for supporting asymmetric bandwidth bidirectional LSPs defined in this document builds on the original RSVP model for the transport of traffic related parameters and GMPLS' support for bidirectional LSPs. An alternative approach was considered and rejected in favor of the more generic approach presented below. For reference purposes only, the rejected approach is summarized in [Appendix A](#).

The defined approach is generic and can be applied to any switching technology supported by GMPLS. With this approach, the existing SENDER_TSPEC, ADSPEC and FLOWSPEC objects are complemented with the addition of new UPSTREAM_TSPEC, UPSTREAM_ADSPEC and UPSTREAM_FLOWSPEC objects. The existing objects are used in the original fashion defined in [RFC2205] and [RFC2210], and refer only to traffic associated with the LSP flowing in the downstream direction. The new objects are used in exactly the same fashion as the old objects, but refer to the upstream traffic flow. Figure 1 shows the bandwidth related objects used for Asymmetric Bandwidth Bidirectional LSPs.

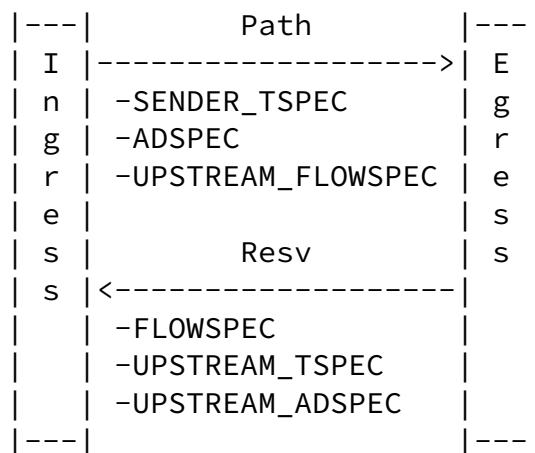


Figure 1: Generic Asymmetric Bandwidth Bidirectional LSPs

This extensions defined in this document are limited to P2P LSPs. Support for P2MP bidirectional LSPs is not currently defined and, as such, not covered in this document.

1.3. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

2. Generalized Asymmetric Bandwidth Bidirectional LSPs

The setup of an asymmetric bandwidth bidirectional LSP is signaled using the bidirectional procedures defined in [[RFC3473](#)] together with the inclusion of the new UPSTREAM_FLOWSPEC, UPSTREAM_TSPEC and UPSTREAM_ADSPEC objects.

The new upstream objects carry the same information and are used in the same fashion as the existing downstream objects; they differ in that they relate to traffic flowing in the upstream direction while the existing objects relate to traffic flowing in the downstream direction. The new objects also differ in that they are used on messages in the opposite directions.

2.1. UPSTREAM_FLOWSPEC Object

The format of an UPSTREAM_FLOWSPEC object is the same as a FLOWSPEC object. This includes the definition of class types and their

formats. The class number of the UPSTREAM_FLOWSPEC object object is TBA by IANA (of the form 0bbbbbbb).

2.1.1. Procedures

The Path message of an asymmetric bandwidth bidirectional LSP MUST contain an UPSTREAM_FLOWSPEC object and MUST use the bidirectional LSP formats and procedures defined in [[RFC3473](#)]. The C-Type of the UPSTREAM_FLOWSPEC Object MUST match the C-Type of the SENDER_TSPEC object used in the Path message. The contents of the UPSTREAM_FLOWSPEC Object MUST be constructed using a format and procedures consistent with those used to construct the FLOWSPEC object that will be used for the LSP, e.g., [[RFC2210](#)] or [[RFC4328](#)].

Nodes processing a Path message containing an UPSTREAM_FLOWSPEC Object MUST use the contents of the UPSTREAM_FLOWSPEC Object in the upstream label and resource allocation procedure defined in [Section 3.1 of \[RFC3473\]](#). Consistent with [[RFC3473](#)], a node that is unable to allocate a label or internal resources based on the contents of the UPSTREAM_FLOWSPEC Object, MUST issue a PathErr message with a "Routing problem/MPLS label allocation failure" indication.

2.2. UPSTREAM_TSPEC Object

The format of an UPSTREAM_TSPEC object is the same as a SENDER_TSPEC object. This includes the definition of class types and their formats. The class number of the UPSTREAM_TSPEC Object object is TBA by IANA (of the form 0bbbbbbb).

2.2.1. Procedures

The UPSTREAM_TSPEC object describes the traffic flow that originates at the egress. The UPSTREAM_TSPEC object MUST be included in any Resv message that corresponds to a Path message containing an UPSTREAM_FLOWSPEC object. The C-Type of the UPSTREAM_TSPEC object MUST match the C-Type of the corresponding UPSTREAM_FLOWSPEC object. The contents of the UPSTREAM_TSPEC Object MUST be constructed using a format and procedures consistent with those used to construct the FLOWSPEC object that will be used for the LSP, e.g., [[RFC2210](#)] or [[RFC4328](#)]. The contents of the UPSTREAM_TSPEC Object MAY differ from

contents of the UPSTREAM_FLOWSPEC object based on application data transmission requirements.

When an UPSTREAM_TSPEC object is received by an ingress, the ingress MAY determine that the original reservation is insufficient to satisfy the traffic flow. In this case, the ingress MAY issue a Path message with an updated UPSTREAM_FLOWSPEC object to modify the resources requested for the upstream traffic flow. This modification might require the LSP to be re-routed, and in extreme cases might result in the LSP being torn down when sufficient resources are not available.

[2.3.](#) UPSTREAM_ADSPEC Object

The format of an UPSTREAM_ADSPEC object is the same as an ADSPEC object. This includes the definition of class types and their formats. The class number of the UPSTREAM_ADSPEC object is TBA by IANA (of the form 0bbbbbbb).

[2.3.1.](#) Procedures

The UPSTREAM_ADSPEC object MAY be included in any Resv message that corresponds to a Path message containing an UPSTREAM_FLOWSPEC object. The C-Type of the UPSTREAM_TSPEC object MUST be consistent with the C-Type of the corresponding UPSTREAM_FLOWSPEC object. The contents of the UPSTREAM_ADSPEC Object MUST be constructed using a format and procedures consistent with those used to construct the ADSPEC object

that will be used for the LSP, e.g., [[RFC2210](#)] or [[MEF-TRAFFIC](#)]. The UPSTREAM_ADSPEC object is processed using the same procedures as the ADSPEC object and as such, MAY be updated or added at transit nodes.

[3.](#) Packet Formats

This section presents the RSVP message related formats as modified by this section. This document modifies formats defined in [[RFC2205](#)], [[RFC3209](#)] and [[RFC3473](#)]. See [[RSVP-BNF](#)] for the syntax used by RSVP. Unmodified formats are not listed. Three new objects are defined in this section:

Object name	Applicable RSVP messages
-----	-----
UPSTREAM_FLOWSPEC	Path, PathTear, PathErr and Notify (via sender descriptor)
UPSTREAM_TSPEC	Resv, ResvConf, ResvTear, ResvErr and Notify (via flow descriptor list)
UPSTREAM_ADSPEC	Resv, ResvConf, ResvTear, ResvErr and Notify (via flow descriptor list)

The format of the sender description for bidirectional asymmetric LSPs is:

```
<sender descriptor> ::= <SENDER_TEMPLATE> <SENDER_TSPEC>
                        [ <ADSPEC> ]
                        [ <RECORD_ROUTE> ]
                        [ <SUGGESTED_LABEL> ]
                        [ <RECOVERY_LABEL> ]
                        <UPSTREAM_LABEL>
                        <UPSTREAM_FLOWSPEC>
```

The format of the flow descriptor list for bidirectional asymmetric LSPs is:

```
<flow descriptor list> ::= <FF flow descriptor list>
                          | <SE flow descriptor>

<FF flow descriptor list> ::= <FLOWSPEC>
                              <UPSTREAM_TSPEC> [ <UPSTREAM_ADSPEC> ]
                              <FILTER_SPEC>
                              <LABEL> [ <RECORD_ROUTE> ]
                              | <FF flow descriptor list>
                              <FF flow descriptor>

<FF flow descriptor> ::= [ <FLOWSPEC> ]
                        [ <UPSTREAM_TSPEC> ] [ <UPSTREAM_ADSPEC> ]
```

```
<FILTER_SPEC> <LABEL>
[ <RECORD_ROUTE> ]
```

```
<SE flow descriptor> ::= <FLOWSPEC>
                        <UPSTREAM_TSPEC> [ <UPSTREAM_ADSPEC> ]
```


<SE filter spec list>

<SE filter spec list> is unmodified by this document.

4. Compatibility

This extension reuses and extends semantics and procedures defined in [RFC2205], [RFC3209] and [RFC3473] to support bidirectional LSPs with asymmetric bandwidth. To indicate the use of asymmetric bandwidth three new objects are defined. Each of these objects is defined with class numbers in the form 0bbbbbbb. Per [RFC2205], nodes not supporting this extension will not recognize the new class numbers and should respond with an "Unknown Object Class" error. The error message will propagate to the ingress which can then take action to avoid the path with the incompatible node, or may simply terminate the session.

5. IANA Considerations

IANA is requested to administer assignment of new values for namespaces defined in this section and reviewed in this subsection.

Upon approval of this document, the IANA will make the assignments described below in the "Class Names, Class Numbers, and Class Types" section of the "RSVP PARAMETERS" registry located at <http://www.iana.org/assignments/rsvp-parameters>

5.1. UPSTREAM_FLOWSPEC Object

A new class named UPSTREAM_FLOWSPEC will be created in the 0bbbbbbb range (TBD suggested) with the following definition:

Class Types or C-types:

Same values as FLOWSPEC object (C-Num 9)

[5.2.](#) UPSTREAM_TSPEC Object

A new class named UPSTREAM_TSPEC will be created in the 0bbbbbbb range (TBD suggested) with the following definition:

Class Types or C-types:

Same values as SENDER_TSPEC object (C-Num 12)

[5.3.](#) UPSTREAM_ADSPEC Object

A new class named UPSTREAM_ADSPEC will be created in the 0bbbbbbb range (TBD suggested) with the following definition:

Class Types or C-types:

Same values as ADSPEC object (C-Num 13)

[6.](#) Security Considerations

This document introduces new message objects for use in GMPLS signaling [[RFC3473](#)]. Specifically the UPSTREAM_TSPEC, UPSTREAM_ADSPEC and UPSTREAM_FLOWSPEC objects. These object parallel the exiting SENDER_TSPEC, ADSPEC and FLOWSPEC objects but are used in the opposite direction. As such, any vulnerabilities that are due to the use of the old objects now apply to messages flowing in the reverse direction.

From a message standpoint, this document does not introduce any new signaling messages, nor change the relationship between LSRs that are adjacent in the control plane. As such, this document introduces no additional message or neighbor related security considerations.

See [[RFC3473](#)] for relevant security considerations, and [SEC-FRAMEWORK] for a more general discussion on RSVP-TE security discussions.

[7.](#) References

[7.1.](#) Normative References

[RFC2205] Braden, R. Ed. et al, "Resource ReserVation Protocol -- Version 1 Functional Specification", [RFC 2205](#), September 1997.

Internet-Draft [draft-ietf-ccamp-asymm-bw-bidir-lsps-02.txt](#) November 17, 2008

- [RFC2210] Wroclawski, J., "The Use of RSVP with IETF Integrated Services," [RFC 2210](#), September 1997.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels," [RFC 2119](#).
- [RFC3209] Awduche, et al, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.
- [RFC3473] Berger, L., Editor, "Generalized Multi-Protocol Label Switching (GMPLS) Signaling - Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003.

7.2. Informative References

- [GMPLS-PBBTE] Fedyk, D., et al "GMPLS control of Ethernet" , [draft-ietf-ccamp-gmpls-ethernet-pbb-te-01.txt](#), Work in progress, July 2008.
- [MEF-TRAFFIC] Papadimitriou, D., "MEF Ethernet Traffic Parameters," [draft-ietf-ccamp-ethernet-traffic-parameters-06.txt](#), Work in progress, October 2008.
- [RFC4606] Mannie, E., Papadimitriou, D., "Generalized Multi-Protocol Label Switching (GMPLS) Extensions for Synchronous Optical Network (SONET) and Synchronous Digital Hierarchy (SDH) Control", [RFC 4606](#), August 2006.
- [RFC4328] Papadimitriou, D., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Extensions for G.709 Optical Transport Networks Control", [RFC 4328](#), January 2006.
- [RSVP-BNF] Farrel, A., "Reduced Backus-Naur Form (RBNF) A Syntax Used in Various Protocol Specifications", Work in progress. [draft-farrel-rtg-common-bnf-07.txt](#), November 2008.
- [SEC-FRAMEWORK] Fang, L., Ed., "Security Framework for MPLS and

GMPLS Networks",
[draft-ietf-mpls-mpls-and-gmpls-security-framework-04.txt](#),
Work in progress, November 2008.

Berger, et. al.

Experimental

[Page 10]

Internet-Draft [draft-ietf-ccamp-asymm-bw-bidir-lsps-02.txt](#) November 17, 2008

8. Authors' Addresses

Lou Berger
LabN Consulting, L.L.C.
Email: lberger@labn.net

Attila Takacs
Ericsson
1. Laborc u.
1037 Budapest, Hungary
Phone: +36-1-4377044
Email: attila.takacs@ericsson.com

Diego Caviglia
Ericsson
Via A. Negrone 1/A
Genova-Sestri Ponente, Italy
Phone: +390106003738
Email: diego.caviglia@ericsson.com

Don Fedyk
Nortel Networks
600 Technology Park Drive
Billerica, MA, USA 01821
Phone: +1-978-288-3041
Email: dwfedyk@nortel.com

Julien Meuric
France Telecom
Research & Development
2, avenue Pierre Marzin
22307 Lannion Cedex - France
Phone: +33 2 96 05 28 28
Email: julien.meuric@orange-ftgroup.com

A. [Appendix A](#): Alternate Approach Using ADSPEC Object

This section is included for historic purposes and its implementation is NOT RECOMMENDED.

A.1. Applicability

This section presents an alternate method for the support of asymmetric bandwidth bidirectional LSP establishment with a single RSVP-TE signaling session. This approach differs in applicability and generality from the approach presented in the main body of this

document. In particular this approach is technology specific; it uses the ADSPEC object to carry traffic parameters for upstream data and requires MEF Ethernet Traffic Parameter while the approach presented above is suitable for use with any technology.

The generalized asymmetric bandwidth bidirectional LSP presented in the main body of this document has the benefit of being applicable to any switching technology, but requires support for three new types of object classes, i.e., the UPSTREAM_TSPEC, UPSTREAM_ADSPEC and UPSTREAM_FLOWSPEC objects.

The solution presented in this section is based on the Ethernet specific ADSPEC Object, and is referred to as the "ADSPEC Object" approach. This approach limits applicability to cases where the [\[MEF-TRAFFIC\]](#) traffic parameters are appropriate, and to switching technologies that define no use for the ADSPEC object. While ultimately it is this limited scope that has resulted in this approach being relegated to an Appendix, the semantics of this approach are quite simple in that they only require the definition of a new ADSPEC object C-Type.

In summary, the "ADSPEC Object" approach presented in this section SHOULD NOT be implemented.

A.2. Overview

The "ADSPEC Object" approach is specific to Ethernet and uses [\[MEF-](#)

TRAFFIC] traffic parameters. This approach is not generic and is aimed at providing asymmetric bandwidth bidirectional LSPs for just Ethernet transport. With this approach, the ADSPEC object carries the traffic parameters for the upstream data flow. SENDER_TSPEC object is used to indicate the traffic parameters for the downstream data flow. The FLOWSPEC object provides confirmation of the allocated downstream resources. Confirmation of the upstream resource allocation is a Resv message, as any resource allocation failure for the upstream direction will always result in a PathErr message. Figure 2 shows the bandwidth related objects used in the first approach.

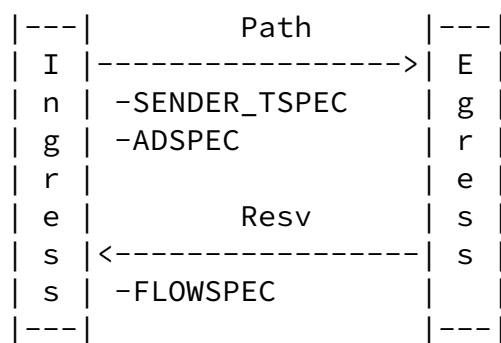


Figure 2: Asymmetric Bandwidth Bidirectional LSPs Using ADSPEC Object

In the "ADSPEC Object" approach, the setup of an asymmetric bandwidth bidirectional LSP would be signaled using the bidirectional procedures defined in [RFC3473] together with the inclusion of a new ADSPEC object. The new ADSPEC object would be specific to Ethernet and could be called the Ethernet Upstream Traffic Parameter ADSPEC object. The Ethernet Upstream Traffic Parameter ADSPEC object would use the Class-Number 13 and C-Type UNASSIGNED (this approach should not be implemented). The format of the object would be the same as the Ethernet SENDER_TSPEC object defined in [MEF-TRAFFIC].

This approach would not modify behavior of symmetric bandwidth LSPs. Per [\[MEF-TRAFFIC\]](#), such LSPs are signaled without an ADSPEC or with an INTSERV ADSPEC.

The defined approach could be reused to support asymmetric bandwidth bidirectional LSPs for other types of switching technologies. All that would be needed would be to define the proper ADSPEC object.

A.3. Procedures

Using the approach presented in this section, the process of establishing an asymmetric bandwidth bidirectional LSP would follow the process of establishing symmetric bandwidth bidirectional LSP, as defined in [Section 3 of \[RFC3473\]](#), with two modifications. These modifications would be followed when an incoming Path message is received containing an Upstream_Label object and the Ethernet Upstream Traffic Parameter ADSPEC object.

The first modification to the symmetric bandwidth process would be that when allocating the upstream label, the bandwidth associated with the upstream label would be taken from the Ethernet Upstream Traffic Parameter ADSPEC object, see [Section 3.1 of \[RFC3473\]](#). Consistent with [\[RFC3473\]](#), a node that is unable to allocate a label or internal resources based on the contents of the ADSPEC Object, would issue a PathErr message with a "Routing problem/MPLS label

allocation failure" indication.

The second modification would be that the ADSPEC object would not be modified by transit nodes.

A.4. Compatibility

The approach presented in this section reuses semantics and procedures defined in [\[RFC3473\]](#). To indicate the use of asymmetric bandwidth a new ADSPEC object c-type would be defined. Per [\[RFC2205\]](#), nodes not supporting the approach should not recognize this new C-type and respond with an "Unknown object C-Type" error.

Full Copyright Statement

Copyright (C) The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository

at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Acknowledgement

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).