

IETF Next Steps in Signaling
Internet-Draft
Intended status: Experimental
Expires: January 27, 2011

C. Shen
H. Schulzrinne
Columbia U.
S. Lee
J. Bang
Samsung AIT
July 26, 2010

NSIS Operation Over IP Tunnels
draft-ietf-nsis-tunnel-13.txt

Abstract

NSIS Quality of Service (QoS) signaling enables applications to perform QoS reservation along a data flow path. When the data flow path contains IP tunnel segments, NSIS QoS signaling has no effect within those tunnel segments. Therefore, the resulting tunnel segments could become the weakest QoS link and invalidate the QoS efforts in the rest of the end-to-end path. The problem with NSIS signaling within the tunnel is caused by the tunnel encapsulation which masks packets' original IP header fields. Those original IP header fields are needed to intercept NSIS signaling messages and classify QoS data packets. This document defines a solution to this problem by mapping end-to-end QoS session requests to corresponding QoS sessions in the tunnel, thus extending the end-to-end QoS signaling into the IP tunnel segments.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 27, 2011.

Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the

document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Table of Contents

1.	Introduction	4
2.	Terminology	5
3.	Problem Statement	6
3.1.	IP Tunneling Protocols	6
3.2.	NSIS QoS Signaling in the Presence of IP Tunnels	8
4.	Design Overview	10
4.1.	Design Requirements	10
4.2.	Overall Design Approach	11
4.3.	Tunnel Flow ID for Different IP Tunneling Protocols	13
5.	NSIS Operation over Tunnels with Pre-configured QoS Sessions	14
5.1.	Sender-initiated Reservation	14
5.2.	Receiver-initiated Reservation	15
6.	NSIS Operation over Tunnels with Dynamically Created QoS Sessions	16
6.1.	Sender-initiated Reservation	17
6.2.	Receiver-initiated Reservation	19
7.	NSIS-Tunnel Signaling Capability Discovery	22
8.	IANA Considerations	23
9.	Security Considerations	24
10.	Acknowledgments	24
11.	References	25
11.1.	Normative References	25
11.2.	Informative References	25
	Authors' Addresses	26

1. Introduction

IP tunneling [[RFC1853](#)][RFC2003] is a technique that allows a packet to be encapsulated and carried as payload within an IP packet. The resulting encapsulated packet is called an IP tunnel packet, and the packet being tunneled is called the original packet. In typical scenarios, IP tunneling is used to exert explicit forwarding path control (e.g., in Mobile IP [[RFC3344](#)]), facilitate the secure IP delivery architecture (e.g., in IPsec [[RFC4301](#)]), and help packet routing in IP networks of different characteristics (e.g., between IPv6 and IPv4 networks [[RFC4213](#)]). [Section 3.1](#) summarizes a list of common IP tunneling protocols.

This document considers the situation when the packet being tunneled contains a Next Step In Signaling (NSIS) [[RFC4080](#)] packet. NSIS is an IP signaling architecture consisting of a Generic Internet Signaling Transport (GIST) [[I-D.ietf-nsis-ntlp](#)] sub-layer for signaling transport, and an NSIS Signaling Layer Protocol (NSLP) sub-layer customizable for different applications. We focus on the Quality of Service (QoS) NSLP [[I-D.ietf-nsis-qos-nslp](#)] which provides functionalities that extend those of the earlier RSVP [[RFC2205](#)] signaling. In this document the term "NSIS" and "NSIS QoS" are used interchangeably.

Without additional efforts, NSIS signaling does not work within IP tunnel segments of a signaling path. The reason is that tunnel encapsulation masks the original packet including its header and payload. However, information from the original packet is required both for NSIS peer node discovery and for QoS data flow packet

classification. Without access to information from the original packet, an IP tunnel acts as an NSIS-unaware virtual link in the end-to-end NSIS signaling path.

This document defines a mechanism to extend end-to-end NSIS signaling for QoS reservation into IP tunnels. The NSIS-aware IP tunnel end-points that support this mechanism are called NSIS-tunnel-aware end-points. There are two main operation modes. On one hand, if the tunnel already has pre-configured QoS sessions, the NSIS-tunnel-aware end-points map end-to-end QoS signaling requests directly to existing tunnel sessions as long as there are enough tunnel session resources; on the other hand, if no pre-configured tunnel QoS sessions are available, the NSIS-tunnel-aware end-points dynamically initiate and maintain tunnel QoS sessions that are then associated with the corresponding end-to-end QoS sessions. Note that whether the tunnel pre-configures QoS sessions or not, and which pre-configured tunnel QoS sessions a particular end-to-end QoS signaling request should be mapped to are policy issues out of scope of this document.

The rest of this document is organized as follows. [Section 2](#) defines terminology. [Section 3](#) presents the problem statement including common IP tunneling protocols and existing behavior of NSIS QoS signaling operating over IP tunnels. [Section 4](#) introduces the design requirements and overall approach of our mechanism. More details about how NSIS QoS signaling operates with tunnels that use pre-configured QoS and dynamic QoS signaling are provided in [Section 5](#) and [Section 6](#). [Section 7](#) describes a method to automatically discover whether a tunnel end-point node supports the NSIS-tunnel interoperation mechanism defined in this document. [Section 8](#) discusses IANA considerations and [Section 9](#) considers security.

[2](#). Terminology

This document uses terminology defined in [\[RFC2473\]](#), [\[I-D.ietf-nsis-ntlp\]](#), and [\[I-D.ietf-nsis-qos-nslp\]](#). In addition, the following terms are used:

IP Tunnel: A tunnel configured as a virtual link between two IP nodes, on which the encapsulating protocol is IP.

Tunnel IP Header: The IP header prepended to the original packet during encapsulation. It specifies the tunnel end-points as source and destination.

Tunnel Specific Header: The header fields inserted by the encapsulation mechanism after the tunnel IP header and before the original packet. These headers may or may not exist depending on the specific tunnel mechanism used. An example of such header fields is the Encapsulation Security Payload (ESP) header for IPsec [[RFC4301](#)] tunneling mode.

Tunnel Intermediate Node (Tmid): A node which resides in the middle of the forwarding path between the tunnel entry-point node and the tunnel exit-point node.

Flow Identifier (Flow ID): The set of header fields which is used to identify a data flow. For example, it may include flow sender and receiver addresses, protocol and port numbers.

End-to-end QoS Signaling: The signaling process that manipulates the QoS control information in the end-to-end path from the flow sender to the flow receiver. When the end-to-end flow path contains tunnel segments, this document uses end-to-end QoS signaling to refer specially to the QoS signaling outside the tunnel segments. This document uses "end-to-end QoS signaling" and "end-to-end signaling" interchangeably.

Tunnel QoS Signaling: The signaling process that manipulates the QoS control information in the path inside a tunnel, between the tunnel entry-point and the tunnel exit-point nodes. This document uses "tunnel QoS signaling" and "tunnel signaling" interchangeably.

NSIS-aware Node: A node that supports NSIS signaling.

NSIS-aware Tunnel End-point Node: A tunnel end-point node which is also an NSIS node.

NSIS-tunnel-aware Tunnel End-point Node: An NSIS-aware Tunnel End-point node which also supports the mechanism for NSIS operating over IP tunnels defined in this document. This document uses

"NSIS-tunnel-aware tunnel end-point node" and "NSIS-tunnel-aware end-point node" interchangeably.

3. Problem Statement

3.1. IP Tunneling Protocols

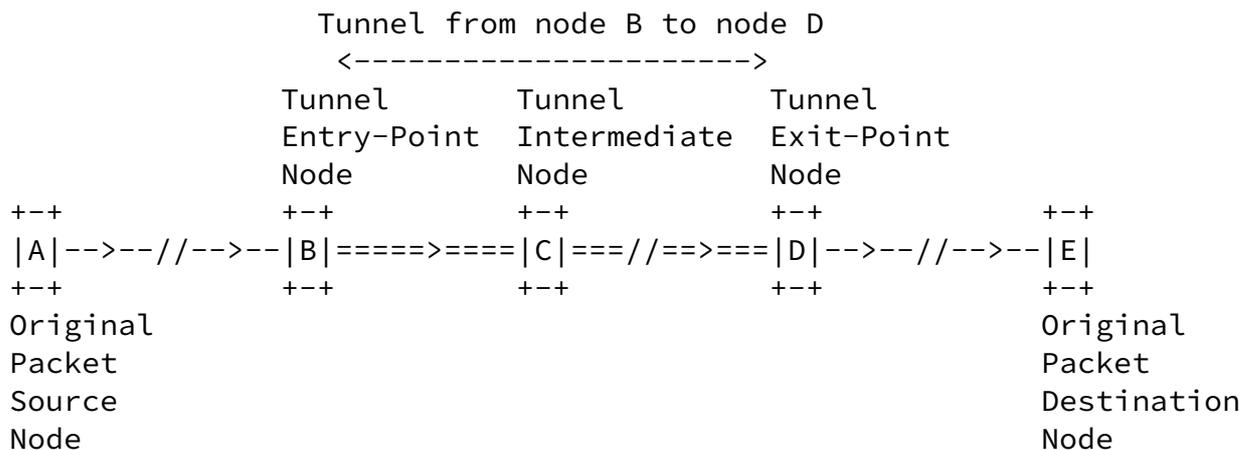


Figure 1: IP Tunnel

The following description about IP tunneling is derived from [RFC2473] and adapted for both IPv4 and IPv6.

IP tunneling (Figure 1) is a technique for establishing a "virtual link" between two IP nodes for transmitting data packets as payloads of IP packets. From the point of view of the two nodes, this "virtual link", called an IP tunnel, appears as a point-to-point link on which IP acts like a link-layer protocol. The two IP nodes play

specific roles. One node encapsulates original packets received from other nodes or from itself and forwards the resulting tunnel packets through the tunnel. The other node decapsulates the received tunnel packets and forwards the resulting original packets towards their destinations, possibly itself. The encapsulating node is called the tunnel entry-point node (Tentry), and it is the source of the tunnel packets. The decapsulating node is called the tunnel exit-point node (Texit), and it is the destination of the tunnel packets.

An IP tunnel is a unidirectional mechanism - the tunnel packet flow takes place in one direction between the IP tunnel entry-point and exit-point nodes. Bi-directional tunneling is achieved by combining two unidirectional mechanisms, that is, configuring two tunnels, each in opposite direction to the other - the entry-point node of one tunnel is the exit-point node of the other tunnel.

Figure 2 illustrates the original packet and the resulting tunnel packet. In a tunnel packet, the original packet is encapsulated within the tunnel header. The tunnel header contains two components, the tunnel IP header and other tunnel specific headers. The tunnel IP header specifies tunnel entry-point node as IP source address and tunnel exit-point node as IP destination address, causing the tunnel packet to be forwarded in the tunnel. The tunnel specific header between the tunnel IP header and the original packet is optional, depending on the tunneling protocol in use.

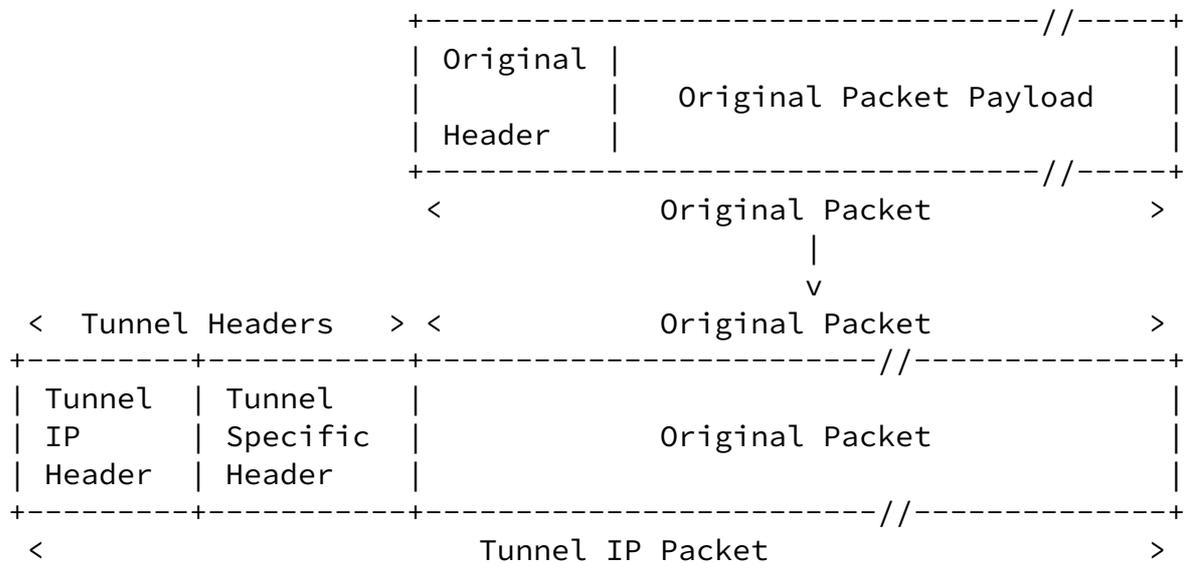


Figure 2: IP Tunnel Encapsulation

Commonly used IP tunneling protocols include Generic Routing

over IPv4 Networks (GREIPv4) [RFC1702] and IP Encapsulation within IP (IPv4INIPv4) [RFC1853][RFC2003], Minimal Encapsulation within IP (MINENC) [RFC2004], IPv6 over IPv4 Tunneling (IPv6INIPv4) [RFC4213], Generic Packet Tunneling in IPv6 Specification (IPv6GEN) [RFC2473] and IPsec tunneling mode (IPsec) [RFC4301][RFC4303]. Among these tunneling protocols, the tunnel headers in IPv4INIPv4, IPv6INIPv4 and IPv6GEN contain only a tunnel IP header, and no tunnel specific header. All the other tunneling protocols have a tunnel header consisting of both a tunnel IP header and a tunnel specific header. The tunnel specific header is the GRE header for GRE and GREIPv4, the minimum encapsulation header for MINENC and the ESP header for IPsec tunneling mode. As will be discussed in [Section 4.3](#), some of the tunnel specific headers may be used to identify a flow in the tunnel and facilitate NSIS operating over IP tunnels.

3.2. NSIS QoS Signaling in the Presence of IP Tunnels

Typically, applications use NSIS QoS signaling to reserve resources for a flow along the flow path. NSIS QoS signaling can be initiated by either the flow sender or flow receiver. Figure 3 shows an example scenario with five NSIS nodes, including flow sender node A, flow receiver node E, and intermediate NSIS nodes B, C and D. Nodes which are not NSIS QoS capable are not shown.

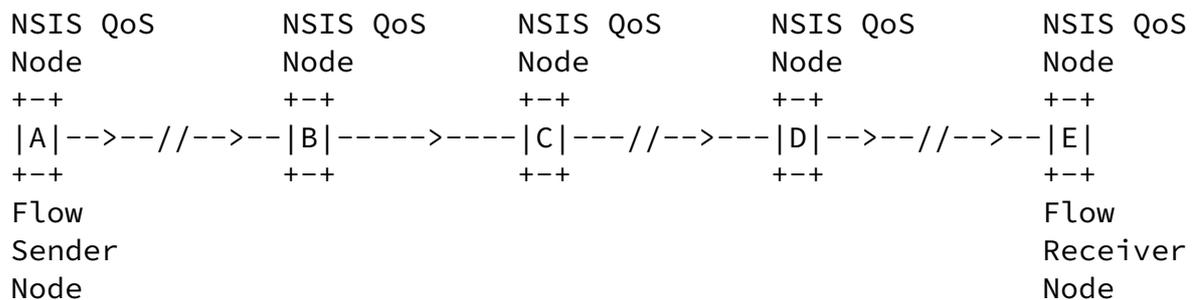


Figure 3: Example Scenario of NSIS QoS Signaling

Figure 4 illustrates a sender-initiated signaling sequence in the scenario of Figure 3. Sender node A sends a RESERVE message towards receiver node E. The RESERVE message gets forwarded by intermediate NSIS Nodes B, C, and D and finally reaches receiver node E. Receiver node E then sends back a RESPONSE message confirming the QoS reservation, again through the previous intermediate NSIS nodes in the flow path.

There are two important aspects in the above signaling process that are worth mentioning. First, the flow sender does not initially know exactly which intermediate nodes are NSIS-aware and should be involved in the signaling process for a flow from node A to node E.

Discovery of those nodes, namely nodes B, C and D is accomplished by a separate NSIS peer discovery process (not shown above, see [I-D.ietf-nsis-ntlp]). The NSIS peer discovery messages contain special IP header and payload format or include a Router Alert Option (RAO) [RFC2113] [RFC2711]. The special formats of NSIS discovery messages allow nodes B, C and D to intercept them and subsequently insert themselves into the signaling path for the flow in question. After formation of the signaling path, all signaling messages corresponding to this flow will be passed to these nodes for processing. Other nodes which are not NSIS-aware simply forward all signaling messages like any other IP packets without additional handling.

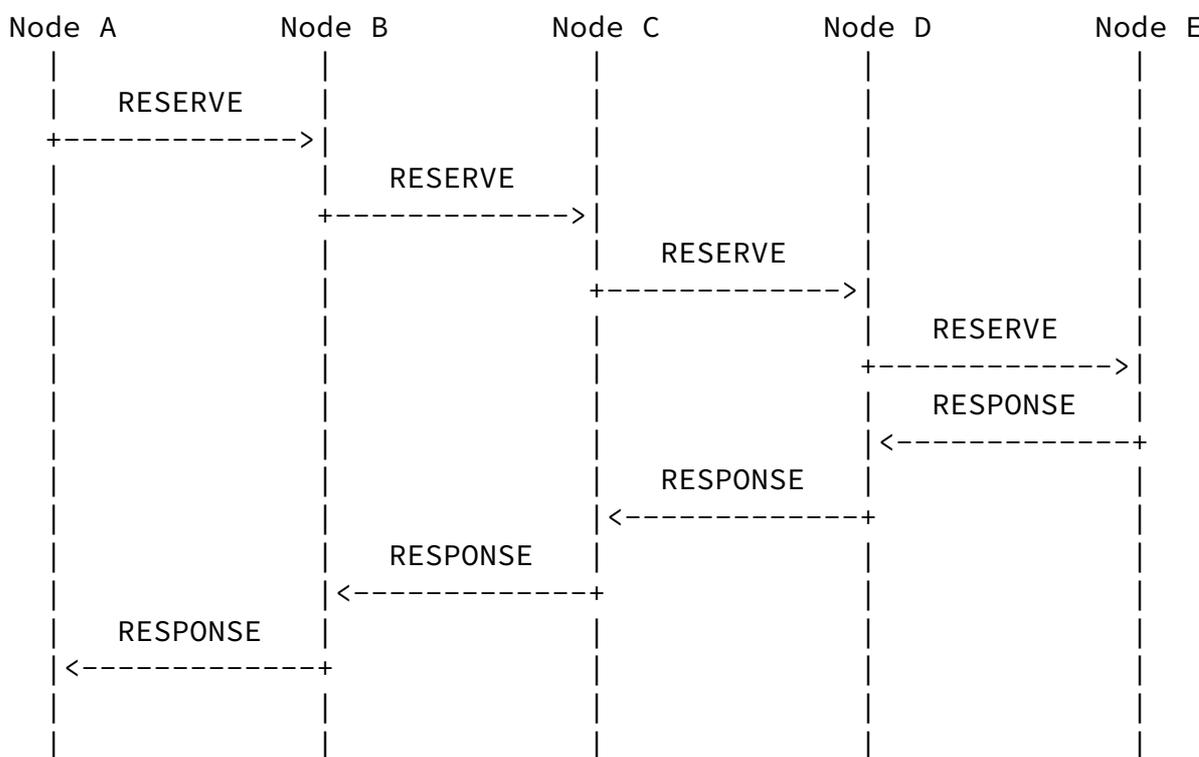


Figure 4: Sender-initiated NSIS QoS Signaling

Second, the goal of QoS signaling is to install control information to give QoS treatment for the flow being signaled. Basic QoS control information includes the data Flow ID for packet classification and the type of QoS treatment those packets are entitled to. The Flow ID contains a set of header fields such as flow sender and receiver addresses, protocol and port numbers.

Now consider Figure 5 where nodes B, C and D are end-points and intermediate nodes of an IP tunnel. During the signaling path discovery process, node B can still intercept and process NSIS peer

discovery messages if it recognizes them before performing tunnel encapsulation; node D can identify NSIS peer discovery messages after

performing tunnel decapsulation. A tunnel intermediate node such as node C, however, only sees the tunnel header of the packets and will not be able to identify the original NSIS peer discovery message or insert itself in the flow signaling path. Furthermore, the Flow ID of the original flow is based on IP header fields of the original packet. Those fields are also hidden in the payload of the tunnel packet. So there is no way node C can classify packets belonging to that flow in the tunnel.

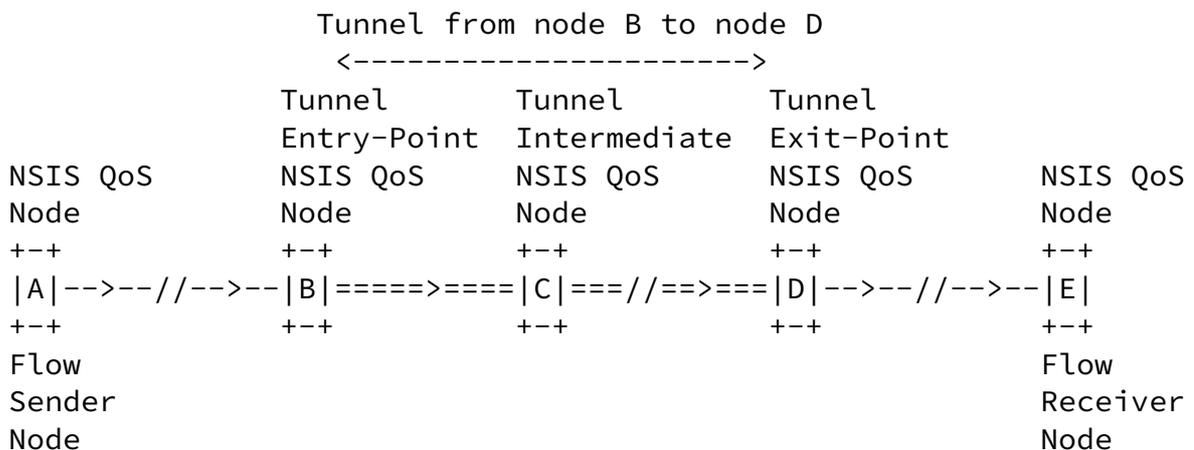


Figure 5: Example Scenario of NSIS QoS Signaling with IP Tunnel

In summary, an IP tunnel segment normally appears like a QoS-unaware virtual link. Since the best QoS of an end-to-end path is judged based on its weakest segment, we need a mechanism to extend NSIS into the IP tunnel segments, which should allow the tunnel intermediate nodes to intercept original NSIS signaling messages and classify original data flow packets in the presence of tunnel encapsulation.

4. Design Overview

4.1. Design Requirements

We identify the following design requirements for NSIS operating over IP tunnels.

- o The mechanism should work with all common IP tunneling protocols listed in [Section 3.1](#).
- o Some IP tunnels maintain pre-configured QoS sessions inside the tunnel. The mechanism should work for IP tunnels both with and without pre-configured tunnel QoS sessions.
- o The mechanism should minimize the required upgrade to existing infrastructure in order to facilitate its deployment. Specifically, we should limit the necessary upgrade to the tunnel

end-points.

- o The mechanism should provide a method for one NSIS-tunnel-aware end-point to discover whether the other end-point is also NSIS-tunnel-aware, when necessary.
- o The mechanism should learn from design experience of previous work on RSVP over IP tunnels (RSVP-TUNNEL) [[RFC2746](#)], while also addressing the following major differences of NSIS from RSVP. First, NSIS is designed as a generic framework to accommodate various signaling application needs, and therefore is split into a signaling transport layer and a signaling application layer; RSVP does not have a layer split and is designed only for QoS signaling. Second, NSIS QoS NSLP allows both sender-initiated and receiver-initiated reservations; RSVP only supports receiver-initiated reservations. Third, NSIS deals only with unicast; RSVP also supports multicast. Fourth, NSIS integrates a new Session ID feature which is different from the session identification concept in RSVP.

[4.2](#). Overall Design Approach

The overall design of this NSIS signaling and IP tunnel interworking mechanism draws similar concepts from RSVP-TUNNEL [[RFC2746](#)], but is tailored and extended for NSIS operation.

Since we only consider unidirectional flows, to accommodate flows in both directions of a tunnel, we require both tunnel entry-point and tunnel exit-point to be NSIS-tunnel-aware. An NSIS-tunnel-aware end-point knows whether the other tunnel end-point is NSIS-tunnel-aware either through pre-configuration or through an NSIS-tunnel capability discovery mechanism defined in [Section 7](#).

Tunnel end-points need to always intercept NSIS peer discovery

messages and insert themselves into the NSIS signaling path so they can receive all NSIS signaling messages and coordinate their interaction with tunnel QoS.

To facilitate QoS handling in the tunnel, an end-to-end QoS session is mapped to a tunnel QoS session, either pre-configured or dynamically created. The tunnel session uses a tunnel Flow ID based on information available in the tunnel headers, thus allowing tunnel-intermediate nodes to classify flow packets correctly.

For tunnels that maintain pre-configured QoS sessions, upon receiving a request to reserve resources for an end-to-end session, the tunnel end-point maps the end-to-end QoS session to an existing tunnel session. To simplify the design, the mapping decision is always made by the tunnel entry-point regardless of whether the end-to-end session uses sender-initiated or receiver-initiated NSIS signaling

mode. The details about which end-to-end session can be mapped to which pre-configured tunnel session depend on policy mechanisms outside the scope of this document.

For tunnels that do not maintain pre-configured QoS sessions, the NSIS-tunnel-aware end-points dynamically create and manage a corresponding tunnel QoS session for the end-to-end session. Since the initiation mode of both QoS sessions can be sender-initiated or receiver-initiated, to simplify the design, we require that the initiation mode of the tunnel QoS session follows that of the end-to-end QoS session. In other words, the end-to-end QoS session and its corresponding tunnel QoS session are either both sender-initiated or both receiver-initiated. To keep the handling mechanism consistent with the case for tunnels with pre-configured QoS sessions, the tunnel entry-point always initiates the mapping between the tunnel session and the end-to-end session.

As the mapping initiator, the tunnel entry-point records the association between the end-to-end session and its corresponding tunnel session, both in tunnels with and without pre-configured QoS sessions. This association serves two purposes, one at the signaling plane and the other at the data plane. For the signaling plane, the association enables the tunnel entry-point to coordinate necessary interaction, such as QoS adjustment in sender-initiated reservations, between the end-to-end and the tunnel QoS sessions. For the data

plane, the association allows the tunnel entry-point to correctly encapsulate data flow packets according to the chosen tunnel Flow ID. Since the tunnel Flow ID uses header fields that are visible inside the tunnel, the tunnel intermediate nodes can classify the data flow packets and apply appropriate QoS treatment.

In addition to the tunnel entry-point recording the association between the end-to-end session and its corresponding tunnel session, the tunnel exit-point also needs to maintain the same association for similar reasons. At the signaling plane, this association at the tunnel exit-point enables the interaction of the end-to-end and the tunnel QoS session such as QoS adjustment in receiver-initiated reservations. At the data plane, this association tells the tunnel exit-point that the relevant data flow packets need to be decapsulated according to the corresponding tunnel Flow ID.

In tunnels with pre-configured QoS sessions, the tunnel exit-point may also learn about the mapping information between the corresponding tunnel and end-to-end QoS sessions through pre-configuration as well. In tunnels without pre-configured QoS sessions, the tunnel exit-point knows the mapping between the corresponding tunnel and end-to-end QoS sessions through the NSIS signaling process that creates the tunnel QoS sessions inside the

tunnel, with the help of appropriate QoS NSLP session binding and message binding mechanisms.

One problem for NSIS operating over IP tunnels which dynamically create QoS sessions is that it involves two signaling sequences. The outcome of the tunnel signaling session directly affects the outcome of the end-to-end signaling session. Since the two signaling sessions overlap in time, there are circumstances when a tunnel end-point has to decide whether it should proceed with the end-to-end signaling session while it is still waiting for results of the tunnel session. This problem can be addressed in two ways, namely sequential mode and parallel mode. In sequential mode, end-to-end signaling pauses when it is waiting for results of tunnel signaling, and resumes upon receipt of the tunnel signaling outcome. In parallel mode, end-to-end signaling continues outside the tunnel while tunnel signaling is still in process and its outcome is unknown. The parallel mode may lead to reduced signaling delays if the QoS resources in the tunnel path are sufficient compared to the

rest of the end-to-end path. If the QoS resources in the tunnel path are more constraint than the rest of the end-to-end path, however, the parallel mode may lead to wasted end-to-end signaling or necessitates re-negotiation after the tunnel signaling outcome becomes available. In those cases, the signaling flow of the parallel mode also tends to be complicated. This document adopts a sequential mode approach for the two signaling sequences.

[4.3.](#) Tunnel Flow ID for Different IP Tunneling Protocols

A tunnel Flow ID identifies the end-to-end flow for packet classification within the tunnel. The tunnel Flow ID is based on a set of tunnel header fields. Different tunnel Flow ID can be chosen for different tunneling mechanisms in order to minimize the classification overhead. This document specifies the following Flow ID formats for the respective tunneling protocols.

- o For IPv6 tunneling protocols (IPv6GEN), the tunnel Flow ID consists of the tunnel entry-point IPv6 address and the tunnel exit-point IPv6 address plus a unique IPv6 flow label [[RFC3697](#)].
- o For IPsec tunnel mode (IPsec), the tunnel Flow ID contains the tunnel entry-point IP address and the tunnel exit-point IP address plus the Security Parameter Index (SPI).
- o For all other tunneling protocols (GRE, GREIPv4, IPv4INIPv4, MINENC, IPv6INIPv4), the tunnel entry-point inserts an additional UDP header between the tunnel header and the original packet. The Flow ID consists of the tunnel entry-point and tunnel exit-point IP addresses and the source port number in the additional UDP header. The source port number is dynamically chosen by the tunnel entry-point and conveyed to the tunnel exit-point. In

these cases, it is especially important that the tunnel exit-point understands the additional UDP encapsulation, and therefore can correctly decapsulate both the normal tunnel header and the additional UDP header. In other words, both tunnel end-points need to be NSIS-tunnel-aware.

The above recommendations about choosing the tunnel Flow ID apply to dynamically created QoS tunnel sessions. For pre-configured QoS tunnel sessions, the corresponding Flow ID is determined by the configuration mechanism itself. For example, if the tunnel QoS is DiffServ based, the DiffServ Code Point (DSCP) field value may be


used to identify the corresponding tunnel session.

5. NSIS Operation over Tunnels with Pre-configured QoS Sessions

When tunnel QoS is managed by pre-configured QoS sessions, both the tunnel entry-point and tunnel exit-point need to be configured with information about the Flow ID of the tunnel QoS session. This is to enable the tunnel end-points to correctly perform matching encapsulating and decapsulating operations. The procedures of NSIS operating over tunnels with pre-configured QoS sessions depend on whether the end-to-end NSIS signaling is sender-initiated or receiver-initiated. But in both cases, it is the tunnel entry-point that first creates the mapping between a tunnel session and an end-to-end session.

5.1. Sender-initiated Reservation

Figure 6 illustrates the signaling sequence when end-to-end signaling outside the tunnel is sender-initiated. Upon receiving a RESERVE message from the sender, Tentry checks tunnel QoS configuration, determines whether and how this end-to-end session can be mapped to a pre-configured tunnel session. The mapping criteria are part of the pre-configuration and outside the scope of this document. Tentry then tunnels the RESERVE message to Texit. Texit forwards the RESERVE message to the receiver. The receiver replies with a RESPONSE message which arrives at Texit, Tentry and finally the sender. If the RESPONSE message that Tentry receives confirms that the overall signaling is successful, Tentry starts to encapsulate all incoming packets of the data flow using the tunnel Flow ID corresponding to the mapped tunnel session. Texit knows how to decapsulate the tunnel packets because it recognizes the mapped tunnel Flow ID based on information supplied during tunnel session pre-configuration.

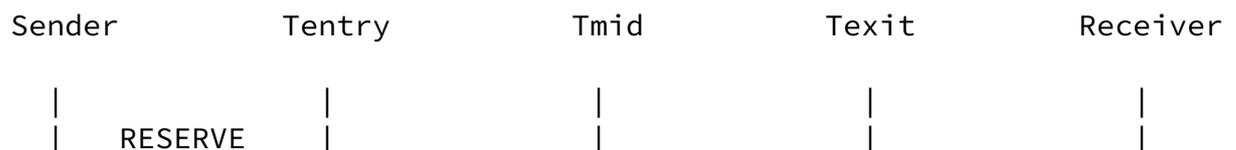

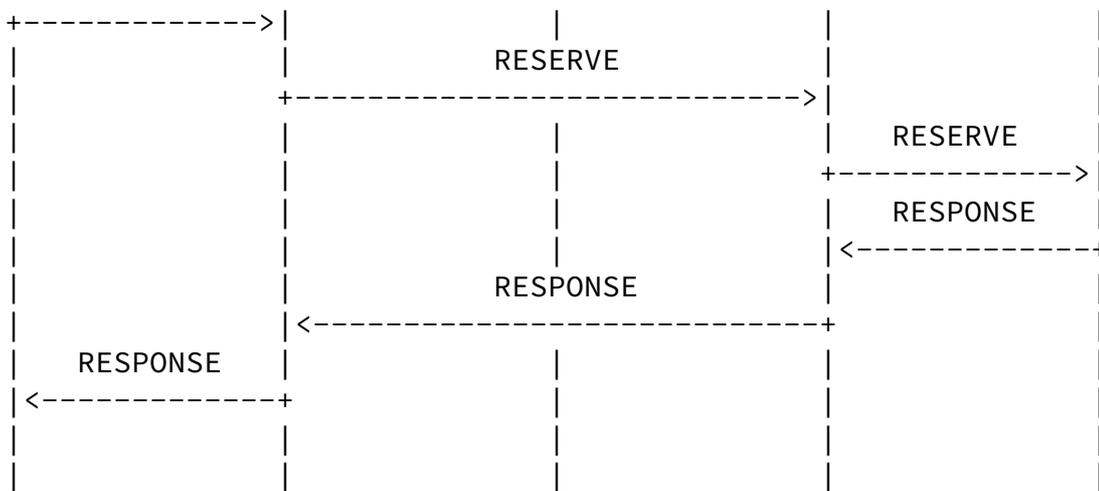


Figure 6: Sender-initiated End-to-end Session with Pre-configured Tunnel QoS Sessions

5.2. Receiver-initiated Reservation

Figure 7 shows the signaling sequence when end-to-end signaling outside the tunnel is receiver-initiated. Upon receiving the first end-to-end Query message, Tentry examines the tunnel QoS configuration, updates and tunnels the Query message to Texit. Texit decapsulates the QUERY message, processes it and forwards it toward the receiver. The receiver sends back a RESERVE message passing through Texit and arriving at Tentry. Tentry decides on whether and how the QoS request for this end-to-end session can be mapped to a pre-configured tunnel session based on criteria outside the scope of this document. Then Tentry forwards the RESERVE message towards the sender. The signaling continues until a RESPONSE message arrives at Tentry, Texit and finally the receiver. If the RESPONSE message that Tentry receives confirms that the overall signaling is successful, Tentry starts to encapsulate all incoming packets of the data flow using the tunnel Flow ID corresponding to the mapped tunnel session. Similarly, Texit knows how to decapsulate the tunnel packets because it recognizes the mapped tunnel Flow ID based on information supplied during tunnel session pre-configuration.

Since separate tunnel QoS signaling is not involved in pre-configured QoS tunnels, Figure 6 and Figure 7 make the tunnel look like a single virtual link. The signaling path simply skips all tunnel intermediate nodes. However, both Tentry and Texit need to deploy NSIS-tunnel related functionalities described above, including acting on the end-to-end NSIS signaling messages based on tunnel QoS status,

mapping end-to-end and tunnel QoS sessions, and correctly encapsulating and decapsulating tunnel packets according to the tunnel protocol and the configured tunnel Flow ID.

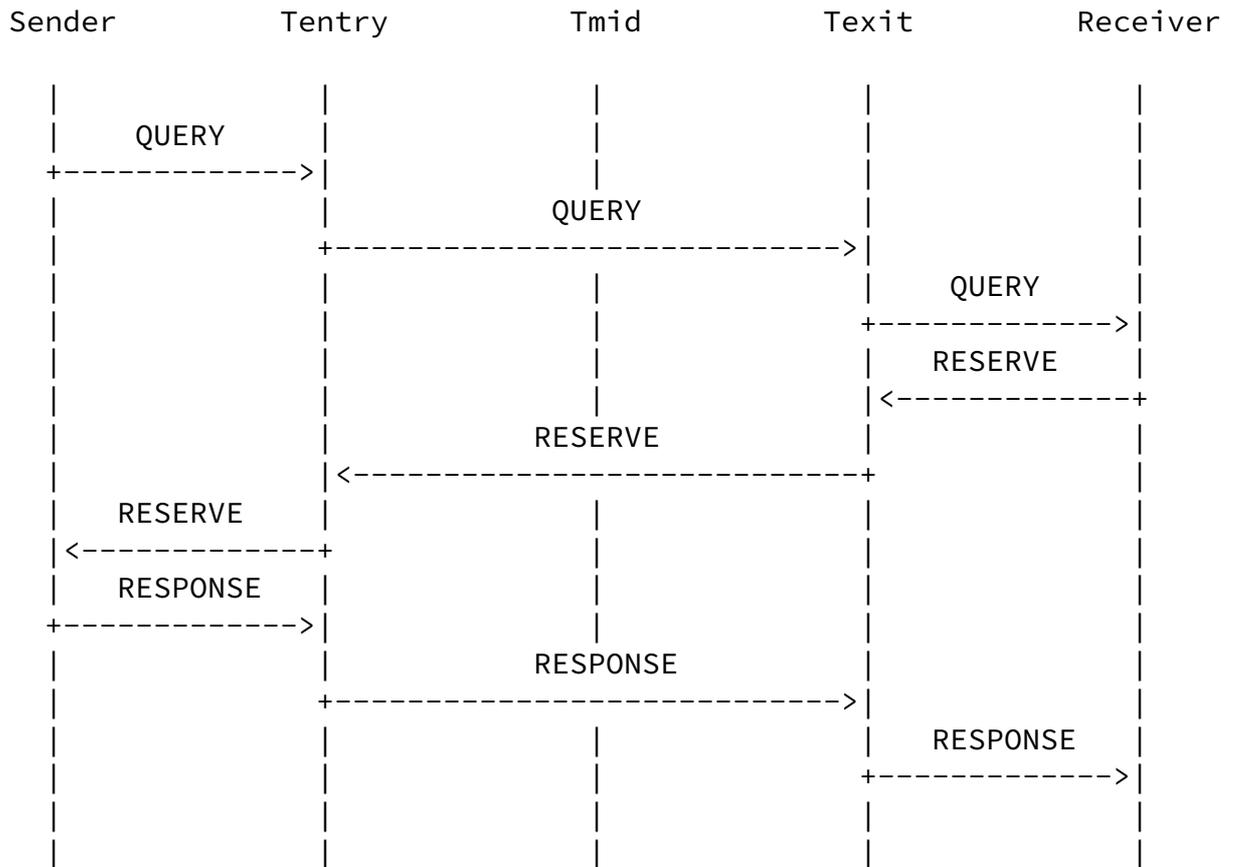


Figure 7: Receiver-initiated End-to-end Session with Pre-configured Tunnel QoS Sessions

6. NSIS Operation over Tunnels with Dynamically Created QoS Sessions

When there are no pre-configured tunnel QoS sessions, a tunnel can apply the same NSIS QoS signaling mechanism used for the end-to-end path to manage the QoS inside the tunnel. The tunnel NSIS signaling involves only those NSIS nodes in the tunnel forwarding path. The Flow IDs for the tunnel signaling are based on tunnel header fields. NSIS peer discovery messages inside the tunnel distinguish themselves using the tunnel header fields, which solves the problem for tunnel intermediate NSIS nodes to intercept signaling messages.

When tunnel end-points dynamically create tunnel QoS sessions, the initiation mode of the tunnel session always follows the initiation mode of the end-to-end session. Specifically, when the end-to-end session is sender-initiated, the tunnel session should also be

sender-initiated; when the end-to-end session is receiver-initiated,


the tunnel session should also be receiver-initiated.

The tunnel entry-point conveys the corresponding tunnel Flow ID associated with an end-to-end session to the tunnel exit-point during the tunnel signaling process. The tunnel entry-point also informs the exit-point of the binding between the corresponding tunnel session and end-to-end session through the BOUND_SESSION_ID QoS NSLP message object. The reservation message dependencies between the tunnel session and end-to-end session is resolved using the MSG_ID and BOUND_MSG_ID objects of the QoS NSLP message binding mechanism.

[6.1.](#) Sender-initiated Reservation

Figure 8 shows the typical messaging sequence of how NSIS operates over IP tunnels when both end-to-end session and tunnel session are sender-initiated. Tunnel signaling messages are distinguished from end-to-end messages by a prime symbol after the message name. The sender first sends an end-to-end RESERVE message (1) which arrives at Tentry. Tentry chooses the tunnel Flow ID, creates the tunnel session and associates the end-to-end session with the tunnel session. Tentry then sends a tunnel RESERVE' message (2) matching the request of the end-to-end session towards Texit to reserve tunnel resources. This RESERVE' message (2) includes a MSG_ID object which contains a randomly generated 128-bit MSG_ID. Meanwhile, Tentry inserts a BOUND_MSG_ID object containing the same MSG_ID as well as a BOUND_SESSION_ID object containing the Session ID of the tunnel session into the original RESERVE message, and sends this RESERVE message (3) towards Texit using normal tunnel encapsulation. The Message_Binding_Type flags of both the MSG_ID and BOUND_MSG_ID objects in the RESERVE' and RESERVE messages (2, 3) are SET, indicating a bidirectional binding. The tunnel RESERVE' message (2) is processed hop-by-hop inside the tunnel for the flow identified by the chosen tunnel Flow ID, while the end-to-end RESERVE message (3) passes through the tunnel intermediate nodes (Tmid) just like other tunneled packets. These two messages could arrive at Texit in different orders, and the reaction of Texit in these different situations should combine the tunnel QoS message processing rules with the QoS NSLP processing principles for message binding [[I-D.ietf-nsis-qos-nslp](#)], as illustrated below.

The first possibility is shown in the example messaging flow of Figure 8, where the tunnel RESERVE' message (2), also known as the triggering message in QoS NSLP message binding terms, arrives first. Since the message binding is bidirectional, Tentry records the MSG_ID of the RESERVE' message (2), enqueues it and starts a MsgIDWait timer waiting for the end-to-end RESERVE message (3), also known as the bound signaling message in QoS NSLP message binding terms. The timer

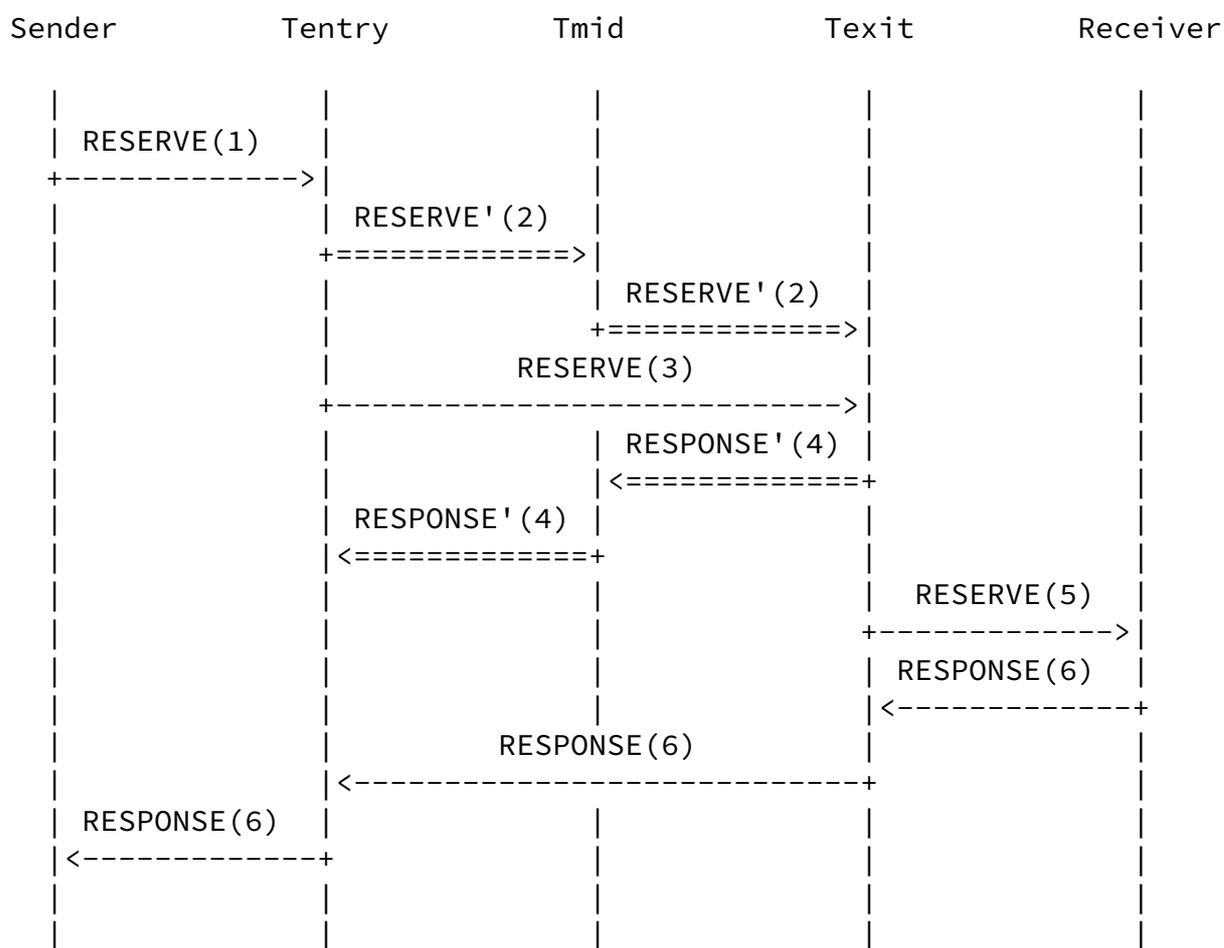

- (1,5): RESERVE w/o BOUND_MSG_ID and BOUND_SESSION_ID
- (2): RESERVE' w/ MSG_ID
- (3): RESERVE w/ BOUND_MSG_ID and BOUND_SESSION_ID

Figure 8: Sender-initiated Reservation for Both End-to-end and Tunnel Signaling

value is set to the default retransmission timeout period QOSNSLP_REQUEST_RETRY. When the end-to-end RESERVE message (3) arrives, Textit notices that there is an existing stored MSG_ID which matches the MSG_ID in the BOUND_MSG_ID object of the incoming RESERVE message (3). Therefore the message binding condition has been satisfied. Textit resumes processing of the tunnel RESERVE' message (2), creates the reservation state for the tunnel session, and sends a tunnel RESPONSE' message (4) to Tentry. At the same time, Textit checks the BOUND_SESSION_ID object of the end-to-end RESERVE message (3) and records the binding of the corresponding tunnel session with the end-to-end session. Textit also updates the end-to-end RESERVE message based on the result of the tunnel session reservation, removes its tunnel BOUND_SESSION_ID and BOUND_MSG_ID object and forwards the end-to-end RESERVE message (5) along the path towards

the receiver. When the receiver receives the end-to-end RESERVE message (5), it sends an end-to-end RESPONSE message (6) back to the sender.

The second possibility is that the end-to-end RESERVE message arrives before the tunnel RESERVE' message at Textit. In that case, Textit notices a BOUND_SESSION_ID object and a BOUND_MSG_ID object in the end-to-end RESERVE message, but realizes that the tunnel session does not exist yet. So Textit enqueues the RESERVE message and starts a MsgIDWait timer. The timer value is set to the default retransmission timeout period QOSNSLP_REQUEST_RETRY. When the corresponding tunnel RESERVE' message arrives with a MSG_ID matching that of the outstanding BOUND_MSG_ID object, the message binding condition is satisfied. Textit sends a tunnel RESPONSE' message back to Tentry and updates the end-to-end RESERVE message by incorporating the result of the tunnel session reservation, as well as removing the tunnel BOUND_SESSION_ID and BOUND_MSG_ID objects. Textit then forwards the end-to-end RESERVE message along the path towards the receiver. When the receiver receives the end-to-end RESERVE message, it sends an end-to-end RESPONSE message back to the sender.


Yet another possibility is that the tunnel RESERVE' message arrives at Textit first but the end-to-end RESERVE message never arrives. In that case, the MsgIDWait timer for the queued tunnel RESERVE' message will expire. Textit should then send a tunnel RESPONSE' message back to Tentry indicating a reservation error has occurred, and discard


the tunnel RESERVE' message. The last possibility is that the end-to-end RESERVE message arrives at Tentry first but the tunnel RESERVE' message never arrives. In that case, the MsgIDWait timer for the queued end-to-end RESERVE message will expire. Tentry should then treat this situation as a local reservation failure, and according to [I-D.ietf-nsis-qos-nslp], Tentry as a stateful QoS NSLP should generate an end-to-end RESPONSE message indicating RESERVE error to the sender.

Once the end-to-end and the tunnel QoS session have both been successfully created and associated, the tunnel end-points Tentry and Texit coordinate the signaling between the two sessions and make sure that adjustment or teardown of either session may trigger similar actions for the other session as necessary, by invoking appropriate signaling messages.

6.2. Receiver-initiated Reservation

Figure 9 shows the typical messaging sequence of how NSIS signaling operates over IP tunnels when both end-to-end and tunnel sessions are receiver-initiated. Upon receiving an end-to-end QUERY message (1) from the sender, Tentry chooses the tunnel Flow ID and sends a tunnel

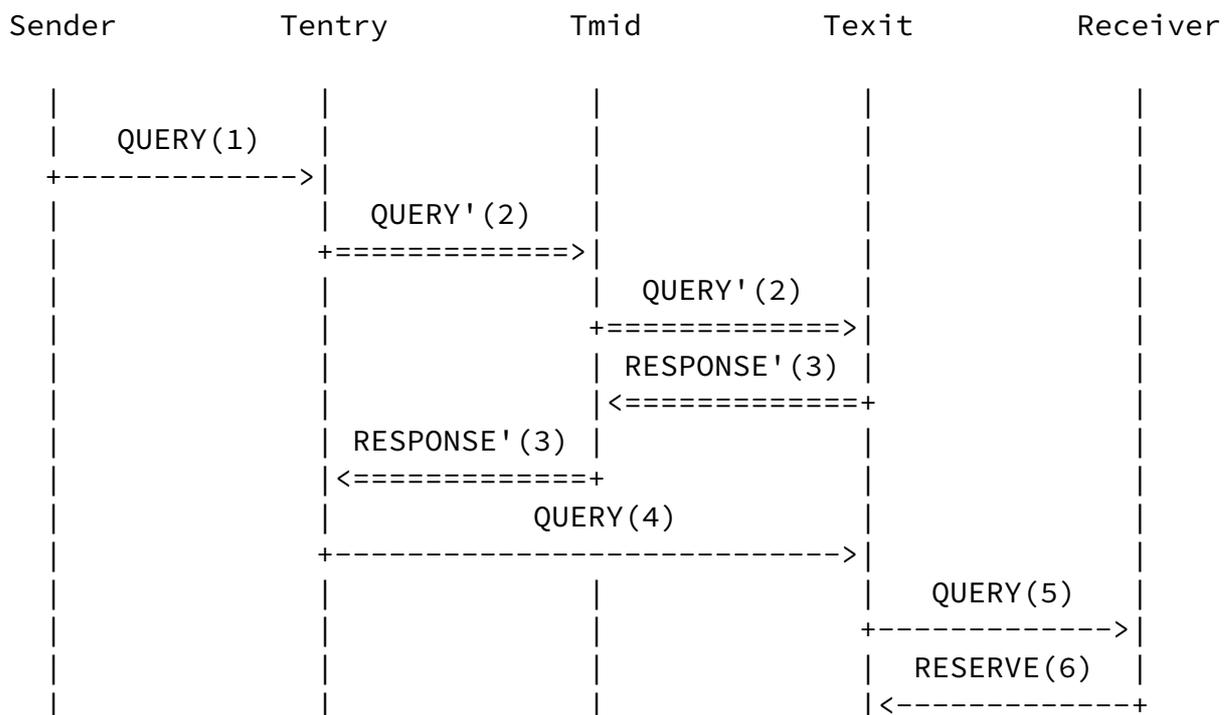

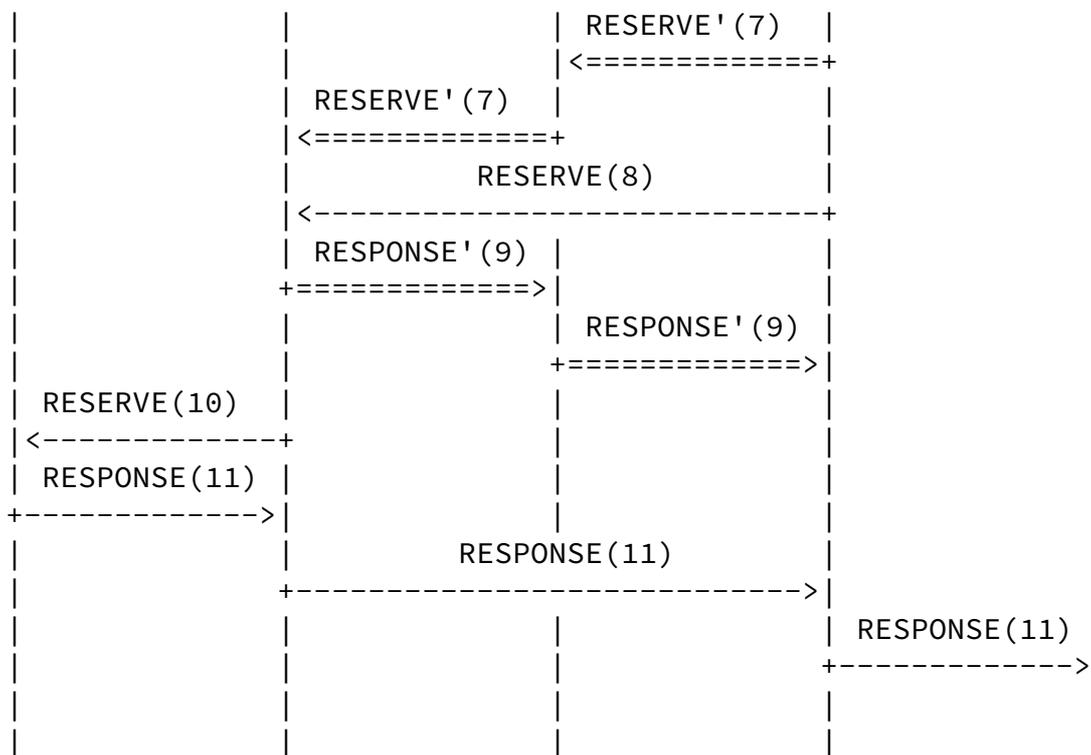

- (1,5): QUERY w/ RESERVE-INIT
- (2): QUERY' w/ RII
- (4): QUERY w/ RESERVE-INIT and BOUND_SESSION_ID
- (6,10): RESERVE w/o BOUND_SESSION_ID
- (7): RESERVE' w/ MSG_ID
- (8): RESERVE w/ BOUND_MSG_ID and BOUND_SESSION_ID

Figure 9: Receiver-initiated Reservation for Both End-to-end and Tunnel Signaling

QUERY' message (2) matching the request of the end-to-end session towards Texit. This tunnel QUERY' message (2) is meant to discover QoS characteristics of the tunnel path, rather than initiating an actual reservation. Therefore, it includes a Request Identification Information (RII) object but does not set the RESERVE-INIT flag. The tunnel QUERY' message (2) is processed hop-by-hop inside the tunnel for the flow identified by the tunnel Flow ID. When Texit receives this tunnel QUERY' message (2), it replies with a corresponding tunnel RESPONSE' message (3) containing the tunnel path characteristics. After receiving the tunnel RESPONSE' message (3), Tentry creates the tunnel session, generates an outgoing end-to-end QUERY message (4) considering the tunnel path characteristics,

appends a tunnel BOUND_SESSION_ID object containing the tunnel Session ID, and sends it toward Texit using normal tunnel encapsulation. The end-to-end QUERY message (4) passes along tunnel intermediate nodes like other tunneled packets. Upon receiving this end-to-end QUERY message (4), Texit notices the tunnel session binding and creates the tunnel session state, removes the tunnel BOUND_SESSION_ID object and forwards the end-to-end QUERY message (5) further along the path.

The end-to-end QUERY message (5) arrives at the receiver and triggers a RESERVE message (6). When Texit receives the RESERVE message (6), it notices that the session is bound to a receiver-initiated tunnel session. Therefore, Texit triggers a RESERVE' message (7) toward Tentry for the tunnel session reservation. This tunnel RESERVE' message (7) includes a randomly generated 128-bit MSG_ID. Meanwhile, Texit inserts a BOUND_MSG_ID object containing the same MSG_ID and a BOUND_SESSION_ID object containing the tunnel Session ID into the end-to-end RESERVE message (8), and sends it towards Tentry using normal tunnel encapsulation. The Message_Binding_Type flags of the MSG_ID and BOUND_MSG_ID objects in the RESERVE' and RESERVE messages (7,8) are SET, indicating a bidirectional binding.

At Tentry, the tunnel RESERVE' message (7) and the end-to-end RESERVE message (8) could arrive in different orders. In a typical case shown in Figure 9, the tunnel RESERVE' message (7) arrives first. Tentry then records the MSG_ID of the tunnel RESERVE' message (7) and starts a MsgIDWait timer. When the end-to-end RESERVE message (8) with the BOUND_MSG_ID object containing the same MSG_ID arrives, the message binding condition is satisfied. Tentry resumes processing of the tunnel RESERVE' message (7), creates the reservation state for the tunnel session, and sends a tunnel RESPONSE' message (9) to Texit. At the same time, Tentry creates the outgoing end-to-end RESERVE message (10) by incorporating results of the tunnel session reservation and removing the BOUND_SESSION_ID and BOUND_MSG_ID objects, and forwards it along the path towards the sender. When the sender receives the end-to-end RESERVE message (10), it sends an end-

to-end RESPONSE message (11) back to the receiver.

If the end-to-end RESERVE message arrives before the tunnel RESERVE' message at Tentry, or either of the two messages fails to arrive at Tentry, the processing rules at Tentry is similar to those of Texit

in the same situation discussed in [Section 6.1](#).

Once the end-to-end and the tunnel QoS session have both been successfully created and associated, the tunnel end-points Tentry and Texit coordinate the signaling between the two sessions and make sure that adjustment or teardown of either session can trigger similar actions for the other session as necessary, by invoking appropriate signaling messages.

7. NSIS-Tunnel Signaling Capability Discovery

The mechanism of NSIS operating over IP tunnels requires the coordination of both tunnel end-points in tasks such as special encapsulation and decapsulation of data flow packets according to the chosen tunnel Flow ID, as well as the possible creation and adjustment of the end-to-end and tunnel QoS sessions. Therefore, one NSIS-tunnel-aware end-point needs to know that the other tunnel end-point is also NSIS-tunnel-aware before initiating this NSIS operating over IP tunnel mechanism. In some cases, especially for IP tunnels with pre-configured QoS sessions, an NSIS-tunnel-aware end-point can learn about whether the other tunnel end-point is also NSIS-tunnel-aware through pre-configuration. In other cases where such pre-configuration is not available, the initiating NSIS-tunnel-aware end-point may dynamically discover the other tunnel end-point's capability through a QoS NSLP `NODE_CAPABILITY_TUNNEL` object defined in this section.

The `NODE_CAPABILITY_TUNNEL` object is a zero-length object with a standard NSLP object header as shown in Figure 10.

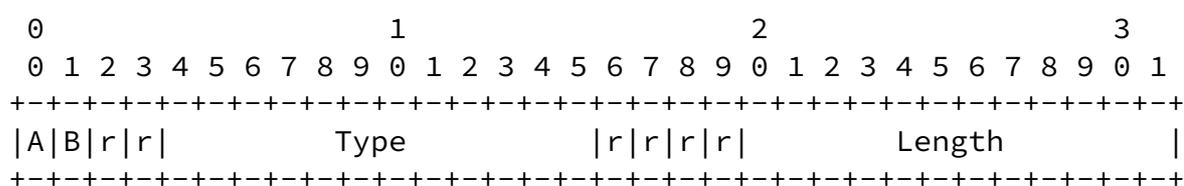


Figure 10: `NODE_CAPABILITY_TUNNEL` Object Format

Type: TBD from the shared NSLP object type space

Length: 0

The bits marked 'A' and 'B' define the desired behavior for objects whose Type field is not recognized. If a node does not recognize the NODE_CAPABILITY_TUNNEL object, the desired behavior is "Forward". That is, the object must be retained unchanged and forwarded as a result of message processing. This is satisfied by setting 'AB' to '10'.

The 'r' bit stands for 'reserved'.

The NODE_CAPABILITY_TUNNEL object is included in a tunnel QUERY' or RESERVE' message by a tunnel end-point that needs to learn about the other end-point's NSIS tunnel handling capability. If the receiving tunnel end-point is indeed NSIS-tunnel-aware, it recognizes this object and knows that the sending end-point is NSIS-tunnel-aware. The receiving tunnel end-point places the same object in a tunnel RESPONSE' message to inform the sending end-point that it is also NSIS-tunnel-aware. The use of the NODE_CAPABILITY_TUNNEL object in the cases of sender-initiated reservation and receiver-initiated reservation are as follows.

First, assume that the end-to-end session is sender-initiated as in Figure 8, and the NSIS-tunnel-aware Tentry wants to discover the NSIS-tunnel capability of Texit. After receiving the first end-to-end RESERVE message (1), Tentry inserts an RII object and a NODE_CAPABILITY_TUNNEL object into the tunnel RESERVE' message (2) and sends it to Texit. If Texit is NSIS-tunnel-aware, it learns from the NODE_CAPABILITY_TUNNEL object that Tentry is also NSIS-tunnel-aware and includes the same object into the tunnel RESPONSE' message (4) sent back to Tentry.

Second, assume that the end-to-end session is receiver-initiated as in Figure 9, and the NSIS-tunnel-aware Tentry wants to discover the NSIS-tunnel capability of Texit. Upon receiving the first end-to-end QUERY message (1), Tentry inserts an RII object and a NODE_CAPABILITY_TUNNEL object in the tunnel QUERY' message (2) and sends it toward Texit. If Texit is NSIS-tunnel-aware, it learns from the NODE_CAPABILITY_TUNNEL object that Tentry is also NSIS-tunnel-aware and includes the same object tunnel RESPONSE' message (3) sent to Tentry.

8. IANA Considerations

This document defines a new object type called NODE_CAPABILITY_TUNNEL for QoS NSLP. Its Type value needs to be assigned by IANA. The object format and the setting of the extensibility bits are defined

in [Section 7](#).

[9](#). Security Considerations

There are two IPsec related security considerations about using this NSIS and IP tunnel interoperation mechanism. First, NSIS messages may require per-hop processing within the IPsec tunnel, and that is potentially incompatible with IPsec. A similar problem exists for RSVP interacting with IPsec, when the Router Alert option is used (Section A.1 of [RFC4302](#) [[RFC4302](#)]). If this mechanism is indeed used for NSIS and IPsec tunnels, a so-called covert channel could exist where someone can create spurious NSIS signaling flows within the protected network in order to create signaling in the outside network, which then someone else is monitoring. For highly secure networks, this would be seen as a way to smuggle information out of the network, and therefore this channel will need to be rate-limited. A similar covert channel rate-limit problem exists for using Differentiated Service (DS) or Explicit Congestion Notification (ECN) fields with IPsec ([Section 5.1.2 of RFC4301](#) [[RFC4301](#)]).

Second, since the NSIS-tunnel-aware end-point is responsible for adapting changes between the NSIS signaling both inside and outside the tunnel, there could be additional risks for an IPsec end-point which is also an NSIS-tunnel-aware end-point. For example, security vulnerability (e.g., buffer overflow) on the NSIS stack of that IPsec tunnel end-point may be exposed to the unprotected outside network. Nevertheless, it should also be noted that if any node along the signaling path is compromised, the whole end-to-end QoS signaling could be affected, whether the end-to-end path includes an IPsec tunnel or not.

Several other documents discussed security issues for NSIS. General threats for NSIS can be found in [[RFC4081](#)]. Security considerations for NSIS NTLP and QoS NSLP are discussed in [[I-D.ietf-nsis-ntlp](#)] and [[I-D.ietf-nsis-qos-nslp](#)], respectively.

[10](#). Acknowledgments

The authors would like to thank Roland Bless, Francis Dupont, Lars Eggert, Adrian Farrel, Russ Housley, Georgios Karagiannis, Jukka

Manner, Martin Rohricht, Peter Saint-Andre, Martin Stiernerling, Hannes Tschofenig, and other members of the NSIS working group for comments. Thanks to Yaron Sheffer for pointing out the IPsec related security considerations.

11. References

11.1. Normative References

[I-D.ietf-nsis-ntlp]

Schulzrinne, H. and M. Stiernerling, "GIST: General Internet Signalling Transport", [draft-ietf-nsis-ntlp-20](#) (work in progress), June 2009.

[I-D.ietf-nsis-qos-nslp]

Manner, J., Karagiannis, G., and A. McDonald, "NSLP for Quality-of-Service Signaling", [draft-ietf-nsis-qos-nslp-18](#) (work in progress), January 2010.

[RFC2113] Katz, D., "IP Router Alert Option", [RFC 2113](#), February 1997.

[RFC2473] Conta, A. and S. Deering, "Generic Packet Tunneling in IPv6 Specification", [RFC 2473](#), December 1998.

[RFC2711] Partridge, C. and A. Jackson, "IPv6 Router Alert Option", [RFC 2711](#), October 1999.

[RFC2746] Terzis, A., Krawczyk, J., Wroclawski, J., and L. Zhang, "RSVP Operation Over IP Tunnels", [RFC 2746](#), January 2000.

[RFC3697] Rajahalme, J., Conta, A., Carpenter, B., and S. Deering, "IPv6 Flow Label Specification", [RFC 3697](#), March 2004.

[RFC4080] Hancock, R., Karagiannis, G., Loughney, J., and S. Van den Bosch, "Next Steps in Signaling (NSIS): Framework", [RFC 4080](#), June 2005.

[RFC4081] Tschofenig, H. and D. Kroeselberg, "Security Threats for Next Steps in Signaling (NSIS)", [RFC 4081](#), June 2005.

11.2. Informative References

- [RFC1701] Hanks, S., Li, T., Farinacci, D., and P. Traina, "Generic Routing Encapsulation (GRE)", [RFC 1701](#), October 1994.
- [RFC1702] Hanks, S., Li, T., Farinacci, D., and P. Traina, "Generic Routing Encapsulation over IPv4 networks", [RFC 1702](#), October 1994.
- [RFC1853] Simpson, W., "IP in IP Tunneling", [RFC 1853](#), October 1995.
- [RFC2003] Perkins, C., "IP Encapsulation within IP", [RFC 2003](#),

Shen, et al.

Expires January 27, 2011

[Page 25]

Internet-Draft

NSIS Operation over IP Tunnels

July 2010

October 1996.

- [RFC2004] Perkins, C., "Minimal Encapsulation within IP", [RFC 2004](#), October 1996.
- [RFC2205] Braden, B., Zhang, L., Berson, S., Herzog, S., and S. Jamin, "Resource ReSerVation Protocol (RSVP) -- Version 1 Functional Specification", [RFC 2205](#), September 1997.
- [RFC2784] Farinacci, D., Li, T., Hanks, S., Meyer, D., and P. Traina, "Generic Routing Encapsulation (GRE)", [RFC 2784](#), March 2000.
- [RFC3344] Perkins, C., "IP Mobility Support for IPv4", [RFC 3344](#), August 2002.
- [RFC4213] Nordmark, E. and R. Gilligan, "Basic Transition Mechanisms for IPv6 Hosts and Routers", [RFC 4213](#), October 2005.
- [RFC4301] Kent, S. and K. Seo, "Security Architecture for the Internet Protocol", [RFC 4301](#), December 2005.
- [RFC4302] Kent, S., "IP Authentication Header", [RFC 4302](#), December 2005.
- [RFC4303] Kent, S., "IP Encapsulating Security Payload (ESP)", [RFC 4303](#), December 2005.

Authors' Addresses

Charles Shen
Columbia University
Department of Computer Science
1214 Amsterdam Avenue, MC 0401
New York, NY 10027
USA

Phone: +1 212 854 3109
Email: charles@cs.columbia.edu

Henning Schulzrinne
Columbia University
Department of Computer Science
1214 Amsterdam Avenue, MC 0401
New York, NY 10027
USA

Shen, et al.

Expires January 27, 2011

[Page 26]

Internet-Draft

NSIS Operation over IP Tunnels

July 2010

Phone: +1 212 939 7004
Email: hgs@cs.columbia.edu

Sung-Hyuck Lee
SAMSUNG Advanced Institute of Technology
San 14-1, Nongseo-ri, Giheung-eup
Yongin-si, Gyeonggi-do 449-712
South Korea

Phone: +82 31 280 9552
Email: starsu.lee@samsung.com

Jong Ho Bang
SAMSUNG Advanced Institute of Technology
San 14-1, Nongseo-ri, Giheung-eup
Yongin-si, Gyeonggi-do 449-712
South Korea

Phone: +82 31 280 9585

Email: jh0278.bang@samsung.com

Shen, et al.

Expires January 27, 2011

[Page 27]