

Internet Engineering Task Force (IETF)  
Request for Comments: 6572  
Category: Standards Track  
ISSN: 2070-1721

F. Xia  
B. Sarikaya  
Huawei USA  
J. Korhonen, Ed.  
Nokia Siemens Networks  
S. Gundavelli  
Cisco  
D. Damic  
Siemens  
June 2012

## RADIUS Support for Proxy Mobile IPv6

### Abstract

This document defines new attributes to facilitate Proxy Mobile IPv6 operations using the RADIUS infrastructure. The protocol defined in this document uses RADIUS-based interfaces of the mobile access gateway and the local mobility anchor with the AAA server for authentication, authorization, and policy functions. The RADIUS interactions between the mobile access gateway and the RADIUS-based AAA server take place when the mobile node (MN) attaches, authenticates, and authorizes to a Proxy Mobile IPv6 domain. Furthermore, this document defines the RADIUS-based interface between the local mobility anchor and the AAA RADIUS server for authorizing received Proxy Binding Update messages for the mobile node's mobility session. In addition to the interactions related to mobility session setup, this document defines the baseline for the mobile access gateway and the local mobility anchor generated accounting.

### Status of This Memo

This is an Internet Standards Track document.

This document is a product of the Internet Engineering Task Force (IETF). It represents the consensus of the IETF community. It has received public review and has been approved for publication by the Internet Engineering Steering Group (IESG). Further information on Internet Standards is available in [Section 2 of RFC 5741](#).

Information about the current status of this document, any errata, and how to provide feedback on it may be obtained at <http://www.rfc-editor.org/info/rfc6572>.

## Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction .....</a>	<a href="#">4</a>
<a href="#">2.</a>	<a href="#">Terminology .....</a>	<a href="#">4</a>
<a href="#">3.</a>	<a href="#">Solution Overview .....</a>	<a href="#">5</a>
<a href="#">4.</a>	<a href="#">Attribute Definitions .....</a>	<a href="#">9</a>
<a href="#">4.1.</a>	<a href="#">MIP6-Feature-Vector .....</a>	<a href="#">9</a>
<a href="#">4.2.</a>	<a href="#">Mobile-Node-Identifier .....</a>	<a href="#">11</a>
<a href="#">4.3.</a>	<a href="#">Service-Selection .....</a>	<a href="#">12</a>
<a href="#">4.4.</a>	<a href="#">PMIP6-Home-LMA-IPv6-Address .....</a>	<a href="#">12</a>
<a href="#">4.5.</a>	<a href="#">PMIP6-Visited-LMA-IPv6-Address .....</a>	<a href="#">13</a>
<a href="#">4.6.</a>	<a href="#">PMIP6-Home-LMA-IPv4-Address .....</a>	<a href="#">14</a>
<a href="#">4.7.</a>	<a href="#">PMIP6-Visited-LMA-IPv4-Address .....</a>	<a href="#">15</a>
<a href="#">4.8.</a>	<a href="#">PMIP6-Home-HN-Prefix .....</a>	<a href="#">15</a>
<a href="#">4.9.</a>	<a href="#">PMIP6-Visited-HN-Prefix .....</a>	<a href="#">16</a>
<a href="#">4.10.</a>	<a href="#">PMIP6-Home-Interface-ID .....</a>	<a href="#">18</a>
<a href="#">4.11.</a>	<a href="#">PMIP6-Visited-Interface-ID .....</a>	<a href="#">18</a>
<a href="#">4.12.</a>	<a href="#">PMIP6-Home-IPv4-HoA .....</a>	<a href="#">19</a>
<a href="#">4.13.</a>	<a href="#">PMIP6-Visited-IPv4-HoA .....</a>	<a href="#">20</a>
<a href="#">4.14.</a>	<a href="#">PMIP6-Home-DHCP4-Server-Address .....</a>	<a href="#">21</a>
<a href="#">4.15.</a>	<a href="#">PMIP6-Visited-DHCP4-Server-Address .....</a>	<a href="#">22</a>
<a href="#">4.16.</a>	<a href="#">PMIP6-Home-DHCP6-Server-Address .....</a>	<a href="#">22</a>
<a href="#">4.17.</a>	<a href="#">PMIP6-Visited-DHCP6-Server-Address .....</a>	<a href="#">23</a>
<a href="#">4.18.</a>	<a href="#">Calling-Station-Id .....</a>	<a href="#">24</a>
<a href="#">4.19.</a>	<a href="#">Chargeable-User-Identity .....</a>	<a href="#">24</a>
<a href="#">4.20.</a>	<a href="#">PMIP6-Home-IPv4-Gateway .....</a>	<a href="#">25</a>
<a href="#">4.21.</a>	<a href="#">PMIP6-Visited-IPv4-Gateway .....</a>	<a href="#">25</a>
<a href="#">5.</a>	<a href="#">MAG to RADIUS AAA Interface .....</a>	<a href="#">26</a>
<a href="#">5.1.</a>	<a href="#">Interface Operations .....</a>	<a href="#">26</a>
<a href="#">5.2.</a>	<a href="#">Table of Attributes .....</a>	<a href="#">27</a>
<a href="#">6.</a>	<a href="#">LMA to RADIUS AAA Interface .....</a>	<a href="#">28</a>
<a href="#">6.1.</a>	<a href="#">Interface Operations .....</a>	<a href="#">28</a>
<a href="#">6.2.</a>	<a href="#">Table of Attributes .....</a>	<a href="#">30</a>
<a href="#">7.</a>	<a href="#">Accounting .....</a>	<a href="#">31</a>
<a href="#">7.1.</a>	<a href="#">Accounting at LMA .....</a>	<a href="#">31</a>
<a href="#">7.2.</a>	<a href="#">Accounting at MAG .....</a>	<a href="#">32</a>

<a href="#">7.3. Table of Attributes</a>	<a href="#">32</a>
<a href="#">8. Security Considerations</a>	<a href="#">32</a>
<a href="#">9. IANA Consideration</a>	<a href="#">33</a>
<a href="#">9.1. Attribute Type Codes</a>	<a href="#">33</a>
<a href="#">9.2. Namespaces</a>	<a href="#">33</a>
<a href="#">10. Acknowledgements</a>	<a href="#">34</a>
<a href="#">11. References</a>	<a href="#">34</a>
<a href="#">11.1. Normative References</a>	<a href="#">34</a>
<a href="#">11.2. Informative References</a>	<a href="#">35</a>

## [1. Introduction](#)

Proxy Mobile IPv6 (PMIPv6) [[RFC5213](#)] is a network-based mobility management protocol that allows IP mobility support for a mobile node without requiring the mobile node's participation in any mobility-related signaling. The mobile management elements in the network, the mobile access gateway (MAG) and the local mobility anchor (LMA), are the two key functions in this network-based mobility system. The mobile access gateway is responsible for detecting the mobile node's movements in the network and for initiating the needed mobility management signaling with the local mobility anchor (LMA). Both the mobility management agents make use of the AAA infrastructure to retrieve the mobile node's policy profile and for performing service authorization.

This document defines a RADIUS-based [[RFC2865](#)] profile and corresponding attributes to be used on the AAA interface between the MAG and the AAA RADIUS server. This interface is used to carry the per-MN policy profile from the remote policy store to the MAG. Furthermore, this document also defines a RADIUS-based interface between the LMA and the AAA RADIUS server for authorization of the received Proxy Mobile IPv6 signaling messages. The AAA procedures defined in this document cover the following two scenarios:

- o a mobile node connects to the Proxy Mobile IPv6 domain from the home network
- o a mobile node connects to the Proxy Mobile IPv6 domain from a visited network

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

All the mobility-related terms used in this document are to be interpreted as defined in the Proxy Mobile IPv6 specifications [[RFC5213](#)] and [[RFC5844](#)]. Additionally, this document uses the following abbreviations:

Network Access Server (NAS):

A function that provides authorization services for a device/user access to the network as defined in [[RFC2865](#)]. This document makes an assumption that the NAS function is co-located with the

MAG. In scenarios where the NAS function and MAG are decoupled, the messaging interface needed between them for the operation of PMIPv6 is beyond the scope of this document.

Home AAA (HAAA):

An Authentication, Authorization, and Accounting (AAA) server located in the MN's home network. This sever has access to the mobile node's policy profiles.

Visited AAA (VAAA):

An Authentication, Authorization, and Accounting (AAA) server located in the MN's visited network. The VAAA server takes the role of a proxy-server, forwarding the received AAA service request to the HAAA server in the mobile node's home network and relaying the response to the requesting node, after applying any local access network policies.

Local AAA (LAAA):

An Authentication, Authorization, and Accounting proxy located in

the local network. In a roaming case, the local AAA has the visited AAA role.

### 3. Solution Overview

This document defines the RADIUS-based AAA interactions with the two mobility management elements in the Proxy Mobile IPv6 domain.

- o Interactions between a MAG and a RADIUS-based AAA server
- o Interactions between a LMA and a RADIUS-based AAA server

The mobile node's policy profile [[RFC5213](#)] is present in a policy store and is needed by the PMIPv6 mobility management elements for authorizing the mobile node for mobility management service and for obtaining various service-related parameters. This policy store could be locally co-located with the mobility management agents enabling direct local access or could be available from a AAA server through a RADIUS-based AAA interface.

When a mobile node attaches to an access network, the NAS on that access network may activate the network access authentication procedure. The choice of the authentication mechanism is specific to the access network deployment; however, it is typically based on the Extensible Authentication Protocol (EAP) [[RFC3748](#)]. The NAS performs the network access authentication and queries the HAAA using AAA

protocol, such as RADIUS. If the network access authentication succeeds, the MN's policy profile is obtained as part of the RADIUS message exchange with the AAA server.

The mobile node may be an IPv4-only node, IPv6-only node, or a dual-stack (IPv4/v6) node. Based on the policy specified in the policy profile, the network access authentication procedure SHOULD provide the unambiguous indication of the type of address(es) to be assigned for the MN in the network and with all other service-related and policy parameters relevant to the mobility service.


After the successful network access authentication and obtaining the mobile node's policy profile, the MAG sends a Proxy Binding Update (PBU) to the LMA. Upon receiving the PBU, the LMA interacts with the HAAA to obtain the mobile node's policy profile, which is required

for authorizing and activating mobility service.

This document adds support for three distinct PMIPv6 mobility use cases, taking into account the administrative domains to which the MAG and the LMA belong. The following are the three relevant deployment models.

1. the MAG and LMA are both in the home network,
2. the MAG and LMA are both in the visited network,
3. the MAG is in the visited network while the LMA is in the home network.

Figure 1 shows participating network entities for the PMIPv6 mobility session, which is located in the home network. The MAG and LMA interact only with the HAAA.

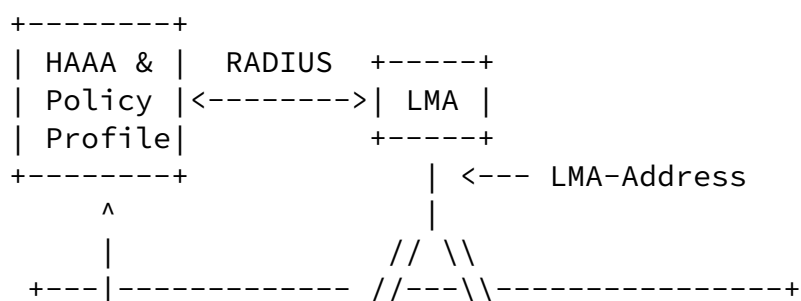

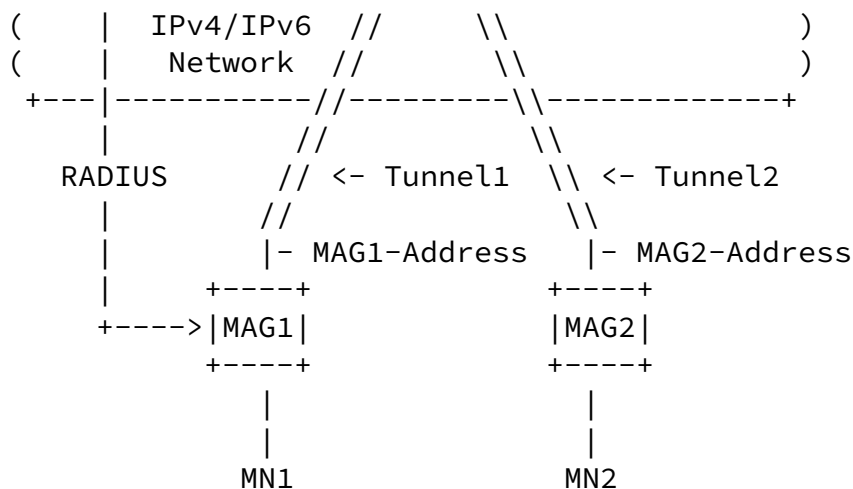


Figure 1: The MAG and LMA Are Both in the Home Network

Figure 2 shows both the LMA and MAG are in the visited network. The MAG and LMA exchange signaling with the HAAA through the VAAA, which acts as a Proxy. The visited network may append additional information to the HAAA replies in order to reflect the local policy.



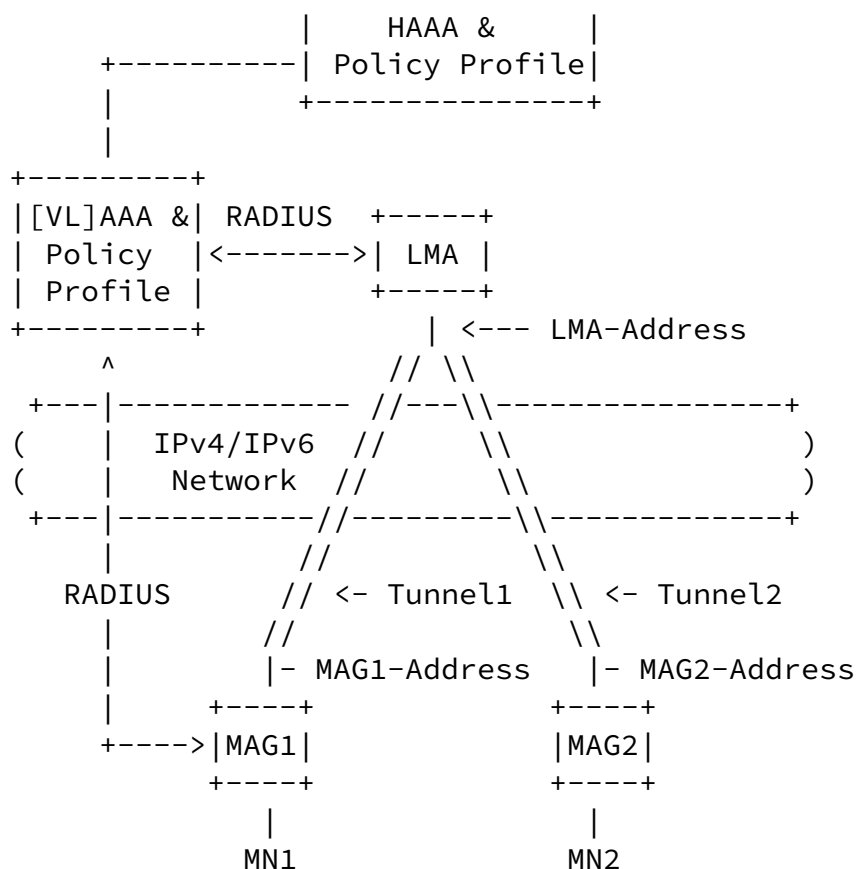


Figure 2: The MAG and LMA Are Both in the Visited/Local Network

Figure 3 illustrates a topology where the MAG resides in the visited network while the associated LMA is in MN's home network. Any message between the MAG and the HAAA passes through the VAAA, which acts as a Proxy. During the network authentication, the visited network's specific policy may also be propagated from the VAAA to the MAG. The LMA has a direct access to the HAAA.

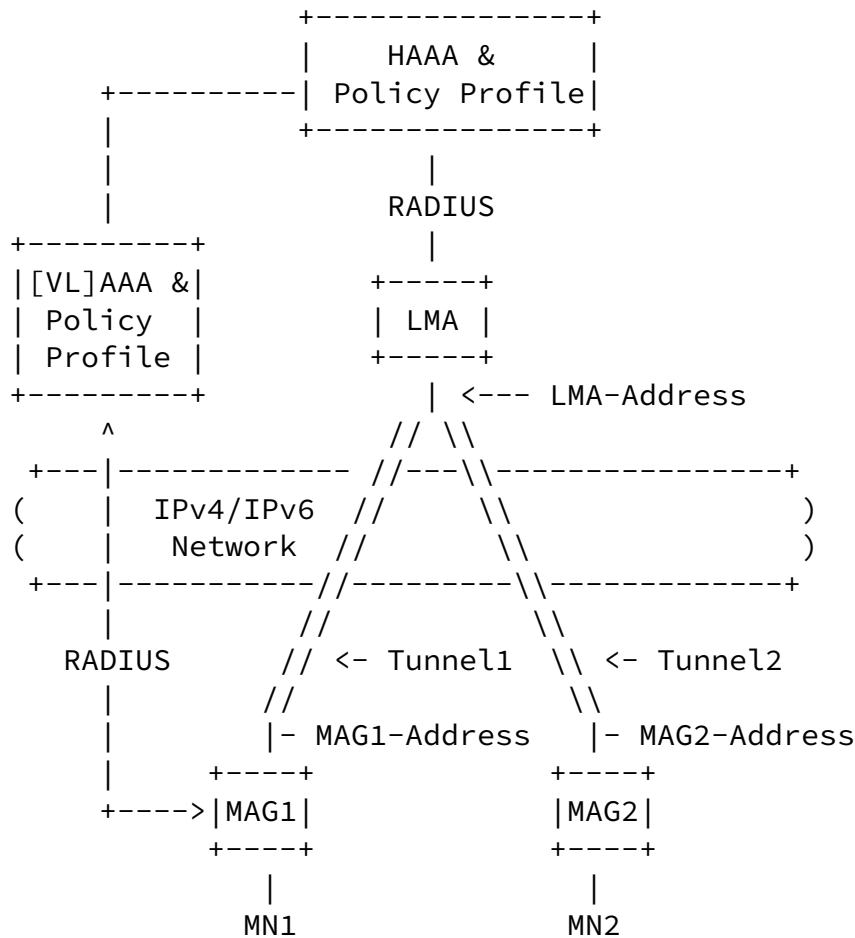


Figure 3: Visited MAG and Home LMA Topology

## 4. Attribute Definitions

### 4.1. MIP6-Feature-Vector

Diameter [RFC3588] reserves AVP Code space 1-255 as RADIUS attribute compatibility space. The MIP6-Feature-Vector attribute (Type value 124) defined in [RFC5447] is of type OctetString and contains a 64-bit flags field of supported mobility capabilities. This document reserves two new capability bits according to the rules in [RFC5447], and reuses the PMIPv6 capability bits defined by [RFC5779]. The following capability flag bits are used or defined in this document:

PMIP6\_SUPPORTED (0x0000010000000000)

This capability bit is used as defined in [RFC5779].

IP4\_HOA\_SUPPORTED (0x0000020000000000)

This capability bit is used as defined in [[RFC5779](#)]. Assignment of the IPv4-HoA (Home Address) is defined by [[RFC5844](#)].

LOCAL\_MAG\_ROUTING\_SUPPORTED (0x0000040000000000)

This capability bit is used as defined in [[RFC5779](#)].

IP4\_TRANSPORT\_SUPPORTED (0x0000800000000000)

This capability bit is used for negotiation of the IPv4 transport support between the MAG and AAA. When the MAG sets this flag bit in the MIP6-Feature-Vector, it indicates the ability of the MAG to provide IPv4 transport (i.e., IPv4-based encapsulation) for carrying IP traffic between the MAG and the LMA. If this flag bit is unset in the returned MIP6-Feature-Vector attribute, the AAA does not authorize the use of IPv4 transport on the MAG-to-LMA tunnel.

IP4\_HOA\_ONLY\_SUPPORTED (0x0001000000000000)

This capability bit is used for determination of the authorized PMIPv6 mobility mode. When this bit is set by the AAA, it indicates PMIPv6 mobility with IPv4 support has only been authorized for the MN. As a result, the RADIUS Access-Accept SHOULD NOT carry the IPv6 Home Network Prefix (IPv6 HNP). When this bit is set, the PMIP6\_SUPPORTED flag MUST also be set and the IP4\_HOA\_SUPPORTED flag MUST NOT be set.

To summarize the use of the MIP6-Feature-Vector the following capability bit combination settings mean:

PMIP6-SUPPORTED bit set - only IPv6 mobility is supported and authorized.

PMIP6-SUPPORTED and IP4-ONLY-HOA-SUPPORTED bits set - only IPv4 mobility is supported and authorized.

PMIP6-SUPPORTED and IP4-HOA-SUPPORTED bits set - both IPv6 and IPv4 mobility are supported and authorized.

The MIP6-Feature-Vector attribute is also used on the LMA to the RADIUS AAA interface. This capability announcement attribute enables



The Service Selection mobility option defined in [RFC5149] can be used in PBU/PBA messages between the MAG and LMA. On the LMA-to-AAA interface, the LMA MAY populate the Service-Selection attribute in the Access-Request message using the service information found in the received PBU, if such a mobility option were included. The Service-Selection identifier should be used to assist the PBU authorization, the assignment of the MN-HNP, and the IPv4-MN-HoA as described in [RFC5149] and [RFC5779].

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      |      Length      |      Service Identifier...      ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type:  
Service-Selection 146.

Length:  
In octets, including Type and Length fields ( $\geq 3$ ).

Text:  
This field is of type UTF-8 text and contains the Service Identifier with which the MN is associated.

#### [4.4.](#) PMIP6-Home-LMA-IPv6-Address

The PMIP6-Home-LMA-IPv6-Address attribute (Type value 147) is of type IPv6 address and is used to deliver the IPv6 address of the LMA located in the home network.

Before the MAG can initiate Proxy Mobile IPv6 signaling, it must be aware of the LMA's IP address.

When the LMA is assigned to the MN from the home network, this attribute MAY be sent by the HAAA to the MAG in the RADIUS Access-Accept message.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      |      Length      |      Home LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Home LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Home LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Home LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

```

      Home LMA IPv6 address      |
+---+---+---+---+---+---+---+---+---+---+

```

Type:  
PMIP6-Home-LMA-IPv6-Address 147.

Length:  
= 18 octets

Home LMA IPv6 address:  
128-bit IPv6 address of the assigned home LMA IPv6 address.

#### 4.5. PMIP6-Visited-LMA-IPv6-Address

The PMIP6-Visited-LMA-IPv6-Address attribute (Type value 148) is of type IPv6 address and is used to propose a particular LMA in the visited network and to authorize the use of the LMA in the visited/local network.

PMIP6-Visited-LMA-IPv6-Address attribute MAY be included by the MAG in the RADIUS Access-Request message. The LMA in the visited/local network may be assigned by the [VL]AAA as the result of retrieved policy profile. If included by the [VL]AAA in the RADIUS Access-Accept sent to the MAG, the use of the LMA in the visited/local network is authorized and the attribute SHALL carry the IPv6 address of the LMA assigned for the particular MN. See [Section 4.2.5 of \[RFC5447\]](#) how the MIP6-Feature-Vector attribute and LOCAL\_HOME\_AGENT\_ASSIGNMENT capability flag is used with the LMA (Home Agent) assignment.

```

      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      | Length      | Visited LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        Visited LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        Visited LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        Visited LMA IPv6 address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

```

    Visited LMA IPv6 address      |
+---+---+---+---+---+---+---+---+---+

```

Type:  
PMIP6-Visited-LMA-IPv6-Address 148.

Length:  
= 18 octets

Visited LMA IPv6 address:  
128-bit IPv6 address of the assigned visited LMA IPv6 address.

#### 4.6. PMIP6-Home-LMA-IPv4-Address

The PMIP6-Home-LMA-IPv4-Address attribute (Type value 149) is of type IPv4 address and contains the IPv4 address of the LMA assigned by the HAAA. The [RFC5844] supports Proxy Mobile IPv6 signaling exchange between MAG and LMA using the IPv4 transport.

When the LMA is located in the home network, this attribute MAY be sent by the HAAA to the MAG in the RADIUS Access-Accept message.

```

      0                   1                   2                   3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|          Type          |      Length      | Home LMA IPv4 address |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Home LMA IPv4 address |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type:  
PMIP6-Home-LMA-IPv4-Address 149.

Length:  
= 6 octets


Home LMA IPv4 address:  
32-bit IPv4 address of the assigned LMA.

#### 4.7. PMIP6-Visited-LMA-IPv4-Address



The PMIP6-Visited-LMA-IPv4-Address attribute (Type value 150) is of type IPv4 address and is used to propose a particular LMA in the visited network and to authorize the use of the LMA in the visited network.

PMIP6-Visited-LMA-IPv4-Address attribute MAY be included by the MAG in the RADIUS Access-Request message. The LMA in the visited/local network may be assigned by the [VL]AAA as the result of retrieved policy profile. If included by the [VL]AAA in the RADIUS Access-Accept sent to the MAG, the use of the LMA in the visited/local network is authorized and the attribute SHALL carry the IPv4 address of the LMA assigned for the particular MN. See [Section 4.2.5 of \[RFC5447\]](#) how the MIP6-Feature-Vector attribute and LOCAL\_HOME\_AGENT\_ASSIGNMENT capability flag is used with the LMA (Home Agent) assignment.

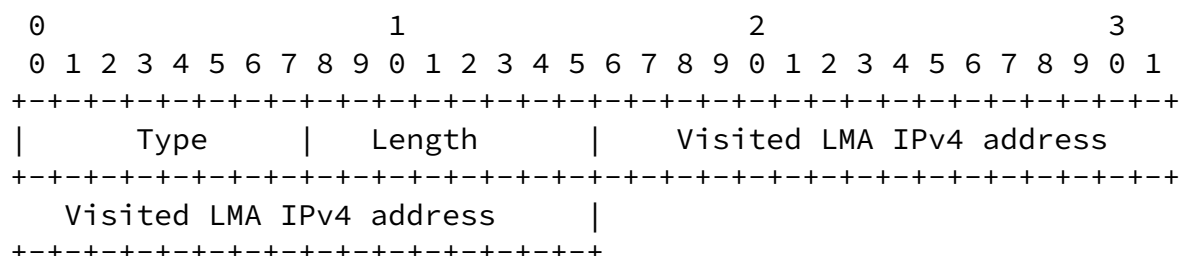

Type:

PMIP6-Visited-LMA-IPv4-Address 150.

Length:

= 6 octets


IPv4 LMA address:

32-bit IPv4 address of the assigned LMA.

#### [4.8.](#) PMIP6-Home-HN-Prefix

The PMIP6-Home-HN-Prefix attribute (Type value 151) is of type IPv6 prefix. It contains the Mobile Node - Home Network Prefix (MN-HNP), which is the IPv6 prefix assigned to the link between the MN and the MAG. The MN configures its IP interface from its home network prefix(es). When the LMA is located in the home network, the PMIP6-Home-HN-Prefix attribute is used to deliver the MN-HNP from the HAAA to the MAG.

The PMIPv6-Home-HN-Prefix attribute is also used on the LMA-to-HAAA interface containing the prefix assigned to the MN. If the LMA delegates the MN-HNP assignment to the HAAA, the attribute MUST contain all zeroes in the address of (i.e., '::') the Access-Request message. The attribute MUST be present in the RADIUS Access-Accept message if the prior request already included one and SHOULD carry the MN-HNP the HAAA assigned to the MN.

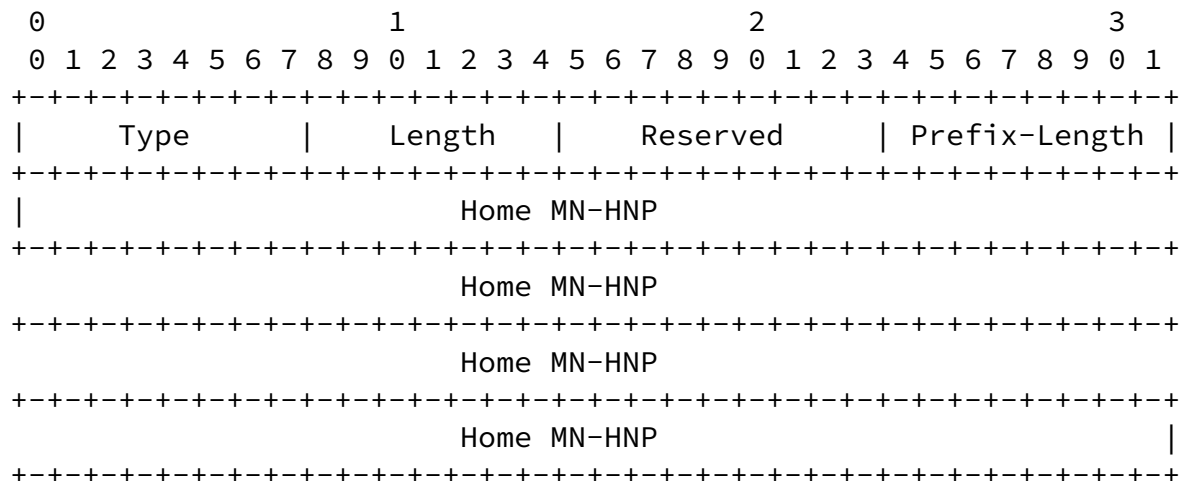

Type:

PMIPv6-Home-HN-Prefix 151.

Length:

= at least 4 and no larger than 20.

Reserved:

Reserved for future use. The bits MUST be set to zero by the sender and MUST be ignored by the receiver.

Prefix-Length:

The 8-bit unsigned integer indicating the prefix length of the home network prefix (at least 0 and no larger than 128). If the home network prefix contains an address of all zeroes (i.e., '::'), then the Prefix-Length MUST be set to 128.

Home Network Prefix:

The home network prefix for the MN's IPv6 address configuration. The Prefix field is up to 16 octets in length. Bits outside of the Prefix-Length, if included, must be zero.

#### 4.9. PMIPv6-Visited-HN-Prefix

The PMIPv6-Visited-HN-Prefix attribute (Type value 152) is of type IPv6 prefix. It contains the Mobile Node - Home Network Prefix (MN-

HNP), which is the IPv6 prefix assigned to the link between the MN

and the MAG. The MN configures its IP interface from its home network prefix(es). When the LMA is located in the visited network, the PMIP6-Visited-HN-Prefix attribute is used to deliver the MN-HNP from the VAAA to the MAG.

The PMIP6-Visited-HN-Prefix attribute is also used on the LMA-to-VAAA interface containing the IPv6 prefix assigned to the MN. If the LMA delegates the assignment of the MN-HNP to the VAAA, the attribute MUST contain an address of all zeroes (i.e., ':::') in the RADIUS Access-Request message. The attribute MUST be present in Access-Accept message if the prior request already included one and SHOULD carry the MN-HNP the VAAA assigned to the MN.

The attribute SHOULD NOT be included if the use of LMA in the home network is authorized (the PMIP6-Home-HN-Prefix and/or PMIP6-Home-LMA-IPv6-Address attributes are already present). However, if the VAAA local policy allows both home and visited LMA addresses to be delivered to the MAG, then this attribute MAY also be included.

[illegible]

Type:

PMIP6-Visited-HN-Prefix 152.

Length:

= at least 4 and no larger than 20.

Reserved:

Reserved for future use. The bits MUST be set to zero by the sender and MUST be ignored by the receiver.

Prefix-Length:

The 8-bit unsigned integer indicating the prefix length of the Visited MN-HNP (at least 0 and no larger than 128). If the visited home network prefix contains an address of all zeroes (i.e., ':::'), then the Prefix-Length MUST be set to 128.


Visited Home Network Prefix:

The home network prefix for the MN's IPv6 address configuration. The Prefix field is up to 16 octets in length. Bits outside of the Prefix-Length, if included, must be zero.

#### 4.10. PMIP6-Home-Interface-ID

The PMIP6-Home-Interface-ID attribute (Type value 153) is of type String and contains the MN's interface identifier. The selection of the interface identifier SHOULD NOT allow the tracking of individual MNs or users between PMIPv6 mobility sessions for privacy reasons. This attribute is applicable in network systems and link technologies, where the network explicitly delivers an interface identifier to the MN during the link setup. Third Generation Partnership Project (3GPP) and PPP link technologies are examples of such.

This attribute MAY be sent by the LMA or the MAG to the HAAA in the RADIUS Access-Request packet as a proposal. This attribute MAY be sent by the HAAA to the LMA or to the MAG in an Access-Accept packet; however, it MUST be present if the prior request already included one.

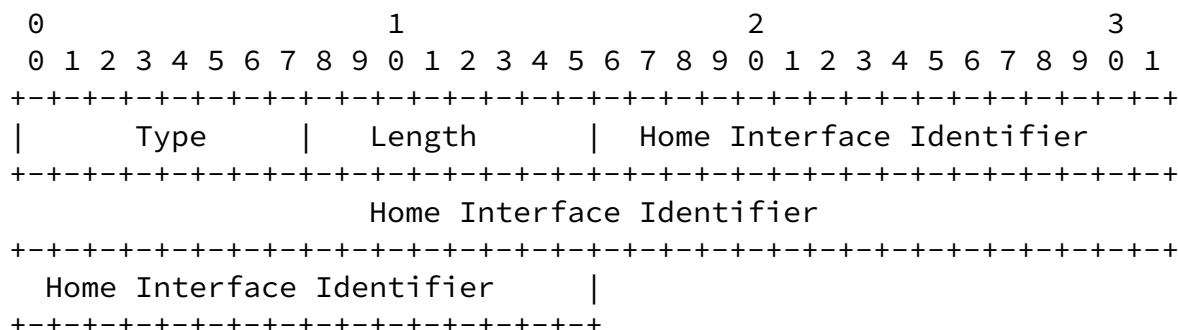

Type:  
PMIP6-Home-Interface-ID 153.

Length:  
= 10 octets.

Home Interface Identifier:  
The 64-bit long interface identifier (8 octets).

#### [4.11.](#) PMIP6-Visited-Interface-ID

The PMIP6-Visited-Interface-ID attribute (Type value 154) is of type String and contains the MN's interface identifier. The selection of the interface identifier SHOULD NOT allow the tracking of individual MNs or users between PMIPv6 mobility session for privacy reasons.

This attribute is applicable in network systems and link technologies, where the network explicitly delivers an interface identifier to the MN during the link setup. 3GPP and PPP link technologies are examples of such.

This attribute MAY be sent by the LMA or the MAG to the VAAA in the RADIUS Access-Request packet as a proposal. This attribute MAY be sent by the VAAA to the LMA or to the MAG in an Access-Accept packet; however, it MUST be present if the prior request already included one.

```

      0                   1                   2                   3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      | Length | Visited Interface Identifier
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        Visited Interface Identifier
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
      Visited Interface Identifier |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type:  
PMIP6-Visited-Interface-ID 154.

Length:  
= 10 octets.


Visited Interface Identifier:

The 64-bit long interface identifier (8 octets).

#### 4.12. PMIP6-Home-IPv4-HoA

[RFC5844] specifies extensions to Proxy Mobile IPv6 protocol that enable IPv4 home address mobility support to the MN. The PMIP6-Home-IPv4-HoA attribute (Type value 155) is of type Address and contains the IPv4 Home Address of the MN. The primary use of this attribute is to deliver the assigned IPv4-HoA from HAAA to the MAG.

The PMIP6-Home-IPv4-HoA is also used on the LMA-to-HAAA interface. If the LMA in the home network delegates the assignment of the IPv4-HoA to the HAAA, the attribute MUST contain an address of all zeroes (i.e., 0.0.0.0) in the Access-Request message. The attribute MUST be included in by HAAA in the Access-Accept message if the previous request included it, and it contains the IPv4-HoA assigned to the MN.

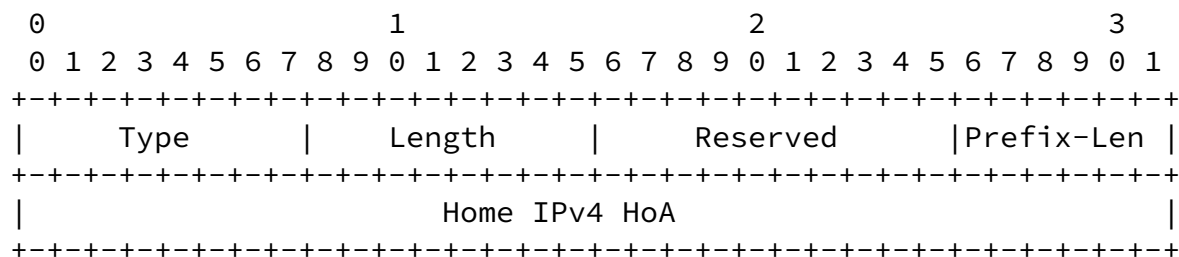

Type:

PMIP6-Home-IPv4-HoA 155.

Length:

= 8 octets

Reserved


The 10-bit field reserved for future use. The value MUST be initialized to zero by sender and MUST be ignored by the receiver.

The 6-bit unsigned integer indicating the prefix length of the IPv4 HoA. If the Home IPv4 HoA contains an address of all zeroes (i.e., '0.0.0.0'), then the Prefix-Len **MUST** be set to 32.

This field is of type Address and contains the IPv4 home address of the MN in the home network.

When both the MAG and the LMA are in the visited network, the PMIP6-Visited-IPv4-HoA attribute (Type value 156) is of type Address and is used to exchange information between the VAAA and the MAG on the assignment of the IPv4 Home Address to the MN being present in the visited network.

The attribute SHOULD NOT be included if the use of the LMA in the home network is authorized (the PMIP6-Home-IPv4-HoA and/or PMIP6-Home-LMA-IPv4-Address attributes are already present). However, if the VAAA local policy allows both home and visited LMA addresses to be delivered to the MAG, then this attribute MAY also be included.

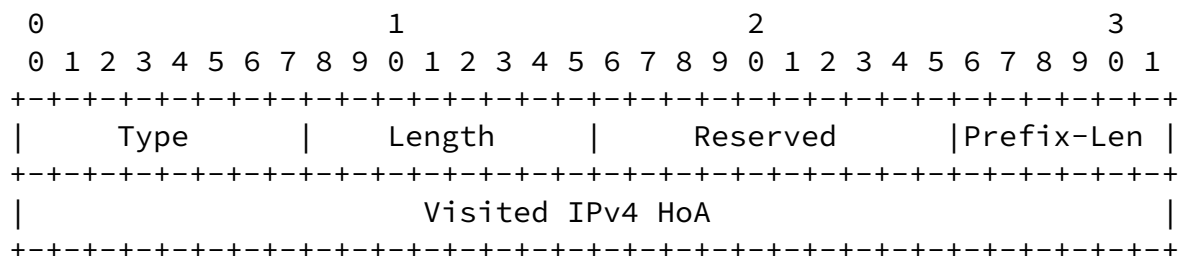

Length:

This field is of type Address and contains a 4-octet IPv4 address



of the DHCP server.

#### [4.15.](#) PMIP6-Visited-DHCP4-Server-Address

The PMIP6-Visited-DHCP4-Server-Address attribute (Type value 158) is of type Address and delivers the IPv4 address of the DHCPv4 server from the visited network to the MAG. When both the MAG and the LMA are in the visited network, the VAAA MAY assign a DHCPv4 server to the MAG in deployments where the MAG acts as a DHCP Relay, as defined in [[RFC5844](#)].

```

      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      |   Length   | Visited DHCPv4 server address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Visited DHCPv4 server address |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type:

PMIP6-Visited-DHCP4-Server-Address 158.

Length:

= 6 octets

Visited DHCPv4 server address:

This field is of type Address and contains a 4-octet IPv4 address of the DHCPv4 server.

#### [4.16.](#) PMIP6-Home-DHCP6-Server-Address

The PMIP6-Home-DHCP6-Server-Address (Type value 159) is of type IPv6 address and contains the IPv6 address of the DHCPv6 server in the home network indicated by the HAAA to the MAG that serves the MN. The HAAA MAY assign a DHCPv6 server to the MAG in deployments where the MAG acts as a DHCP Relay, as defined in [[RFC5213](#)].



```

      0               1               2               3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      | Length | Visited DHCPv6 server address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        Visited DHCPv6 server address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        Visited DHCPv6 server address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        Visited DHCPv6 server address
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
      Visited DHCPv6 server address |
+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type:

PMIPv6-Visited-DHCPv6-Server-Address 160.

Length:

= 18 octets

Visited DHCPv6 server address:

This field is of type Address and contains the 16-octet IPv6 address of the DHCPv6 server.

#### [4.18.](#) Calling-Station-Id

The Calling-Station-Id attribute (Type value 31) is of type String. When used within PMIPv6 deployments, the attribute contains the MN Link-Layer Identifier option of the MN as defined in [[RFC5213](#)], Sections [2.2](#) and [8.6](#).

#### [4.19.](#) Chargeable-User-Identity

The Chargeable-User-Identity attribute, or CUI, (Type value 89) is a unique, temporary handle used as means to, for example, correlate authentication, accounting, and bill post-processing for a particular chargeable subscriber. The CUI format and use follows guidelines defined by [[RFC4372](#)].

In the scope of this document, the CUI attribute MAY be present in the Access-Request. The CUI MAY also be present in the Access-Accept. The CUI MUST be present in the Access-Accept if it was

present in the Access-Request. If the use of the Chargeable-User-Identity attribute is supported, then the MAG and/or the LMA commits to include the Chargeable-User-Identity attribute in all subsequent RADIUS Accounting packets they send for the given user.

#### [4.20.](#) PMIP6-Home-IPv4-Gateway

[RFC5844] specifies extensions to Proxy Mobile IPv6 protocol that enable IPv4 home address mobility support to the MN. The PMIP6-Home-IPv4-Gateway attribute (Type value 161) is of type Address and contains the default gateway IPv4 address for the MN. This address is populated into the PMIPv6 IPv4 Default-Router Address Option [[RFC5844](#)]. The address MUST belong to the subnet defined in the PMIP6-Home-IPv4-HoA attribute.

0																1																2																3															
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9																								
Type																Length																Home IPv4 default gateway address																															

Type:

PMIP6-Home-IPv4-Gateway 161.

Length:

= 6 octets

Home IPv4 default gateway address:

This field is of type Address and contains a 4-octet IPv4 default gateway address.

#### [4.21.](#) PMIP6-Visited-IPv4-Gateway

[RFC5844] specifies extensions to Proxy Mobile IPv6 protocol that enable IPv4 home address mobility support to the MN. The PMIP6-Visited-IPv4-Gateway attribute (Type value 162) is of type Address and contains the default gateway IPv4 address for the MN. This address is populated into the PMIPv6 IPv4 Default-Router Address

Option [[RFC5844](#)]. The address MUST belong to the subnet defined in the PMIP6-Visited-IPv4-HoA attribute.

```

      0                   1                   2                   3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      | Length | Visited IPv4 default gateway |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
                        address |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type:

PMIP6-Visited-IPv4-Gateway 162.

Length:

= 6 octets

Visited IPv4 default gateway address:

This field is of type Address and contains a 4-octet IPv4 default gateway address.

## [5.](#) MAG to RADIUS AAA Interface

### [5.1.](#) Interface Operations

The MAG to the AAA RADIUS server interface is used for retrieval of the policy profile when an MN tries to attach, authenticate, and authorize to a PMIPv6 domain. Depending on the policies and network capabilities, the MAG may retrieve different sets of PMIPv6-session-related parameters:

- o Configuration attributes for home or visited network access scenario, depending on the location and attachment point of the MN,
- o The IPv6 or IPv4 address of the designated LMA, depending on the access network's actual IP topology,
- o The IPv6 or IPv4 configuration parameters for the MN, depending on the utilized IP configuration method and individual MN's service Policy,
- o The DHCP Relay support attributes (IPv4 or IPv6) in case such functionality is supported in the network.

In addition to PMIPv6-specific attributes, other RADIUS attributes are to be used on the MAG-to-AAA interface.

The User-Name attribute MUST be present in the Access-Request. It MUST carry a correctly formed identifier that SHOULD correspond to an MN identity unless the identity is being suppressed for policy reasons, for example, when identity hiding is in effect. The MN identity, if available, MUST be in Network Access Identifier (NAI) [[RFC4282](#)] format. At minimum, the home realm of the MN MUST be available at the MAG when the network access authentication takes place. Otherwise, the MAG is not able to route RADIUS request messages towards the correct HAAA. The MN identity used on the MAG-to-HAAA interface and in the User-Name attribute MAY entirely be related to the network access authentication and, therefore, not be suitable to be used as the MN-Identifier mobility option value in the subsequent PBU/PBA messages. In this case, the HAAA MUST provide the MN-Identifier for PBU/PBA messages using the Mobile-Node-Identifier attribute (see [Section 4.2](#)).

At least one of the NAS-IP-Address, NAS-IPv6-Address, or NAS-Identifier attributes MUST be present in the Access-Request. The Service-Type attribute SHOULD be set to value 1 (Login) and the NAS-Port-Type attribute SHOULD be present in the Access-Request.

## [5.2.](#) Table of Attributes

The following table provides a guide to attributes that may be found in authentication and authorization RADIUS messages between the MAG and the AAA server.

Request	Accept	Reject	Challenge	#	Attribute
1	0-1	0	0	1	User-Name
0-1	0	0	0	4	NAS-IP-Address
0-1	0-1	0	0	5	NAS-Port
0-1	0-1	0	0	6	Service-Type
0-1	0-1	0	0-1	24	State
0	0-1	0	0	25	Class
0	0-1	0	0-1	27	Session-Timeout
0-1	0	0	0	31	Calling-Station-Id
0-1	0	0	0	32	NAS-Identifier
0+	0+	0+	0+	33	Proxy-State
0-1	0	0	0	69	NAS-Port-Type
0+	0+	0+	0+	79	EAP-Message

1	1	1	1	80	Message-Authenticator
0-1	0-1	0	0	89	Chargeable-User-Identity
0-1	0	0	0	95	NAS-IPv6-Address
0-1	0-1	0	0	124	MIP6-Feature-Vector
0	1	0	0	145	Mobile-Node-Identifier
0-1	0-1	0	0	146	Service-Selection
0	0-1	0	0	147	PMIP6-Home-LMA-IPv6-Address
0-1	0-1	0	0	148	PMIP6-Visited-LMA-IPv6-Address
0	0-1	0	0	149	PMIP6-Home-LMA-IPv4-Address
0-1	0-1	0	0	150	PMIP6-Visited-LMA-IPv4-Address
0	0+	0	0	151	PMIP6-Home-HN-Prefix
0	0+	0	0	152	PMIP6-Visited-HN-Prefix
0	0-1	0	0	153	PMIP6-Home-Interface-ID
0	0-1	0	0	154	PMIP6-Visited-Interface-ID
0	0-1	0	0	155	PMIP6-Home-IPv4-HoA
0	0-1	0	0	156	PMIP6-Visited-IPv4-HoA
0	0-1	0	0	157	PMIP6-Home-DHCP4-Server-Address
0	0-1	0	0	158	PMIP6-Visited-DHCP4-Server-Address
0	0-1	0	0	159	PMIP6-Home-DHCP6-Server-Address
0	0-1	0	0	160	PMIP6-Visited-DHCP6-Server-Address
0	0-1	0	0	161	PMIP6-Home-IPv4-Gateway
0	0-1	0	0	162	PMIP6-Visited-IPv4-Gateway

## [6.](#) LMA to RADIUS AAA Interface

### [6.1.](#) Interface Operations

The LMA-to-HAAA interface may be used for multiple purposes. These include the authorization of the incoming PBU, updating the LMA address to the HAAA, delegating the assignment of the MN-HNP or the IPv4-HoA to the HAAA, and accounting and PMIPv6 session management. The primary purpose of this interface is to update the HAAA with the

LMA address information in case of dynamically assigned LMA and to exchange the MN address assignment information between the LMA and the HAAA.

Whenever the LMA sends an Access-Request message to the HAAA, the User-Name attribute SHOULD contain the MN's identity. The LMA-provided identity in the User-Name attribute is strongly RECOMMENDED



to be the same as the MN's identity information in the PBU MN-Identifier mobility option. The identity SHOULD also be the same as used on the MAG-to-HAAA interface; however, in case those identities differ, the HAAA MUST have a mechanism of mapping the MN identity used on the MAG-to-HAAA interface to the identity used on the LMA-to-HAAA interface.

If the PBU contains the MN Link-Layer Identifier option, the Calling-Station-Id attribute SHOULD be included in the request message containing the received MN Link-Layer Identifier option. Furthermore, if the PBU contains the Service Selection mobility option [[RFC5149](#)], the Service-Selection attribute SHOULD be included in the request message containing the received service identifier. Both the MN Link-Layer Identifier option and the service selection can be used to provide more information for the PBU authorization step in the HAAA.

The Service-Type attribute MUST be set to the value 17 (Authorize Only). If the HAAA is not able to authorize the subscriber's mobility service session, then the Access-Reject message to the LMA MAY contain the Reply-Message attribute describing the reason for rejecting the authorization. A failed authorization obviously results in a rejection of the PBU, and a PBA with an appropriate error Status Value MUST be sent back to the MAG.

The authorization step MUST be performed at least for the initial PBU session up to a mobility session, when the LMA-to-HAAA interface is deployed. For the subsequent re-registration and handover of PBUs, the authorization step MAY be repeated (in this case, the LMA-to-HAAA interface should also maintain an authorization session state).

In case of a dynamic LMA discovery and assignment [[RFC6097](#)], the HAAA and the remote policy store may need to be updated with the selected LMA address information. The update can be done during the PBU authorization step using the LMA-to-HAAA interface. This specification uses the PMIP6-\*-LMA-\*-Address attribute for carrying the LMA's address information from the LMA to the HAAA. The LMA address information in the request message MUST contain the IP address of the LMA, the Fully Qualified Domain Name (FQDN) uniquely

identifying the LMA, or both. The LMA address information refers to the PMIPv6 part of the LMA, not necessarily the LMA part interfacing with the AAA infrastructure.

The LMA and the HAAA use the PMIPv6-Home-HN-Prefix/PMIPv6-Visited-HN-Prefix attributes to exchange the MN-HNP when appropriate. Similarly, the LMA and the HAAA use the PMIPv6-Home-IPv4-HoA/PMIPv6-Visited-IPv4-HoA attributes to exchange the IPv4-MN-HoA when appropriate. The MN address information exchange is again done during the PBU authorization step. The HAAA MAY also use the LMA-provided MN address information as a part of the information used to authorize the PBU.

Which entity is actually responsible for the address management is deployment specific within the PMIPv6 Domain and MUST be pre-agreed on per deployment basis. When the LMA is responsible for the address management, the PMIPv6-\* -HN-Prefix/PMIPv6-\* -IPv4-HoA attributes are used to inform the HAAA and the remote policy store of the MN-HNP/IPv4-MN-HoA assigned to the MN. It is also possible that the LMA delegates the address management to the HAAA. In this case, the MN-HNP/IPv4-MN-HoA are set to undefined addresses in the Access-Request message sent from the LMA to the HAAA. The LMA expects to receive the HAAA assigned HNP/IPv4-MN-HoA in the corresponding Access-Accept message.

## [6.2.](#) Table of Attributes

The following table provides a guide to which attributes may be found in authorization process between LMA and the AAA.

Request	Accept	Reject	Challenge	#	Attribute
1	0-1	0	0	1	User-Name
0-1	0-1	0	0	4	NAS-IP-Address
0-1	0-1	0	0	5	NAS-Port
1	0-1	0	0	6	Service-Type
0	0-1	0	0	25	Class
0	0-1	0	0-1	27	Session-Timeout
0-1	0	0	0	31	Calling-Station-Id
1	0	0	0	32	NAS-Identifier
0+	0+	0+	0+	33	Proxy-State
1	0	0	0	69	NAS-Port-Type
1	1	1	1	80	Message-Authenticator
0-1	0-1	0	0	89	Chargeable-User-Identity
0-1	0-1	0	0	95	NAS-IPv6-Address
0-1	0-1	0	0	124	MIPv6-Feature-Vector
1	0	0	0	145	Mobile-Node-Identifier
0-1	0-1	0	0	146	Service-Selection
0-1	0	0	0	147	PMIPv6-Home-LMA-IPv6-Address
0-1	0	0	0	148	PMIPv6-Visited-LMA-IPv6-Address
0-1	0	0	0	149	PMIPv6-Home-LMA-IPv4-Address
0-1	0	0	0	150	PMIPv6-Visited-LMA-IPv4-Address
0+	0+	0	0	151	PMIPv6-Home-HN-Prefix
0+	0+	0	0	152	PMIPv6-Visited-HN-Prefix
0-1	0-1	0	0	153	PMIPv6-Home-Interface-ID
0-1	0-1	0	0	154	PMIPv6-Visited-Interface-ID
0-1	0-1	0	0	155	PMIPv6-Home-IPv4-HoA
0-1	0-1	0	0	156	PMIPv6-Visited-IPv4-HoA
0-1	0-1	0	0	161	PMIPv6-Home-IPv4-Gateway
0-1	0-1	0	0	162	PMIPv6-Visited-IPv4-Gateway

## [7.](#) Accounting

Radius-based interfaces at the MAG and LMA with the AAA server enables the metering of traffic associated with the MN, commonly called "accounting". If accounting is turned on in the mobile node's policy profile, the local routing SHOULD NOT be enabled [[RFC5213](#)].

### [7.1.](#) Accounting at LMA

The accounting at the LMA to AAA server interface is based on [[RFC2865](#)] and [[RFC2866](#)]. This interface MUST support the transfer of accounting records needed for service control and charging. These

records should include (but may not be limited to) the following: time of binding cache entry creation and deletion, number of the octets sent and received by the MN over the bi-directional tunnel, etc.

### [7.2.](#) Accounting at MAG

The accounting at the MAG to AAA server interface is based on [\[RFC2865\]](#) and [\[RFC2866\]](#). The interface MUST also support the transfer of accounting records that should include the following: time of binding cache entry creation and deletion, number of the octets sent and received by the MN over the bi-directional tunnel, etc.

If there is data traffic between a visiting MN and a correspondent node that is locally attached to an access link connected to the same MAG, the mobile access gateway MAY optimize on the delivery efforts by locally routing the packets instead of using reverse tunneling to the mobile node's LMA. In this case, the local data traffic too MUST be reported to AAA Accounting servers by means of RADIUS protocol.

### [7.3.](#) Table of Attributes

The following table provides a list of attributes that may be included in the RADIUS Accounting messages. These attributes are to complement the set of accounting attributes already required by [\[RFC2866\]](#) and [\[RFC2869\]](#).

Accounting Request	#	Attribute
0-1	145	Mobile-Node-Identifier
0-1	146	Service-Selection
0-1	147	PMIP6-Home-LMA-IPv6-Address
0-1	148	PMIP6-Visited-LMA-IPv6-Address
0-1	149	PMIP6-Home-LMA-IPv4-Address
0-1	150	PMIP6-Visited-LMA-IPv4-Address
0+	151	PMIP6-Home-HN-Prefix
0+	152	PMIP6-Visited-HN-Prefix
0-1	155	PMIP6-Home-IPv4-HoA
0-1	156	PMIP6-Visited-IPv4-HoA

0-1	31	Calling-Station-Id
0-1	80	Message-Authenticator
0-1	89	Chargeable-User-Identity
0-1	124	MIP6-Feature-Vector

## [8.](#) Security Considerations

The RADIUS messages may be transported between the MAG and/or the LMA to the RADIUS server via one or more AAA brokers or RADIUS proxies. In this case, the communication between the LMA and the RADIUS AAA server relies on the security properties of the intermediate AAA brokers and RADIUS proxies.

Regarding the privacy threats associated with sending MN-specific information between the MAG and AAA server and between the LMA and AAA server, considerations of the RADIUS Base protocol [[RFC2865](#)], RADIUS Accounting [[RFC2866](#)], and the RADIUS EAP application [[RFC3579](#)] are applicable to this document. The MAG, LMA, and AAA server SHOULD avoid including attributes containing personally identifying information such as a MN's Interface ID, link-layer address, or NAI, except as needed and SHOULD pay special attention if identity hiding is desired.

## [9.](#) IANA Consideration

### [9.1.](#) Attribute Type Codes

This specification defines the following new RADIUS attribute type values:

Mobile-Node-Identifier	145
Service-Selection	146
PMIPv6-Home-LMA-IPv6-Address	147
PMIPv6-Visited-LMA-IPv6-Address	148
PMIPv6-Home-LMA-IPv4-Address	149
PMIPv6-Visited-LMA-IPv4-Address	150
PMIPv6-Home-HN-Prefix	151
PMIPv6-Visited-HN-Prefix	152
PMIPv6-Home-Interface-ID	153
PMIPv6-Visited-Interface-ID	154
PMIPv6-Home-IPv4-HoA	155
PMIPv6-Visited-IPv4-HoA	156

PMIP6-Home-DHCP4-Server-Address	157
PMIP6-Visited-DHCP4-Server-Address	158
PMIP6-Home-DHCP6-Server-Address	159
PMIP6-Visited-DHCP6-Server-Address	160
PMIP6-Home-IPv4-Gateway	161
PMIP6-Visited-IPv4-Gateway	162

## [9.2.](#) Namespaces

This specification defines new values to the Mobility Capability registry (see [[RFC5447](#)]) for use with the MIP6-Feature-Vector AVP:

Token	Value
-----+-----	
IP4_TRANSPORT_SUPPORTED	0x0000800000000000
IP4_HOA_ONLY_SUPPORTED	0x0001000000000000

## [10.](#) Acknowledgements

First of all, the authors would like to acknowledge the standardization work and people of the WiMAX Forum that have set the foundation for this document.

The authors would like to thank Basavaraj Patil, Glen Zorn, Avi Lior, Alan DeKok, Dhananjay Patki and Pete McCann for reviewing the document and providing valuable input. The authors also thank Elwyn Davies, Pete Resnick, Bernard Aboba, Jari Arkko, and Stephen Farrell for their reviews on the document during the IESG process.

The authors would also like to thank the authors of [[RFC5779](#)] as this document reuses some procedural ideas of that specification.

## [11.](#) References

### [11.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

- [RFC2865] Rigney, C., Willens, S., Rubens, A., and W. Simpson, "Remote Authentication Dial In User Service (RADIUS)", [RFC 2865](#), June 2000.
- [RFC5213] Gundavelli, S., Leung, K., Devarapalli, V., Chowdhury, K., and B. Patil, "Proxy Mobile IPv6", [RFC 5213](#), August 2008.
- [RFC4282] Aboba, B., Beadles, M., Arkko, J., and P. Eronen, "The Network Access Identifier", [RFC 4282](#), December 2005.
- [RFC5447] Korhonen, J., Bournelle, J., Tschofenig, H., Perkins, C., and K. Chowdhury, "Diameter Mobile IPv6: Support for Network Access Server to Diameter Server Interaction", [RFC 5447](#), February 2009.
- [RFC3588] Calhoun, P., Loughney, J., Guttman, E., Zorn, G., and J. Arkko, "Diameter Base Protocol", [RFC 3588](#), September 2003.
- [RFC5844] Wakikawa, R. and S. Gundavelli, "IPv4 Support for Proxy Mobile IPv6", [RFC 5844](#), May 2010.
- [RFC5779] Korhonen, J., Bournelle, J., Chowdhury, K., Muhanna, A., and U. Meyer, "Diameter Proxy Mobile IPv6: Mobile Access Gateway and Local Mobility Anchor Interaction with Diameter Server", [RFC 5779](#), February 2010.

- [RFC4372] Adrangi, F., Lior, A., Korhonen, J., and J. Loughney, "Chargeable User Identity", [RFC 4372](#), January 2006.

## [11.2](#). Informative References

- [RFC3579] Aboba, B. and P. Calhoun, "RADIUS (Remote Authentication Dial In User Service) Support For Extensible Authentication Protocol (EAP)", [RFC 3579](#), September 2003.
- [RFC2866] Rigney, C., "RADIUS Accounting", [RFC 2866](#), June 2000.
- [RFC2869] Rigney, C., Willats, W., and P. Calhoun, "RADIUS Extensions", [RFC 2869](#), June 2000.
- [RFC3748] Aboba, B., Blunk, L., Vollbrecht, J., Carlson, J., and H.

- Levkowetz, "Extensible Authentication Protocol (EAP)",  
[RFC 3748](#), June 2004.
- [RFC5149] Korhonen, J., Nilsson, U., and V. Devarapalli, "Service Selection for Mobile IPv6", [RFC 5149](#), February 2008.
- [RFC6097] Korhonen, J. and V. Devarapalli, "Local Mobility Anchor (LMA) Discovery for Proxy Mobile IPv6", [RFC 6097](#), February 2011.
- [UNF] Davis, M., Ed. and K. Whistler, Ed., "Unicode Standard Annex #15: Unicode Normalization Forms", January 2012, <<http://www.unicode.org/reports/tr15/>>.

#### Authors' Addresses

Frank Xia  
Huawei USA  
1700 Alma Dr., Suite 500  
Plano, TX 75075

Phone: +1 972-509-5599



EMail: xiayangsong@huawei.com

Behcet Sarikaya  
Huawei USA  
1700 Alma Dr., Suite 500  
Plano, TX 75075

Phone: +1 972-509-5599  
EMail: sarikaya@ieee.org

Jouni Korhonen (editor)  
Nokia Siemens Networks  
Linnoitustie 6  
Espoo FI-02600  
Finland

EMail: jouni.nospam@gmail.com

Sri Gundavelli  
Cisco  
170 West Tasman Drive  
San Jose, CA 95134

EMail: sgundave@cisco.com

Damjan Damic  
Siemens  
Heinzelova 70a  
Zagreb 10000  
Croatia

EMail: damjan.damic@siemens.com