



IETF 102 – Montreal
July 2018
6man Working Group

draft-ali-spring-srv6-oam-01.txt

SRv6 OAM

Zafar Ali - Cisco Systems (zali@cisco.com) - Presenter
Clarence Filselfs - Cisco Systems (cfilselfs@cisco.com)
Nagendra Kumar - Cisco Systems (naikumar@cisco.com)
Carlos Pignataro – Cisco Systems (cpignata@cisco.com)
Faisal Iqbal – Cisco Systems (faiqbal@cisco.com)
Rakesh Gandhi - Cisco Systems (rgandhi@cisco.com)
John Leddy Comcast (John_Leddy@cable.comcast.com)
Satoru Matsushima – Softbank (satoru.matsushima@g.softbank.co.jp)
Robert Raszuk Bloomberg LP (robert@raszuk.net)
Daniel Voyer - Bell Canada (daniel.voyer@bell.ca)
Gaurav Dawra – LinkedIn (gdawra.ietf@gmail.com)
Bart Peirens – Proximus (bart.peirens@proximus.com)
Mach Chen – Huawei (mach.chen@huawei.com)
Gaurav Naik - Drexel University (gn@drexel.edu)

Reference Topology



k SRv6 Capable

k classic IPv6 Node

k classic IPv4 Node


↓
○ Message Processing Node

History of the Draft

- draft-ali-6man-srv6-oam-00 was published in July 2017.
 - Main draft describing use-cases including classic ping and traceroute in SRv6 networks.
- draft-ali-6man-srv6-oam-01 was published in October 2017.
 - Revision with editorial changes.
- draft-ali-spring-srv6-oam-00.txt was published in Feb 2018.
 - Added SRv6 ping and traceroute.
 - Added SRv6 segment-by-segment ping and overlay traceroute.
 - Presented in IETF101 (London, March 2018).
- draft-ali-spring-srv6-oam-01.txt was published in July 2018.
 - Moved O-bit flag from draft-ietf-6man-segment-routing-header-14
 - Moved OAM SIDs from draft-filsfils-srv6-network-programming-05

OAM Building Blocks


- OAM SIDs
 - END.OP
 - >OAM Endpoint with Punt.
 - END.OTP
 - >OAM Endpoint with Timestamp and Punt.
- SRH.Flags.O-flag
 - O-flag processing
 - >Punt a timestamped copy of the packet and forward
 - >Forward and punt a timestamped copy of the packet

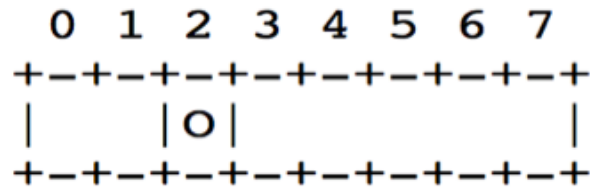

Use Cases (I-D illustrations)


- Classic Ping
- Classic Traceroute
- Use of the existing ICMP mechanisms.
 - ICMPv6 related processing remains unchanged.
 - Works seamlessly with the classic IPv6 nodes.
 - Adds a new ICMPv6 message type for SRv6 OAM.

ICMPv6 Ping Via a SID list

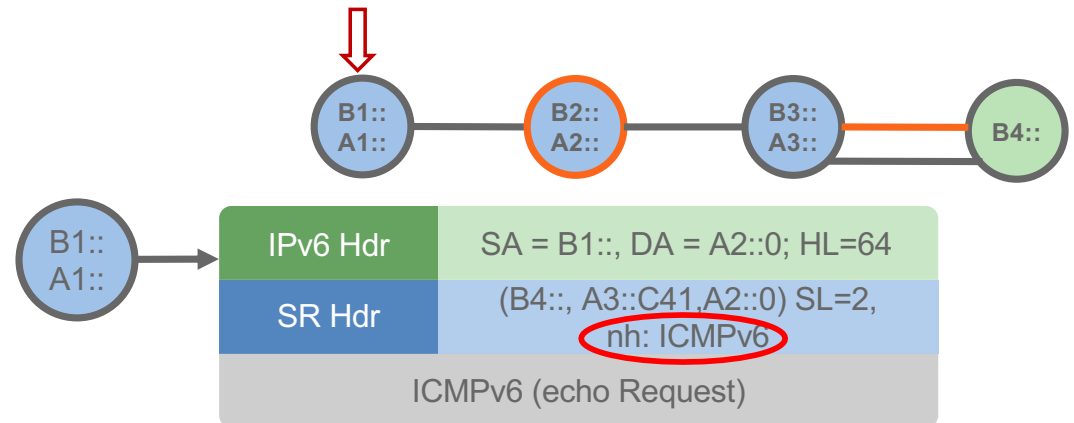

- The originator node constructs an SRH using the segment list specified by the user and adds it to IPv6 packet.
- All other ICMPv6 related processing remains unchanged.
- No changes are required at the transit node.
- No changes are required at the destination node.

Traceroute Via a SID list

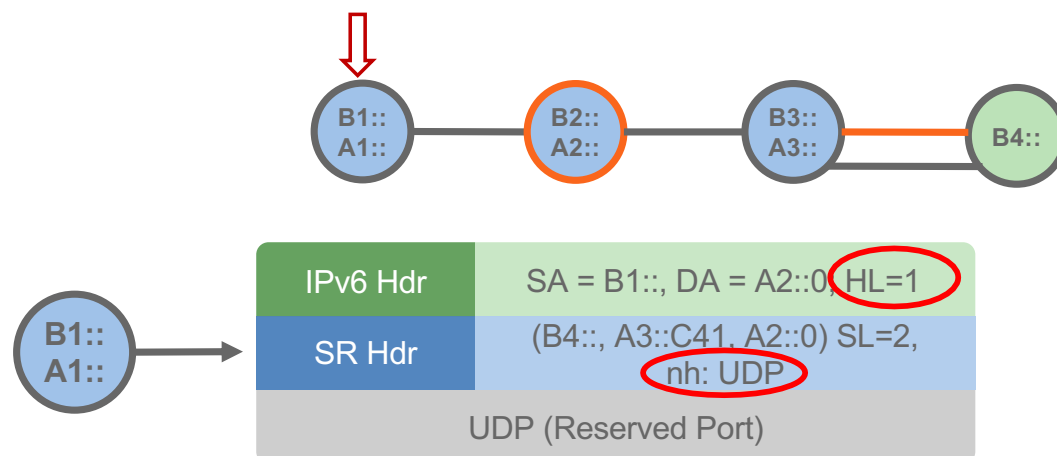


- The originator node constructs an SRH using the segment list specified by the user and adds it to traceroute probe packet.
- All other IPv6 traceroute related processing remains unchanged.
- No changes are required at the transit node.
- No changes are required at the destination node.

Use Cases (I-D illustrations – cont'ed)


- SRv6 Ping
 - End-to-end
 - Segment-by-segment
- SRv6 Traceroute
 - Hop-by-hop
 - Segment-by-Segment (Overlay Traceroute)
- SRv6 Paths Monitoring
 - Applicability of draft-ietf-spring-oam-usecase-10 to SRv6 Networks
- In-situ OAM
 - Applicability of ietf-ippm-ioam-data to SRv6 Networks

Pinging a SID Function

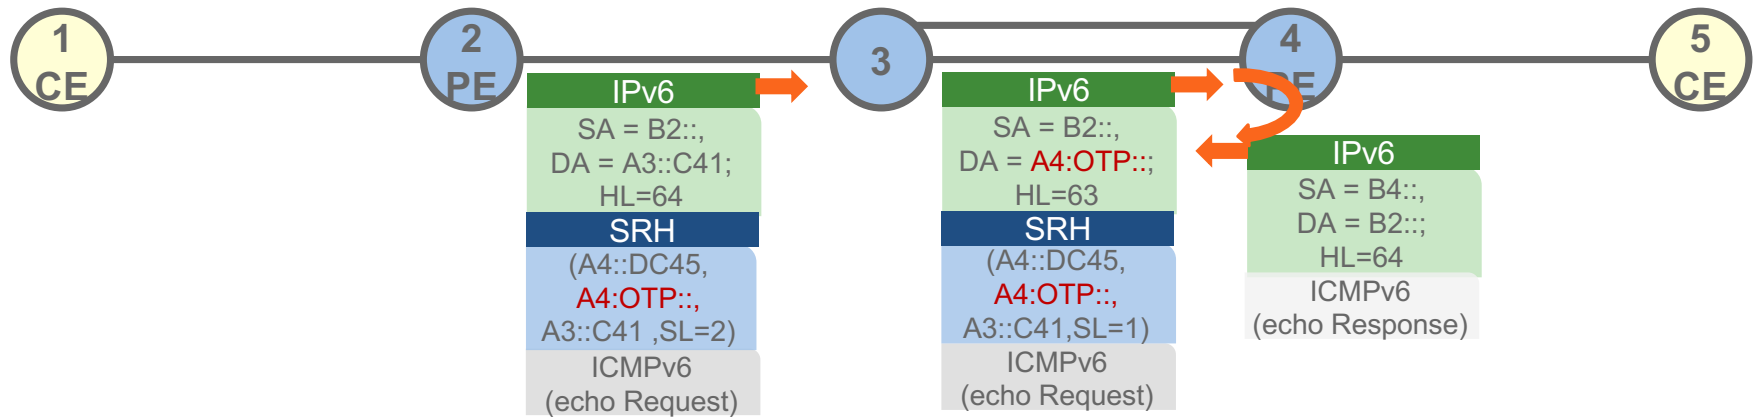

- An:OTP:: SID is instructed in front of the target SID where punt behavior needs to be programmed. E.g., A4::C45 in this example.

SRv6 Overlay Traceroute

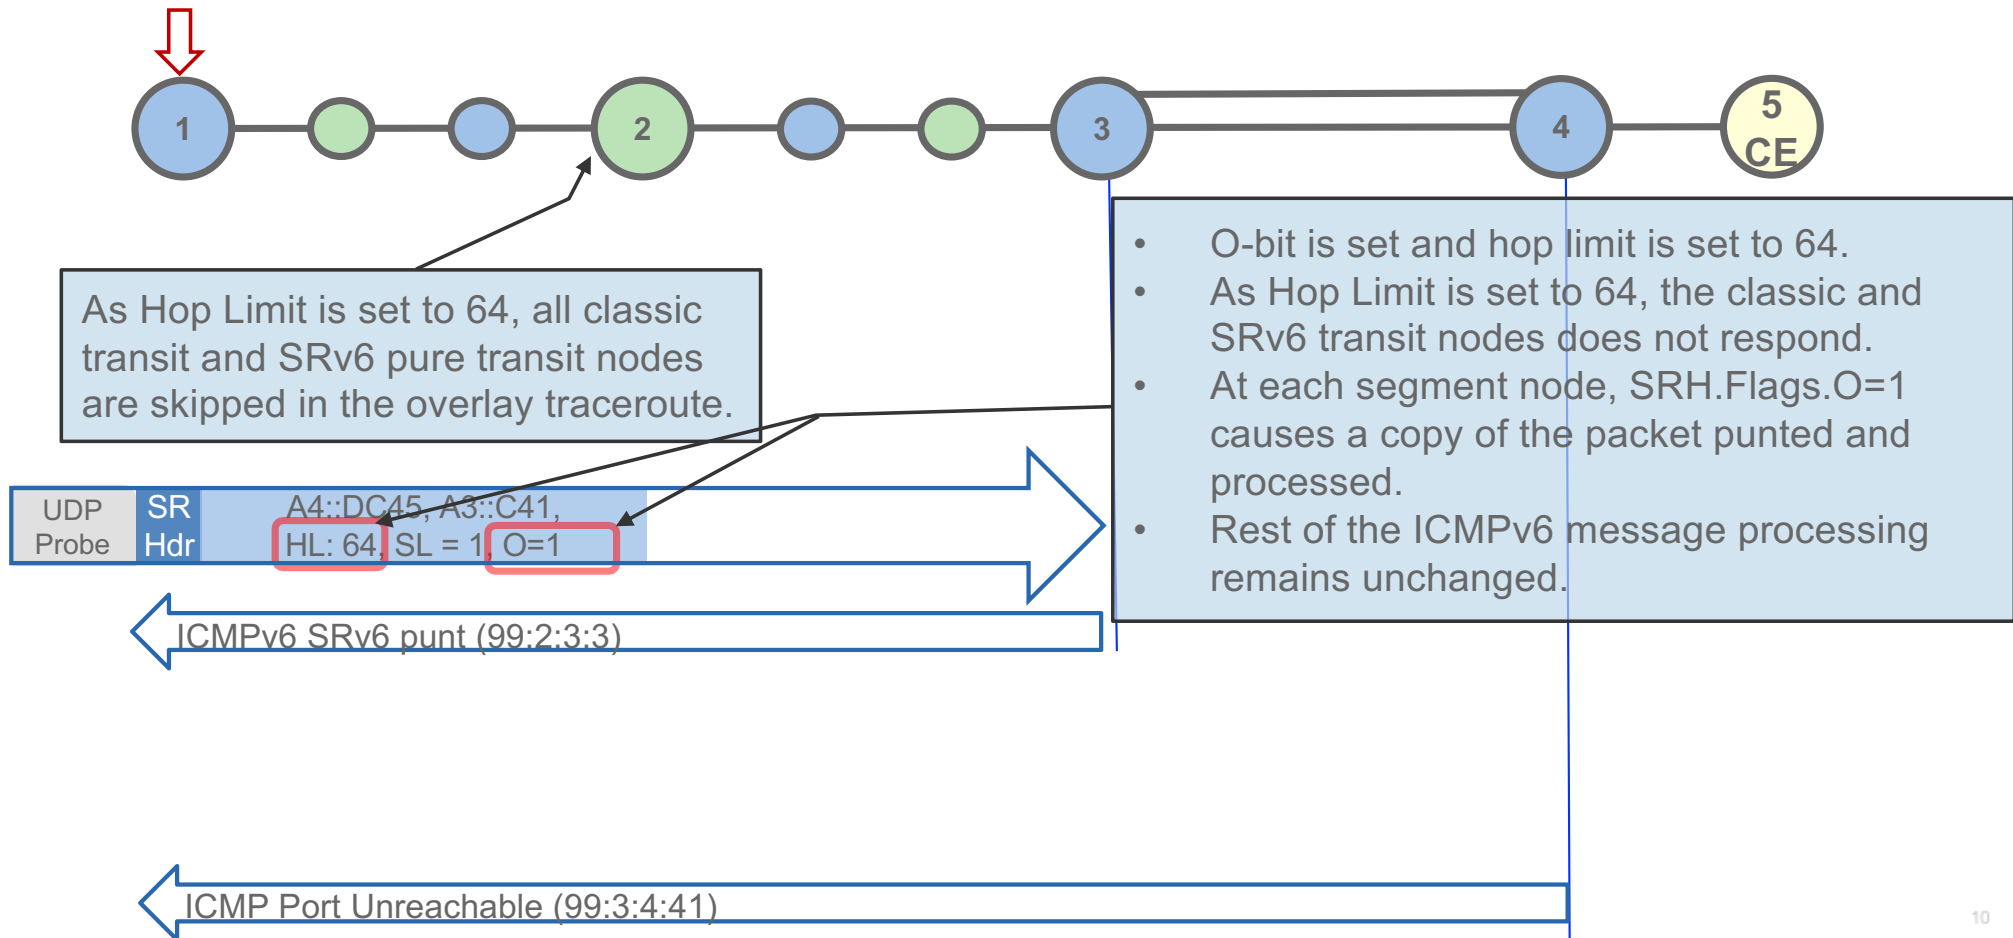

Next Steps

- The authors would like to request WG for the review and the feedback.