

Large-Scale Deterministic Network

[draft-qiang-detnet-large-scale-detnet-00](#)


Li Biang (Christina) qiangli3@huawei.com, Liu Bingyang (Bryan) liubingyang@huawei.com
Toerless Eckert tte+ietf@cs.fau.de (Huawei USA),
Liang Geng gengliang@chinamobile.com, Lei Wang wangleiyjy@chinamobile.com

Goals

- Propose work for bounded delay solution with IP/MPLS/SR forwarding
 - Bounded: tight [min..max] range for end-to-end propagation delay
 - Made specific to match DetNet requirements.
- Control Plane and Forwarding Plane modular from each other
 - Can start working/finalize forwarding independent of control plane
 - Might have different forwarding plane (central SDN .. RSVP modifications .. Better)
- Forwarding Plane derived from TSN/CQF principles
 - No per-flow state in forwarding plane. Cyclic time-slot based forwarding.
 - But: remove need for short link propagation delay, tight hop-to-hop synchronization
 - Want to be able to deal with links with usec...msec delays

Overview


- Large-scale Deterministic Network (**LDN**) consists of
 - Scalable Resource Reservation (**SRR**) at control plane
 - Scalable Deterministic Forwarding (**SDF**) at forwarding plane
- SRR and SDF can be used independently

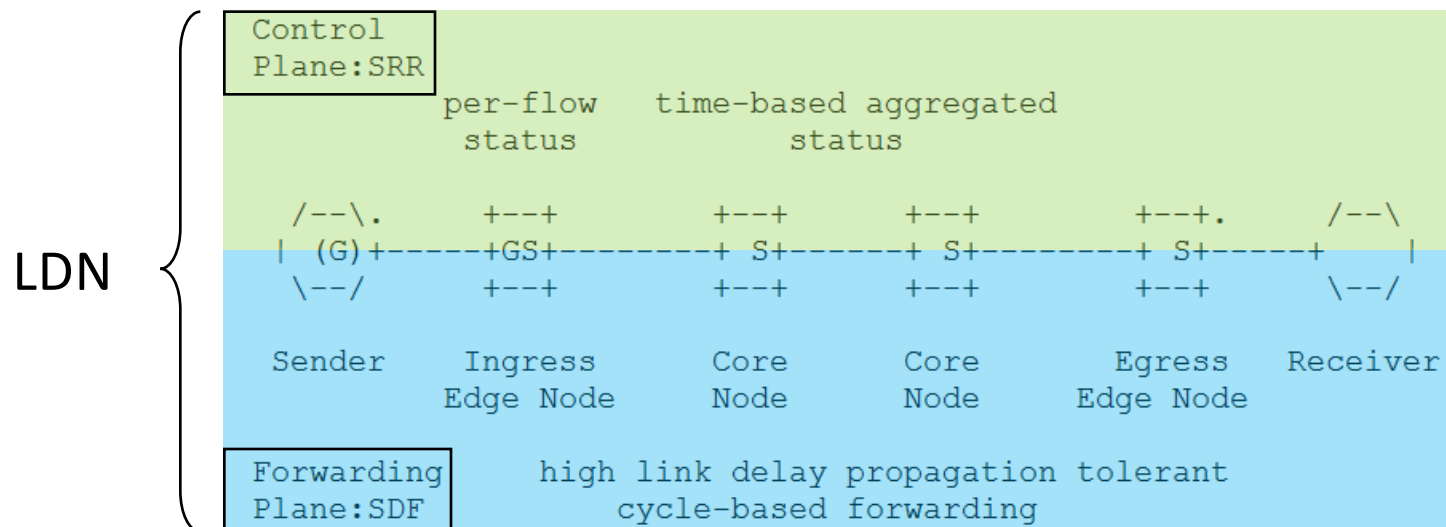

SDF (scalable deterministic forwarding) – long link propagation tolerance, bonded latency


- Cyclic forwarding – the length of a cycle is T , irrelevant of time slot in control plane
- Long link propagation tolerance & bounded latency

Pre-existing: TSN solution CQF (time-synchronization)

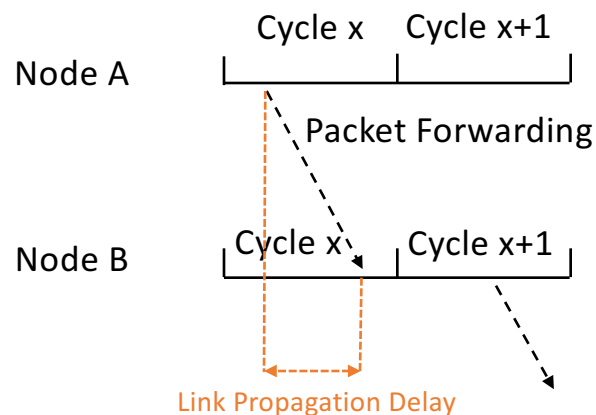

Link propagation delay is required to be smaller than T , T couldn't be too large since End-to-End Jitter's upper bounder is $2 \cdot T$. Therefore link propagation delay couldn't be very high.

SDF (frequency-synchronization)

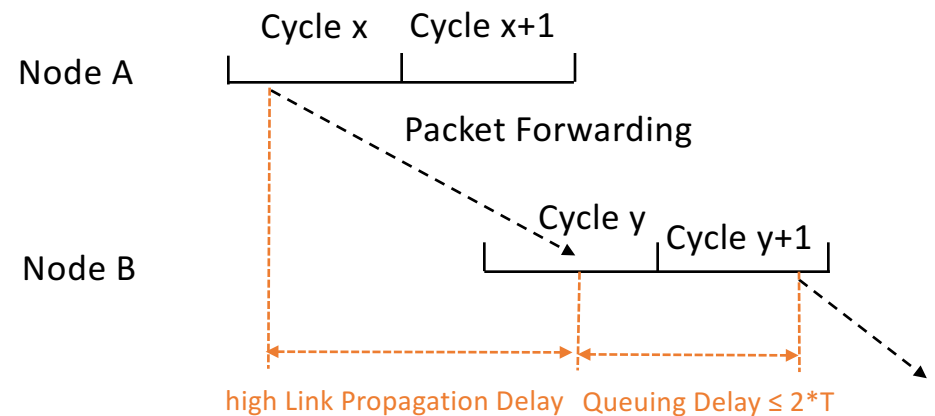


End-to-End Jitter $\leq 2 \cdot T$
End-to-end Queuing delay $\leq 2 \cdot T \cdot \text{hops}$

SDF – cycle mapping, three queues

Simple (when ignoring link propagation delay variation) :


- Each pair of neighboring nodes has a stable cycle mapping relationship that could be used to indicate the packet forwarding time

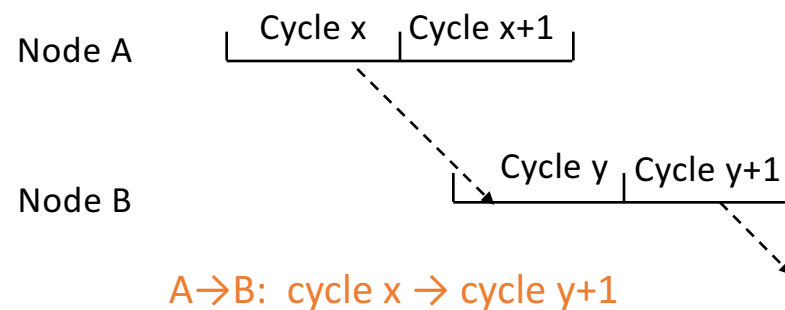


- The cycle mapping relationship could be notified by control plane, also can be self-studied in a distributed way

SDF – cycle mapping, three queues

- Cycle y may receives packets sent from two cycles (x and x+1) due to loose time-synchronization, hence needs two receiving queues

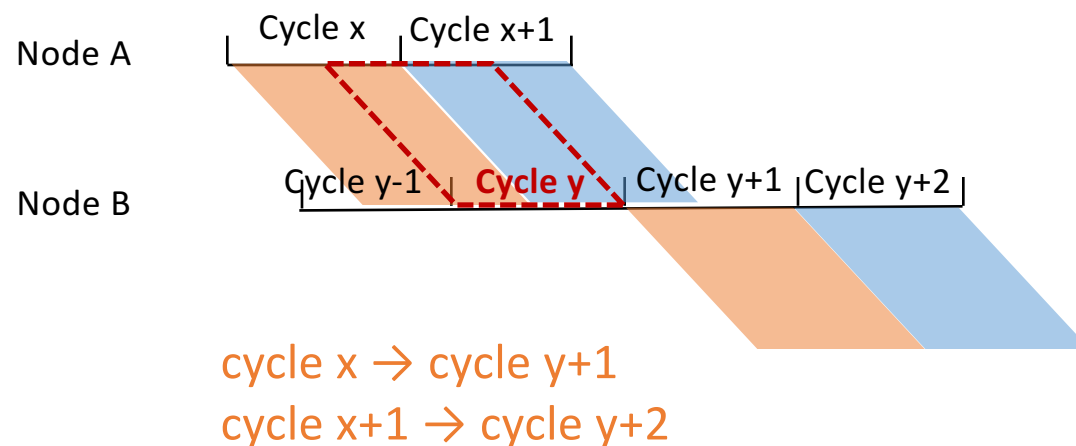

three cyclic queues at each output port

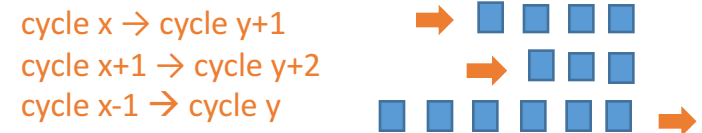

2 bits to carry cycle-identifiers



- ✓ DSCP of IPv4 Header
- ✓ Traffic Class of IPv6 Header
- ✓ TC of MPLS Header (used to be EXP)
- ✓ EtherType of Ethernet Header
- ✓ IPv6 Extension Header
- ✓ TLV of SRv6
- ✓ TC of MPLS-SR Header (used to be EXP)
- ✓ Three labels/adjacency of SIDs for MPLS-SR
- ✓ Etc.

Sync requirements & slot requirements

- Guard band: unchanged from TSN
 - Clocks frequencies across nodes do not need to be tightly synchronized
 - If clock speed between nodes varies by $< 5\%$,
5% of each slot can not be used for deterministic traffic
- Link delay variation
 - Assume slot is 10 usec. If link propagation delay varies over time and is larger than 10 usec, what then ?
 - Inband measure long term min/max delay (by received slot labels in packet)
 - Need to use more slots: Need to map slot so that all packets from source slot can make it into the destination slot with both min and max propagation delay
 - Reasons for link propagation delay variation ?
 - Hanging copper cables on poles in the heat ($\geq 10\%$ variation)
- Should be able to build forwarding solution with no additional clock synchronization over e.g.: $\leq 5\%$ drift ?!

SRR_(scalable resource reservation) – Scalable at Core Node

- Ingress edge node maintains per-flow resource reservation states
- Core node aggregates per-flow resource reservation states in time slots
- Core node refreshes ABRW according to the per-flow information maintained at Ingress node through RSVP

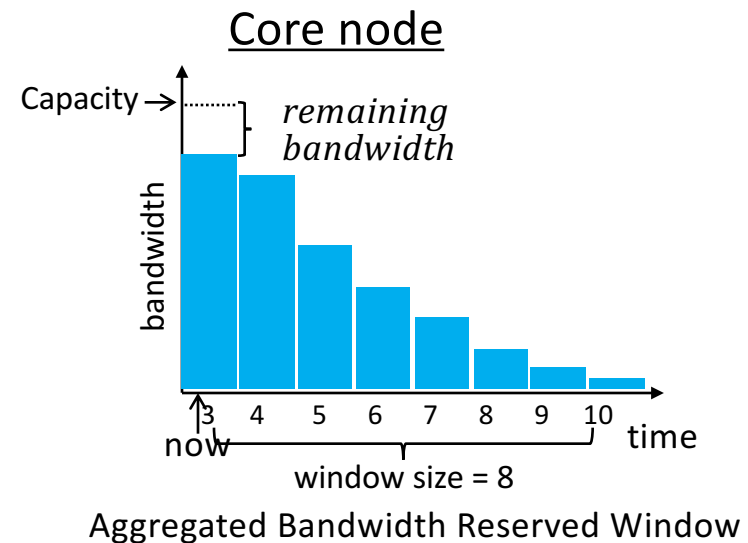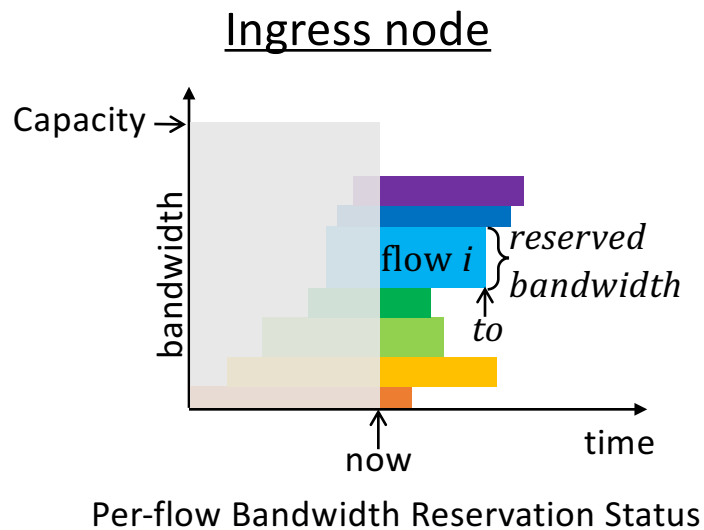

Summary: LDN (large-scale deterministic network)

- Forwarding Plane – SDF (scalable deterministic forwarding)
 - ✓ no per-flow status at core nodes
 - ✓ loose time-synchronization
 - ✓ end-to-end jitter $\leq 2 \cdot T$
 - ✓ end-to-end queueing delay $\leq 2 \cdot T \cdot \text{hops}$
 - ✓ queue size of each output port = $3 \cdot \text{port rate} \cdot T$
- Control Plane – SRR (scalable resource reservation)
 - ✓ no per-flow status at core nodes

Thank You!

Demo at Coffee Break Main Area Now