

# Advanced Unidirectional Route Assessment (AURA)

draft-amf-ippm-route-02

J.I. Alvarez-Hamelin, A. Morton,

J. Fabini, C. Pignataro


# Background & Inputs

- Route Metric developed/discussed IETF-99
- Scope refined@IETF-100, adopted afterward
  - Charter limits direct coverage below IP
- Generalized all definitions for IETF-101
  - “applicable to other network domains, if desired”
- Feedback from WG @101 session
  - Need to qualify what can be discovered (done thrice)
  - New Methods : Temporal Comp & Class C; exist tools
  - Ref to RFC 5388 on XML storage (reporting)
  - THANKS to reviewers: Rüdiger Geib -> Appendix

# Version 02 Development Areas

- ★ • Temporal Composition for Route Metrics
  - Past measurements influence current results!
  - Spot-check past measurements at critical hops (reduce measurement load & time)
- ★ • LB Hop treats Packets of Routing Class C equal
  - concept in RFC 2330 & 7799, a Metric Parameter
  - Each Member Route of Route Ensemble has one
  - Synergy with the Temporal Composition
  - very useful to know. **How useful is it?**

# Route measurement at a mid-point?

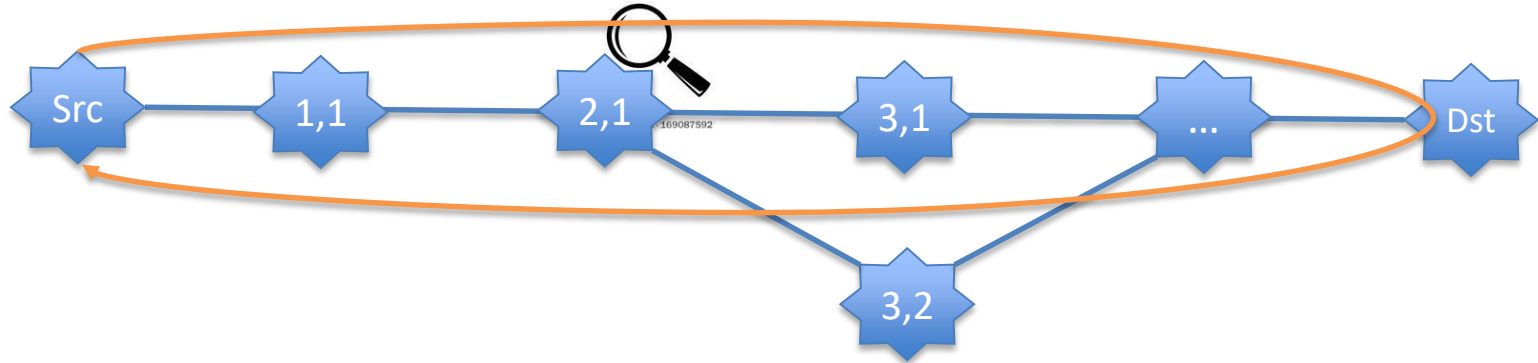

- Ex: Passive Observations indicate abnormal RTT
- End2End flow conforms to a “Routing Class C”
- Knowing the qualifications of that Class enable
  - Measurement of End2End flow’s route
  - Examination of RTT to intermediate Hops.
  - Other diagnostic measurements launched from the mid-point: Multipath Detection Algorithm (MDA), etc.
  - Don’t have to \*spoof\* the Src IP addrs for traceroute! (connection to Hackfest@102, Spin bit)

# To Do

- DONE CMP: Paris Tracert has IPv6 & Flow Label
- CMP: Packet Fields can ID a Flow (RFC 6438)
- CMP: Interface name and MTU (RFC 5837)
  - Use with Traceroute
- CMP: Add Cautions for Methods
  - Try to avoid good measurements used badly
- FB: Method using IOAM Loopback bit (UDP pinger)
- If +MPLS Appendix:
  - mention TTL Propagate RFC 4950

# Next Steps

## Authors

- Complete ToDo work items


## WG + authors

- Continue Temporal, Class C, MDA, items
  - New material is found in Section 4
- Please Read and send your Review to the list
  - Still needed for sections 5 & 6, RT Delay and Analysis

# BACKUP

# Route Ensemble (not showing $\text{Src}=\text{h}(0, j)$ )

```
Route Ensemble = {  
  {h(1,1), h(2,1), h(3,1), ... h(N1,1)=Dst},  
  {h(1,2), h(2,2), h(3,2), ..., h(N2,2)=Dst},  
  ...  
  {h(1,m), h(2,m), h(3,m), ... h(Nm,m)=Dst}  
}
```

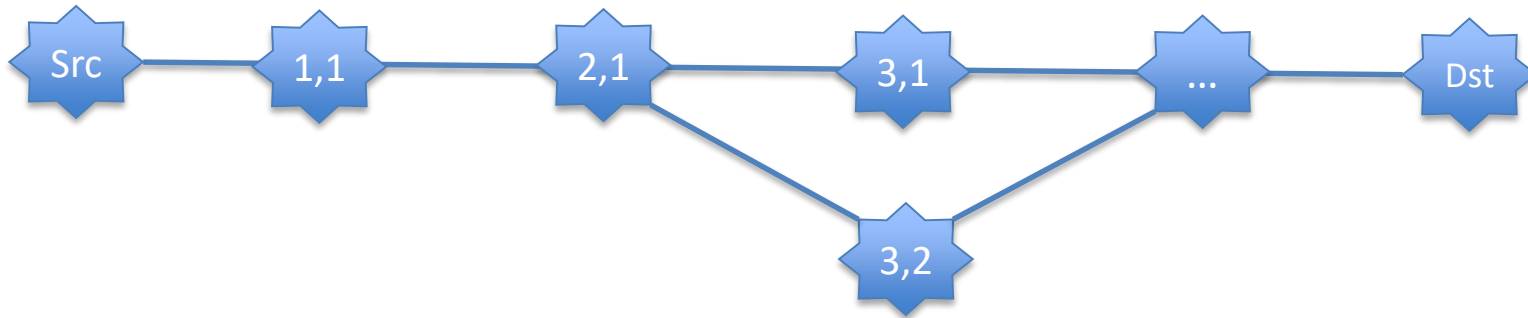



# Hops!

- Each Route represented as an ordered graph:

$Src = h(0,1), h(1,1), h(2,1), h(3,1), \dots, h(N1,1) = Dst$

- $h(i, j)$  was a host, but we can learn more...
  - MUST include Host Identity
  - Arrival Interface ID
  - Departure Interface ID
  - Arrival Timestamp
  - Round-trip Delay Measurements

# Generalized Definitions

- Host Identity:
  - The unique address for hosts communicating within the network domain. (e.g., Globally Routable IP address)
  - The Address for Normal comm and Error conditions
- Discoverable Host:
  - Hosts that convey their Host Identity according to the requirements of their network domain, such as when error conditions are detected
  - (IP) sends ICMP Time Exceeded when discarding
  - (IP) RFC 1122 and RFC 1812

# Generalize: Definitions + more

- Cooperating Host:
  - MUST respond with Identity to interrogation, SHOULD provide other info (RFC 2119 terms)
- Remainder of Section 3:
  - IPaddrs, TTL, other layer-specific terms > general
  - Hop
  - Member Route
  - Route Ensemble

# Methods of Measurement

- Two Classes, with likely different scopes
  - Active & Multiple Domain
  - Hybrid & Single Domain (at first?)
- Added 2119 Req's to Paris-Traceroute (active)
- Clarified Checksum calculations
- New Subsection on combining diff Methods
  - Ingress Hosts BOTH Discoverable and Cooperating
  - Key is overlapping Host Identities

# Individual Background & Inputs

- Route Metric developed, then Introduced before IETF-99
- Rüdiger Geib's comments became our initial To Do List (7 items), replies, p/o -99 slides.
- Interim: Ext. comments: Carlos Pignataro
  - Many [CMP] comments addressed
  - Several remain: discuss TODAY! (Expand Scope)
- Off-list comments from Frank Brockners
- THANKS to reviewers so far
- <https://tools.ietf.org/rfcdiff?url2=draft-amf-ippm-route-01.txt>

# Background & Inputs (for 01)

- Route Metric developed, then Introduced before IETF-99, WG adopted post-IETF-100
- Scope Discussion@IETF-100
  - Charter limits direct coverage
  - Can make definitions more general
  - Consider what work/applicable layers needed
  - Added Carlos Pignataro [CMP] as co-author
- THANKS to reviewers so far:
  - Rüdiger Geib, Frank Brockners

# Discussion/Development Areas (01)

- ★ • Temporal Composition for Route Metrics
  - Past measurements influence current results
  - Can we spot-check past measurements at critical hops? (reduce measurement load & time)
- Hop/Route treats a Class C of Packets equally
  - very useful to know, incorporate as a Parameter
  - a concept of RFC 2330 & RFC 7799
- Interaction between Host Identity and ability to discern Subpaths
- Assessment at IP-layer reveals the Route Ensemble for “IP and Higher”

# Questions for the IPPM WG (01)

- +Appendix? Illustrate applicability beyond IP?
  - Spencer: “consider first whether work needs to be done”
- Candidate: MPLS Ping & Tracert
  - RFC 8029 Deterministic Multipath & Timestamps
  - Can be applied to IP (already in IPv6 Datacenter)
  - RFC 6374 for Loss & Delay Measurement (Greg)
- Reporting the Metric: suggestions?