

ROLL
Internet-Draft
Intended status: Standards Track
Expires: January 4, 2019

R. Koutsiamanis, Ed.
G. Papadopoulos
N. Montavont
IMT Atlantique
P. Thubert
Cisco
July 3, 2018

RPL DAG Metric Container Node State and Attribute object type extension
draft-koutsiamanis-roll-nsa-extension-02

Abstract

Implementing 6TiSCH Packet Replication and Elimination from / to the RPL root requires the ability to forward copies of packets over different paths via different RPL parents. Selecting the appropriate parents to achieve ultra-low latency and jitter requires information about a node's parents. This document details what information needs to be transmitted and how it is encoded within a packet to enable this functionality.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 4, 2019.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
2. Terminology	3
3. Tracks	3
3.1. Tracks Overview	3
3.2. Complex Tracks	4
4. Packet Replication and Elimination principles	4
5. Alternative Parent Selection Issue	5
6. Node State and Attribute (NSA) object type extension	6
6.1. Usage	8
6.1.1. DAG Metric Container fields	9
6.1.2. Node State and Attribute fields	9
6.2. Compression	9
7. Security Considerations	9
8. IANA Considerations	10
9. References	10
9.1. Informative references	10
9.2. Other Informative References	11
Authors' Addresses	11

1. Introduction

Industrial network applications have stringent requirements on reliability and predictability, and typically leverage 1+1 redundancy, aka Packet Replication and Elimination (PRE) [I-D.papadopoulos-6tisch-pre-reqs] to achieve their goal. In order for wireless networks to be able to be used in such applications, the principles of Deterministic Networking [I-D.ietf-detnet-architecture] lead to designs that aim at maximizing packet delivery rate and minimizing latency and jitter. Additionally, given that the network nodes often do not have an unlimited power supply, energy consumption needs to be minimized as well.

To meet this goal, IEEE Std. 802.15.4 [IEEE802154-2015] provides Time-Slotted Channel Hopping (TSCH), a mode of operation which uses a fixed communication schedule to allow deterministic medium access as well as channel hopping to work around radio interference. However, since TSCH uses retransmissions in the event of a failed transmission, end-to-end delay and jitter performance can deteriorate.

The 6TiSCH working group, focusing on IPv6 over IEEE Std. 802.15.4-TSCH, has worked on the issues previously highlighted and produced the "6TiSCH Architecture" [I-D.ietf-6tisch-architecture] to address that case. Building on this architecture, "Exploiting Packet Replication and Elimination in Complex Tracks in 6TiSCH LLNs" [I-D.papadopoulos-6tisch-pre-reqs] leverages PRE to improve the Packet Delivery Ratio (PDR), provide a hard bound to the end-to-end latency, and limit jitter.

PRE achieves a controlled redundancy by laying multiple forwarding paths through the network and using them in parallel for different copies of a same packet. PRE can follow the Destination-Oriented Directed Acyclic Graph (DODAG) formed by RPL from a node to the root. Building a multi-path DODAG can be achieved based on the RPL capability of having multiple parents for each node in a network, a subset of which is used to forward packets. In order for this subset to be defined, a RPL parent subset selection mechanism, which falls within the remit of the RPL Objective Function (OF), needs to have specific path information. The specification of the transmission of this information is the focus of this document.

More concretely, this specification focuses on the extensions to the DAG Metric Container [RFC6551] required for providing the PRE mechanism a part of the information it needs to operate. This information is the RPL [RFC6550] parent address set of a node and it must be sent to potential children nodes of the node. The RPL DIO Control Message is the canonical way of broadcasting this kind of information and therefore its DAG Metric Container [RFC6551] field is used to append a Node State and Attribute (NSA) object. The node's parent address set is stored as an optional TLV within the NSA object. This specification defines the type value and structure for this TLV.

2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

3. Tracks

3.1. Tracks Overview

The concept of Track is introduced in the "6TiSCH Architecture" [I-D.ietf-6tisch-architecture], defined as a sequence of elements, each consisting of the 3-tuple of a transmitter, a receiver, and a given timeslot expressed as a slotOffset/channelOffset tuple. A simple Track is intended to provide the full resources required to

allow the transmission of a single packet from a source 6TiSCH node to a destination 6TiSCH node across a 6TiSCH multihop path.

3.2. Complex Tracks

Similarly to, but as a generalization of a simple Track, a Complex Track is defined in the "6TiSCH Architecture" [I-D.ietf-6tisch-architecture] as a DODAG starting at a source 6TiSCH node and leading to a sink 6TiSCH node in order to support multi-path forwarding. Multiple independent paths may be produced by using techniques for Packet Replication and Elimination (PRE) [I-D.papadopoulos-6tisch-pre-reqs] based on DetNet [I-D.ietf-detnet-architecture] principles. As an example, a complex Track allows for branching off and rejoining over non-congruent paths.

In the following Section, we will detail Deterministic Networks PRE techniques.

4. Packet Replication and Elimination principles

The idea behind Packet Replication and Elimination (PRE) is to transmit the same data packet through parallel and adjacent paths in a network with the aim of improving reliability and predictability through redundancy.

The process of replication consists of identifying multiple potential paths, selecting a subset to use, and sending copies of a single packet through each path. When receiving packets the process of elimination is required so that multiple copies of the same packet are not replicated again, to avoid an exponential growth in unnecessary traffic. Combined together, these processes enable controlled redundancy which in turn can be used to achieve the previously stated goals of reliability (i.e., ultra-high packet delivery rate) and predictability (i.e., ultra-low end-to-end delay and jitter) in wireless networks. For example, in Figure 1, the source 6TiSCH node S is sending the data packet to its RPL Default Parent (DP) (node A) and Alternative Parent (AP) (node B) in two different timeslots.

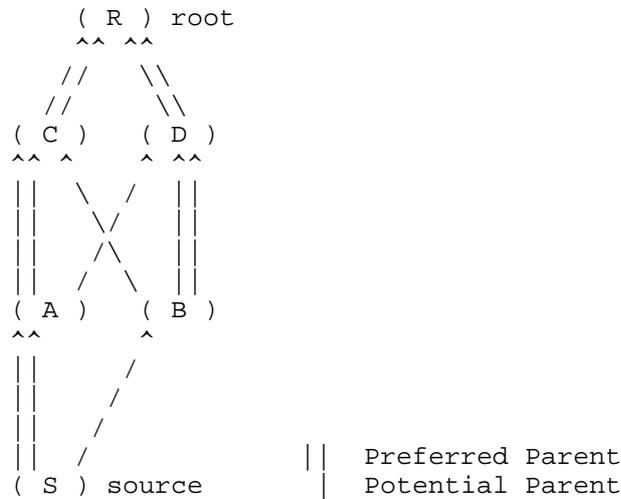


Figure 1: Packet Replication: S transmits the same data packet twice: to its DP (A) and to its AP (B).

In "Exploiting Packet Replication and Elimination in Complex Tracks in 6TiSCH LLNs" [I-D.papadopoulos-6tisch-pre-reqs], the concept of PRE is further expanded along with its requirements.

5. Alternative Parent Selection Issue

In the RPL protocol, each node maintains a list of potential parents. For PRE, the DP node is defined as the RPL DODAG preferred parent node. Furthermore, to construct an alternative path toward the root, in addition to the DP node, each 6TiSCH node in the network registers an AP node as well. There are multiple alternative methods of selecting the AP node, functionality which is included in operation of the RPL Objective Function (OF). In "Exploiting Packet Replication and Elimination in Complex Tracks in 6TiSCH LLNs" [I-D.papadopoulos-6tisch-pre-reqs], a scheme which allows the two paths to remain correlated is detailed. More specifically, in this scheme a 6TiSCH node will select an alternative parent node close to its default parent node to allow the operation of overhearing between parents. To do so, the node will check if its Default Grand Parent (DGP), the DP of its DP, is in the set of parents of a potential AP. If multiple potential APs match this condition, the AP with the lowest rank will be registered.

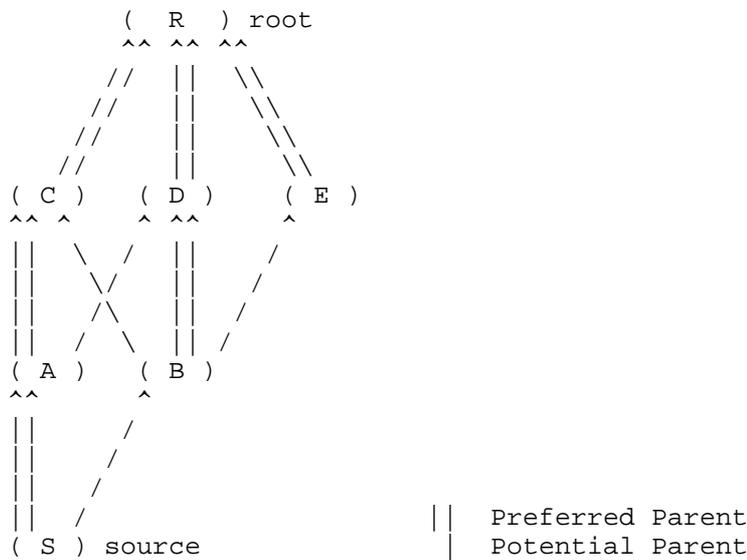


Figure 2: Example Parent Selection mechanism

For instance, in Figure 2, source 6TiSCH node S must know its grandparent sets both through node A and through node B. In this scenario, node A has the parent set {C, D} with C as DP and node B has the parent set {C, D, E} with D as DP. Therefore, node S can decide to use node B as its AP node, since the the DGP of S (via node A) is node C, and node C is in the parent set of node B ({C, D, E}).

In order to select their AP node, 6TiSCH nodes need to be aware of their grandparent node sets. Within RPL [RFC6550], the nodes use the DODAG Information Object (DIO) Control Message to broadcast information about themselves to potential children. However, RPL [RFC6550], does not define how to propagate parent set related information, which is what this document addresses.

6. Node State and Attribute (NSA) object type extension

For supporting PRE, nodes need to report their parent set to their potential children. DIO messages can carry multiple options, out of which the DAG Metric Container option [RFC6551] is the most suitable structurally and semantically for the purpose of carrying the parent set. The DAG Metric Container option itself can carry different nested objects, out of which the Node State and Attribute (NSA) [RFC6551] is appropriate for transferring generic node state data. Within the Node State and Attribute it is possible to store optional TLVs representing various node characteristics. As per the Node State and Attribute (NSA) [RFC6551] description, no TLV have been

defined for use. This document defines one TLV for the purpose of transmitting a node's parent set.

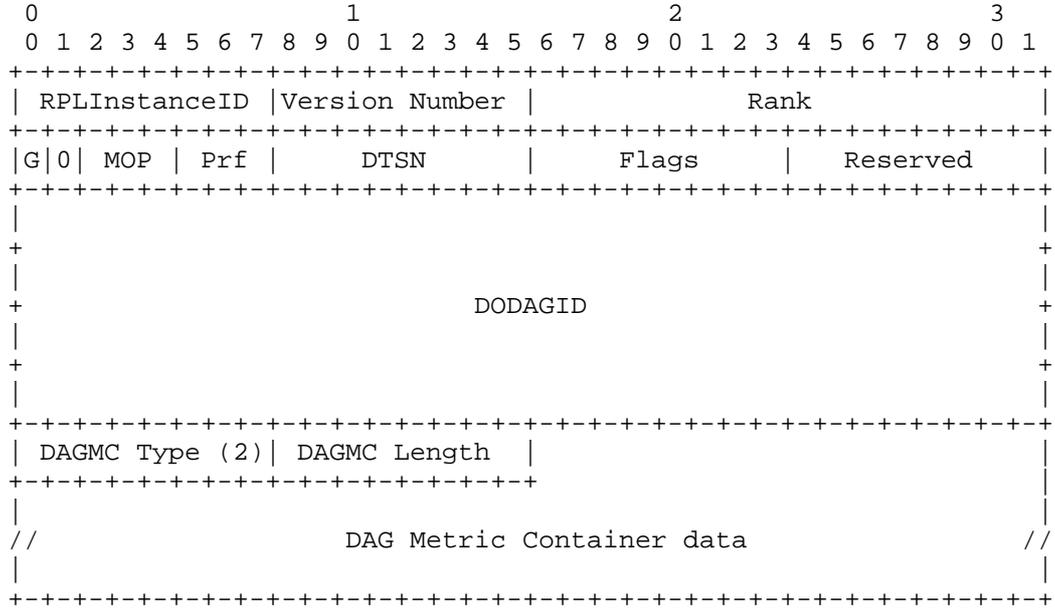


Figure 3: Example DIO Message with a DAG Metric Container option

The structure of the DIO Control Message when a DAG Metric Container option is included is shown in Figure 3. The DAG Metric Container option type (DAGMC Type in Figure 3) has the value 0x02 as per the IANA registry for the RPL Control Message Options, and is defined in [RFC6550]. The DAG Metric Container option length (DAGMC Length in Figure 3) expresses the the DAG Metric Container length in bytes. DAG Metric Container data holds the actual data and is shown further expanded in Figure 4.

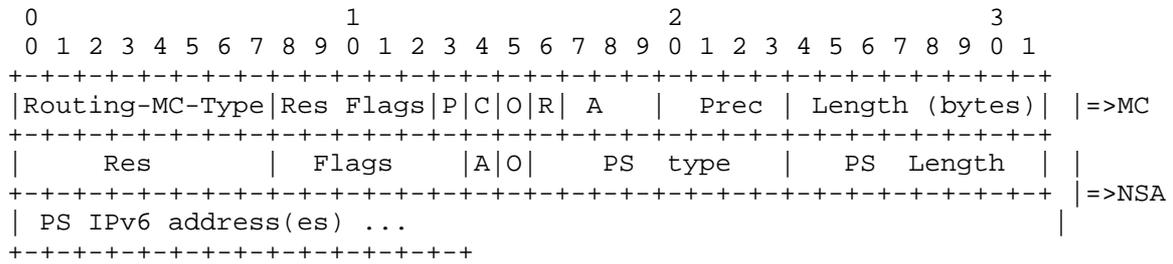


Figure 4: DAG Metric Container (MC) data with Node State and Attribute (NSA) object body and a TLV

The structure of the DAG Metric Container data in the form of a Node State and Attribute (NSA) object with a TLV in the NSA Optional TLVs field is shown in Figure 4. The first 32 bits comprise the DAG Metric Container header and all the following bits are part of the Node State and Attribute object body, as defined in [RFC6551]. This document defines a new TLV, which CAN be carried in the Node State and Attribute (NSA) object Optional TLVs field. The TLV is named Parent Set and is abbreviated as PS in Figure 4.

PS type: The type of the Parent Set TLV. The value is TBD1.

PS Length: The total length of the TLV value field (PS IPv6 address(es)) in bytes.

PS IPv6 address(es): A sequence of zero or more IPv6 addresses belonging to a node's parent set. Each address requires 16 bytes. The order of the parents in the parent set is in decreasing preference based on the Objective Function [RFC6550] used by the node.

6.1. Usage

The PS SHOULD be used in the process of parent selection, and especially in alternative parent selection, since it can help the alternative path from significantly deviating from the preferred path. The Parent Set is information local to the node that broadcasts it. It does not make sense for this information to be aggregated due to the scalability issue created by the space required for many IPv6 addresses. Therefore, the PS MUST NOT be aggregated.

6.1.1.1. DAG Metric Container fields

Given the intended usage, when using the PS, the NSA object it is contained in MUST be used as a constraint in the DAG Metric Container. More specifically, using the PS places the following requirements on the DAG Metric Container header fields:

- o 'P' flag: MUST be cleared, since PS is used only with constraints.
- o 'C' flag: MUST be set, since PS is used only with constraints.
- o 'O' flag: Used as per [RFC6550], to indicated optionality.
- o 'R' flag: MUST be cleared, since PS is used only with constraints.
- o 'A' Field: MUST be set to 0 and ignored, since PS is used only with constraints.
- o 'Prec' Field: Used as per [RFC6550].

6.1.1.2. Node State and Attribute fields

For reasons of clarity, the usage of the PS places no additional restrictions on the NSA flags ('A' and 'O'), which can be used as normally defined in [RFC6550].

6.2. Compression

The PS IPv6 address(es) field in the Parent Set TLV add overhead due to their size. Therefore, compression is highly desirable in order for this extension to be usable. To meet this goal, a good compression method candidate is [RFC8138] 6LoWPAN Routing Header (6LoRH). Furthermore, the PS IPv6 address(es) belong by definition to nodes in the same RPL DODAG and are stored in the form of a list of addresses. This makes this field a good candidate for the use of the same compression as in Source Routing Header 6LoRH (SRH-6LoRH), achieving efficiency and implementation reuse. Therefore, the PS IPv6 address(es) field SHOULD be compressed using the compression method for Source Routing Header 6LoRH (SRH-6LoRH) [RFC8138].

7. Security Considerations

TODO.

8. IANA Considerations

TBA.

9. References

9.1. Informative references

[I-D.ietf-6tisch-architecture]

Thubert, P., "An Architecture for IPv6 over the TSCH mode of IEEE 802.15.4", draft-ietf-6tisch-architecture-14 (work in progress), April 2018.

[I-D.ietf-detnet-architecture]

Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", draft-ietf-detnet-architecture-06 (work in progress), June 2018.

[I-D.papadopoulos-6tisch-pre-reqs]

Papadopoulos, G., Montavont, N., and P. Thubert, "Exploiting Packet Replication and Elimination in Complex Tracks in 6TiSCH LLNs", draft-papadopoulos-6tisch-pre-reqs-01 (work in progress), December 2017.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC6550] Winter, T., Ed., Thubert, P., Ed., Brandt, A., Hui, J., Kelsey, R., Levis, P., Pister, K., Struik, R., Vasseur, JP., and R. Alexander, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks", RFC 6550, DOI 10.17487/RFC6550, March 2012, <<https://www.rfc-editor.org/info/rfc6550>>.

[RFC6551] Vasseur, JP., Ed., Kim, M., Ed., Pister, K., Dejean, N., and D. Barthel, "Routing Metrics Used for Path Calculation in Low-Power and Lossy Networks", RFC 6551, DOI 10.17487/RFC6551, March 2012, <<https://www.rfc-editor.org/info/rfc6551>>.

[RFC8138] Thubert, P., Ed., Bormann, C., Toutain, L., and R. Cragie, "IPv6 over Low-Power Wireless Personal Area Network (6LoWPAN) Routing Header", RFC 8138, DOI 10.17487/RFC8138, April 2017, <<https://www.rfc-editor.org/info/rfc8138>>.

9.2. Other Informative References

[IEEE802154-2015]

IEEE standard for Information Technology, "IEEE Std
802.15.4-2015 Standard for Low-Rate Wireless Personal Area
Networks (WPANs)", December 2015.

Authors' Addresses

Remous-Aris Koutsiamanis (editor)
IMT Atlantique
Office B00 - 126A
2 Rue de la Chataigneraie
Cesson-Sevigne - Rennes 35510
FRANCE

Phone: +33 299 12 70 49
Email: aris@ariskou.com

Georgios Papadopoulos
IMT Atlantique
Office B00 - 114A
2 Rue de la Chataigneraie
Cesson-Sevigne - Rennes 35510
FRANCE

Phone: +33 299 12 70 04
Email: georgios.papadopoulos@imt-atlantique.fr

Nicolas Montavont
IMT Atlantique
Office B00 - 106A
2 Rue de la Chataigneraie
Cesson-Sevigne - Rennes 35510
FRANCE

Phone: +33 299 12 70 23
Email: nicolas.montavont@imt-atlantique.fr

Pascal Thubert
Cisco Systems, Inc
Building D
45 Allee des Ormes - BP1200
MOUGINS - Sophia Antipolis 06254
FRANCE

Phone: +33 497 23 26 34
Email: pthubert@cisco.com