

# Export of MPLS-SR Label Type Information in IPFIX

Enabling insights in MPLS-SR forwarding plane  
by adding Segment Routing dimensions

thomas.graf@swisscom.com

13. June 2020

# MPLS-SR @ IPFIX

## Vendor Status


- MPLS-SR uses the existing MPLS data plane.
- Therefore, looking how IPFIX metrics are exposed at a current MPLS-SR vendor implementation we see **not much of a difference to classical MPLS**.
- Looking more deeply, **we notice "not much" is pretty much what is missing**.
- mplsTopLabelType is referencing LDP even though there isn't any LDP anymore. -> Funny

```
> Frame 527: 182 bytes on wire (1456 bits), 182 bytes captured (1456 bits)
> Ethernet II, Src: Cisco_ea:ad:1c (00:32:17:ea:ad:1c), Dst: Vmware_21:95:d2 (00:0c:29:21:95:d2)
> Internet Protocol Version 4, Src: 138.187.57.63, Dst: 138.187.58.13
> User Datagram Protocol, Src Port: 44542, Dst Port: 9991
▼ Cisco NetFlow/IPFIX
  Version: 9
  Count: 1
  SysUptime: 516154.381000000 seconds
  > Timestamp: Feb 23, 2020 13:57:18.000000000 W. Europe Standard Time
  FlowSequence: 23685
  SourceId: 0
  ▼ FlowSet 1 [id=313] (1 flows)
    FlowSet Id: (Data) (313)
    FlowSet Length: 120
    [Template Frame: 9]
    ▼ Flow 1
      > MPLS-Label1: 17002 exp-bits: 0
      > MPLS-Label2: 24622 exp-bits: 0 bottom-of-stack
      > MPLS-Label3: 0 exp-bits: 0
      > MPLS-Label4: 0 exp-bits: 0
      > MPLS-Label5: 0 exp-bits: 0
      > MPLS-Label6: 0 exp-bits: 0
      InputInt: 87
      OutputInt: 111
      Octets: 216000
      Packets: 2000
      > [Duration: 5.753000000 seconds (switched)]
      TopLabelAddr: 138.187.57.13
      SrcAddr: ::
      DstAddr: ::
      ipv6FlowLabel: 0
      IPv6 Extension Headers: 0x00000000
      SrcAddr: 10.248.4.236
      DstAddr: 10.248.4.222
      SrcPort: 0
      DstPort: 2048
      MPLS Top Label Prefix Length: 32
      TopLabelType: LDP (5)
      > Forwarding Status
      Direction: Ingress (0)
      IP ToS: 0x00
      Protocol: ICMP (1)
      > TCP Flags: 0x00
      SamplerID: 1
      Ingress VRFID: 1610612736
      Egress VRFID: 1610612736
      Padding: 0000
```

# MPLS-SR @ IPFIX

## IANA Status

- Looking at IANA makes it clear, there is **NO** mplsTopLabelType code point for IS-IS, OSPFv2 and OSPFv3 Segment Routing.

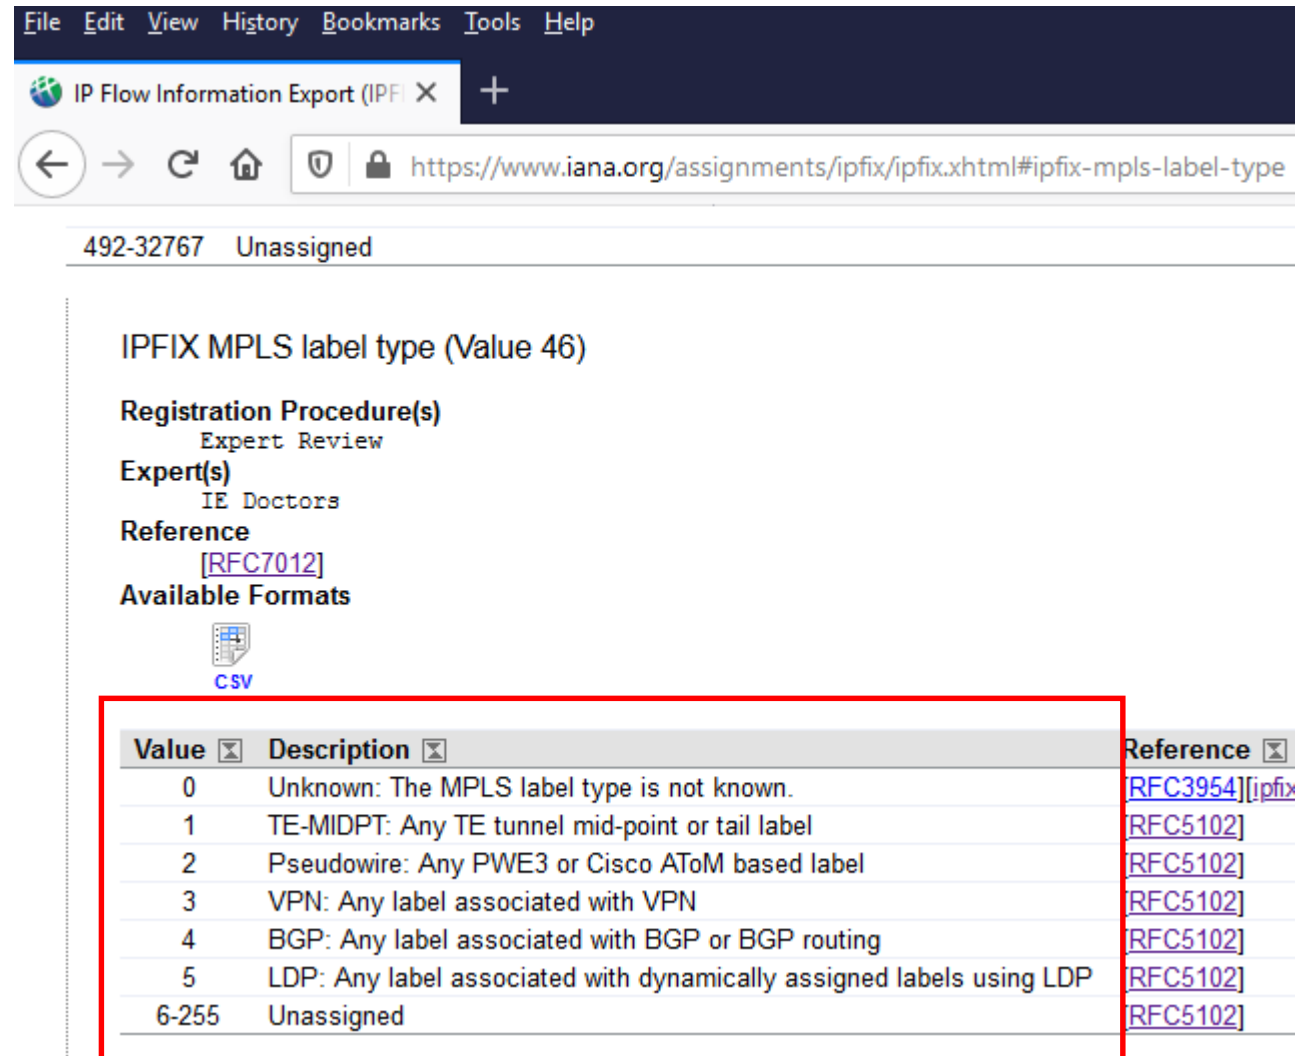

492-32767 Unassigned


IPFIX MPLS label type (Value 46)

Registration Procedure(s)  
Expert Review

Expert(s)  
IE Doctors

Reference  
[\[RFC7012\]](#)

Available Formats

  
CSV

Value	Description	Reference
0	Unknown: The MPLS label type is not known.	<a href="#">RFC3954</a> [ipfix]
1	TE-MIDPT: Any TE tunnel mid-point or tail label	<a href="#">RFC5102</a>
2	Pseudowire: Any PWE3 or Cisco AToM based label	<a href="#">RFC5102</a>
3	VPN: Any label associated with VPN	<a href="#">RFC5102</a>
4	BGP: Any label associated with BGP or BGP routing	<a href="#">RFC5102</a>
5	LDP: Any label associated with dynamically assigned labels using LDP	<a href="#">RFC5102</a>
6-255	Unassigned	<a href="#">RFC5102</a>

# MPLS-SR @ IPFIX

## RFC 8402, SID's, SID's

- Segment Routing is all about SID's.
- An Adjacency-SID can be used by TI-LFA or uLoop avoidance to use a different path to the Prefix SID than what the routing protocol calculated as best path.
- Where are the SID's in IPFIX?  
-> **Nowhere!**


### Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Terminology</a>	<a href="#">6</a>
<a href="#">3.</a>	<a href="#">Link-State IGP Segments</a>	<a href="#">9</a>
<a href="#">3.1.</a>	<a href="#">IGP-Prefix Segment (Prefix-SID)</a>	<a href="#">9</a>
<a href="#">3.1.1.</a>	<a href="#">Prefix-SID Algorithm</a>	<a href="#">9</a>
<a href="#">3.1.2.</a>	<a href="#">SR-MPLS</a>	<a href="#">10</a>
<a href="#">3.1.3.</a>	<a href="#">SRv6</a>	<a href="#">12</a>
<a href="#">3.2.</a>	<a href="#">IGP-Node Segment (Node-SID)</a>	<a href="#">13</a>
<a href="#">3.3.</a>	<a href="#">IGP-Anycast Segment (Anycast-SID)</a>	<a href="#">13</a>
<a href="#">3.3.1.</a>	<a href="#">Anycast-SID in SR-MPLS</a>	<a href="#">13</a>
<a href="#">3.4.</a>	<a href="#">IGP-Adjacency Segment (Adj-SID)</a>	<a href="#">15</a>
<a href="#">3.4.1.</a>	<a href="#">Parallel Adjacencies</a>	<a href="#">17</a>
<a href="#">3.4.2.</a>	<a href="#">LAN Adjacency Segments</a>	<a href="#">18</a>
<a href="#">3.5.</a>	<a href="#">Inter-Area Considerations</a>	<a href="#">18</a>
<a href="#">4.</a>	<a href="#">BGP Segments</a>	<a href="#">19</a>
<a href="#">4.1.</a>	<a href="#">BGP-Prefix Segment</a>	<a href="#">19</a>
<a href="#">4.2.</a>	<a href="#">BGP Peering Segments</a>	<a href="#">20</a>
<a href="#">5.</a>	<a href="#">Binding Segment</a>	<a href="#">21</a>
<a href="#">5.1.</a>	<a href="#">IGP Mirroring Context Segment</a>	<a href="#">21</a>
<a href="#">6.</a>	<a href="#">Multicast</a>	<a href="#">22</a>
<a href="#">7.</a>	<a href="#">IANA Considerations</a>	<a href="#">22</a>
<a href="#">8.</a>	<a href="#">Security Considerations</a>	<a href="#">22</a>
<a href="#">8.1.</a>	<a href="#">SR-MPLS</a>	<a href="#">22</a>
<a href="#">8.2.</a>	<a href="#">SRv6</a>	<a href="#">24</a>
<a href="#">8.3.</a>	<a href="#">Congestion Control</a>	<a href="#">25</a>
<a href="#">9.</a>	<a href="#">Manageability Considerations</a>	<a href="#">25</a>
<a href="#">10.</a>	<a href="#">References</a>	<a href="#">26</a>
<a href="#">10.1.</a>	<a href="#">Normative References</a>	<a href="#">26</a>
<a href="#">10.2.</a>	<a href="#">Informative References</a>	<a href="#">27</a>
	<a href="#">Acknowledgements</a>	<a href="#">30</a>
	<a href="#">Contributors</a>	<a href="#">31</a>
	<a href="#">Authors' Addresses</a>	<a href="#">32</a>

# MPLS-SR @ IPFIX

draft-tgraf-ipfix-mpls-sr-label-type

- Segment Routing adds the source routing paradigm to MPLS and enhances IGP routing protocol to carry label information.
- Let's bring visibility into **how Segment Routing applications change the MPLS forwarding plane.**
- "Show me all MPLS-SR controlled traffic where Adj-SID's were used, group by Label Stack, and show for each through which nodes and interfaces it was forwarded."
- Fill the missing gaps at IPFIX:
  - Update **mplsTopLabelType**
  - Introduce **SrSidType**

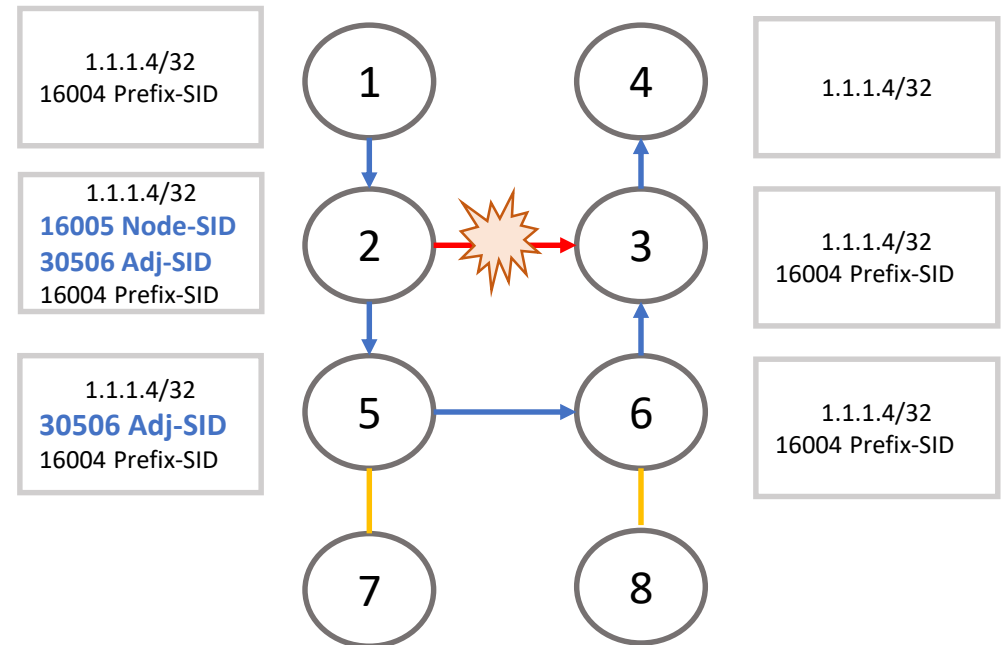

Feedback collected from SPRING and OPSAWG lists, submitted to IANA and received review from IE-DOCTOR...

**-> Call for adoption at OPSWAG**

thomas.graf@swisscom.com

13. June 2020