

DMM Working Group
Internet-Draft
Intended status: Standards Track
Expires: November 5, 2021

S. Matsushima, Ed.
SoftBank
C. Filsfils
M. Kohno
P. Camarillo, Ed.
Cisco Systems, Inc.
D. Voyer
Bell Canada
C. Perkins
Futurewei
May 4, 2021

Segment Routing IPv6 for Mobile User Plane
draft-ietf-dmm-srv6-mobile-uplane-12

Abstract

This document shows the applicability of SRv6 (Segment Routing IPv6) to the user-plane of mobile networks. The network programming nature of SRv6 accomplishes mobile user-plane functions in a simple manner. The statelessness of SRv6 and its ability to control both service layer path and underlying transport can be beneficial to the mobile user-plane, providing flexibility, end-to-end network slicing, and SLA control for various applications. This document describes the SRv6 mobile user plane.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on November 5, 2021.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	3
2. Conventions and Terminology	3
2.1. Terminology	3
2.2. Conventions	4
2.3. Predefined SRv6 Endpoint Behaviors	4
3. Motivation	5
4. 3GPP Reference Architecture	6
5. User-plane behaviors	7
5.1. Traditional mode	7
5.1.1. Packet flow - Uplink	8
5.1.2. Packet flow - Downlink	9
5.2. Enhanced Mode	9
5.2.1. Packet flow - Uplink	10
5.2.2. Packet flow - Downlink	11
5.2.3. Scalability	11
5.3. Enhanced mode with unchanged gNB GTP behavior	11
5.3.1. Interworking with IPv6 GTP	12
5.3.2. Interworking with IPv4 GTP	15
5.3.3. Extensions to the interworking mechanisms	17
5.4. SRv6 Drop-in Interworking	17
6. SRv6 Segment Endpoint Mobility Behaviors	19
6.1. Args.Mob.Session	19
6.2. End.MAP	20
6.3. End.M.GTP6.D	20
6.4. End.M.GTP6.D.Di	21
6.5. End.M.GTP6.E	22
6.6. End.M.GTP4.E	23
6.7. H.M.GTP4.D	25
6.8. End.Limit: Rate Limiting behavior	26
7. SRv6 supported 3GPP PDU session types	26
8. Network Slicing Considerations	26

9. Control Plane Considerations	27
10. Security Considerations	27
11. IANA Considerations	28
12. Acknowledgements	28
13. Contributors	28
14. References	28
14.1. Normative References	28
14.2. Informative References	29
Appendix A. Implementations	31
Authors' Addresses	31

1. Introduction

In mobile networks, mobility management systems provide connectivity over a wireless link to stationary and non-stationary nodes. The user-plane establishes a tunnel between the mobile node and its anchor node over IP-based backhaul and core networks.

This document shows the applicability of SRv6 (Segment Routing IPv6) to mobile networks.

Segment Routing [RFC8402] is a source routing architecture: a node steers a packet through an ordered list of instructions called "segments". A segment can represent any instruction, topological or service based.

SRv6 applied to mobile networks enables a source-routing based mobile architecture, where operators can explicitly indicate a route for the packets to and from the mobile node. The SRv6 Endpoint nodes serve as mobile user-plane anchors.

2. Conventions and Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

2.1. Terminology

- o CNF: Cloud-native Network Function
- o NFV: Network Function Virtualization
- o PDU: Packet Data Unit
- o PDU Session: Context of a UE connects to a mobile network.
- o UE: User Equipment
- o UPF: User Plane Function
- o VNF: Virtual Network Function (including CNFs)

The following terms used within this document are defined in [RFC8402]: Segment Routing, SR Domain, Segment ID (SID), SRv6, SRv6 SID, Active Segment, SR Policy, Prefix SID, Adjacency SID and Binding SID.

The following terms used within this document are defined in [RFC8754]: SRH, SR Source Node, Transit Node, SR Segment Endpoint Node and Reduced SRH.

The following terms used within this document are defined in [RFC8986]: NH, SL, FIB, SA, DA, SRv6 SID behavior, SRv6 Segment Endpoint Behavior.

2.2. Conventions

An SR Policy is resolved to a SID list. A SID list is represented as <S1, S2, S3> where S1 is the first SID to visit, S2 is the second SID to visit, and S3 is the last SID to visit along the SR path.

(SA,DA) (S3, S2, S1; SL) represents an IPv6 packet with:

- Source Address is SA, Destination Address is DA, and next-header is SRH
- SRH with SID list <S1, S2, S3> with Segments Left = SL
- Note the difference between the <> and () symbols: <S1, S2, S3> represents a SID list where S1 is the first SID and S3 is the last SID to traverse. (S3, S2, S1; SL) represents the same SID list but encoded in the SRH format where the rightmost SID in the SRH is the first SID and the leftmost SID in the SRH is the last SID. When referring to an SR policy in a high-level use-case, it is simpler to use the <S1, S2, S3> notation. When referring to an illustration of the detailed packet behavior, the (S3, S2, S1; SL) notation is more convenient.
- The payload of the packet is omitted.

SRH[n]: A shorter representation of Segment List[n], as defined in [RFC8754]. SRH[SL] can be different from the DA of the IPv6 header.

- o gNB::1 is an IPv6 address (SID) assigned to the gNB.
- o U1::1 is an IPv6 address (SID) assigned to UPF1.
- o U2::1 is an IPv6 address (SID) assigned to UPF2.
- o U2:: is some other IPv6 address (SID) assigned to UPF2.

2.3. Predefined SRv6 Endpoint Behaviors

The following SRv6 Endpoint Behaviors are defined in [RFC8986].

- o End.DT4: Decapsulation and Specific IPv4 Table Lookup

- o End.DT6: Decapsulation and Specific IPv6 Table Lookup
- o End.DT46: Decapsulation and Specific IP Table Lookup
- o End.DX4: Decapsulation and IPv4 Cross-Connect
- o End.DX6: Decapsulation and IPv6 Cross-Connect
- o End.DX2: Decapsulation and L2 Cross-Connect
- o End.T: Endpoint with specific IPv6 Table Lookup

This document defines new SRv6 Segment Endpoint Behaviors in Section 6.

3. Motivation

Mobile networks are becoming more challenging to operate. On one hand, traffic is constantly growing, and latency requirements are tighter; on the other-hand, there are new use-cases like distributed NFVi that are also challenging network operations.

The current architecture of mobile networks does not take into account the underlying transport. The user-plane is rigidly fragmented into radio access, core and service networks, connected by tunneling according to user-plane roles such as access and anchor nodes. These factors have made it difficult for the operator to optimize and operate the data-path.

In the meantime, applications have shifted to use IPv6, and network operators have started adopting IPv6 as their IP transport. SRv6, the IPv6 dataplane instantiation of Segment Routing [RFC8402], integrates both the application data-path and the underlying transport layer into a single protocol, allowing operators to optimize the network in a simplified manner and removing forwarding state from the network. It is also suitable for virtualized environments, like VNF/CNF to VNF/CNF networking. SRv6 has been deployed in dozens of networks [I-D.matsushima-spring-srv6-deployment-status].

SRv6 defines the network-programming concept [RFC8986]. Applied to mobility, SRv6 can provide the user-plane behaviors needed for mobility management. SRv6 takes advantage of the underlying transport awareness and flexibility together with the ability to also include services to optimize the end-to-end mobile dataplane.

The use-cases for SRv6 mobility are discussed in [I-D.camarilloelmalaky-springdmm-srv6-mob-usecases].

4. 3GPP Reference Architecture

This section presents a reference architecture and possible deployment scenarios.

Figure 1 shows a reference diagram from the 5G packet core architecture [TS.23501].

The user plane described in this document does not depend on any specific architecture. The 5G packet core architecture as shown is based on the latest 3GPP standards at the time of writing this draft.

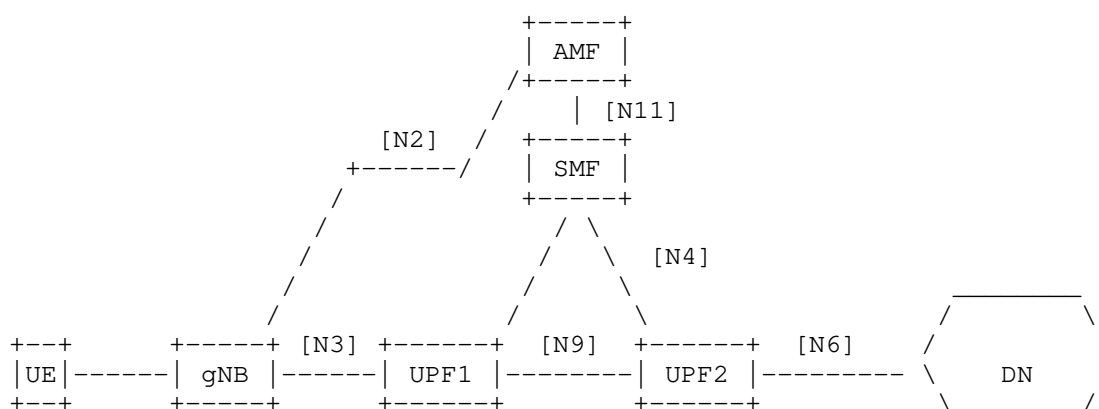


Figure 1: 3GPP 5G Reference Architecture

- o UE: User Endpoint
- o gNB: gNodeB with N3 interface towards packet core (and N2 for control plane)
- o UPF1: UPF with Interfaces N3 and N9 (and N4 for control plane)
- o UPF2: UPF with Interfaces N9 and N6 (and N4 for control plane)
- o SMF: Session Management Function
- o AMF: Access and Mobility Management Function
- o DN: Data Network e.g. operator services, Internet access

This reference diagram does not depict a UPF that is only connected to N9 interfaces, although the mechanisms defined in this document also work in such case.

Each session from a UE gets assigned to a UPF. Sometimes multiple UPFs may be used, providing richer service functions. A UE gets its IP address from the DHCP block of its UPF. The UPF advertises that IP address block toward the Internet, ensuring that return traffic is routed to the right UPF.

5. User-plane behaviors

This section introduces an SRv6 based mobile user-plane.

In order to simplify the adoption of SRv6, we present two different "modes" that vary with respect to the use of SRv6. The first one is the "Traditional mode", which inherits the current 3GPP mobile user-plane. In this mode GTP-U protocol [TS.29281] is replaced by SRv6, however the N3, N9 and N6 interfaces are still point-to-point interfaces with no intermediate waypoints as in the current mobile network architecture.

The second mode is the "Enhanced mode". This is an evolution from the "Traditional mode". In this mode the N3, N9 or N6 interfaces have intermediate waypoints -SIDs- that are used for Traffic Engineering or VNF purposes. This results in optimal end-to-end policies across the mobile network with transport and services awareness.

In both, the Traditional and the Enhanced modes, we assume that the gNB as well as the UPFs are SR-aware (N3, N9 and -potentially- N6 interfaces are SRv6).

In addition to those two modes, we introduce two mechanisms for interworking with legacy access networks (those where the N3 interface is unmodified). In this document we introduce them as a variant to the Enhanced mode, however they are equally applicable to the Traditional mode.

One of these mechanisms is designed to interwork with legacy gNBs using GTP/IPv4. The second mechanism is designed to interwork with legacy gNBs using GTP/IPv6.

This document uses SRv6 Segment Endpoint Behaviors defined in [RFC8986] as well as new SRv6 Segment Endpoint Behaviors designed for the mobile user plane that are defined in this document in Section 6.

5.1. Traditional mode

In the traditional mode, the existing mobile UPFs remain unchanged with the sole exception of the use of SRv6 as the data plane instead of GTP-U. There is no impact to the rest of the mobile system.

In existing 3GPP mobile networks, a PDU Session is mapped 1-for-1 with a specific GTP tunnel (TEID). This 1-for-1 mapping is mirrored here to replace GTP encapsulation with the SRv6 encapsulation, while not changing anything else. There will be a unique SRv6 SID associated with each PDU Session.

The traditional mode minimizes the changes required to the mobile system; hence it is a good starting point for forming a common ground.

Our example topology is shown in Figure 2. In traditional mode the gNB and the UPFs are SR-aware. In the descriptions of the uplink and downlink packet flow, A is an IPv6 address of the UE, and Z is an IPv6 address reachable within the Data Network DN. A new SRv6 Endpoint Behavior, End.MAP, defined in Section 6.2, is used.

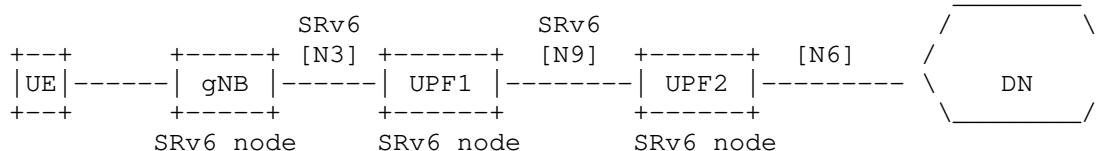


Figure 2: Traditional mode - example topology

5.1.1. Packet flow - Uplink

The uplink packet flow is as follows:

```

UE_out   : (A, Z)
gNB_out  : (gNB, U1::1) (A, Z)    -> H.Encaps.Red <U1::1>
UPF1_out : (gNB, U2::1) (A, Z)    -> End.MAP
UPF2_out : (A, Z)                  -> End.DT4 or End.DT6
  
```

When the UE packet arrives at the gNB, the gNB performs a H.Encaps.Red operation. Since there is only one SID, there is no need to push an SRH. gNB only adds an outer IPv6 header with IPv6 DA U1::1. U1::1 represents an anchoring SID specific for that session at UPF1. gNB obtains the SID U1::1 from the existing control plane (N2 interface).

When the packet arrives at UPF1, the SID U1::1 is associated with the End.MAP SRv6 Endpoint Behavior. End.MAP replaces U1::1 by U2::1, that belongs to the next UPF (U2).

When the packet arrives at UPF2, the SID U2::1 corresponds to an End.DT4/End.DT6/End.DT46 SRv6 Endpoint Behavior. UPF2 decapsulates the packet, performs a lookup in a specific table associated with that mobile network and forwards the packet toward the data network (DN).

5.1.2. Packet flow - Downlink

The downlink packet flow is as follows:

```
UPF2_in : (Z,A)
UPF2_out: (U2::, U1::2) (Z,A)    -> H.Encaps.Red <U1::2>
UPF1_out: (U2::, gNB::1) (Z,A)  -> End.MAP
gNB_out  : (Z,A)                 -> End.DX4, End.DX6, End.DX2
```

When the packet arrives at the UPF2, the UPF2 maps that flow into a PDU Session. This PDU Session is associated with the segment endpoint <U1::2>. UPF2 performs a H.Encaps.Red operation, encapsulating the packet into a new IPv6 header with no SRH since there is only one SID.

Upon packet arrival on UPF1, the SID U1::2 is a local SID associated with the End.MAP SRv6 Endpoint Behavior. It maps the SID to the next anchoring point and replaces U1::2 by gNB::1, that belongs to the next hop.

Upon packet arrival on gNB, the SID gNB::1 corresponds to an End.DX4, End.DX6 or End.DX2 behavior (depending on the PDU Session Type). The gNB decapsulates the packet, removing the IPv6 header and all its extensions headers, and forwards the traffic toward the UE.

5.2. Enhanced Mode

Enhanced mode improves scalability, provides traffic engineering capabilities, and allows service programming [I-D.ietf-spring-sr-service-programming], thanks to the use of multiple SIDs in the SID list (instead of a direct connectivity in between UPFs with no intermediate waypoints as in Traditional Mode).

Thus, the main difference is that the SR policy MAY include SIDs for traffic engineering and service programming in addition to the anchoring SIDs at UPFs.

Additionally in this mode the operator may choose to aggregate several devices under the same SID list (e.g., stationary residential meters connected to the same cell) to improve scalability.

The gNB control-plane (N2 interface) is unchanged, specifically a single IPv6 address is provided to the gNB.

The gNB MAY resolve the IP address received via the control plane into a SID list using a mechanism like PCEP, DNS-lookup, LISP control-plane or others. The resolution mechanism is out of the scope of this document.

Note that the SIDs MAY use the arguments Args.Mob.Session if required by the UPFs.

Figure 3 shows an Enhanced mode topology. In the Enhanced mode, the gNB and the UPF are SR-aware. The Figure shows two service segments, S1 and C1. S1 represents a VNF in the network, and C1 represents an intermediate router used for Traffic Engineering purposes to enforce a low-latency path in the network. Note that neither S1 nor C1 are required to have an N4 interface.

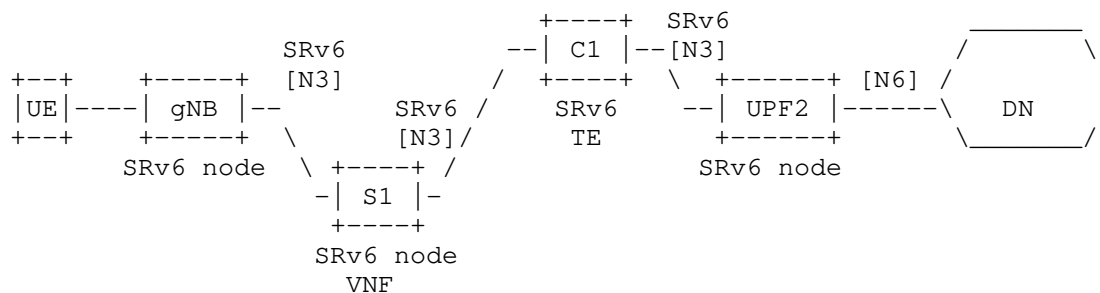


Figure 3: Enhanced mode - Example topology

5.2.1. Packet flow - Uplink

The uplink packet flow is as follows:

```

UE_out   : (A,Z)
gNB_out  : (gNB, S1) (U2::1, C1; SL=2) (A,Z) ->H.Encaps.Red<S1,C1,U2::1>
S1_out   : (gNB, C1) (U2::1, C1; SL=1) (A,Z)
C1_out   : (gNB, U2::1) (A,Z)                ->End with PSP
UPF2_out : (A,Z)                             ->End.DT4,End.DT6,End.DT2U
    
```

UE sends its packet (A,Z) on a specific bearer to its gNB. gNB's control plane associates that session from the UE(A) with the IPv6 address B. gNB's control plane does a lookup on B to find the related SID list <S1, C1, U2::1>.

When gNB transmits the packet, it contains all the segments of the SR policy. The SR policy includes segments for traffic engineering (C1) and for service programming (S1).

Nodes S1 and C1 perform their related Endpoint functionality and forward the packet.

When the packet arrives at UPF2, the active segment (U2::1) is an End.DT4/End.DT6/End.DT2U which performs the decapsulation (removing

the IPv6 header with all its extension headers) and forwards toward the data network.

5.2.2. Packet flow - Downlink

The downlink packet flow is as follows:

UPF2_in : (Z,A)	->UPF2 maps the flow w/ SID list <C1,S1, gNB>
UPF2_out: (U2::1, C1) (gNB, S1; SL=2) (Z,A)	->H.Encaps.Red
C1_out : (U2::1, S1) (gNB, S1; SL=1) (Z,A)	
S1_out : (U2::1, gNB) (Z,A)	->End with PSP
gNB_out : (Z,A)	->End.DX4/End.DX6/End.DX2

When the packet arrives at the UPF2, the UPF2 maps that particular flow into a UE PDU Session. This UE PDU Session is associated with the policy <C1, S1, gNB>. The UPF2 performs a H.Encaps.Red operation, encapsulating the packet into a new IPv6 header with its corresponding SRH.

The nodes C1 and S1 perform their related Endpoint processing.

Once the packet arrives at the gNB, the IPv6 DA corresponds to an End.DX4, End.DX6 or End.DX2 behavior at the gNB (depending on the underlying traffic). The gNB decapsulates the packet, removing the IPv6 header and forwards the traffic toward the UE.

5.2.3. Scalability

The Enhanced Mode improves since it allows the aggregation of several UEs under the same SID list. For example, in the case of stationary residential meters that are connected to the same cell, all such devices can share the same SID list. This improves scalability compared to Traditional Mode (unique SID per UE) and compared to GTP-U (dedicated TEID per UE).

5.3. Enhanced mode with unchanged gNB GTP behavior

This section describes two mechanisms for interworking with legacy gNBs that still use GTP: one for IPv4, and another for IPv6.

In the interworking scenarios as illustrated in Figure 4, the gNB does not support SRv6. The gNB supports GTP encapsulation over IPv4 or IPv6. To achieve interworking, an SR Gateway (SRGW-UPF1) entity is added. The SRGW maps the GTP traffic into SRv6.

The SRGW is not an anchor point and maintains very little state. For this reason, both IPv4 and IPv6 methods scale to millions of UEs.

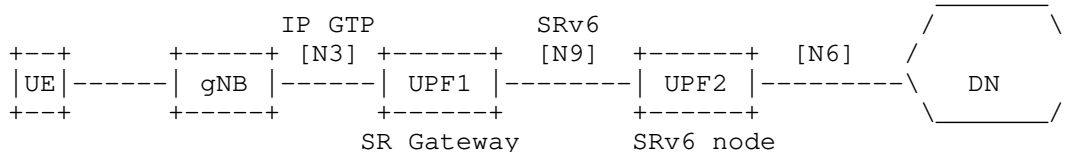


Figure 4: Example topology for interworking

Both of the mechanisms described in this section are applicable to either the Traditional Mode or the Enhanced Mode.

5.3.1. Interworking with IPv6 GTP

In this interworking mode the gNB at the N3 interface uses GTP over IPv6.

Key points:

- o The gNB is unchanged (control-plane or user-plane) and encapsulates into GTP (N3 interface is not modified).
- o The 5G Control-Plane towards the gNB (N2 interface) is unmodified; one IPv6 address is needed (i.e. a BSID at the SRGW).
- o In the uplink, the SRGW removes GTP, finds the SID list related to the IPv6 DA, and adds SRH with the SID list.
- o There is no state for the downlink at the SRGW.
- o There is simple state in the uplink at the SRGW; using Enhanced mode results in fewer SR policies on this node. An SR policy is shared across UEs.
- o When a packet from the UE leaves the gNB, it is SR-routed. This simplifies network slicing [I-D.ietf-lsr-flex-algo].
- o In the uplink, the SRv6 BSID located in the IPv6 DA steers traffic into an SR policy when it arrives at the SRGW-UPF1.

An example topology is shown in Figure 5.

S1 and C1 are two service segments. S1 represents a VNF in the network, and C1 represents a router configured for Traffic Engineering.

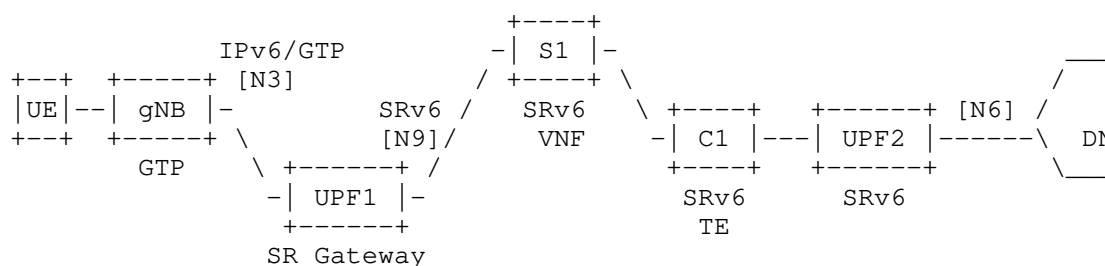


Figure 5: Enhanced mode with unchanged gNB IPv6/GTP behavior

5.3.1.1. Packet flow - Uplink

The uplink packet flow is as follows:

```

UE_out   : (A,Z)
gNB_out  : (gNB, B) (GTP: TEID T) (A,Z)      -> Interface N3 unmodified
                                                (IPv6/GTP)
SRGW_out : (SRGW, S1) (U2::1, C1; SL=2) (A,Z) -> B is an End.M.GTP6.D
                                                SID at the SRGW
S1_out   : (SRGW, C1) (U2::1, C1; SL=1) (A,Z)
C1_out   : (SRGW, U2::1) (A,Z)               -> End with PSP
UPF2_out : (A,Z)                             -> End.DT4 or End.DT6
    
```

The UE sends a packet destined to Z toward the gNB on a specific bearer for that session. The gNB, which is unmodified, encapsulates the packet into IPv6, UDP, and GTP headers. The IPv6 DA B, and the GTP TEID T are the ones received in the N2 interface.

The IPv6 address that was signaled over the N2 interface for that UE PDU Session, B, is now the IPv6 DA. B is an SRv6 Binding SID at the SRGW. Hence the packet is routed to the SRGW.

When the packet arrives at the SRGW, the SRGW identifies B as an End.M.GTP6.D Binding SID (see Section 6.3). Hence, the SRGW removes the IPv6, UDP, and GTP headers, and pushes an IPv6 header with its own SRH containing the SIDs bound to the SR policy associated with this BindingSID. There is one instance of the End.M.GTP6.D SID per PDU type.

S1 and C1 perform their related Endpoint functionality and forward the packet.

When the packet arrives at UPF2, the active segment is (U2::1) which is bound to End.DT4/6. UPF2 then decapsulates (removing the outer IPv6 header with all its extension headers) and forwards the packet toward the data network.

5.3.1.2. Packet flow - Downlink

The downlink packet flow is as follows:

```

UPF2_in : (Z,A)                                -> UPF2 maps the flow with
                                                <C1, S1, SRGW::TEID,gNB>
UPF2_out: (U2::1, C1) (gNB, SRGW::TEID, S1; SL=3) (Z,A) -> H.Encaps.Red
C1_out  : (U2::1, S1) (gNB, SRGW::TEID, S1; SL=2) (Z,A)
S1_out  : (U2::1, SRGW::TEID) (gNB, SRGW::TEID, S1, SL=1) (Z,A)
SRGW_out: (SRGW, gNB) (GTP: TEID=T) (Z,A)      -> SRGW/96 is End.M.GTP6.E
gNB_out : (Z,A)

```

When a packet destined to A arrives at the UPF2, the UPF2 performs a lookup in the table associated to A and finds the SID list <C1, S1, SRGW::TEID, gNB>. The UPF2 performs an H.Encaps.Red operation, encapsulating the packet into a new IPv6 header with its corresponding SRH.

C1 and S1 perform their related Endpoint processing.

Once the packet arrives at the SRGW, the SRGW identifies the active SID as an End.M.GTP6.E function. The SRGW removes the IPv6 header and all its extensions headers. The SRGW generates new IPv6, UDP, and GTP headers. The new IPv6 DA is the gNB which is the last SID in the received SRH. The TEID in the generated GTP header is an argument of the received End.M.GTP6.E SID. The SRGW pushes the headers to the packet and forwards the packet toward the gNB. There is one instance of the End.M.GTP6.E SID per PDU type.

Once the packet arrives at the gNB, the packet is a regular IPv6/GTP packet. The gNB looks for the specific radio bearer for that TEID and forward it on the bearer. This gNB behavior is not modified from current and previous generations.

5.3.1.3. Scalability

For the downlink traffic, the SRGW is stateless. All the state is in the SRH pushed by the UPF2. The UPF2 must have the UE states since it is the UE's session anchor point.

For the uplink traffic, the state at the SRGW does not necessarily need to be unique per PDU Session; the SR policy can be shared among UEs. This enables more scalable SRGW deployments compared to a solution holding millions of states, one or more per UE.

5.3.2. Interworking with IPv4 GTP

In this interworking mode the gNB uses GTP over IPv4 in the N3 interface

Key points:

- o The gNB is unchanged and encapsulates packets into GTP (the N3 interface is not modified).
- o In the uplink, traffic is classified by SRGW's Uplink Classifier and steered into an SR policy. The SRGW is a UPF1 functionality and can coexist with UPF1's Uplink Classifier functionality.
- o SRGW removes GTP, finds the SID list related to DA, and adds an SRH with the SID list.

An example topology is shown in Figure 6. In this mode the gNB is an unmodified gNB using IPv4/GTP. The UPFs are SR-aware. As before, the SRGW maps the IPv4/GTP traffic to SRv6.

S1 and C1 are two service segment endpoints. S1 represents a VNF in the network, and C1 represents a router configured for Traffic Engineering.

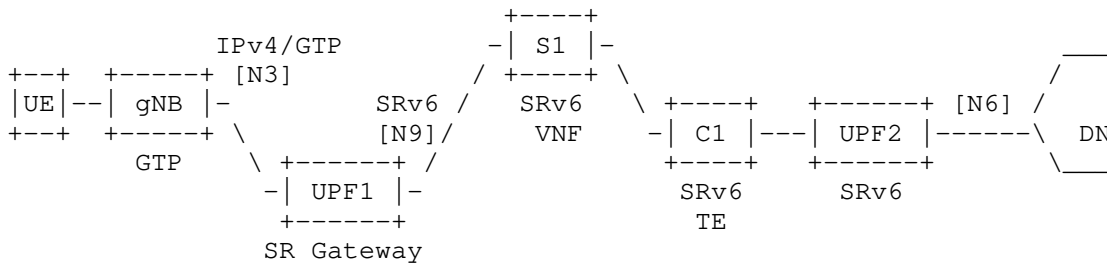


Figure 6: Enhanced mode with unchanged gNB IPv4/GTP behavior

5.3.2.1. Packet flow - Uplink

The uplink packet flow is as follows:

- gNB_out : (gNB, B) (GTP: TEID T) (A, Z) -> Interface N3
unchanged IPv4/GTP
- SRGW_out: (SRGW, S1) (U2::1, C1; SL=2) (A, Z) -> H.M.GTP4.D function
- S1_out : (SRGW, C1) (U2::1, C1; SL=1) (A, Z)
- C1_out : (SRGW, U2::1) (A, Z) -> PSP
- UPF2_out: (A, Z) -> End.DT4 or End.DT6

The UE sends a packet destined to Z toward the gNB on a specific bearer for that session. The gNB, which is unmodified, encapsulates

the packet into a new IPv4, UDP, and GTP headers. The IPv4 DA, B, and the GTP TEID are the ones received at the N2 interface.

When the packet arrives at the SRGW for UPF1, the SRGW has an Uplink Classifier rule for incoming traffic from the gNB, that steers the traffic into an SR policy by using the function H.M.GTP4.D. The SRGW removes the IPv4, UDP, and GTP headers and pushes an IPv6 header with its own SRH containing the SIDs related to the SR policy associated with this traffic. The SRGW forwards according to the new IPv6 DA.

S1 and C1 perform their related Endpoint functionality and forward the packet.

When the packet arrives at UPF2, the active segment is (U2::1) which is bound to End.DT4/6 which performs the decapsulation (removing the outer IPv6 header with all its extension headers) and forwards toward the data network.

5.3.2.2. Packet flow - Downlink

The downlink packet flow is as follows:

```

UPF2_in : (Z,A)                                -> UPF2 maps flow with SID
                                                <C1, S1,GW::SA:DA:TEID>
UPF2_out: (U2::1, C1) (GW::SA:DA:TEID, S1; SL=2) (Z,A) ->H.Encaps.Red
C1_out  : (U2::1, S1) (GW::SA:DA:TEID, S1; SL=1) (Z,A)
S1_out  : (U2::1, GW::SA:DA:TEID) (Z,A)
SRGW_out: (GW, gNB) (GTP: TEID=T) (Z,A)        -> End.M.GTP4.E
gNB_out : (Z,A)

```

When a packet destined to A arrives at the UPF2, the UPF2 performs a lookup in the table associated to A and finds the SID list <C1, S1, SRGW::SA:DA:TEID>. The UPF2 performs a H.Encaps.Red operation, encapsulating the packet into a new IPv6 header with its corresponding SRH.

The nodes C1 and S1 perform their related Endpoint processing.

Once the packet arrives at the SRGW, the SRGW identifies the active SID as an End.M.GTP4.E function. The SRGW removes the IPv6 header and all its extensions headers. The SRGW generates an IPv4, UDP, and GTP headers. The IPv4 SA and DA are received as SID arguments. The TEID in the generated GTP header is also the arguments of the received End.M.GTP4.E SID. The SRGW pushes the headers to the packet and forwards the packet toward the gNB.

When the packet arrives at the gNB, the packet is a regular IPv4/GTP packet. The gNB looks for the specific radio bearer for that TEID

and forwards it on the bearer. This gNB behavior is not modified from current and previous generations.

5.3.2.3. Scalability

For the downlink traffic, the SRGW is stateless. All the state is in the SRH pushed by the UPF2. The UPF must have this UE-base state anyway (since it is its anchor point).

For the uplink traffic, the state at the SRGW is dedicated on a per UE/session basis according to an Uplink Classifier. There is state for steering the different sessions in the form of an SR Policy. However, SR policies are shared among several UE/sessions.

5.3.3. Extensions to the interworking mechanisms

In this section we presented two mechanisms for interworking with gNBs and UPFs that do not support SRv6. These mechanisms are used to support GTP over IPv4 and IPv6.

Even though we have presented these methods as an extension to the "Enhanced mode", it is straightforward in its applicability to the "Traditional mode".

Furthermore, although these mechanisms are designed for interworking with legacy RAN at the N3 interface, these methods could also be applied for interworking with a non-SRv6 capable UPF at the N9 interface (e.g., L3-anchor is SRv6 capable but L2-anchor is not).

5.4. SRv6 Drop-in Interworking

In this section we introduce another mode useful for legacy gNB and UPFs that still operate with GTP-U. This mode provides an SRv6-enabled user plane in between two GTP-U tunnel endpoints.

In this mode we employ two SRGWs that map GTP-U traffic to SRv6 and vice-versa.

Unlike other interworking modes, in this mode both of the mobility overlay endpoints use GTP-U. Two SRGWs are deployed in either N3 or N9 interface to realize an intermediate SR policy.

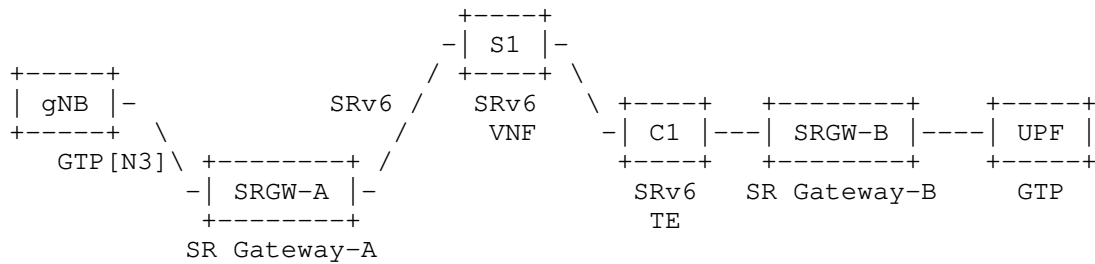


Figure 7: Example topology for SRv6 Drop-in mode

The packet flow of Figure 7 is as follows:

```

gNB_out : (gNB, U::1) (GTP: TEID T) (A,Z)
GW-A_out: (GW-A, S1) (U::1, SGB::TEID, C1; SL=3) (A,Z) ->U::1 is an
                                                    End.M.GTP6.D.Di
                                                    SID at SRGW-A
S1_out   : (GW-A, C1) (U::1, SGB::TEID, C1; SL=2) (A,Z)
C1_out   : (GW-A, SGB::TEID) (U::1, SGB::TEID, C1; SL=1) (A,Z)
GW-B_out: (GW-B, U::1) (GTP: TEID T) (A,Z) ->SGB::TEID is an
                                                    End.M.GTP6.E
                                                    SID at SRGW-B
UPF_out  : (A,Z)
  
```

When a packet destined to Z is sent to the gNB, which is unmodified (control-plane and user-plane remain GTP-U), gNB performs encapsulation into a new IP, UDP, and GTP headers. The IPv6 DA, U::1, and the GTP TEID are the ones received at the N2 interface.

The IPv6 address that was signaled over the N2 interface for that PDU Session, U::1, is now the IPv6 DA. U::1 is an SRv6 Binding SID at SRGW-A. Hence the packet is routed to the SRGW.

When the packet arrives at SRGW-A, the SRGW identifies U::1 as an End.M.GTP6.D.Di Binding SID (see Section 6.4). Hence, the SRGW removes the IPv6, UDP, and GTP headers, and pushes an IPv6 header with its own SRH containing the SIDs bound to the SR policy associated with this Binding SID. There is one instance of the End.M.GTP6.D.Di SID per PDU type.

S1 and C1 perform their related Endpoint functionality and forward the packet.

Once the packet arrives at SRGW-B, the SRGW identifies the active SID as an End.M.GTP6.E function. The SRGW removes the IPv6 header and all its extensions headers. The SRGW generates new IPv6, UDP, and


GTP headers. The new IPv6 DA is U::1 which is the last SID in the received SRH. The TEID in the generated GTP header is an argument of the received End.M.GTP6.E SID. The SRGW pushes the headers to the packet and forwards the packet toward UPF. There is one instance of the End.M.GTP6.E SID per PDU type.

Once the packet arrives at UPF, the packet is a regular IPv6/GTP packet. The UPF looks for the specific rule for that TEID to forward the packet. This UPF behavior is not modified from current and previous generations.

6. SRv6 Segment Endpoint Mobility Behaviors

6.1. Args.Mob.Session

Args.Mob.Session provide per-session information for charging, buffering and lawful intercept (among others) required by some mobile nodes. The Args.Mob.Session argument format is used in combination with End.Map, End.DT4/End.DT6/End.DT46 and End.DX4/End.DX6/End.DX2 behaviors. Note that proposed format is applicable for 5G networks, while similar formats could be used for legacy networks.

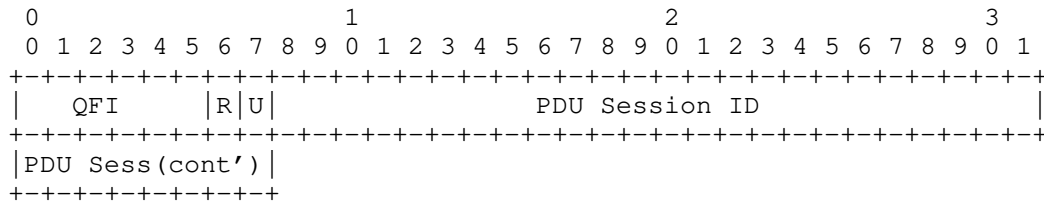

Args.Mob.Session format

- o QFI: QoS Flow Identifier [TS.38415]
- o R: Reflective QoS Indication [TS.23501]. This parameter indicates the activation of reflective QoS towards the UE for the transferred packet. Reflective QoS enables the UE to map UL User Plane traffic to QoS Flows without SMF provided QoS rules.
- o U: Unused and for future use. MUST be 0 on transmission and ignored on receipt.
- o PDU Session ID: Identifier of PDU Session. The GTP-U equivalent is TEID.

Arg.Mob.Session is required in case that one SID aggregates multiple PDU Sessions. Since the SRv6 SID is likely NOT to be instantiated per PDU session, Args.Mob.Session helps the UPF to perform the behaviors which require per QFI and/or per PDU Session granularity.

6.2. End.MAP

The "Endpoint behavior with SID mapping" behavior (End.MAP for short) is used in several scenarios. Particularly in mobility, End.MAP is used in the UPFs for the PDU Session anchor functionality.

When node N receives a packet whose IPv6 DA is S and S is a local End.MAP SID, N does:

```
S01. If (IPv6 Hop Limit <= 1) {
S02.   Send an ICMP Time Exceeded message to the Source Address,
       Code 0 (Hop limit exceeded in transit),
       interrupt packet processing, and discard the packet.
S03. }
S04. Decrement IPv6 Hop Limit by 1
S05. Lookup the IPv6 DA in the mapping table
S06. Update the IPv6 DA with the new mapped SID
S07. Submit the packet to the egress IPv6 FIB lookup for
       transmission to the new destination
```

Notes:

The SIDs in the SRH are not modified.

6.3. End.M.GTP6.D

The "Endpoint behavior with IPv6/GTP decapsulation into SR policy" behavior (End.M.GTP6.D for short) is used in interworking scenario for the uplink towards SRGW from the legacy gNB using IPv6/GTP. Any SID instance of this behavior is associated with an SR Policy B and an IPv6 Source Address A.

When the SR Gateway node N receives a packet destined to S and S is a local End.M.GTP6.D SID, N does:

```
S01. When an SRH is processed {
S02.   If (Segments Left != 0) {
S03.     Send an ICMP Parameter Problem to the Source Address,
       Code 0 (Erroneous header field encountered),
       Pointer set to the Segments Left field,
       interrupt packet processing, and discard the packet.
S04.   }
S05.   Proceed to process the next header in the packet
S06. }
```

When processing the Upper-layer header of a packet matching a FIB entry locally instantiated as an End.M.GTP6.D SID, N does:

```
S01. If (Next Header = UDP & UDP_Dest_port = GTP) {
S02.   Copy the GTP TEID to buffer memory
S03.   Pop the IPv6, UDP, and GTP Headers
S04.   Push a new IPv6 header with its own SRH containing B
S05.   Set the outer IPv6 SA to A
S06.   Set the outer IPv6 DA to the first SID of B
S07.   Set the outer Payload Length, Traffic Class, Flow Label,
       Hop Limit, and Next-Header fields
S08.   Write in the last SID of the SRH the Args.Mob.Session
       based on the information of buffer memory
S09.   Submit the packet to the egress IPv6 FIB lookup and
       transmission to the new destination
S10. } Else {
S11.   Process as per [RFC8986] Section 4.1.1
S12. }
```

Notes:

The NH is set based on the SID parameter. There is one instantiation of the End.M.GTP6.D SID per PDU Session Type, hence the NH is already known in advance. For the IPv4v6 PDU Session Type, in addition we inspect the first nibble of the PDU to know the NH value.

The prefix of last segment (S3 in above example) SHOULD be followed by an Arg.Mob.Session argument space which is used to provide the session identifiers.

The prefix of A SHOULD be an End.M.GTP6.E SID instantiated at an SR gateway.

6.4. End.M.GTP6.D.Di

The "Endpoint behavior with IPv6/GTP decapsulation into SR policy for Drop-in Mode" behavior (End.M.GTP6.D.Di for short) is used in SRv6 drop-in interworking scenario described in Section 5.4. The difference between End.M.GTP6.D as another variant of IPv6/GTP decapsulation function is that the original IPv6 DA of GTP packet is preserved as the last SID in SRH.

Any SID instance of this behavior is associated with an SR Policy B and an IPv6 Source Address A.

When the SR Gateway node N receives a packet destined to S and S is a local End.M.GTP6.D.Di SID, N does:

```
S01. When an SRH is processed {
S02.   If (Segments Left != 0) {
S03.     Send an ICMP Parameter Problem to the Source Address,
           Code 0 (Erroneous header field encountered),
           Pointer set to the Segments Left field,
           interrupt packet processing, and discard the packet.
S04.   }
S05.   Proceed to process the next header in the packet
S06. }
```

When processing the Upper-layer header of a packet matching a FIB entry locally instantiated as an End.M.GTP6.Di SID, N does:

```
S01. If (Next Header = UDP & UDP_Dest_port = GTP) {
S02.   Copy S to buffer memory
S03.   Pop the IPv6, UDP, and GTP Headers
S04.   Push a new IPv6 header with its own SRH containing B
S05.   Set the outer IPv6 SA to A
S06.   Set the outer IPv6 DA to the first SID of B
S07.   Set the outer Payload Length, Traffic Class, Flow Label,
           Hop Limit, and Next-Header fields
S08.   Write S to the SRH
S09.   Submit the packet to the egress IPv6 FIB lookup and
           transmission to the new destination
S10. } Else {
S11.   Process as per [RFC8986] Section 4.1.1
S12. }
```

Notes:

The NH is set based on the SID parameter. There is one instantiation of the End.M.GTP6.D SID per PDU Session Type, hence the NH is already known in advance. For the IPv4v6 PDU Session Type, in addition we inspect the first nibble of the PDU to know the NH value.

The prefix of A SHOULD be an End.M.GTP6.E SID instantiated at an SR gateway.

6.5. End.M.GTP6.E

The "Endpoint behavior with encapsulation for IPv6/GTP tunnel" behavior (End.M.GTP6.E for short) is used in interworking scenario for the downlink toward the legacy gNB using IPv6/GTP.

The prefix of End.M.GTP6.E SID MUST be followed by the Arg.Mob.Session argument space which is used to provide the session identifiers.

When the SR Gateway node N receives a packet destined to S, and S is a local End.M.GTP6.E SID, N does the following:

```
S01. When an SRH is processed {
S02.   If (Segments Left != 1) {
S03.     Send an ICMP Parameter Problem to the Source Address,
        Code 0 (Erroneous header field encountered),
        Pointer set to the Segments Left field,
        interrupt packet processing, and discard the packet.
S04.   }
S05.   Proceed to process the next header in the packet
S06. }
```

When processing the Upper-layer header of a packet matching a FIB entry locally instantiated as an End.M.GTP6.E SID, N does:

```
S01. If (Next Header = UDP & UDP_Dest_port = GTP) {
S02.   Copy SRH[0] to buffer memory
S03.   Pop the IPv6 header and all its extension headers
S04.   Push a new IPv6 header with a UDP/GTP Header
S05.   Set the outer IPv6 SA to A
S06.   Set the outer IPv6 DA to the first SID of B
S07.   Set the outer Payload Length, Traffic Class, Flow Label,
        Hop Limit, and Next-Header fields
S08.   Set the GTP TEID (from buffer memory)
S09.   Submit the packet to the egress IPv6 FIB lookup and
        transmission to the new destination
S10. } Else {
S11.   Process as per [RFC8986] Section 4.1.1
S12. }
```

Notes:

An End.M.GTP6.E SID MUST always be the penultimate SID.
The TEID is extracted from the argument space of the current SID.

The source address A SHOULD be an End.M.GTP6.D SID instantiated at an SR gateway.

6.6. End.M.GTP4.E

The "Endpoint behavior with encapsulation for IPv4/GTP tunnel" behavior (End.M.GTP4.E for short) is used in the downlink when doing interworking with legacy gNB using IPv4/GTP.

When the SR Gateway node N receives a packet destined to S and S is a local End.M.GTP4.E SID, N does:

```

S01. When an SRH is processed {
S02.   If (Segments Left != 0) {
S03.     Send an ICMP Parameter Problem to the Source Address,
           Code 0 (Erroneous header field encountered),
           Pointer set to the Segments Left field,
           interrupt packet processing, and discard the packet.
S04.   }
S05.   Proceed to process the next header in the packet
S06. }

```

When processing the Upper-layer header of a packet matching a FIB entry locally instantiated as an End.M.GTP4.E SID, N does:


```

S01. If (Next Header = UDP & UDP_Dest_port = GTP) {
S02.   Store the IPv6 DA and SA in buffer memory
S03.   Pop the IPv6 header and all its extension headers
S04.   Push a new IPv4 header with a UDP/GTP Header
S05.   Set the outer IPv4 SA and DA (from buffer memory)
S06.   Set the outer Total Length, DSCP, Time To Live, and
           Next-Header fields
S07.   Set the GTP TEID (from buffer memory)
S08.   Submit the packet to the egress IPv6 FIB lookup and
           transmission to the new destination
S09. } Else {
S10.   Process as per [NET-PGM] Section 4.1.1
S11. }

```


Notes:

The End.M.GTP4.E SID in S has the following format:

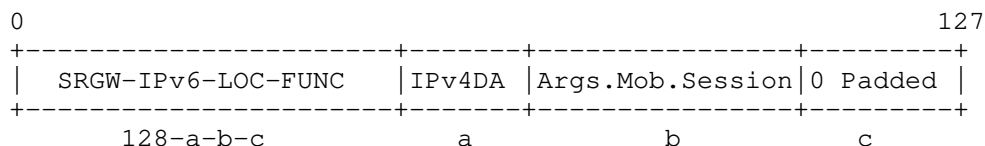

End.M.GTP4.E SID Encoding

The IPv6 Source Address has the following format:

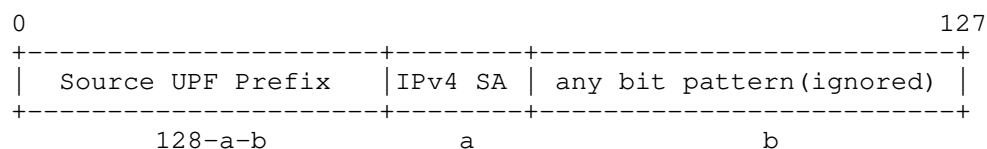

IPv6 SA Encoding for End.M.GTP4.E

6.7. H.M.GTP4.D

The "SR Policy Headend with tunnel decapsulation and map to an SRv6 policy" behavior (H.M.GTP4.D for short) is used in the direction from legacy IPv4 user-plane to SRv6 user-plane network.

When the SR Gateway node N receives a packet destined to a IW-IPv4-Prefix, N does:


```

S01. IF Payload == UDP/GTP THEN
S02.   Pop the outer IPv4 header and UDP/GTP headers
S03.   Copy IPv4 DA, TEID to form SID B
S04.   Copy IPv4 SA to form IPv6 SA B'
S05.   Encapsulate the packet into a new IPv6 header   ;;Ref1
S06.   Set the IPv6 DA = B
S07.   Forward along the shortest path to B
S08. ELSE
S09.   Drop the packet

```

Ref1: The NH value is identified by inspecting the first nibble of the inner payload.

The SID B has the following format:

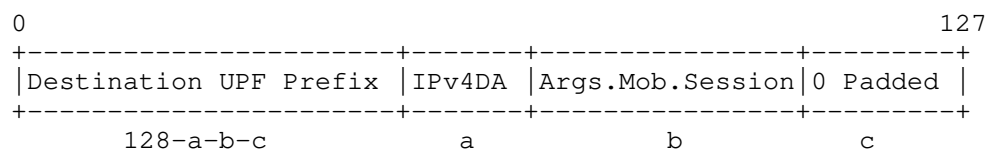


H.M.GTP4.D SID Encoding

The SID B MAY be an SRv6 Binding SID instantiated at the first UPF (U1) to bind an SR policy [I-D.ietf-spring-segment-routing-policy].

The prefix of B' SHOULD be an End.M.GTP4.E SID with its format instantiated at an SR gateway with the IPv4 SA of the receiving packet.

6.8. End.Limit: Rate Limiting behavior

The mobile user-plane requires a rate-limit feature. For this purpose, we define a new behavior "End.Limit". The "End.Limit" behavior encodes in its arguments the rate limiting parameter that should be applied to this packet. Multiple flows of packets should have the same group identifier in the SID when those flows are in the same AMBR (Aggregate Maximum Bit Rate) group. The encoding format of the rate limit segment SID is as follows:



End.Limit: Rate limiting behavior argument format

If the limit-rate bits are set to zero, the node should not do rate limiting unless static configuration or control-plane sets the limit rate associated to the SID.

7. SRv6 supported 3GPP PDU session types

The 3GPP [TS.23501] defines the following PDU session types:

- o IPv4
- o IPv6
- o IPv4v6
- o Ethernet
- o Unstructured

SRv6 supports the 3GPP PDU session types without any protocol overhead by using the corresponding SRv6 behaviors (End.DX4, End.DT4 for IPv4 PDU sessions; End.DX6, End.DT6, End.T for IPv6 PDU sessions; End.DT46 for IPv4v6 PDU sessions; End.DX2 for L2 and Unstructured PDU sessions).

8. Network Slicing Considerations

A mobile network may be required to implement "network slices", which logically separate network resources. User-plane behaviors represented as SRv6 segments would be part of a slice.

[I-D.ietf-spring-segment-routing-policy] describes a solution to build basic network slices with SR. Depending on the requirements, these slices can be further refined by adopting the mechanisms from:

- o IGP Flex- Algo [I-D.ietf-lsr-flex-algo]

- o Inter-Domain policies
[I-D.ietf-spring-segment-routing-central-epe]

Furthermore, these can be combined with ODN/AS (On Demand Nexthop/Automated Steering) [I-D.ietf-spring-segment-routing-policy] for automated slice provisioning and traffic steering.

Further details on how these tools can be used to create end to end network slices are documented in [I-D.ali-spring-network-slicing-building-blocks].

9. Control Plane Considerations

This document focuses on user-plane behavior and its independence from the control plane.

The control plane could be the current 3GPP-defined control plane with slight modifications to the N4 interface [TS.29244].

Alternatively, SRv6 could be used in conjunction with a new mobility control plane as described in LISP [I-D.rodriquerznatal-lisp-srv6], hICN [I-D.augedmm-hicn-mobility-deployment-options] or in conjunction with FPC [I-D.ietf-dmm-fpc-cpdp]. The analysis of new mobility control-planes and its applicability to an SRv6 user-plane is out of the scope of this document.

Section 11 allocates SRv6 Segment Endpoint Behavior codepoints for the new behaviors defined in this document.

10. Security Considerations

The security considerations for Segment Routing are discussed in [RFC8402]. More specifically for SRv6 the security considerations and the mechanisms for securing an SR domain are discussed in [RFC8754]. Together, they describe the required security mechanisms that allow establishment of an SR domain of trust to operate SRv6-based services for internal traffic while preventing any external traffic from accessing or exploiting the SRv6-based services.

The technology described in this document is applied to a mobile network that is within the SR Domain.

This document introduces new SRv6 Endpoint Behaviors. Those behaviors do not need any special security consideration given that it is deployed within that SR Domain.

11. IANA Considerations

The following values have been allocated within the "SRv6 Endpoint Behaviors" [RFC8986] sub-registry belonging to the top-level "Segment Routing Parameters" registry:

Value	Hex	Endpoint behavior	Reference
40	0x0028	End.MAP	[This.ID]
41	0x0029	End.Limit	[This.ID]
69	0x0045	End.M.GTP6.D	[This.ID]
70	0x0046	End.M.GTP6.Di	[This.ID]
71	0x0047	End.M.GTP6.E	[This.ID]
72	0x0048	End.M.GTP4.E	[This.ID]

Table 1: SRv6 Mobile User-plane Endpoint Behavior Types

12. Acknowledgements

The authors would like to thank Daisuke Yokota, Bart Peirens, Ryokichi Onishi, Kentaro Ebisawa, Peter Bosch, Darren Dukes, Francois Clad, Sri Gundavelli, Sridhar Bhaskaran, Arashmid Akhavain, Ravi Shekhar, Aeneas Dodd-Noble, Carlos Jesus Bernardos, Dirk v. Hugo and Jeffrey Zhang for their useful comments of this work.

13. Contributors

Kentaro Ebisawa
Toyota Motor Corporation
Japan

Email: ebisawa@toyota-tokyo.tech

Tetsuya Murakami
Arrcus, Inc.
United States of America

Email: tetsuya.ietf@gmail.com

14. References

14.1. Normative References

- [I-D.ietf-spring-segment-routing-policy]
Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", draft-ietf-spring-segment-routing-policy-09 (work in progress), November 2020.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", RFC 8402, DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.
- [RFC8754] Filsfils, C., Ed., Dukes, D., Ed., Previdi, S., Leddy, J., Matsushima, S., and D. Voyer, "IPv6 Segment Routing Header (SRH)", RFC 8754, DOI 10.17487/RFC8754, March 2020, <<https://www.rfc-editor.org/info/rfc8754>>.
- [RFC8986] Filsfils, C., Ed., Camarillo, P., Ed., Leddy, J., Voyer, D., Matsushima, S., and Z. Li, "Segment Routing over IPv6 (SRv6) Network Programming", RFC 8986, DOI 10.17487/RFC8986, February 2021, <<https://www.rfc-editor.org/info/rfc8986>>.
- [TS.23501] 3GPP, "System Architecture for the 5G System", 3GPP TS 23.501 15.0.0, November 2017.

14.2. Informative References

- [I-D.ali-spring-network-slicing-building-blocks]
Ali, Z., Filsfils, C., Camarillo, P., and D. Voyer, "Building blocks for Slicing in Segment Routing Network", draft-ali-spring-network-slicing-building-blocks-04 (work in progress), February 2021.
- [I-D.auge-dmm-hicn-mobility-deployment-options]
Auge, J., Carofiglio, G., Muscariello, L., and M. Papalini, "Anchorless mobility management through hICN (hICN-AMM): Deployment options", draft-auge-dmm-hicn-mobility-deployment-options-04 (work in progress), July 2020.

- [I-D.camarilloelmalky-springdmm-srv6-mob-usecases]
Garvia, P. C., Filsfils, C., Elmalky, H., Matsushima, S., Voyer, D., Cui, A., and B. Peirens, "SRv6 Mobility Use-Cases", draft-camarilloelmalky-springdmm-srv6-mob-usecases-02 (work in progress), August 2019.
- [I-D.ietf-dmm-fpc-cpdp]
Matsushima, S., Bertz, L., Liebsch, M., Gundavelli, S., Moses, D., and C. E. Perkins, "Protocol for Forwarding Policy Configuration (FPC) in DMM", draft-ietf-dmm-fpc-cpdp-14 (work in progress), September 2020.
- [I-D.ietf-lsr-flex-algo]
Psenak, P., Hegde, S., Filsfils, C., Talaulikar, K., and A. Gulko, "IGP Flexible Algorithm", draft-ietf-lsr-flex-algo-14 (work in progress), February 2021.
- [I-D.ietf-spring-segment-routing-central-epe]
Filsfils, C., Previdi, S., Dawra, G., Aries, E., and D. Afanasiev, "Segment Routing Centralized BGP Egress Peer Engineering", draft-ietf-spring-segment-routing-central-epe-10 (work in progress), December 2017.
- [I-D.ietf-spring-sr-service-programming]
Clad, F., Xu, X., Filsfils, C., Bernier, D., Li, C., Decraene, B., Ma, S., Yadlapalli, C., Henderickx, W., and S. Salsano, "Service Programming with Segment Routing", draft-ietf-spring-sr-service-programming-04 (work in progress), March 2021.
- [I-D.matsushima-spring-srv6-deployment-status]
Matsushima, S., Filsfils, C., Ali, Z., Li, Z., and K. Rajaraman, "SRv6 Implementation and Deployment Status", draft-matsushima-spring-srv6-deployment-status-11 (work in progress), February 2021.
- [I-D.rodriueznatal-lisp-srv6]
Rodriguez-Natal, A., Ermagan, V., Maino, F., Dukes, D., Camarillo, P., and C. Filsfils, "LISP Control Plane for SRv6 Endpoint Mobility", draft-rodriueznatal-lisp-srv6-04 (work in progress), July 2020.
- [TS.29244]
3GPP, "Interface between the Control Plane and the User Plane Nodes", 3GPP TS 29.244 15.0.0, December 2017.

[TS.29281]

3GPP, "General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U)", 3GPP TS 29.281 15.1.0, December 2017.

[TS.38415]

3GPP, "Draft Specification for 5GS container (TS 38.415)", 3GPP R3-174510 0.0.0, August 2017.

Appendix A. Implementations

This document introduces new SRv6 Endpoint Behaviors. These behaviors have an open-source P4 implementation available in <https://github.com/ebiken/p4srv6>.

Additionally, a full implementation of this document is available in Linux Foundation FD.io VPP project since release 20.05. More information available here: https://docs.fd.io/vpp/20.05/d7/d3c/srv6_mobile_plugin_doc.html.

There are also experimental implementations in M-CORD NGIC and Open Air Interface (OAI).

Authors' Addresses

Satoru Matsushima (editor)
SoftBank
Japan

Email: satoru.matsushima@g.softbank.co.jp

Clarence Filsfils
Cisco Systems, Inc.
Belgium

Email: cf@cisco.com

Miya Kohno
Cisco Systems, Inc.
Japan

Email: mkohno@cisco.com

Pablo Camarillo Garvia (editor)
Cisco Systems, Inc.
Spain

Email: pcamaril@cisco.com

Daniel Voyer
Bell Canada
Canada

Email: daniel.voyer@bell.ca

Charles E. Perkins
Futurewei Inc.
2330 Central Expressway
Santa Clara, CA 95050
USA

Phone: +1-408-330-4586
Email: charliep@computer.org

DMM Working Group
Internet-Draft
Intended status: Informational
Expires: November 7, 2021

M. Kohno
F. Clad
P. Camarillo
Z. Ali
Cisco Systems, Inc.
May 6, 2021

Architecture Discussion on SRv6 Mobile User plane
draft-kohno-dmm-srv6mob-arch-04

Abstract

SRv6 mobile user plane is standardized in IETF. It accomplishes the mobile user-plane functions in a simple, flexible and scalable manner, by utilizing the network programming nature of SRv6. It leverages common native IPv6 data plane and creates interoperable overlays with underlay optimization.

This document discusses the solution approach and its architectural benefits of common data plane across domains and across overlay/underlay.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on November 7, 2021.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
2. Problem Definition	3
3. Common data plane across domains and across overlay/underlay	3
4. Terminology	4
5. SRv6 mobile user plane and the 5G use cases	4
5.1. Network Slicing	5
5.2. Edge Computing	5
5.3. URLLC (Ultra-Reliable Low-Latency Communication) support	6
6. Control Plane Considerations	7
7. Incremental Deployment	8
8. Security Considerations	8
9. IANA Considerations	8
10. Acknowledgements	8
11. References	8
11.1. Normative References	8
11.2. Informative References	9
Authors' Addresses	11

1. Introduction

Mobile architectures have evolved individually, and the user plane, GTP-U, has been defined as an overlay tunnel that is agnostic to the IP infrastructure.

However, the system requirements are changing as digitalization goes into full swing. The continued use of GTP-U as a user plane protocol will lock-in to the existing architectural structure and hinder the innovation. GTP-U will not be able to meet the diverse SLA requirements of the 5G era and beyond with efficiency and scalability. Also it will not be able to meet the demands of new mobile-first data intensive applications, which will be more dynamically distributed.

SRv6 mobile user plane [I-D.ietf-dmm-srv6-mobile-uplane] is standardized in IETF. It accomplishes the mobile user-plane functions in a simple, flexible and scalable manner, by utilizing the network programming nature of SRv6. It leverages common native IPv6 data plane and creates interoperable overlays with underlay optimization.

This document discusses the solution approach and its architectural benefits of common data plane across domains (e.g., mobile domain, IP infrastructure, data center, applications) and across overlay/underlay.

2. Problem Definition

The current mobile user plane, GTP-U, defined as an overlay tunnel that is agnostic to the IP infrastructure, has the following limitations that prevent it from supporting new application demands.

- o Non-optimal for any-to-any communication
- o No control of the underlay path
- o Non-optimal for edge/distributed computing
- o Non-optimal for fixed and mobile path convergence
- o Lack a way for application/service developers to manipulate and interact

In addition, the centralized tunnel terminating gateway becomes a scaling bottleneck and a single point of failure

For residential broadband IP and data center networking, tunnel sessions can be eliminated depending on the situations (e.g. PPPoE -> IPoE, VXLAN/NSH -> SRv6), but such an architectural change used to be difficult for mobile domain.

3. Common data plane across domains and across overlay/underlay

[I-D.ietf-dmm-srv6-mobile-uplane] defines SRv6 mobile user plane as an alternative or co-existing solution to GTP-U.

Since SRv6 is a native IPv6 data plane, it can be a common data plane regardless of the domain.

SRv6 Network Programming [RFC8986] enables the creation of overlays with underlay optimization. In addition, SRv6 can be operated by application developers because of its implementation in the computing stack, e.g. VPP, Linux Kernel, smart NIC, and cloud native platform such as Network Service Mesh.

Data plane commonality offers significant advantage regarding function, scaling, and cost. In particular, the benefits of the 5G era are shown in Section 5.

Note that the interaction with underlay infrastructure is not a mandatory in the data plane commonality. It just gives a design option to interact with the underlay and optimize it, and it is totally fine to keep overlay underlay-agnostic.

4. Terminology

The terminology used in this document leverages and conforms to [I-D.ietf-dmm-srv6-mobile-uplane].

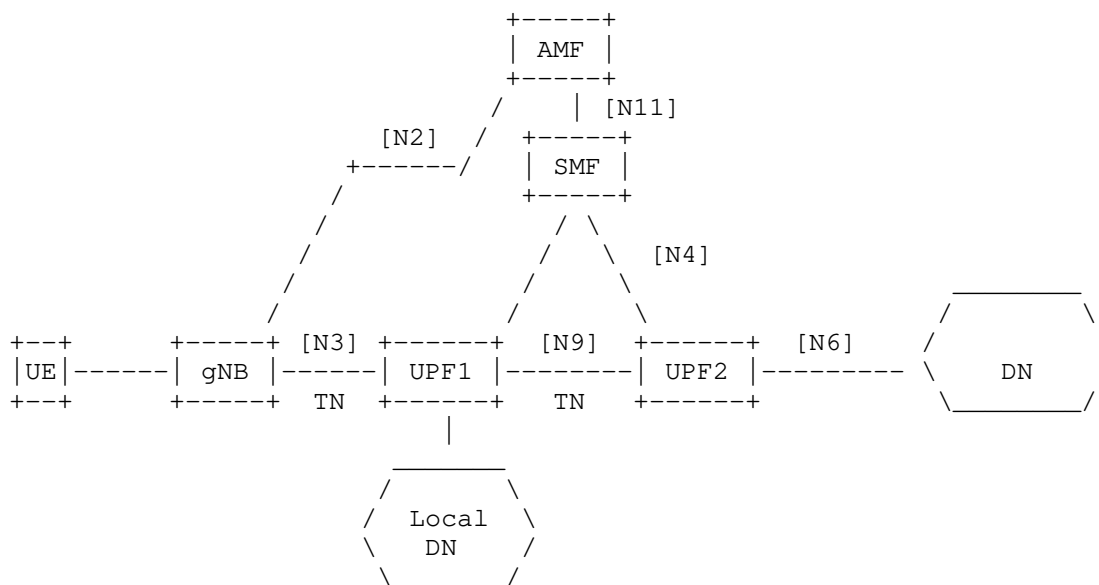


Figure 1: Reference Architecture

- UE : User Equipment
- gNB : gNodeB
- UPF : User Plane Function
- SMF : Session Management Function
- AMF : Access and Mobility Management Function
- 3GPP data plane entities : 3GPP entities responsible for data plane forwarding, i.e. gNB and UPF
- TN : Transport Network - IP network where 3GPP data plane entities connected
- DN : Data Network e.g. operator services, Internet access
- CUPS : Control Plane and User Plane Separation
- VNF : Virtual Network Function
- CNF : Cloud native Network Function

5. SRv6 mobile user plane and the 5G use cases

This section describes the advantages of the common data plane and of applying SRv6 mobile user plane for 5G use cases.

5.1. Network Slicing

Network slicing enables network segmentation, isolation, and SLA differentiation in terms of latency and availability. End-to-end slicing will be achieved by mapping and coordinating IP network slicing, RAN and mobile packet core slicing.

However, as pointed out in [I-D.clt-dmm-tn-aware-mobility], the 5G System as defined, does not have underlying IP network awareness, which could lead to the inability in meeting SLAs.

Segment Routing has a comprehensive set of slice engineering technologies. How to build network slicing using the Segment Routing based technology is described in [I-D.ali-spring-network-slicing-building-blocks].

In the typical GTP-U over IP/MPLS/SR configuration, 3GPP data plane entity such as UPF is a CE to the transport networks PE. But if 3GPP they support SRv6 mobile user plane, they can directly participate in network slicing, and solves the following issues.

- o A certain Extra ID such as VLAN-ID is needed for segregating traffic and mapping it onto a designated slice.
- o PE and the PE-CE connection is a single point of failure, so some form of PE redundancy (using routing protocols, MC-LAG, etc.) is required.

Moreover, the stateless slice identifier encoding [I-D.filsfils-spring-srv6-stateless-slice-id] can be applicable to enable per-slice forwarding policy using the IPv6 header.

5.2. Edge Computing

Edge computing, where the computing workloads and datastores are placed closer to users, is recognized as one of the key pillars to meet 5G's demanding requirements, with regard to low latency, bandwidth efficiency, and data privacy. The computing workload includes network services, security, data analytics, content cache and various applications. (UPF itself can also be viewed as a distributed network service function.)

Edge computing is more important than ever. This is because no matter how much 5G improves access speeds, it won't improve end-to-end throughput because it's largely bound to round trip delay. It is also important from the viewpoint of "local production for local consumption" and privacy protection.

However, the current MEC discussion [ETSI-MEC] focuses on how to properly select the UPF of adequate proximity, and not on how to interact with applications.

SRv6 has an advantage in enabling edge computing for the following reasons.

- o Programmable and Flexible Traffic Steering : SRv6's flexible traffic steering capabilities and the network programming concept is suitable for flexible placement of computing workload.
- o Common data plane across domains : SRv6/IPv6 can be a common data plane regardless of the domains such as mobile including UE, IP transport, data center, applications.
- o Stateless Service Chaining : It does not require any per-flow state in network fabric.
- o Interaction with Applications : SRv6 can be implemented in the compute stack and can be manipulated by applications using socket API. Also, SRv6 can carry meta data, which can be used for interacting with applications.
- o Functionality without performance degradation : Various information can be exposed in IP header, but it does not degrade performance thanks to the longest match mechanism in the IP routing. Only who needs the information for granular processing are to lookup.

It is even more beneficial if service functions/applications directly support SRv6.

5.3. URLLC (Ultra-Reliable Low-Latency Communication) support

3GPP [TR.23725] investigates the key issues for meeting the URLLC requirements on latency, jitter and reliability in the 5G System. The solutions provided in the document are focused at improving the overlay protocol (GTP-U) and limits to provide a few hints into how to map such tight-SLA into the transport network. These hints are based on static configuration or static mapping for steering the overlay packet into the right transport SLA. Such solutions do not scale and hinder network economics.

Some of the issues can be solved more simply without GTP-U tunnel. SRv6 mobile user plane can expose session and QoS flow information in IP header as discussed in the previous section. This would make routing and forwarding path optimized for URLLC, much simpler than the case with GTP-U tunnel.

Another issue that deserves special mention is the ultra-reliability issue. In 3GPP, in order to support ultra-reliability, redundant

user planes paths based on dual connectivity has been proposed. The proposal has two main options.

- o Dual Connectivity based end-to-end Redundant User Plane Paths
- o Support of redundant transmission on N3/N9 interfaces

In the case of the former, UE and hosts have RHF (Redundancy Handling Function). In sending, RHF is to replicate the traffic onto two GTP-U tunnels, and in receiving, RHF is to merge the traffic.

In the case of the latter, the 3GPP data plane entities are to replicate and merge the packets with the same sequence for specific QoS flow, which requires further enhancements.

And in either cases, the bigger problem is the lack of a reliable way for the redundant sessions to get through the disjoint path: even with the redundant sessions, if it ends up using the same infrastructure at some points, the redundancy is meaningless.

SRv6 mobile user plane has some advantages for URLLC traffic. First, with SRv6, Traffic can be mapped to a disjoint path or low latency path as needed, by means of the scalable Traffic Engineering.

Additionally, SRv6 provides an automated reliability protection mechanism known as TI-LFA, which is a sub-50ms FRR mechanism that provides protection regardless of the topology through the optimal backup path. It can be provisioned slice-aware.

With the case that dual live-live path is required, the problem is not only the complexity but that the replication point and the merging point would be the single point of failure. The SRv6 mobile user plane also has an advantage in this respect, because any endpoints or 3GPP data plane nodes themselves can be the replication/merging point when they are SRv6 aware.

Furthermore, SRv6 supports inband telemetry/time stamping for latency monitoring and control.

6. Control Plane Considerations

This draft focuses on commonalization of data plane, and control plane is out of scope. Having said that, IGP and BGP extension for SRv6 can be used as the control plane as they are.

As for the mobility management, Loc/ID mapping protocol or the existing 3GPP control plane can still be used with slight modification, as stated in [I-D.ietf-dmm-srv6-mobile-uplane].

And even pure ID based anchorless protocol such as hICN [I-D.auge-dmm-hicn-mobility] can be used for mobility management as well.

7. Incremental Deployment

Although it may seem difficult to migrate from the current mobile architecture, the conversion between GTP-U and SRv6 has been defined and can co-exist with the current mobile architecture as needed. Since the conversion is done completely statelessly (i.e., all necessary information is retained in the packet), there will not be a scaling bottleneck or a single point of failure. Various co-existence scenarios are examined and described in [I-D.ietf-dmm-srv6-mobile-uplane].

With regard to the architectural migration, the insertion with no modification to the existing 3GPP architecture is considered first, and then the tighter integration of data plane is to be achieved. as described in [I-D.auge-dmm-hicn-mobility-deployment-options].

8. Security Considerations

TBD

9. IANA Considerations

NA

10. Acknowledgements

Authors would like to thank Satoru Matsushima, Shunsuke Homma and Yuji Tochio, for their insights and comments.

11. References

11.1. Normative References

[I-D.hegdeppsenak-isis-sr-flex-algo]

Psenak, P., Hegde, S., Filsfils, C., and A. Gulko, "ISIS Segment Routing Flexible Algorithm", draft-hegdeppsenak-isis-sr-flex-algo-02 (work in progress), February 2018.

[I-D.ietf-dmm-srv6-mobile-uplane]

Matsushima, S., Filsfils, C., Kohno, M., Garvia, P. C., Voyer, D., and C. E. Perkins, "Segment Routing IPv6 for Mobile User Plane", draft-ietf-dmm-srv6-mobile-uplane-11 (work in progress), April 2021.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", RFC 8402, DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.
- [RFC8754] Filsfils, C., Ed., Dukes, D., Ed., Previdi, S., Leddy, J., Matsushima, S., and D. Voyer, "IPv6 Segment Routing Header (SRH)", RFC 8754, DOI 10.17487/RFC8754, March 2020, <<https://www.rfc-editor.org/info/rfc8754>>.
- [RFC8986] Filsfils, C., Ed., Camarillo, P., Ed., Leddy, J., Voyer, D., Matsushima, S., and Z. Li, "Segment Routing over IPv6 (SRv6) Network Programming", RFC 8986, DOI 10.17487/RFC8986, February 2021, <<https://www.rfc-editor.org/info/rfc8986>>.

11.2. Informative References

- [ETSI-MEC] ETSI, "MEC in 5G Networks", ETSI White Paper No.28, June 2018.
- [I-D.ali-spring-network-slicing-building-blocks] Ali, Z., Filsfils, C., Camarillo, P., and D. Voyer, "Building blocks for Slicing in Segment Routing Network", draft-ali-spring-network-slicing-building-blocks-04 (work in progress), February 2021.
- [I-D.auge-dmm-hicn-mobility] Auge, J., Carofiglio, G., Muscariello, L., and M. Papalini, "Anchorless mobility through hICN", draft-auge-dmm-hicn-mobility-04 (work in progress), July 2020.
- [I-D.auge-dmm-hicn-mobility-deployment-options] Auge, J., Carofiglio, G., Muscariello, L., and M. Papalini, "Anchorless mobility management through hICN (hICN-AMM): Deployment options", draft-auge-dmm-hicn-mobility-deployment-options-04 (work in progress), July 2020.

- [I-D.clt-dmm-tn-aware-mobility]
Chunduri, U., Li, R., Bhaskaran, S., Kaippallimalil, J., Tantsura, J., Contreras, L. M., and P. Muley, "Transport Network aware Mobility for 5G", draft-clt-dmm-tn-aware-mobility-09 (work in progress), February 2021.
- [I-D.filsfils-spring-srv6-interop]
Filsfils, C., Clad, F., Garvia, P. C., AbdelSalam, A., Salsano, S., Bonaventure, O., Horn, J., and J. Liste, "SRv6 interoperability report", draft-filsfils-spring-srv6-interop-02 (work in progress), March 2019.
- [I-D.filsfils-spring-srv6-stateless-slice-id]
Filsfils, C., Clad, F., Camarillo, P., and K. Raza, "Stateless and Scalable Network Slice Identification for SRv6", draft-filsfils-spring-srv6-stateless-slice-id-02 (work in progress), January 2021.
- [I-D.guichard-spring-srv6-simplified-firewall]
Guichard, J. N., Filsfils, C., Bernier, D., Li, Z., Clad, F., Camarillo, P., and A. AbdelSalam, "Simplifying Firewall Rules with Network Programming and SRH Metadata", draft-guichard-spring-srv6-simplified-firewall-02 (work in progress), April 2020.
- [I-D.ietf-dmm-fpc-cpdp]
Matsushima, S., Bertz, L., Liebsch, M., Gundavelli, S., Moses, D., and C. E. Perkins, "Protocol for Forwarding Policy Configuration (FPC) in DMM", draft-ietf-dmm-fpc-cpdp-14 (work in progress), September 2020.
- [RFC5213] Gundavelli, S., Ed., Leung, K., Devarapalli, V., Chowdhury, K., and B. Patil, "Proxy Mobile IPv6", RFC 5213, DOI 10.17487/RFC5213, August 2008, <<https://www.rfc-editor.org/info/rfc5213>>.
- [TR.23725]
3GPP, "Study on enhancement of Ultra-Reliable Low-Latency Communication (URLLC) support in the 5G Core network (5GC)", 3GPP TR 23.725 16.2.0, June 2019.
- [TR.29892]
3GPP, "Study on User Plane Protocol in 5GC", 3GPP TR 29.892 16.1.0, April 2019.
- [TS.23501]
3GPP, "System Architecture for the 5G System", 3GPP TS 23.501 15.0.0, November 2017.

[TS.29244]

3GPP, "Interface between the Control Plane and the User Plane Nodes", 3GPP TS 29.244 15.0.0, December 2017.

[TS.29281]

3GPP, "General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U)", 3GPP TS 29.281 15.1.0, December 2017.

Authors' Addresses

Miya Kohno
Cisco Systems, Inc.
Japan

Email: mkohno@cisco.com

Francois Clad
Cisco Systems, Inc.
France

Email: fclad@cisco.com

Pablo Camarillo Garvia
Cisco Systems, Inc.
Spain

Email: pcamaril@cisco.com

Zafar Ali
Cisco Systems, Inc.
Canada

Email: zali@cisco.com