

# SR-TSN

draft-stein-srtsn-00

DetNet

IETF-110

Yaakov (J) Stein

RAD

# What is the problem I am solving?

SRTSN is a new mechanism for **Time Sensitive** packet flows


There two good reasons *not* to use time scheduled gating (Qbv) :

1. Qbv assigns packet flows to TDM-like timeslots  
negating much of the statmux advantage of PSNs
2. Qbv requires complex optimization and distribution  
which is a challenging exercise **at scale**  
(when not accomplished optimally  
efficiency is abysmal and/or  
delay requirements are not met)

Note that low latency is critical for URLLC xHauling  
yet, the TSN folks are not mandating their own mechanism  
for this kind of TS flow (802.1CM only includes  
preemption)

leaving only the alternative of physical traffic

# What forwarder architecture is assumed?

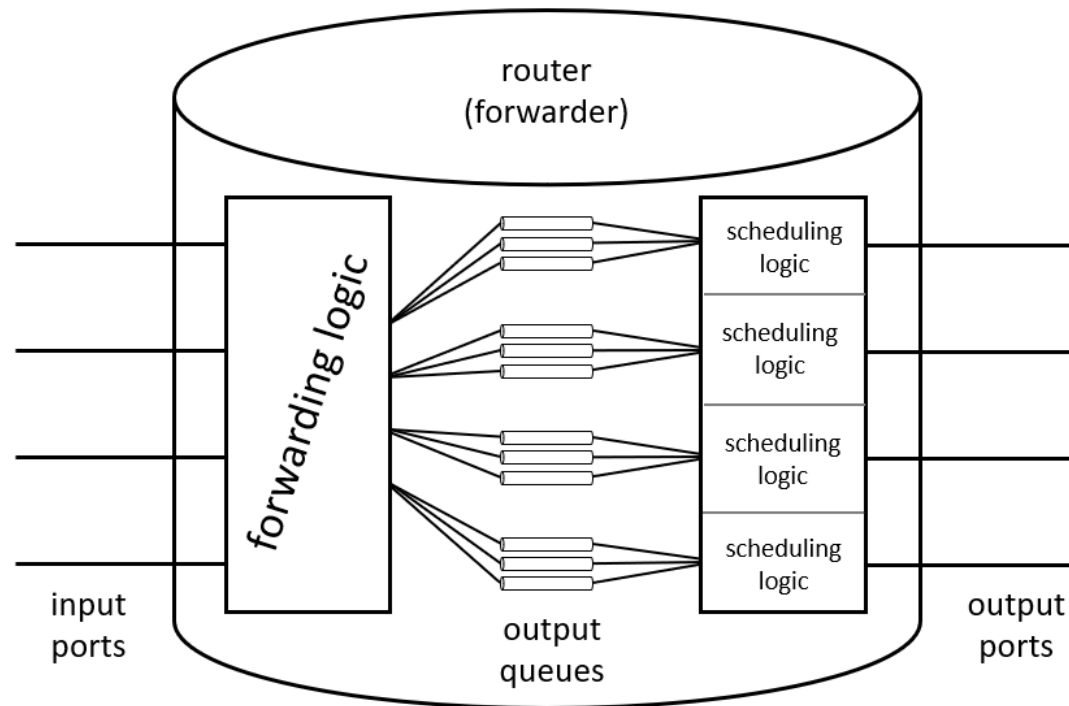

Note: I wrote output **queues** but conventional FIFO queues are not optimal data structures for SRTSN

Routers (forwarders) perform 2 distinct per-packet **and** per-router\* functions:

- forwarding
  - to which output port
  - *where* to send
- scheduling
  - which packet to transmit
  - *when* to send

with Segment Routing

with TSN/DetNet

\* They may also perform per-flow **or** per-router functions, which are already handled well enough

# What am I proposing?

There is an alternative to time scheduled gating that does not suffer from these drawbacks

- it can be optimized even for relatively large networks
- its configuration can be easily and rapidly distributed
- time sensitive flows can be dynamically added or removed
- it lowers average latency as compared to standard queueing
- ratio of missed deadlines can be tuned

The approach requires adding a new extension header containing a *stack* (or equivalent) data structure

One implementation of the proposal

is merged with source routing or Segment Routing implementing a more complete form of *network programming*

## What else can be done?

There are several known ways

to reduce end-to-end propagation delay, for example :

- **Longest In System**

- insert the packet's birth time into the header

- prioritize packets with earlier birth times

*this is suboptimal since a LIS packet  
with a loose delay budget*

*will be sent before a younger packet with a tight  
budget*

- **Earliest Deadline First**

- insert packet's deadline into the header

- prioritize packets with earlier deadlines

*this is suboptimal since an EDF packet*

*already be close to its destination*

*will be sent before a later packet far from*

## So, what's the stack-based approach?

The stack-based approach inserts into the packet *local* deadlines for each router along the path and each router prioritizes according to its own local deadline

The router *may* perform EDF on local deadlines or maybe **Just In Time**, or any other method to ensure that the packet exits before its local deadline

*In fact, one particularly convoluted method reproduces Qbv but without having to configure all the routers*

Notes:

- the router needs something more complex than a FIFO queue but less complex than time scheduled gates
- there are several ways to compute the local deadlines (more on that later)

# What is SRTSN?

If we are already using a stack  
why not reuse Segment Routing's stack too?

With SRTSN each TS packet carries a stack with both  
– forwarding (segment routing) instructions and  
– scheduling (local deadline) instructions  
in each stack entry

Like in SR, the stack is inserted by the ingress router  
which has its clock sync'ed to all the other routers  
so that the deadlines are directly comparable


There may additionally be non-TS packets with lower priority  
and there may be several priority levels of TS packets

# Simple Example \*

Total delay budget = 200  $\mu$ sec

Minimal delay = link latencies + minimal residence times = 100  $\mu$ sec

Fairly divide spare 100  $\mu$ sec queueing time between forwarders

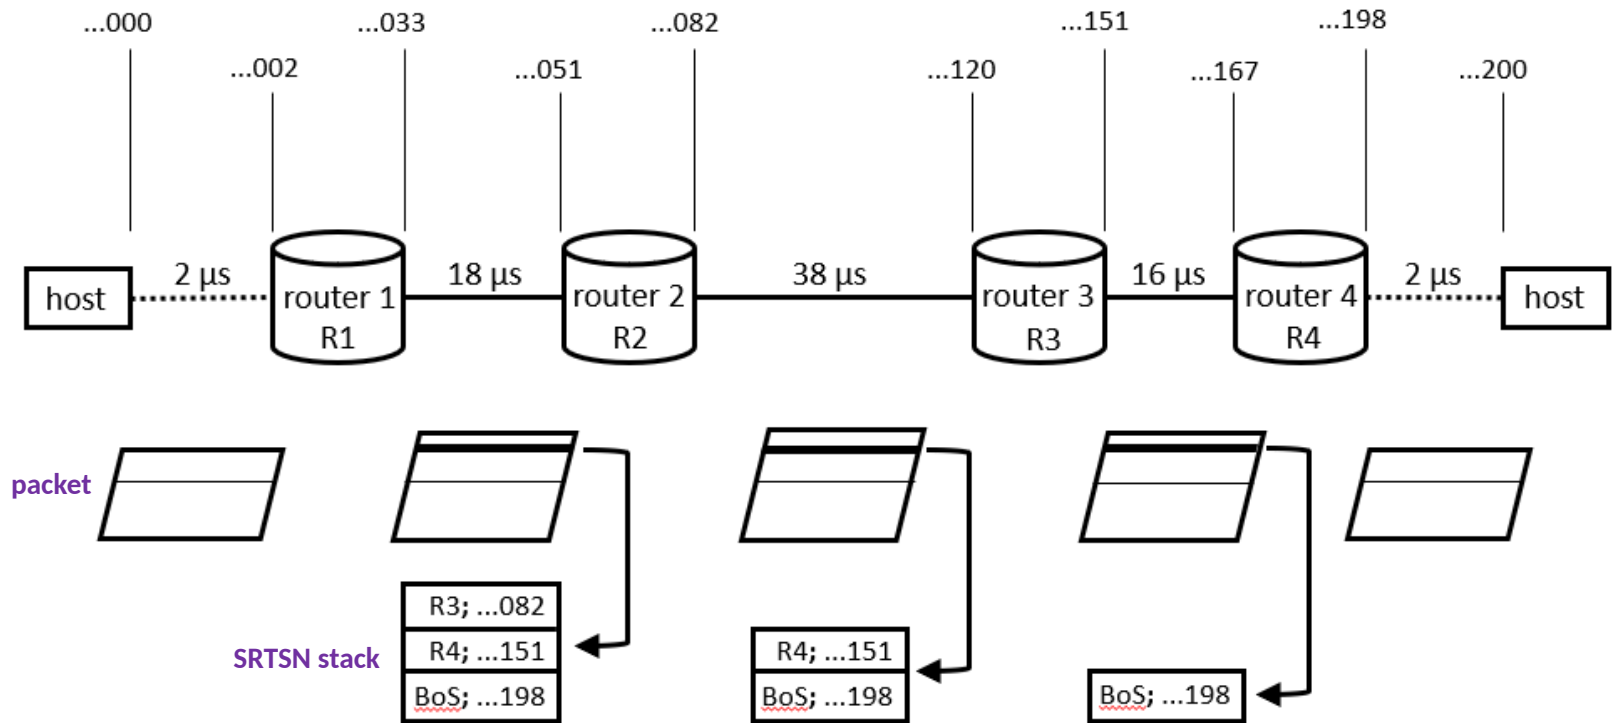

\* This is just one way to set local deadlines



# What am I asking this WG?

Being a solution for Time Sensitive flows

this work seems to naturally fit the DetNet charter

- addresses bounds on latency
- focuses on the data plane aspects
- applicable to both L2 and L3 networks
  - (no physical layer mechanism needed)
- mostly for networks under single administrative control

Is there interest here ?

I request the DetNet and Spring chairs to coordinate  
as to where this work should progress

**Thanks for listening !**

**comments appreciated**

**Yaakov\_S@rad.com**