

CCAMP Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: 1 August 2024

H. Zheng  
Huawei Technologies  
A. Guo  
Futurewei  
I. Busi  
Huawei Technologies  
A. Snitser  
Cisco  
C. Yu  
Huawei Technologies  
29 January 2024

A YANG Data Model for Transport Network Client Signals  
draft-ietf-ccamp-client-signal-yang-12

## Abstract

A transport network is a server-layer network to provide connectivity services to its client. The topology and tunnel information in the transport layer has already been defined by generic Traffic-engineered models and technology-specific models (e.g., OTN, WSON). However, how the client signals are accessing to the network has not been described. These information is necessary to both client and provider.

This draft describes how the client signals are carried over transport network and defines YANG data models which are required during configuration procedure. More specifically, several client signal (of transport network) models including ETH, STM-n, FC and so on, are defined in this draft.

## About This Document

This note is to be removed before publishing as an RFC.

The latest revision of this draft can be found at <https://ietf-ccamp-wg.github.io/draft-ietf-ccamp-client-signal-yang/draft-ietf-ccamp-client-signal-yang.html>. Status information for this document may be found at <https://datatracker.ietf.org/doc/draft-ietf-ccamp-client-signal-yang/>.

Discussion of this document takes place on the Common Control and Measurement Plane Working Group mailing list (<mailto:ccamp@ietf.org>), which is archived at <https://mailarchive.ietf.org/arch/browse/ccamp/>. Subscribe at <https://www.ietf.org/mailman/listinfo/ccamp/>.

Source for this draft and an issue tracker can be found at <https://github.com/ietf-ccamp-wg/draft-ietf-ccamp-client-signal-yang>.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 1 August 2024.

Copyright Notice

Copyright (c) 2024 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction . . . . .	3
1.1.	Overview . . . . .	3
2.	Conventions and Definitions . . . . .	4
2.1.	Prefixes in Model Names . . . . .	4
2.2.	Terminology and Notations . . . . .	5
3.	Transport Network Client Signal Overview . . . . .	5
3.1.	Overview of Service Request and Network Configuration Scenarios . . . . .	5
3.2.	Applicability of Proposed Model . . . . .	8
3.2.1.	Identifier and Readable Information . . . . .	8
3.2.2.	Unified Resource Identifiers . . . . .	9
3.2.3.	Threshold Configuration . . . . .	10

3.3.	State data of Services . . . . .	11
3.3.1.	Generic Requirements . . . . .	11
3.3.2.	Timestamp and Administrative information . . . . .	11
3.3.3.	performance monitoring status . . . . .	12
3.3.4.	Error Message Report . . . . .	13
4.	YANG Model for Transport Network Client Signal . . . . .	14
4.1.	YANG Tree for Ethernet Service . . . . .	14
4.2.	YANG Tree for other Transport Network Client Signal Model . . . . .	19
5.	YANG Code for Transport Network Client Signal . . . . .	21
5.1.	The ETH Service YANG Code . . . . .	21
5.2.	YANG Code for ETH type . . . . .	41
5.3.	Other Client Signal YANG Code . . . . .	51
5.4.	Other Client Signal Types YANG Code . . . . .	59
6.	Implementation Status . . . . .	60
6.1.	Usage of the ETH Service YANG Model on ONAP . . . . .	61
7.	Manageability Considerations . . . . .	62
8.	Security Considerations . . . . .	62
9.	IANA Considerations . . . . .	62
10.	References . . . . .	63
10.1.	Normative References . . . . .	63
10.2.	Informative References . . . . .	65
	Acknowledgments . . . . .	67
	Contributors . . . . .	67
	Authors' Addresses . . . . .	68

## 1. Introduction

### 1.1. Overview

A transport network is a server-layer network designed to provide connectivity services for a client-layer network to carry the client traffic transparently across the server-layer network resources. Currently the topology and tunnel models have been defined for transport networks, including [I-D.ietf-ccamp-otn-topo-yang] and [I-D.ietf-ccamp-otn-tunnel-model], providing server-layer topology abstraction and tunnel configuration between PEs. However, there is a missing piece for configuring how the PEs should map the client-layer traffic, received from the CE, over the server-layer tunnels: this gap is expected to be solved in this document.

This document defines a data model of all transport network client signals, using YANG language defined in [RFC7950]. The model can be used by applications exposing to a transport network controller via a RESTconf interface. Furthermore, it can be used by an application for the following purposes (but not limited to):

- \* To request/update an end-to-end service by driving a new tunnel to be set up to support this service;
- \* To request/update an end-to-end service by using an existing tunnel;
- \* To receive notification with regard to the information change of the given service;

The YANG modules defined in this document conforms to the Network Management Datastore Architecture (NMDA) defined in [RFC8342].

## 2. Conventions and Definitions

### 2.1. Prefixes in Model Names

In this document, names of data nodes and other data model objects are prefixed using the standard prefix associated with the corresponding YANG imported modules, including [RFC6991], [RFC8294] and [I-D.ietf-ccamp-otn-tunnel-model], which are shown as follow.

Prefix	YANG module	Reference
yang	ietf-yang-types	[RFC6991]
rt-types	ietf-routing-types	[RFC8294]
te-types	ietf-te-types	[RFCYYYY]
ll-types	ietf-layer1-types	[RFCZZZZ]
nw	ietf-network	[RFC8345]
nt	ietf-network-topology	[RFC8345]
te	ietf-te	[RFCXXXX]
clnt-types	ietf-trans-client-svc-types	RFC XXXX
ethht-types	ietf-eth-tran-types	RFC XXXX
clnt-svc	ietf-trans-client-service	RFC XXXX
ethht-svc	ietf-eth-tran-service	RFC XXXX

Table 1: Prefixes and corresponding YANG modules

RFC Editor Note: Please replace XXXX with the number assigned to the RFC once this draft becomes an RFC. Please replace YYYY with the RFC numbers assigned to [I-D.ietf-teas-rfc8776-update]. Please replace ZZZZ with the RFC numbers assigned to [I-D.ietf-ccamp-layer1-types]. Please replace KKKK with the RFC numbers assigned to [I-D.ietf-teas-yang-te].

## 2.2. Terminology and Notations

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in the YANG data tree presented later in this document is defined in [RFC8340]. They are provided below for reference.

- \* Brackets "[" and "]" enclose list keys.
- \* Abbreviations before data node names: "rw" means configuration (read-write) and "ro" state data (read-only).
- \* Symbols after data node names: "?" means an optional node, "!" means a presence container, and "\*" denotes a list and leaf-list.
- \* Parentheses enclose choice and case nodes, and case nodes are also marked with a colon (":").
- \* Ellipsis ("...") stands for contents of subtrees that are not shown.

## 3. Transport Network Client Signal Overview

### 3.1. Overview of Service Request and Network Configuration Scenarios

A global view of a multi-domain service can be described as the Figure 1. The customer is usually responsible to configure the CE nodes and to request to the provider the service intent, from the CE nodes perspective, while the provider is responsible to configure the whole network (including the PE nodes) to support the customer service intent. Generally speaking, the network configurations required to support a customer service can be split into two different groups: CE-PE and PE-PE. The CE-PE configuration deals with the client layer one-hop access link, while PE-PE configuration deals with the server layer tunnel. In Figure 1 we mark the intermediate nodes as 'P', which has same switching capability of PE but just not the 'end-point'. In this example, the link P-P and PE-P are a server-layer intra-domain or inter-domain link.

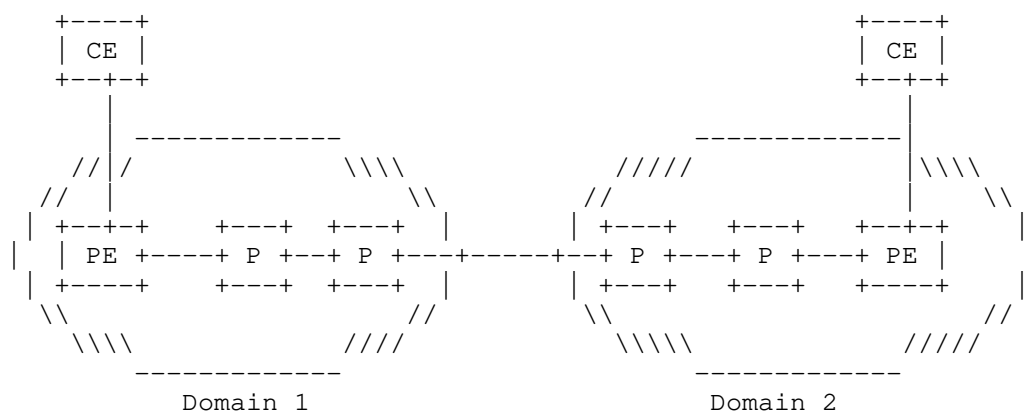


Figure 1: Global view of Client Service with the Network Provider

According to the responsibilities of each controller in [RFC8453], the controllers have different views of the service request and network configuration. The duty of CNC is to give the MDSC a description of the customer service intent: candidate YANG models include LlCSM [I-D.ietf-ccamp-llcsm-yang], L2SM [RFC8466] and L3SM [RFC8299], which are classified as customer service models, according to [RFC8309]. These models provide necessary attributes to describe the customer service intent from the customer/CE perspective, and do not provide any specific network configuration. These models also implies that the customer service description can be considered in a separate manner rather than integratig with network configurations, which also enable the controllers to abstract/virtualize the network resource to make them visible to the customer and also easier to manage. In other words, the network knowledge is not necessary at CNC and CMI, which is seen in an abstracted form as shown in Figure 2.

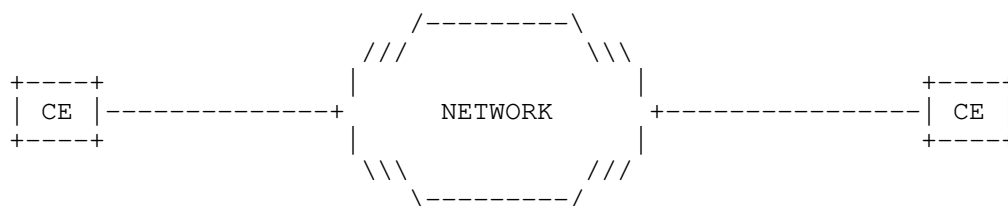


Figure 2: CNC Viewpoint on the Client Service

The functionalities of MDSC have been described in [RFC8453], which include the customer mapping/translation and multi-domain coordination. By receiving the request from CNC, MDSC need to understand what network configuration can support the customer

service intent and turn to the corresponding PNCs for configuration. The service request is therefore decomposed by MDSC into a few network configurations and forwarded to one or multiple PNCs respectively in single-domain and multi-domain scenario. In general, the MDSC has the view of both PE and CE nodes and of some abstract information regarding the P nodes, as shown in Figure 3. It is worth noting that this MDSC view is different with Figure 1 at the intra-domain link. Usually these details are hidden, for scalability purposes, and therefore the MDSC has only an abstract view of each domain internal topology.

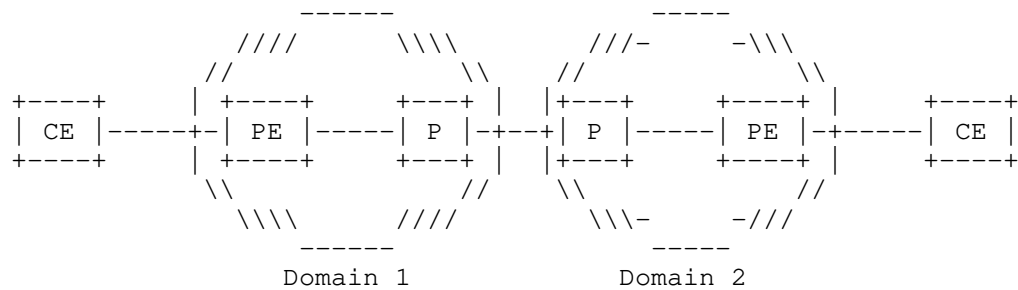


Figure 3: MDSC view of both Client Service and Network Abstraction

PNC is the controller that configure the physical devices, based on the network configuration received from the MDSC. Each PNC has the detailed view of its own domain, the example of view from PNC in domain 1 is shown in Figure 4. The PNC has all the detailed topology information on PE and P nodes and on the intra-domain links. The PNC configures the tunnel/tunnel segment within its domain based on the network configuration provided by the MDSC. The PNC also configures the network part of the CE-PE access links as well as the mapping of the client-layer traffic and the server-layer tunnels, based on the network configuration provided by the MDSC. The interaction between PNC and MDSC for the client-layer network configuration is accomplished by the models defined in this draft.

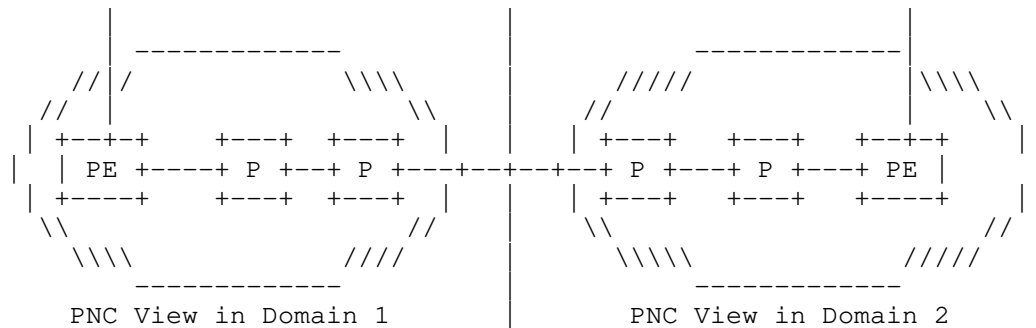


Figure 4: PNC view on Network Configuration

### 3.2. Applicability of Proposed Model

Existing TE and technology-specific models, such as topology models and tunnel models, support the network configuration among PEs and Ps. The customer service models, such as L1CSM, L2SM and L3SM, focus on describing the attributes among CEs. However, there is a missing piece on how to configure the CE-PE session. The models defined in this document provide the configuration on CE-PE when the provider server-layer network is TE-based technology.

In the example of OTN as the server-layer transport network, a full list of G-PID was summarized in [RFC7139], which can be divided into a few categories. The G-PID signals can be categorized into transparent and non-transparent. Examples of transparent signals may include Ethernetphysical interfaces, FC, STM-n and so on. In this approach the OTN devices is not aware of the client signal type, and this information is only necessary among the controllers. Once the OTN tunnel is set up, there is no switching requested on the client layer, and therefore only signal mapping is needed, without a client tunnel set up. The models that supporting the configuration of transparent signals are defined in Section 4.2. The other category would be non-transparent, such as Carrier Ethernet and MPLS-TP, with a switching request on the client layer. Once the OTN tunnel is set up, a corresponding tunnel in the client layer has to be set up to carry services. The models that supporting the configuration of transparent signals are defined in Section 4.1.

It is also worth noting that some client signal can be carried over multiple types of networks. For example, the Ethernet services can be carried over either OTN or Ethernet TE tunnels (over optical or microwave networks). The model specified in this document allows the support from networks with different technologies. The list of identities for client signals are defined in [I-D.ietf-ccamp-layer1-types].

#### 3.2.1. Identifier and Readable Information

**Name:** The identifier of the client signal service can be configured or retrieved by the name information. The naming of this attribute is based on the requirements of unifying with TE tunnel models. It can be readable or unreadable. If it is readable, to make it unique, it is needed to specify a unified structure for all the PNC systems. It is hard to do that for the reason of a lot of customized requirements from different Operators. In the ICT technology, UUID format could be a good option. **Title:** The title of client signal service can be configured with its readable name. **Description:** More



detail information of client signal service, such as some administrative information or location information. User-label: An alias of client signal service which is used to tag based on the maintenance requirement.

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--rw client-svc-name          string
      +--rw client-svc-title?        string
      +--rw user-label?              string
      +--rw client-svc-descr?        string
      .....

module: ietf-eth-tran-service
  +--rw ethht-svc-instances* [ethht-svc-name]
    +--rw ethht-svc-name            string
    +--rw ethht-svc-title?          string
    +--rw user-label?              string
    +--rw ethht-svc-descr?          string
    .....

```

### 3.2.2. Unified Resource Identifiers

In [I-D.ietf-teas-rfc8776-update], it is recognized that if the used topology resource adopts TE modeling, there could be two identifier systems, one is the network modeling system and the other one from TE topology modeling. The access ports of client signal service or end points of Ethernet service also adopt the TE topology resources. So two identifiers are both fine to specified in the configuration requests.

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--rw src-access-ports
        +--rw access-node-id?      te-types:te-node-id
        +--rw access-node-uri?     nw:node-id
        +--rw access-ltp-id?       te-types:te-tp-id
        +--rw access-ltp-uri?     nt:tp-id
        +--rw client-signal?       identityref
      +--rw dst-access-ports
        +--rw access-node-id?      te-types:te-node-id
        +--rw access-node-uri?     nw:node-id
        +--rw access-ltp-id?       te-types:te-tp-id
        +--rw access-ltp-uri?     nt:tp-id
        +--rw client-signal?       identityref
        .....

module: ietf-eth-tran-service
  +--rw etht-svc
    +--rw etht-svc-instances* [etht-svc-name]
      +--rw etht-svc-end-points* [etht-svc-end-point-name]
        +--rw etht-svc-access-points* [access-point-id]
          +--rw access-point-id      string
          +--rw access-node-id?      te-types:te-node-id
          +--rw access-node-uri?     nw:node-id
          +--rw access-ltp-id?       te-types:te-tp-id
          +--rw access-ltp-uri?     nt:tp-id
          +--rw access-role?         identityref
          .....

```

### 3.2.3. Threshold Configuration

Some PM data are quite critical for client signal service users' experience, e.g. latency value. For the Operators, they can configure a service-oriented threshold for the PM data, to make the maintenance engineer recognize the network issues in time.

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--rw alarm-shreshold
        +--rw latency-threshold?   uint32
        .....

module: ietf-eth-tran-service
  +--rw ethht-svc
    +--rw ethht-svc-instances* [ethht-svc-name]
      +--rw alarm-shreshold
        +--rw latency-threshold?   uint32
        .....

```

### 3.3. State data of Services

#### 3.3.1. Generic Requirements

States have been defined to retrieve the status of the delivered services. A few generic states defined in [I-D.ietf-teas-rfc8776-update] are reused in this document. These states include the operational state and the provisioning state.

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--ro operational-state?      identityref
      +--ro provisioning-state?     identityref
      .....

module: ietf-eth-tran-service
  +--rw ethht-svc
    +--rw ethht-svc-instances* [ethht-svc-name]
      +--ro state
        +--ro operational-state?    identityref
        +--ro provisioning-state?   identityref
        .....

```

#### 3.3.2. Timestamp and Administrative information

A few other parameters are defined for the management of the services. Given the complicated labor division, the creation, update and maintenance may have different responsible systems. So the log of the service would be helpful and should be easy to retrieved in a standard way as well. These information include, but not restricted to the following:

- \* When the service is created and has been last updated, these are specified in the creation-time and last-updated-time.
- \* Who created the service and who made the last update to the service, these are specified in the created-by and last-updated-by.
- \* The owner of the service is specified as owned-by, which would be useful when the service is delegated by or to a specific system. The identifier of the system is used to represent such information.

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--ro creation-time?          yang:date-and-time
      +--ro last-updated-time?      yang:date-and-time
      +--ro created-by?             string
      +--ro last-updated-by?        string
      +--ro owned-by?               string
      .....

```

```

module: ietf-eth-tran-service
  +--rw etht-svc
    +--rw etht-svc-instances* [etht-svc-name]
      +--ro state
        +--ro creation-time?      yang:date-and-time
        +--ro last-updated-time?  yang:date-and-time
        +--ro created-by?         string
        +--ro last-updated-by?    string
        +--ro owned-by?           string
        .....

```

### 3.3.3. performance monitoring status

For the Operators, there are also some requirements to provide some PM data to the service users. Especially some PM data are quite critical for users' experience.

For example, one of the great advantage of client signal service is it can provide deterministic low latency. Some industry users, e.g. stock trading company, have great demand of stable short latency service to ensure their high-frequency fast trading operations can be finished quickly and definitely. In addition to provision a low-latency client signal service, Operators can also provide some other differentiated services for these kinds of service users. For example latency visibility can be provided to the users, to let them monitor the latency values.

The latency measurement mechanism can be referenced from sub-clause 7.10.1 of [ITU-T\_G.875]. And PNC can provide a measurement latency after service is provisioned if the devices support this measurement mechanism. Otherwise providing an estimated value could be a workaround solution.

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--ro pm-state
        +--ro latency?   uint32
        .....

module: ietf-eth-tran-service
  +--rw etht-svc
    +--rw etht-svc-instances* [etht-svc-name]
      +--ro state
        +--ro pm-state
          +--ro latency?   uint32
          .....

```

### 3.3.4. Error Message Report

Once the processing of client signal service configuration, including creation, updating, deletion, meets with some internal problems, such as no enough available bandwidth, or wrong client signal mapping .etc., the problems should be reported to the client system to make the issues read by the maintenance engineers. Since these error messages are more technologies-specific, especially sometimes accurate location information is needed in these messages, it is hard to standardize these error messages by RESTCONF protocol errors. For the client systems, they would like to get these messages both from notifications and retrieval. So this document defines an error container in the YANG data model to let the PNC to provide these messages.

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--ro error-info
        +--ro error-code?          uint16
        +--ro error-description?   string
        +--ro error-timestamp?     yang:date-and-time
        .....

module: ietf-eth-tran-service
  +--rw ethht-svc
    +--rw ethht-svc-instances* [ethht-svc-name]
      +--rw ethht-svc-end-points* [ethht-svc-end-point-name]
        +--ro state
          +--ro error-info
            +--ro error-code?          uint16
            +--ro error-description?   string
            +--ro error-timestamp?     yang:date-and-time
            .....

```

#### 4. YANG Model for Transport Network Client Signal

##### 4.1. YANG Tree for Ethernet Service

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```

module: ietf-eth-tran-service
  +--rw ethht-svc
    +--rw globals
      +--rw named-bandwidth-profiles* [bandwidth-profile-name]
        +--rw bandwidth-profile-name   string
        +--rw bandwidth-profile-type?
          |   ethht-types:bandwidth-profile-type
        +--rw CIR?                      uint64
        +--rw CBS?                      uint64
        +--rw EIR?                      uint64
        +--rw EBS?                      uint64
        +--rw color-aware?              boolean
        +--rw coupling-flag?            boolean
    +--rw ethht-svc-instances* [ethht-svc-name]
      +--rw ethht-svc-name               string
      +--rw ethht-svc-title?             string
      +--rw user-label?                  string
      +--rw ethht-svc-descr?             string
      +--rw ethht-svc-customer?          string
      +--rw ethht-svc-type?              ethht-types:service-type
      +--rw ethht-svc-lifecycle?         ethht-types:lifecycle-status
      +--rw te-topology-identifier

```

```

+--rw provider-id?    te-global-id
+--rw client-id?      te-global-id
+--rw topology-id?    te-topology-id
+--rw resilience
+--rw protection
|   +--rw protection-type?          identityref
|   +--rw protection-reversion-disable?  boolean
|   +--rw hold-off-time?             uint32
|   +--rw wait-to-revert?            uint16
|   +--rw aps-signal-id?             uint8
+--rw restoration
|   +--rw restoration-type?          identityref
|   +--rw restoration-scheme?        identityref
|   +--rw restoration-reversion-disable?  boolean
|   +--rw hold-off-time?             uint32
|   +--rw wait-to-restore?           uint16
|   +--rw wait-to-revert?            uint16
+--rw ethht-svc-end-points* [ethht-svc-end-point-name]
|   +--rw ethht-svc-end-point-name      string
|   +--rw ethht-svc-end-point-id?       string
|   +--rw ethht-svc-end-point-descr?    string
|   +--rw topology-role?
|   |   identityref
|   +--rw resilience
+--rw ethht-svc-access-points* [access-point-id]
|   +--rw access-point-id      string
|   +--rw access-node-id?      te-types:te-node-id
|   +--rw access-node-uri?     nw:node-id
|   +--rw access-ltp-id?       te-types:te-tp-id
|   +--rw access-ltp-uri?      nt:tp-id
|   +--rw access-role?         identityref
+--rw pm-config
|   +--rw pm-enable?           boolean
|   +--rw sending-rate-high?   uint64
|   +--rw sending-rate-low?    uint64
|   +--rw receiving-rate-high? uint64
|   +--rw receiving-rate-low?  uint64
+--ro state
|   +--ro operational-state?    identityref
|   +--ro provisioning-state?   identityref
+--ro performance?             identityref
+--rw service-classification-type?
|   identityref
+--rw (service-classification)?
|   +--:(port-classification)
|   +--:(vlan-classification)
|   +--rw outer-tag!
|   |   +--rw tag-type?

```

```

|         etht-types:eth-tag-classify
+--rw (individual-bundling-vlan)?
|   +--:(individual-vlan)
|   |   +--rw vlan-value?      etht-types:vlanid
|   +--:(vlan-bundling)
|   |   +--rw vlan-range?
|   |       etht-types:vid-range-type
+--rw second-tag!
+--rw tag-type?
|   etht-types:eth-tag-classify
+--rw (individual-bundling-vlan)?
|   +--:(individual-vlan)
|   |   +--rw vlan-value?      etht-types:vlanid
|   +--:(vlan-bundling)
|   |   +--rw vlan-range?
|   |       etht-types:vid-range-type
+--rw split-horizon-group?          string
+--rw (direction)?
+--:(symmetrical)
|   +--rw ingress-egress-bandwidth-profile
|   |   +--rw (style)?
|   |   |   +--:(named)
|   |   |   |   +--rw bandwidth-profile-name?  leafref
|   |   |   +--:(value)
|   |   |   |   +--rw bandwidth-profile-type?
|   |   |   |   |   etht-types:bandwidth-profile-type
|   |   |   |   +--rw CIR?                      uint64
|   |   |   |   +--rw CBS?                      uint64
|   |   |   |   +--rw EIR?                      uint64
|   |   |   |   +--rw EBS?                      uint64
|   |   |   |   +--rw color-aware?              boolean
|   |   |   |   +--rw coupling-flag?            boolean
+--:(asymmetrical)
|   +--rw ingress-bandwidth-profile
|   |   +--rw (style)?
|   |   |   +--:(named)
|   |   |   |   +--rw bandwidth-profile-name?  leafref
|   |   |   +--:(value)
|   |   |   |   +--rw bandwidth-profile-type?
|   |   |   |   |   etht-types:bandwidth-profile-type
|   |   |   |   +--rw CIR?                      uint64
|   |   |   |   +--rw CBS?                      uint64
|   |   |   |   +--rw EIR?                      uint64
|   |   |   |   +--rw EBS?                      uint64
|   |   |   |   +--rw color-aware?              boolean
|   |   |   |   +--rw coupling-flag?            boolean
+--rw egress-bandwidth-profile
|   +--rw (style)?

```



```

+---:(named)
| +---rw bandwidth-profile-name?   leafref
+---:(value)
| +---rw bandwidth-profile-type?
| | etht-types:bandwidth-profile-type
+---rw CIR?                        uint64
+---rw CBS?                        uint64
+---rw EIR?                        uint64
+---rw EBS?                        uint64
+---rw color-aware?                boolean
+---rw coupling-flag?              boolean
+---rw vlan-operations
| +---rw (direction)?
| | +---:(symmetrical)
| | | +---rw symmetrical-operation
| | | +---rw pop-tags?             uint8
| | | +---rw push-tags
| | | | +---rw outer-tag!
| | | | | +---rw tag-type?
| | | | | | etht-types:eth-tag-type
| | | | | +---rw vlan-value?       etht-types:vlanid
| | | | | +---rw default-pcp?      uint8
| | | | +---rw second-tag!
| | | | | +---rw tag-type?
| | | | | | etht-types:eth-tag-type
| | | | | +---rw vlan-value?       etht-types:vlanid
| | | | | +---rw default-pcp?      uint8
| | | +---:(asymmetrical)
| | | | +---rw asymmetrical-operation
| | | | +---rw ingress
| | | | | +---rw pop-tags?         uint8
| | | | | +---rw push-tags
| | | | | | +---rw outer-tag!
| | | | | | | +---rw tag-type?
| | | | | | | | etht-types:eth-tag-type
| | | | | | | +---rw vlan-value?
| | | | | | | | etht-types:vlanid
| | | | | | | +---rw default-pcp?   uint8
| | | | | +---rw second-tag!
| | | | | | +---rw tag-type?
| | | | | | | etht-types:eth-tag-type
| | | | | | +---rw vlan-value?
| | | | | | | etht-types:vlanid
| | | | | | +---rw default-pcp?     uint8
| | | | +---rw egress
| | | | | +---rw pop-tags?         uint8
| | | | | +---rw push-tags
| | | | | | +---rw outer-tag!

```

```

| | | | | +---rw tag-type?
| | | | | | etht-types:eth-tag-type
| | | | | +---rw vlan-value?
| | | | | | etht-types:vlanid
| | | | | +---rw default-pcp? uint8
+---rw second-tag!
| | | | | +---rw tag-type?
| | | | | | etht-types:eth-tag-type
+---rw vlan-value?
| | | | | | etht-types:vlanid
+---rw default-pcp? uint8
+---rw alarm-threshold
| | | | | +---rw latency-threshold? uint32
+---rw underlay
| | | | | +---rw (technology)?
| | | | | +---:(native-ethernet)
| | | | | | +---rw eth-tunnels* [name]
| | | | | | | +---rw name
| | | | | | | | -> /te:te/tunnels/tunnel/name
| | | | | | | +---rw encoding? identityref
| | | | | | | +---rw switching-type? identityref
+---:(frame-base)
| | | | | | +---rw otn-tunnels* [name]
| | | | | | | +---rw name
| | | | | | | | -> /te:te/tunnels/tunnel/name
| | | | | | | +---rw encoding? identityref
| | | | | | | +---rw switching-type? identityref
+---:(mpls-tp)
| | | | | | +---rw pw
| | | | | | | +---rw pw-id? string
| | | | | | | +---rw pw-name? string
| | | | | | | +---rw transmit-label?
| | | | | | | | rt-types:mpls-label
| | | | | | | +---rw receive-label?
| | | | | | | | rt-types:mpls-label
| | | | | | | +---rw encapsulation-type? identityref
| | | | | | | +---ro oper-status? identityref
| | | | | | | +---rw ingress-bandwidth-profile
| | | | | | | | +---rw (style)?
| | | | | | | | +---:(named)
| | | | | | | | | +---rw bandwidth-profile-name? leafref
| | | | | | | | +---:(value)
| | | | | | | | | +---rw bandwidth-profile-type?
| | | | | | | | | | etht-types:bandwidth-profile-ty\
pe
| | | | | | | | | +---rw CIR? uint64
| | | | | | | | | +---rw CBS? uint64
| | | | | | | | | +---rw EIR? uint64

```

```

|         |         |         +---rw EBS?                               uint64
|         |         |         +---rw pw-paths* [path-id]
|         |         |         +---rw path-id           uint8
|         |         |         +---rw tp-tunnels* [name]
|         |         |         +---rw name             string
|         |         +---rw src-split-horizon-group?    string
|         +---rw dst-split-horizon-group?             string
+---rw admin-status?                                identityref
+---ro state
+---ro operational-state?                            identityref
+---ro provisioning-state?                           identityref
+---ro creation-time?                                yang:date-and-time
+---ro last-updated-time?                             yang:date-and-time
+---ro created-by?                                    string
+---ro last-updated-by?                               string
+---ro owned-by?                                      string
+---ro pm-state
| +---ro latency?   uint32
+---ro error-info
+---ro error-code?      uint16
+---ro error-description? string
+---ro error-timestamp? yang:date-and-time

```

Figure 5

#### 4.2. YANG Tree for other Transport Network Client Signal Model

```

module: ietf-trans-client-service
  +--rw client-svc
    +--rw client-svc-instances* [client-svc-name]
      +--rw client-svc-name          string
      +--rw client-svc-title?        string
      +--rw user-label?              string
      +--rw client-svc-descr?        string
      +--rw client-svc-customer?     string
      +--rw resilience
      +--rw te-topology-identifier
        +--rw provider-id?   te-global-id
        +--rw client-id?     te-global-id
        +--rw topology-id?   te-topology-id
      +--rw admin-status?       identityref
      +--rw src-access-ports
        +--rw access-node-id?   te-types:te-node-id
        +--rw access-node-uri?  nw:node-id
        +--rw access-ltp-id?    te-types:te-tp-id
        +--rw access-ltp-uri?   nt:tp-id
        +--rw client-signal?    identityref
      +--rw dst-access-ports
        +--rw access-node-id?   te-types:te-node-id
        +--rw access-node-uri?  nw:node-id
        +--rw access-ltp-id?    te-types:te-tp-id
        +--rw access-ltp-uri?   nt:tp-id
        +--rw client-signal?    identityref
      +--ro pm-state
        +--ro latency?   uint32
      +--ro error-info
        +--ro error-code?      uint16
        +--ro error-description? string
        +--ro error-timestamp? yang:date-and-time
      +--rw alarm-threshold
        +--rw latency-threshold? uint32
      +--rw direction?          identityref
      +--rw svc-tunnels* [tunnel-name]
        +--rw tunnel-name      string
      +--ro operational-state?  identityref
      +--ro provisioning-state? identityref
      +--ro creation-time?      yang:date-and-time
      +--ro last-updated-time?  yang:date-and-time
      +--ro created-by?         string
      +--ro last-updated-by?    string
      +--ro owned-by?           string

```

Figure 6

## 5. YANG Code for Transport Network Client Signal

### 5.1. The ETH Service YANG Code

This module imports typedefs and modules from [RFC6991], [RFC8294], [I-D.ietf-teas-rfc8776-update].

```
<CODE BEGINS> file "ietf-eth-tran-service@2024-01-11.yang"
module iETF-eth-tran-service {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-eth-tran-service";
  prefix etht-svc;

  import iETF-yang-types {
    prefix yang;
    reference
      "RFC 6991: Common YANG Data Types";
  }

  import iETF-routing-types {
    prefix rt-types;
    reference
      "RFC 8294: Common YANG Data Types for the Routing Area";
  }

  import iETF-te-types {
    prefix te-types;
    reference "RFCYYYY: Traffic Engineering Common YANG Types";
  }
  // RFC Editor: replace YYYY with the actual RFC number assigned
  // to the RFC once draft-ietf-teas-rfc8776-update
  // becomes an RFC, update date information and remove this note.

  import iETF-network {
    prefix nw;
    reference
      "RFC8345: A YANG Data Model for Network Topologies";
  }

  import iETF-network-topology {
    prefix "nt";
    reference
      "RFC8345: A YANG Data Model for Network Topologies";
  }

  import iETF-te {
    prefix "te";
    reference
```

```
    "RFCXXXX: A YANG Data Model for Traffic Engineering Tunnels
    and Interfaces";
}
// RFC Editor: replace KKKK with the actual RFC number assigned
// to the RFC once draft-ietf-teas-yang-te
// becomes an RFC, update date information and remove this note.

import ietf-eth-tran-types {
    prefix etht-types;
    reference
        "RFCXXXX: A YANG Data Model for Transport Network Client
        Signals";
}
// RFC Editor: replace XXXX with the actual RFC number assigned
// to the RFC once this draft
// becomes an RFC, update date information and remove this note.

organization
    "Internet Engineering Task Force (IETF) CCAMP WG";
contact
    "WG Web: <https://datatracker.ietf.org/wg/ccamp/>
    WG List: <mailto:ccamp@ietf.org>

    Editor: Haomian Zheng
            <mailto:zhenghaomian@huawei.com>

    Editor: Aihua Guo
            <mailto:aihuaguo.ietf@gmail.com>

    Editor: Italo Busi
            <mailto:italo.busi@huawei.com>

    Editor: Anton Snitser
            <mailto:asnizar@cisco.com>

    Editor: Chaode Yu
            <mailto:yuchaode@huawei.com>;

description
    "This module defines a YANG data model for describing
    Ethernet transport network client services.

    The model fully conforms to the Network Management
    Datastore Architecture (NMDA).

    Copyright (c) 2024 IETF Trust and the persons
    identified as authors of the code. All rights reserved."
```

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Revised BSD License set forth in Section 4.c of the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

```
revision 2024-01-11 {
  description
    "Initial Version";
  reference
    "RFC XXXX: A YANG Data Model for Transport Network Client
    Signals";
}
// RFC Editor: replace XXXX with the actual RFC number assigned
// to the RFC once this draft
// becomes an RFC, update date information and remove this note.

/*
 * Groupings
 */

grouping vlan-classification {
  description
    "A grouping which represents classification
    on an 802.1Q VLAN tag.";

  leaf tag-type {
    type eth-types:eth-tag-classify;
    description
      "The tag type used for VLAN classification.";
  }
  choice individual-bundling-vlan {
    description
      "VLAN based classification can be individual
      or bundling.";

    case individual-vlan {
      leaf vlan-value {
        type eth-types:vlanid;
        description
          "VLAN ID value.";
      }
    }
    case vlan-bundling {
```

```
        leaf vlan-range {
            type ethht-types:vid-range-type;
            description
                "List of VLAN ID values.";
        }
    }
}

grouping vlan-write {
    description
        "A grouping which represents push/pop operations
        of an 802.1Q VLAN tag.";

    leaf tag-type {
        type ethht-types:eth-tag-type;
        description
            "The VLAN tag type to push/swap.";
    }
    leaf vlan-value {
        type ethht-types:vlanid;
        description
            "The VLAN ID value to push/swap.";
    }
}

/*
 * To be added: this attribute is used when:
 * a) the ETH service has only one CoS (as in current version)
 * b) as a default when a mapping between a given CoS value
 *    and the PCP value is not defined (in future versions)
 */
leaf default-pcp {
    type uint8 {
        range "0..7";
    }
    description
        "The default Priority Code Point (PCP) value to push/swap";
}

grouping vlan-operations {
    description
        "A grouping which represents VLAN operations.";

    leaf pop-tags {
        type uint8 {
            range "1..2";
        }
        description

```



```
        "The number of VLAN tags to pop (or swap if used in
        conjunction with push-tags)";
    }
    container push-tags {
        description
            "The VLAN tags to push (or swap if used in
            conjunction with pop-tags)";
        container outer-tag {
            presence
                "Indicates existence of the outermost VLAN tag to
                push/swap";
            description
                "The outermost VLAN tag to push/swap.";
            uses vlan-write;
        }
        container second-tag {
            must
                ' ../outer-tag/tag-type = "eth-types:s-vlan-tag-type" and ' +
                ' tag-type = "eth-types:c-vlan-tag-type" '
            {
                error-message
                    "
                    When pushing/swapping two tags, the outermost tag must
                    be specified and of S-VLAN type and the second
                    outermost tag must be of C-VLAN tag type.
                    ";
                description
                    "
                    For IEEE 802.1Q interoperability, when pushing/swapping
                    two tags, it is required that the outermost tag exists
                    and is an S-VLAN, and the second outermost tag is a
                    C-VLAN.
                    ";
            }
            presence
                "Indicates existence of a second outermost VLAN tag to
                push/swap";
            description
                "The second outermost VLAN tag to push/swap.";
            uses vlan-write;
        }
    }
}

grouping named-or-value-bandwidth-profile {
    description
        "A grouping to configure a bandwidth profile either by
        referencing a named bandwidth profile or by
```

```
    configuring the values of the bandwidth profile attributes.";
choice style {
  description
    "Whether the bandwidth profile is named or defined by value";
  case named {
    description
      "Named bandwidth profile.";
    leaf bandwidth-profile-name {
      type leafref {
        path "/etht-svc:etht-svc/etht-svc:globals/"
          + "etht-svc:named-bandwidth-profiles/"
          + "etht-svc:bandwidth-profile-name";
      }
      description
        "Name of the bandwidth profile.";
    }
  }
  case value {
    description
      "Bandwidth profile configured by value.";
    uses etht-types:etht-bandwidth-profiles;
  }
}

grouping bandwidth-profiles {
  description
    "A grouping which represent bandwidth profile configuration.";

  choice direction {
    description
      "Whether the bandwidth profiles are symmetrical or
      asymmetrical";
    case symmetrical {
      description
        "The same bandwidth profile is used to describe both
        the ingress and the egress bandwidth profile.";
      container ingress-egress-bandwidth-profile {
        description
          "The bandwidth profile used in both directions.";
        uses named-or-value-bandwidth-profile;
      }
    }
    case asymmetrical {
      description
        "Ingress and egress bandwidth profiles can be specified.";
      container ingress-bandwidth-profile {
        description

```

```
        "The bandwidth profile used in the ingress direction.";
        uses named-or-value-bandwidth-profile;
    }
    container egress-bandwidth-profile {
        description
            "The bandwidth profile used in the egress direction.";
        uses named-or-value-bandwidth-profile;
    }
}

}

}

grouping etht-svc-access-parameters {
    description
        "ETH services access parameters";

    leaf access-node-id {
        type te-types:te-node-id;
        description
            "The identifier of the access node in
            the ETH TE topology.";
    }
    leaf access-node-uri {
        type nw:node-id;
        description
            "The identifier of the access node in the network.";
    }
    leaf access-ltp-id {
        type te-types:te-tp-id;
        description
            "The TE link termination point identifier, used
            together with access-node-id to identify the
            access LTP.";
    }
    leaf access-ltp-uri {
        type nt:tp-id;
        description
            "The link termination point identifier in network topology,
            used together with access-node-uri to identify the
            access LTP.";
    }
    leaf access-role {
        type identityref {
            base etht-types:access-role;
        }
        description
            "Indicate the role of access, e.g., working or protection. ";
    }
}
```

```
    container pm-config {
      uses pm-config-grouping;
      description
        "This grouping is used to set the threshold value for
        performance monitoring. ";
    }
    container state {
      config false;
      description
        "The state is used to monitor the status of service. ";
      leaf operational-state {
        type identityref {
          base te-types:tunnel-state-type;
        }
        description
          "Indicating the operational state of client signal. ";
      }
      leaf provisioning-state {
        type identityref {
          base te-types:lsp-state-type;
        }
        description
          "Indicating the provisional state of client signal,
          especially when there is a change, i.e., revise, create. ";
      }
    }
    leaf performance {
      type identityref {
        base eth-types:performance;
      }
      config false;
      description
        "Performance Monitoring for the service. ";
    }
  }

  grouping etht-svc-tunnel-parameters {
    description
      "ETH services tunnel parameters.";

    choice technology {
      description
        "Service multiplexing is optional and flexible.";
      case native-ethernet {
        /*
         * placeholder to support proprietary multiplexing
         * (for further discussion)
         */
      }
    }
  }
```

```
    list eth-tunnels {
        key name;
        description
            "ETH Tunnel list in native Ethernet scenario.";
        uses tunnels-grouping;
    }
}
case frame-base {
    list otn-tunnels {
        key name;
        description
            "OTN Tunnel list in Frame-based scenario.";
        uses tunnels-grouping;
    }
}
case mpls-tp {
    container pw {
        description
            "Pseudowire information for Ethernet over MPLS-TP.";
        uses pw-segment-grouping;
    }
}
}
/*
* Open issue:
*   can we constraints it to be used only with mp services?
*/
leaf src-split-horizon-group {
    type string;
    description
        "Identify a split horizon group at the source Tunnel
        Termination Point (TTP).";
}
leaf dst-split-horizon-group {
    type string;
    description
        "Identify a split horizon group at the destination Tunnel
        Termination Point (TTP).";
}
}

grouping etht-svc-pm-threshold-config {
    description
        "Configuraiton parameters for Ethernet service PM thresholds.";

    leaf sending-rate-high {
        type uint64;
        description

```

```
        "High threshold of packet sending rate in kbps.";
    }
    leaf sending-rate-low {
        type uint64;
        description
            "Low threshold of packet sending rate in kbps.";
    }
    leaf receiving-rate-high {
        type uint64;
        description
            "High threshold of packet receiving rate in kbps.";
    }
    leaf receiving-rate-low {
        type uint64;
        description
            "Low threshold of packet receiving rate in kbps.";
    }
}

grouping ethht-svc-pm-stats {
    description
        "Ethernet service PM statistics.";

    leaf sending-rate-too-high {
        type uint32;
        description
            "Counter that indicates the number of times the
            sending rate is above the high threshold";
    }
    leaf sending-rate-too-low {
        type uint32;
        description
            "Counter that indicates the number of times the
            sending rate is below the low threshold";
    }
    leaf receiving-rate-too-high {
        type uint32;
        description
            "Counter that indicates the number of times the
            receiving rate is above the high threshold";
    }
    leaf receiving-rate-too-low {
        type uint32;
        description
            "Counter that indicates the number of times the
            receiving rate is below the low threshold";
    }
}
```

```
grouping etht-svc-instance-config {
  description
    "Configuraiton parameters for Ethernet services.";

  leaf etht-svc-name {
    type string;
    description
      "Name of the ETH service.";
  }
  leaf etht-svc-title {
    type string;
    description
      "The Identifier of the ETH service.";
  }
  leaf user-label {
    type string;
    description
      "Alias of the ETH service.";
  }
  leaf etht-svc-descr {
    type string;
    description
      "Description of the ETH service.";
  }
  leaf etht-svc-customer {
    type string;
    description
      "Customer of the ETH service.";
  }
  leaf etht-svc-type {
    type etht-types:service-type;
    description
      "Type of ETH service (p2p, mp2mp or rmp).";
    /* Add default as p2p */
  }
  leaf etht-svc-lifecycle {
    type etht-types:lifecycle-status;
    description
      "Lifecycle state of ETH service.";
    /* Add default as installed */
  }
  uses te-types:te-topology-identifier;
  uses resilience-grouping;
  list etht-svc-end-points {
    key etht-svc-end-point-name;
    description
      "The logical end point for the ETH service. ";
    uses etht-svc-end-point-grouping;
  }
}
```

```
    }
    container alarm-threshold {
      description
        "threshold configuration for the E2E client signal";
      uses alarm-threshold-grouping;
    }
    container underlay {
      description
        "The unterlay tunnel information that carrying the
        ETH service. ";
      uses etht-svc-tunnel-parameters;
    }
    leaf admin-status {
      type identityref {
        base te-types:tunnel-admin-state-type;
      }
      default te-types:tunnel-admin-state-up;
      description "ETH service administrative state.";
    }
  }

  grouping etht-svc-instance-state {
    description
      "State parameters for Ethernet services.";

    leaf operational-state {
      type identityref {
        base te-types:tunnel-state-type;
      }
      default te-types:tunnel-state-up;
      description
        "ETH service operational state.";
    }
    leaf provisioning-state {
      type identityref {
        base te-types:lsp-state-type;
      }
      description
        "ETH service provisioning state.";
    }
    leaf creation-time {
      type yang:date-and-time;
      description
        "Time of ETH service creation.";
    }
    leaf last-updated-time {
      type yang:date-and-time;
      description
```



```
        "Time of ETH service last update.";
    }
    leaf created-by {
        type string;
        description
            "The client signal is created by whom,
            can be a system or staff ID.";
    }
    leaf last-updated-by {
        type string;
        description
            "The client signal is last updated by whom,
            can be a system or staff ID.";
    }
    leaf owned-by {
        type string;
        description
            "The client signal is last updated by whom,
            can be a system ID.";
    }
    container pm-state {
        description
            "PM data of E2E Ethernet service";
        uses pm-state-grouping;
    }
    container error-info {
        description "error messages of configuration";
        uses error-info-grouping;
    }
}

grouping pm-state-grouping {
    description
        "Performance Monitoring (PM) state attributes";
    leaf latency {
        type uint32;
        units microsecond;
        description
            "latency value of the E2E Ethernet service";
    }
}

grouping error-info-grouping {
    description
        "Error information parameters";

    leaf error-code {
        type uint16;
    }
}
```

```
        description "error code";
    }
    leaf error-description {
        type string;
        description "detail message of error";
    }
    leaf error-timestamp {
        type yang:date-and-time;
        description "the date and time error is happened";
    }
}

grouping alarm-threshold-grouping {
    description
        "Alarm threshold parameters.";
    leaf latency-threshold {
        type uint32;
        units microsecond;
        description
            "a threshold for the E2E client signal service's
            latency. Once the latency value exceed this threshold,
            an alarm should be triggered.";
    }
}

grouping resilience-grouping {
    description
        "Grouping for resilience configuration. ";
    container resilience {
        description
            "To configure the data plane protection parameters,
            currently a placeholder only, future candidate attributes
            include, Revert, WTR, Hold-off Timer, ...";
        uses te:protection-restoration-properties;
    }
}

grouping ethht-svc-end-point-grouping {
    description
        "Grouping for the end point configuration.";

    leaf ethht-svc-end-point-name {
        type string;
        description
            "The name of the logical end point of ETH service. ";
    }
    leaf ethht-svc-end-point-id {
        type string;
    }
}
```

```
    description
      "The identifier of the logical end point of ETH service.";
  }
  leaf etht-svc-end-point-descr {
    type string;
    description
      "The description of the logical end point of ETH service. ";
  }
  leaf topology-role {
    type identityref {
      base etht-types:topology-role;
    }
    description
      "Indicating the underlay topology role,
       e.g., hub,spoke, any-to-any ";
  }
  container resilience {
    description
      "Placeholder for resilience configuration, for future
       study.";
  }
  list etht-svc-access-points {
    key access-point-id;
    min-elements "1";
    /*
     Open Issue:
     Is it possible to limit the max-elements only for p2p
     services?
     max-elements "2";
    */
    description
      "List of the ETH trasport services access point instances.";
    leaf access-point-id {
      type string;
      description
        "ID of the service access point instance";
    }
    uses etht-svc-access-parameters;
  }
  leaf service-classification-type {
    type identityref {
      base etht-types:service-classification-type;
    }
    description
      "Service classification type.";
  }
  choice service-classification {
    description
```

```

        "Access classification can be port-based or
        VLAN based.";
    case port-classification {
        /* no additional information */
    }
    case vlan-classification {
        container outer-tag {
            presence "The outermost VLAN tag exists";
            description
                "Classifies traffic using the outermost VLAN tag.";
            uses vlan-classification;
        }
        container second-tag {
            must
                '../outer-tag/tag-type = "eth-types:classify-s-vlan"' +
                ' and tag-type = "eth-types:classify-c-vlan"'
            {
                error-message
                    "
                    When matching two tags, the outermost tag must be
                    specified and of S-VLAN type and the second
                    outermost tag must be of C-VLAN tag type.
                    ";
                description
                    "
                    For IEEE 802.1Q interoperability, when matching two
                    tags, it is required that the outermost tag exists
                    and is an S-VLAN, and the second outermost tag is a
                    C-VLAN.
                    ";
            }
            presence "The second outermost VLAN tag exists";
            description
                "Classifies traffic using the second outermost VLAN
                tag.";
            uses vlan-classification;
        }
    }
}
/*
* Open issue:
*   can we constraints it to be used only with mp services?
*/
leaf split-horizon-group {
    type string;
    description "Identify a split horizon group";
}
uses bandwidth-profiles;

```

```
    container vlan-operations {
      description
        "Configuration of VLAN operations.";
      choice direction {
        description
          "Whether the VLAN operations are symmetrical or
          asymmetrical";
        case symmetrical {
          container symmetrical-operation {
            uses vlan-operations;
            description
              "Symmetrical operations.
              Expressed in the ingress direction, but
              the reverse operation is applied to egress traffic";
          }
        }
        case asymmetrical {
          container asymmetrical-operation {
            description "Asymmetrical operations";
            container ingress {
              uses vlan-operations;
              description "Ingress operations";
            }
            container egress {
              uses vlan-operations;
              description "Egress operations";
            }
          }
        }
      }
    }
  }
}

grouping pm-config-grouping {
  description
    "Grouping used for Performance Monitoring Configuration. ";

  leaf pm-enable {
    type boolean;
    description
      "Whether to enable the performance monitoring.";
  }
  leaf sending-rate-high {
    type uint64;
    description
      "The upperbound of sending rate.";
  }
  leaf sending-rate-low {
```

```
        type uint64;
        description
            "The lowerbound of sending rate.";
    }
    leaf receiving-rate-high {
        type uint64;
        description
            "The upperbound of receiving rate.";
    }
    leaf receiving-rate-low {
        type uint64;
        description
            "The lowerbound of receiving rate.";
    }
}

grouping pw-segment-grouping {
    description
        "Grouping used for PW configuration. ";

    leaf pw-id {
        type string;
        description
            "The Identifier information of pseudowire. ";
    }
    leaf pw-name {
        type string;
        description
            "The name information of pseudowire.";
    }
    leaf transmit-label {
        type rt-types:mpls-label;
        description
            "Transmit label information in PW. ";
    }
    leaf receive-label {
        type rt-types:mpls-label;
        description
            "Receive label information in PW. ";
    }
    leaf encapsulation-type {
        type identityref {
            base eth-types:encapsulation-type;
        }
        description
            "The encapsulation type, raw or tag. ";
    }
    leaf oper-status {
```

```
    type identityref {
      base te-types:tunnel-state-type;
    }
    config false;
    description
      "The operational state of the PW segment. ";
  }
  container ingress-bandwidth-profile {
    description
      "Bandwidth Profile for ingress. ";
    uses pw-segment-named-or-value-bandwidth-profile;
  }
  list pw-paths {
    key path-id;
    description
      "A list of pw paths. ";
    leaf path-id {
      type uint8;
      description
        "The identifier of pw paths. ";
    }
  }
  list tp-tunnels {
    key name;
    description
      "Names of TP Tunnel underlay";
    leaf name {
      type string;
      description
        "Names of TP Tunnel underlay";
    }
  }
}

grouping pw-segment-named-or-value-bandwidth-profile {
  description
    "A grouping to configure a bandwidth profile either by
    referencing a named bandwidth profile or by
    configuring the values of the bandwidth profile attributes.";

  choice style {
    description
      "Whether the bandwidth profile is named or defined by value";
    case named {
      description
        "Named bandwidth profile.";
      leaf bandwidth-profile-name {
        type leafref {
```

```
        path "/ethht-svc:ethht-svc/ethht-svc:globals/"
        + "ethht-svc:named-bandwidth-profiles/"
        + "ethht-svc:bandwidth-profile-name";
    }
    description
        "Name of the bandwidth profile.";
}
}
case value {
    description
        "Bandwidth profile configured by value.";
    uses ethht-types:pw-segement-bandwidth-profile-grouping;
}
}
}

grouping tunnels-grouping {
    description
        "A group of tunnels. ";
    leaf name {
        type leafref {
            path "/te:te/te:tunnels/te:tunnel/te:name";
            require-instance false;
        }
        description "Dependency tunnel name";
    }
    leaf encoding {
        type identityref {
            base te-types:lsp-encoding-types;
        }
        description "LSP encoding type";
        reference "RFC3945";
    }
    leaf switching-type {
        type identityref {
            base te-types:switching-capabilities;
        }
        description "LSP switching type";
        reference "RFC3945";
    }
}

/*
 * Data nodes
 */

container ethht-svc {
    description
```



```
    "ETH services.";

    container globals {
      description
        "Globals Ethernet configuration data container";
      list named-bandwidth-profiles {
        key bandwidth-profile-name;
        description
          "List of named bandwidth profiles used by
          Ethernet services.";

        leaf bandwidth-profile-name {
          type string;
          description
            "Name of the bandwidth profile.";
        }
        uses etht-types:etht-bandwidth-profiles;
      }
    }
    list etht-svc-instances {
      key etht-svc-name;
      description
        "The list of p2p ETH service instances";

      uses etht-svc-instance-config;
      container state {
        config false;
        description
          "Ethernet Service states.";
        uses etht-svc-instance-state;
      }
    }
  }
}
<CODE ENDS>
```

Figure 7

## 5.2. YANG Code for ETH type

This module references a few documents including [RFC2697], [RFC2698], [RFC4115], [IEEE\_802.1ad], [IEEE\_802.1q] and [MEF10].

```
<CODE BEGINS> file "ietf-eth-tran-types@2024-01-11.yang"
module ietf-eth-tran-types {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-eth-tran-types";
  prefix etht-types;

  organization
    "Internet Engineering Task Force (IETF) CCAMP WG";
  contact
    "WG Web: <https://datatracker.ietf.org/wg/ccamp/>
    WG List: <mailto:ccamp@ietf.org>

    Editor: Haomian Zheng
            <mailto:zhenghaomian@huawei.com>

    Editor: Aihua Guo
            <mailto:aihuaguo.ietf@gmail.com>

    Editor: Italo Busi
            <mailto:italo.busi@huawei.com>

    Editor: Anton Snitser
            <mailto:asnizar@cisco.com>

    Editor: Chaode Yu
            <mailto:yuchaode@huawei.com>";

  description
    "This module defines a collection of common YANG identity, data
    type and grouping definitions for describing Ethernet transport
    network clients.

    Copyright (c) 2024 IETF Trust and the persons
    identified as authors of the code. All rights reserved.

    Redistribution and use in source and binary forms, with or
    without modification, is permitted pursuant to, and subject
    to the license terms contained in, the Revised BSD License
    set forth in Section 4.c of the IETF Trust's Legal Provisions
    Relating to IETF Documents
    (https://trustee.ietf.org/license-info).

    This version of this YANG module is part of RFC XXXX; see
    the RFC itself for full legal notices.";

  revision 2024-01-11 {
    description
      "Initial Version";
```

```
    reference
      "RFC XXXX: A YANG Data Model for Transport Network Client
      Signals";
  }
  // RFC Editor: replace XXXX with the actual RFC number assigned
  // to the RFC once this draft
  // becomes an RFC, update date information and remove this note.

  /*
   * Identities
   */

  identity eth-vlan-tag-type {
    description
      "ETH VLAN tag type.";
  }

  identity c-vlan-tag-type {
    base eth-vlan-tag-type;
    description
      "802.1Q Customer VLAN";
  }

  identity s-vlan-tag-type {
    base eth-vlan-tag-type;
    description
      "802.1Q Service VLAN (QinQ)";
  }

  identity service-classification-type {
    description
      "Service classification.";
  }

  identity port-classification {
    base service-classification-type;
    description
      "Port classification.";
  }

  identity vlan-classification {
    base service-classification-type;
    description
      "VLAN classification.";
  }

  identity eth-vlan-tag-classify {
    description
```

```
        "VLAN tag classification.";
    }

    identity classify-c-vlan {
        base eth-vlan-tag-classify;
        description
            "Classify 802.1Q Customer VLAN tag.
            Only C-tag type is accepted";
    }

    identity classify-s-vlan {
        base eth-vlan-tag-classify;
        description
            "Classify 802.1Q Service VLAN (QinQ) tag.
            Only S-tag type is accepted";
    }

    identity classify-s-or-c-vlan {
        base eth-vlan-tag-classify;
        description
            "Classify S-VLAN or C-VLAN tag-classify.
            Either tag is accepted";
    }

    identity bandwidth-profile-type {
        description
            "Bandwidth Profile Types";
    }

    identity mef-10-bwp {
        base bandwidth-profile-type;
        description
            "MEF 10 Bandwidth Profile";
    }

    identity rfc-2697-bwp {
        base bandwidth-profile-type;
        description
            "RFC 2697 Bandwidth Profile";
    }

    identity rfc-2698-bwp {
        base bandwidth-profile-type;
        description
            "RFC 2698 Bandwidth Profile";
    }

    identity rfc-4115-bwp {
```

```
        base bandwidth-profile-type;
        description
            "RFC 4115 Bandwidth Profile";
    }

    identity service-type {
        description
            "Type of Ethernet service.";
    }

    identity p2p-svc {
        base service-type;
        description
            "Ethernet point-to-point service (EPL, EVPL).";
    }

    identity rmp-svc {
        base service-type;
        description
            "Ethernet rooted-multitpoint service (E-TREE, EP-TREE).";
    }

    identity mp2mp-svc {
        base service-type;
        description
            "Ethernet multipoint-to-multitpoint service
            (E-LAN, EP-LAN).";
    }

    identity lifecycle-status {
        description
            "Lifecycle Status.";
    }

    identity installed {
        base lifecycle-status;
        description
            "Installed.";
    }

    identity planned {
        base lifecycle-status;
        description
            "Planned.";
    }

    identity pending-removal {
        base lifecycle-status;
```

```
        description
            "Pending Removal.";
    }

    identity topology-role {
        description
            "The role of underlay topology: e.g., hub, spoke,
            any-to-any.";
    }

    identity resilience {
        description
            "Placeholder for resilience information in data plane,
            for future study. ";
    }

    identity access-role {
        description
            "Indicating whether the access is a working or protection
            access.";
    }

    identity root-primary {
        base access-role;
        description
            "Designates the primary root UNI of an E-Tree service, and
            may also designates the UNI access role of E-LINE and E-LAN
            service.";
    }

    identity root-backup {
        base access-role;
        description
            "Designates the backup root UNI of an E-Tree service.";
    }

    identity leaf-access {
        base access-role;
        description
            "Designates the leaf UNI of an E-Tree service.";
    }

    identity performance {
        description
            "Placeholder for performance information, for future study.";
    }

    identity encapsulation-type {
```

```
    description
      "Indicating how the service is encapsulated (to PW), e.g, raw or
      tag. ";
  }

  /*
   * Data Types
   */

  typedef eth-tag-type {
    type identityref {
      base eth-vlan-tag-type;
    }
    description
      "Identifies a specific ETH VLAN tag type.";
  }

  typedef eth-tag-classify {
    type identityref {
      base eth-vlan-tag-classify;
    }
    description
      "Identifies a specific VLAN tag classification.";
  }

  typedef vlanid {
    type uint16 {
      range "1..4094";
    }
    description
      "The 12-bit VLAN-ID used in the VLAN Tag header.";
  }

  typedef vid-range-type {
    type string {
      pattern "([1-9][0-9]{0,3}(-[1-9][0-9]{0,3})?" +
        "(, [1-9][0-9]{0,3}(-[1-9][0-9]{0,3})?)*)";
    }
    description
      "A list of VLAN Ids, or non overlapping VLAN ranges, in
      ascending order, between 1 and 4094.
      This type is used to match an ordered list of VLAN Ids, or
      contiguous ranges of VLAN Ids. Valid VLAN Ids must be in the
      range 1 to 4094, and included in the list in non overlapping
      ascending order.

      For example: 1,10-100,50,500-1000";
  }
```

```
typedef bandwidth-profile-type {
  type identityref {
    base bandwidth-profile-type;
  }
  description
    "Identifies a specific Bandwidth Profile type.";
}

typedef service-type {
  type identityref {
    base service-type;
  }
  description
    "Identifies the type of Ethernet service.";
}

typedef lifecycle-status {
  type identityref {
    base lifecycle-status;
  }
  description
    "Identifies the Lifecycle Status .";
}

/*
 * Groupings
 */

grouping etht-bandwidth-profiles {
  description
    "Bandwidth profile configuration parameters.";

  leaf bandwidth-profile-type {
    type etht-types:bandwidth-profile-type;
    description
      "The type of bandwidth profile.";
  }
  leaf CIR {
    type uint64;
    description
      "Committed Information Rate in Kbps";
  }
  leaf CBS {
    type uint64;
    description
      "Committed Burst Size in KBytes";
  }
  leaf EIR {
```



```
    type uint64;
    /* Need to indicate that EIR is not supported by RFC 2697

    must
      '../bw-profile-type = "mef-10-bwp" or ' +
      '../bw-profile-type = "rfc-2698-bwp" or ' +
      '../bw-profile-type = "rfc-4115-bwp"'

    must
      '../bw-profile-type != "rfc-2697-bwp"'
    */
    description
      "Excess Information Rate in Kbps
      In case of RFC 2698, PIR = CIR + EIR";
  }
  leaf EBS {
    type uint64;
    description
      "Excess Burst Size in KBytes.
      In case of RFC 2698, PBS = CBS + EBS";
  }
  leaf color-aware {
    type boolean;
    description
      "Indicates whether the color-mode is
      color-aware or color-blind.";
  }
  leaf coupling-flag {
    type boolean;
    /* Need to indicate that Coupling Flag is defined only for
      MEF 10

    must
      '../bw-profile-type = "mef-10-bwp"'
    */
    description
      "Coupling Flag.";
  }
}

grouping pw-segment-bandwidth-profile-grouping {
  description
    "bandwidth profile grouping for PW segment.";

  leaf bandwidth-profile-type {
    type ethtypes:bandwidth-profile-type;
    description
      "The type of bandwidth profile.";
  }
}
```

```
    }
    leaf CIR {
        type uint64;
        description
            "Committed Information Rate in Kbps";
    }
    leaf CBS {
        type uint64;
        description
            "Committed Burst Size in in KBytes";
    }
    leaf EIR {
        type uint64;
        /* Need to indicate that EIR is not supported by RFC 2697

        must
            '../bw-profile-type = "mef-10-bwp" or ' +
            '../bw-profile-type = "rfc-2698-bwp" or ' +
            '../bw-profile-type = "rfc-4115-bwp"'

        must
            '../bw-profile-type != "rfc-2697-bwp"'
        */
        description
            "Excess Information Rate in Kbps
            In case of RFC 2698, PIR = CIR + EIR";
    }
    leaf EBS {
        type uint64;
        description
            "Excess Burst Size in KBytes.
            In case of RFC 2698, PBS = CBS + EBS";
    }
}

grouping eth-bandwidth {
    description
        "Available bandwith for ethernet.";
    leaf eth-bandwidth {
        type uint64{
            range "0..100000000000";
        }
        units "Kbps";
        description
            "Available bandwith value expressed in kilobits per second";
    }
}
```

```
grouping eth-label-restriction {
  description
    "Label Restriction for ethernet.";
  leaf tag-type {
    type eth-types:eth-tag-type;
    description "VLAN tag type.";
  }
  leaf priority {
    type uint8;
    description "priority.";
  }
}

grouping eth-label {
  description
    "Label for ethernet.";
  leaf vlanid {
    type eth-types:vlanid;
    description
      "VLAN tag id.";
  }
}

grouping eth-label-step {
  description "Label step for Ethernet VLAN";
  leaf eth-step {
    type uint16 {
      range "1..4095";
    }
    default 1;
    description
      "Label step which represent possible increments for
      an Ethernet VLAN tag.";
    reference
      "IEEE 802.1ad: Provider Bridges.";
  }
}
}
<CODE ENDS>
```

Figure 8

### 5.3. Other Client Signal YANG Code

This module imports typedefs and modules from [RFC6991],  
[I-D.ietf-ccamp-otn-tunnel-model], [I-D.ietf-teas-rfc8776-update].

```
<CODE BEGINS> file "ietf-trans-client-service@2024-01-11.yang"
module ietf-trans-client-service {
  yang-version 1.1;
  namespace
    "urn:ietf:params:xml:ns:yang:ietf-trans-client-service";
  prefix clnt-svc;

  import ietf-yang-types {
    prefix yang;
    reference "RFC 6991: Common YANG Data Types";
  }

  import ietf-te-types {
    prefix te-types;
    reference "RFCYYYY: Traffic Engineering Common YANG Types";
  }
  // RFC Editor: replace YYYY with the actual RFC number assigned
  // to the RFC once draft-ietf-teas-rfc8776-update
  // becomes an RFC, update date information and remove this note.

  import ietf-layer1-types {
    prefix ll-types;
    reference "RFCZZZZ: A YANG Data Model for Layer 1 Types";
  }
  // RFC Editor: replace ZZZZ with the actual RFC number assigned
  // to the RFC once draft-ietf-ccamp-layer1-types
  // becomes an RFC, update date information and remove this note.

  import ietf-network {
    prefix nw;
    reference "RFC8345: A YANG Data Model for Network Topologies";
  }

  import ietf-network-topology {
    prefix nt;
    reference "RFC8345: A YANG Data Model for Network Topologies";
  }

  import ietf-trans-client-svc-types {
    prefix clnt-types;
    reference
      "RFCXXXX: A YANG Data Model for Transport Network Client
      Signals";
  }
  // RFC Editor: replace XXXX with the actual RFC number assigned
  // to the RFC once this draft
  // becomes an RFC, update date information and remove this note.
```

## organization

"Internet Engineering Task Force (IETF) CCAMP WG";

## contact

"WG Web: <<https://datatracker.ietf.org/wg/ccamp/>>

WG List: <<mailto:ccamp@ietf.org>>

Editor: Haomian Zheng

<<mailto:zhenghaomian@huawei.com>>

Editor: Aihua Guo

<<mailto:aihuaguo.ietf@gmail.com>>

Editor: Italo Busi

<<mailto:italo.busi@huawei.com>>

Editor: Anton Snitser

<<mailto:asnizar@cisco.com>>

Editor: Chaode Yu

<<mailto:yuchaode@huawei.com>>;

## description

"This module defines a YANG data model for describing transport network client services.

The model fully conforms to the Network Management Datastore Architecture (NMDA).

Copyright (c) 2024 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Revised BSD License set forth in Section 4.c of the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

## revision 2024-01-11 {

## description

"Initial Version";

## reference

"RFC XXXX: A YANG Data Model for Transport Network Client Signals";

}

```
// RFC Editor: replace XXXX with the actual RFC number assigned
// to the RFC once this draft
// becomes an RFC, update date information and remove this note.

/*
 * Groupings
 */

grouping client-svc-access-parameters {
  description
    "Transport network client signals access parameters";

  leaf access-node-id {
    type te-types:te-node-id;
    description
      "The identifier of the access node in the TE topology.";
  }
  leaf access-node-uri {
    type nw:node-id;
    description
      "The identifier of the access node in the network.";
  }
  leaf access-ltp-id {
    type te-types:te-tp-id;
    description
      "The TE link termination point identifier in TE topology,
      used together with access-node-id to identify the access
      Link Termination Point (LTP).";
  }
  leaf access-ltp-uri {
    type nt:tp-id;
    description
      "The link termination point identifier in network topology,
      used together with access-node-uri to identify the access
      LTP";
  }
  leaf client-signal {
    type identityref {
      base ll-types:client-signal;
    }
    description
      "Identify the client signal type associated with this port";
  }
}

grouping pm-state-grouping {
  description
    "Performance Monitoring (PM) state attributes";
```

```
    leaf latency {
      type uint32;
      units microsecond;
      description
        "latency value of the E2E client signal service";
    }
  }

  grouping error-info-grouping {
    description
      "Error information parameters";
    leaf error-code {
      type uint16;
      description "error code";
    }
    leaf error-description {
      type string;
      description "detail message of error";
    }
    leaf error-timestamp {
      type yang:date-and-time;
      description "the date and time error is happened";
    }
  }

  grouping alarm-threshold-grouping {
    description
      "Alarm threshold parameters.";
    leaf latency-threshold {
      type uint32;
      units microsecond;
      description
        "a threshold for the E2E client signal service's
        latency. Once the latency value exceed this threshold,
        an alarm should be triggered.";
    }
  }

  grouping client-svc-tunnel-parameters {
    description
      "Transport network client signals tunnel parameters";

    leaf tunnel-name {
      type string;
      description
        "TE tunnel instance name.";
    }
  }
}
```

```
grouping client-svc-instance-config {
  description
    "Configuration parameters for client services.";

  leaf client-svc-name {
    type string;
    description
      "Identifier of the p2p transport network client signals.";
  }
  leaf client-svc-title {
    type string;
    description
      "Name of the p2p transport network client signals.";
  }
  leaf user-label {
    type string;
    description
      "Alias of the p2p transport network client signals.";
  }
  leaf client-svc-descr {
    type string;
    description
      "Description of the transport network client signals.";
  }
  leaf client-svc-customer {
    type string;
    description
      "Customer of the transport network client signals.";
  }
  container resilience {
    description "Place holder for resilience functionalities";
  }
  uses te-types:te-topology-identifier;
  leaf admin-status {
    type identityref {
      base te-types:tunnel-admin-state-type;
    }
    default te-types:tunnel-admin-state-up;
    description "Client signals administrative state.";
  }
  container src-access-ports {
    description
      "Source access port of a client signal.";
    uses client-svc-access-parameters;
  }
  container dst-access-ports {
    description
      "Destination access port of a client signal.";
```



```
    uses client-svc-access-parameters;
  }
  container pm-state {
    config false;
    description "PM data of E2E client signal";
    uses pm-state-grouping;
  }
  container error-info {
    config false;
    description "error messages of configuration";
    uses error-info-grouping;
  }
  container alarm-threshold {
    description
      "threshold configuration for the E2E client signal";
    uses alarm-threshold-grouping;
  }
  leaf direction {
    type identityref {
      base clnt-types:direction;
    }
    description "Uni-dir or Bi-dir for the client signal.";
  }
  list svc-tunnels {
    key tunnel-name;
    description
      "List of the TE Tunnels supporting the client signal.";
    uses client-svc-tunnel-parameters;
  }
}

grouping client-svc-instance-state {
  description
    "State parameters for client services.";
  leaf operational-state {
    type identityref {
      base te-types:tunnel-state-type;
    }
    config false;
    description "Client signal operational state.";
  }
  leaf provisioning-state {
    type identityref {
      base te-types:lsp-state-type;
    }
    config false;
    description "Client signal provisioning state.";
  }
}
```

```
    leaf creation-time {
        type yang:date-and-time;
        config false;
        description "The time of the client signal be created.";
    }
    leaf last-updated-time {
        type yang:date-and-time;
        config false;
        description "The time of the client signal's latest update.";
    }
    leaf created-by {
        type string;
        config false;
        description
            "The client signal is created by whom,
             can be a system or staff ID.";
    }
    leaf last-updated-by {
        type string;
        config false;
        description
            "The client signal is last updated by whom,
             can be a system or staff ID.";
    }
    leaf owned-by {
        type string;
        config false;
        description
            "The client signal is owned by whom,
             can be a system ID.";
    }
}

/*
 * Data nodes
 */

container client-svc {
    description
        "Transport client services.";

    list client-svc-instances {
        key client-svc-name;
        description
            "The list of p2p transport client service instances";
        uses client-svc-instance-config;
        uses client-svc-instance-state;
    }
}
```

```
    }  
  }  
<CODE ENDS>
```

Figure 9

#### 5.4. Other Client Signal Types YANG Code

This module defines the types for other client signal types.

```
<CODE BEGINS> file "ietf-trans-client-svc-types@2024-01-11.yang"  
module ietf-trans-client-svc-types {  
  yang-version 1.1;  
  namespace  
    "urn:ietf:params:xml:ns:yang:ietf-trans-client-svc-types";  
  prefix clnt-types;  
  
  organization  
    "Internet Engineering Task Force (IETF) CCAMP WG";  
  contact  
    "WG Web: <https://datatracker.ietf.org/wg/ccamp/>  
    WG List: <mailto:ccamp@ietf.org>  
  
    Editor: Haomian Zheng  
            <mailto:zhenghaomian@huawei.com>  
  
    Editor: Aihua Guo  
            <mailto:aihuaguo.ietf@gmail.com>  
  
    Editor: Italo Busi  
            <mailto:italo.busi@huawei.com>  
  
    Editor: Anton Snitser  
            <mailto:asnizar@cisco.com>  
  
    Editor: Chaode Yu  
            <mailto:yuchaode@huawei.com>";  
  
  description  
    "This module defines a collection of common YANG identity  
    definitions for describing Constant Bit Rate (CBR) transport  
    network clients.  
  
    Copyright (c) 2024 IETF Trust and the persons  
    identified as authors of the code. All rights reserved.  
  
    Redistribution and use in source and binary forms, with or  
    without modification, is permitted pursuant to, and subject
```

to the license terms contained in, the Revised BSD License set forth in Section 4.c of the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

```
revision 2024-01-11 {
  description
    "Initial Version";
  reference
    "RFC XXXX: A YANG Data Model for Transport Network Client
    Signals";
}
// RFC Editor: replace XXXX with the actual RFC number assigned
// to the RFC once this draft
// becomes an RFC, update date information and remove this note.

/*
 * Identities
 */

identity direction {
  description
    "Direction information of Client Signal.";
}

identity bidirectional {
  base direction;
  description
    "Client Signal is bi-directional.";
}

identity unidirectional {
  base direction;
  description
    "Client Signal is uni-directional.";
}
}
<CODE ENDS>
```

Figure 10

## 6. Implementation Status

[Note to the RFC Editor - remove this section before publication, as well as remove the reference to RFC [RFC7942].]

This section records the status of known implementations of the protocol defined by this specification at the time of posting of this Internet-Draft, and is based on a proposal described in [RFC7942]. The description of implementations in this section is intended to assist the IETF in its decision processes in progressing drafts to RFCs. Please note that the listing of any individual implementation here does not imply endorsement by the IETF. Furthermore, no effort has been spent to verify the information presented here that was supplied by IETF contributors. This is not intended as, and must not be construed to be, a catalog of available implementations or their features. Readers are advised to note that other implementations may exist.

According to [RFC7942], "this will allow reviewers and working groups to assign due consideration to documents that have the benefit of running code, which may serve as evidence of valuable experimentation and feedback that have made the implemented protocols more mature. It is up to the individual working groups to use this information as they see fit".

#### 6.1. Usage of the ETH Service YANG Model on ONAP

The implementation of the CCVPN (Cross Domain and Cross Layer VPN) use-case on ONAP follows the ACTN [RFC8453] architecture. In the design of CCVPN, ONAP presumes the responsibility of the MDSC, and third party network domain controllers the PNCs. Consequently, the ETH Service YANG model is used as the MPI between ONAP and the domain controllers.

- \* Organization: China Mobile, Huawei Technologies, etc.
- \* Implementation: ONAP CCVPN uses the ETH Service YANG model as the ACTN MPI
- \* Description: ONAP CCVPN realizes the E-LINE and E-TREE service on a multi-domain network. Both of the services are modeled on ONAP by the ETH Service YANG model, and the model instances (e.g., JSON objects) are sent between ONAP and the domain controllers. Refer to the following CCVPN wiki for more information:  
<https://wiki.onap.org/display/DW/CCVPN%28Cross+Domain+and+Cross+Layer+VPN%29+USE+CASE>
- \* Maturity Level: Prototype
- \* Coverage: Partial
- \* Contact: [henry.yul@huawei.com](mailto:henry.yul@huawei.com)

## 7. Manageability Considerations

TBD

## 8. Security Considerations

The data following the model defined in this document is exchanged via, for example, the interface between an orchestrator and a network domain controller.

The YANG module defined in this document can be accessed via the RESTCONF protocol defined in [RFC8040], or maybe via the NETCONF protocol [RFC6241].

There are a number of data nodes defined in the YANG module which are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., POST) to these data nodes without proper protection can have a negative effect on network operations.

## 9. IANA Considerations

It is proposed that IANA should assign new URIs from the "IETF XML Registry" [RFC3688] as follows:

URI: urn:ietf:params:xml:ns:yang:ietf-eth-tran-service  
Registrant Contact: The IESG  
XML: N/A; the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-trans-client-service  
Registrant Contact: The IESG  
XML: N/A; the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-eth-tran-types  
Registrant Contact: The IESG  
XML: N/A; the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-trans-client-svc-types  
Registrant Contact: The IESG  
XML: N/A; the requested URI is an XML namespace.

This document registers following YANG modules in the YANG Module Names registry [RFC6020].

name: ietf-eth-tran-service  
namespace: urn:ietf:params:xml:ns:yang:ietf-eth-tran-service  
prefix: ethtsvc  
reference: RFC XXXX: A YANG Data Model for Transport  
Network Client Signals

name: ietf-eth-tran-types  
namespace: urn:ietf:params:xml:ns:yang:ietf-eth-tran-types  
prefix: etht-types  
reference: RFC XXXX: A YANG Data Model for Transport  
Network Client Signals

name: ietf-trans-client-service  
namespace: urn:ietf:params:xml:ns:yang:ietf-trans-client-service  
prefix: clntsvc  
reference: RFC XXXX: A YANG Data Model for Transport  
Network Client Signals

name: ietf-trans-client-svc-types  
namespace: urn:ietf:params:xml:ns:yang:ietf-trans-client-svc-types  
prefix: clntsvc-types  
reference: RFC XXXX: A YANG Data Model for Transport  
Network Client Signals

## 10. References

### 10.1. Normative References

- [I-D.ietf-ccamp-llcsm-yang]  
Lee, Y., Lee, K., Zheng, H., de Dios, O. G., and D. Ceccarelli, "A YANG Data Model for L1 Connectivity Service Model (L1CSM)", Work in Progress, Internet-Draft, draft-ietf-ccamp-llcsm-yang-24, 11 January 2024, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-llcsm-yang-24>>.
- [I-D.ietf-ccamp-layer1-types]  
Zheng, H. and I. Busi, "A YANG Data Model for Layer 1 Types", Work in Progress, Internet-Draft, draft-ietf-ccamp-layer1-types-16, 10 July 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-layer1-types-16>>.

- [I-D.ietf-ccamp-otn-topo-yang]  
Zheng, H., Busi, I., Liu, X., Belotti, S., and O. G. de Dios, "A YANG Data Model for Optical Transport Network Topology", Work in Progress, Internet-Draft, draft-ietf-ccamp-otn-topo-yang-17, 10 July 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-otn-topo-yang-17>>.
- [I-D.ietf-ccamp-otn-tunnel-model]  
Zheng, H., Busi, I., Belotti, S., Lopez, V., and Y. Xu, "OTN Tunnel YANG Model", Work in Progress, Internet-Draft, draft-ietf-ccamp-otn-tunnel-model-20, 24 November 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-otn-tunnel-model-20>>.
- [I-D.ietf-teas-rfc8776-update]  
Busi, I., Guo, A., Liu, X., Saad, T., and I. Bryskin, "Common YANG Data Types for Traffic Engineering", Work in Progress, Internet-Draft, draft-ietf-teas-rfc8776-update-07, 15 September 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-teas-rfc8776-update-07>>.
- [I-D.ietf-teas-yang-te]  
Saad, T., Gandhi, R., Liu, X., Beeram, V. P., and I. Bryskin, "A YANG Data Model for Traffic Engineering Tunnels, Label Switched Paths and Interfaces", Work in Progress, Internet-Draft, draft-ietf-teas-yang-te-35, 12 January 2024, <<https://datatracker.ietf.org/doc/html/draft-ietf-teas-yang-te-35>>.
- [ITU-T\_G.875]  
International Telecommunication Union, "Optical transport network: Protocol-neutral management information model for the network element view", ITU-T G.875 , June 2020.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/rfc/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/rfc/rfc6241>>.



- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", RFC 6991, DOI 10.17487/RFC6991, July 2013, <<https://www.rfc-editor.org/rfc/rfc6991>>.
- [RFC7139] Zhang, F., Ed., Zhang, G., Belotti, S., Ceccarelli, D., and K. Pithewan, "GMPLS Signaling Extensions for Control of Evolving G.709 Optical Transport Networks", RFC 7139, DOI 10.17487/RFC7139, March 2014, <<https://www.rfc-editor.org/rfc/rfc7139>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", RFC 7950, DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/rfc/rfc7950>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", RFC 8040, DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/rfc/rfc8040>>.
- [RFC8294] Liu, X., Qu, Y., Lindem, A., Hopps, C., and L. Berger, "Common YANG Data Types for the Routing Area", RFC 8294, DOI 10.17487/RFC8294, December 2017, <<https://www.rfc-editor.org/rfc/rfc8294>>.
- [RFC8345] Clemm, A., Medved, J., Varga, R., Bahadur, N., Ananthakrishnan, H., and X. Liu, "A YANG Data Model for Network Topologies", RFC 8345, DOI 10.17487/RFC8345, March 2018, <<https://www.rfc-editor.org/rfc/rfc8345>>.

## 10.2. Informative References

- [IEEE\_802.1ad] Institute of Electrical and Electronics Engineers, "IEEE Standard for Local and Metropolitan Area Networks – Virtual Bridged Local Area Networks – Amendment 4: Provider Bridges", IEEE 802.1ad-2005 , December 2005.
- [IEEE\_802.1q] "IEEE Standard for Local and Metropolitan Area Networks – Bridges and Bridged Networks", IEEE 802.1Q-2022 , December 2022.
- [MEF10] MEF Forum, "Ethernet Services Attributes Phase 1", MEF 10 , November 2004, <[https://www.mef.net/Assets/Technical\\_Specifications/PDF/MEF\\_10.pdf](https://www.mef.net/Assets/Technical_Specifications/PDF/MEF_10.pdf)>.

- [RFC2697] Heinanen, J. and R. Guerin, "A Single Rate Three Color Marker", RFC 2697, DOI 10.17487/RFC2697, September 1999, <<https://www.rfc-editor.org/rfc/rfc2697>>.
- [RFC2698] Heinanen, J. and R. Guerin, "A Two Rate Three Color Marker", RFC 2698, DOI 10.17487/RFC2698, September 1999, <<https://www.rfc-editor.org/rfc/rfc2698>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/rfc/rfc3688>>.
- [RFC4115] Aboul-Magd, O. and S. Rabie, "A Differentiated Service Two-Rate, Three-Color Marker with Efficient Handling of in-Profile Traffic", RFC 4115, DOI 10.17487/RFC4115, July 2005, <<https://www.rfc-editor.org/rfc/rfc4115>>.
- [RFC7942] Sheffer, Y. and A. Farrel, "Improving Awareness of Running Code: The Implementation Status Section", BCP 205, RFC 7942, DOI 10.17487/RFC7942, July 2016, <<https://www.rfc-editor.org/rfc/rfc7942>>.
- [RFC8299] Wu, Q., Ed., Litkowski, S., Tomotaki, L., and K. Ogaki, "YANG Data Model for L3VPN Service Delivery", RFC 8299, DOI 10.17487/RFC8299, January 2018, <<https://www.rfc-editor.org/rfc/rfc8299>>.
- [RFC8309] Wu, Q., Liu, W., and A. Farrel, "Service Models Explained", RFC 8309, DOI 10.17487/RFC8309, January 2018, <<https://www.rfc-editor.org/rfc/rfc8309>>.
- [RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", BCP 215, RFC 8340, DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/rfc/rfc8340>>.
- [RFC8342] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture (NMDA)", RFC 8342, DOI 10.17487/RFC8342, March 2018, <<https://www.rfc-editor.org/rfc/rfc8342>>.
- [RFC8453] Ceccarelli, D., Ed. and Y. Lee, Ed., "Framework for Abstraction and Control of TE Networks (ACTN)", RFC 8453, DOI 10.17487/RFC8453, August 2018, <<https://www.rfc-editor.org/rfc/rfc8453>>.

[RFC8466] Wen, B., Fioccola, G., Ed., Xie, C., and L. Jalil, "A YANG Data Model for Layer 2 Virtual Private Network (L2VPN) Service Delivery", RFC 8466, DOI 10.17487/RFC8466, October 2018, <<https://www.rfc-editor.org/rfc/rfc8466>>.

#### Acknowledgments

We would like to acknowledge the contribution from Francesco Lazzeri to the initial versions of this document, before it has been adopted by CCAMP WG.

We would like to thank Igor Bryskin and Daniel King for their comments and discussions.

#### Contributors

Yunbin Xu  
CAICT  
Email: xuyunbin@caict.ac.cn

Yang Zhao  
China Mobile  
Email: zhaoyangyjy@chinamobile.com

Xufeng Liu  
Alef Edge  
Email: xufeng.liu.ietf@gmail.com

Yanlei Zheng  
China Unicom  
Email: zhengyanlei@chinaunicom.cn

Giuseppe Fioccola  
Huawei Technologies  
Email: giuseppe.fioccola@huawei.com

Zhe Liu  
Huawei Technologies  
Email: liuzhe123@huawei.com

Sergio Belotti  
Nokia

Email: sergio.belotti@nokia.com

Yingxi Yao  
Shanghai Bell  
Email: yingxi.yao@nokia-sbell.com

Henry Yu  
Huawei Technologies  
Email: henry.yu1@huawei.com

#### Authors' Addresses

Haomian Zheng  
Huawei Technologies  
H1 XiliuBeipo Village, Songshan Lake  
Dongguan  
Guangdong,  
China  
Email: zhenghaomian@huawei.com

Aihua Guo  
Futurewei  
Email: aihuaguo.ietf@gmail.com

Italo Busi  
Huawei Technologies  
Email: italo.busi@huawei.com

Anton Snitser  
Cisco  
Email: asnizar@cisco.com

Chaode Yu  
Huawei Technologies  
Email: yuchaode@huawei.com