

PIM Join/ Prune Attributes for LISP Environments using Underlay Multicast

(draft-ietf-pim-jp-extensions-lisp-00)

PIM WG/ IETF-112 -Nov 2021

Vengada Prasad Govindan (venggovi@cisco.com)

Stig Venaas (svenaas@cisco.com)


Updates since last IETF

- Draft was presented in PIM and LISP WGs @IETF-111
 - Draft will be progressed by PIM WG, WG adoption completed
 - Security considerations section is work-in-progress.


Problem statement

- IP Multicast Source(s) and receiver(s) in different (and same) LISP sites [RFC6831]
 - ASM, SSM and BIDIR modes supported in overlay
- IP-multicast based underlay
- 'm' Overlay IP multicast groups mapped to 'n' underlay IP multicast groups, where $m \gg n$ (Sec 8.1.2 of RFC 6831)
 - Problem compounded for IP multicast flowing across multisite
- Border nodes play a special role:
 - They participate in the PIM signaling of upto three different PIM domains: Two in the underlay and one in the overlay.

Illustration

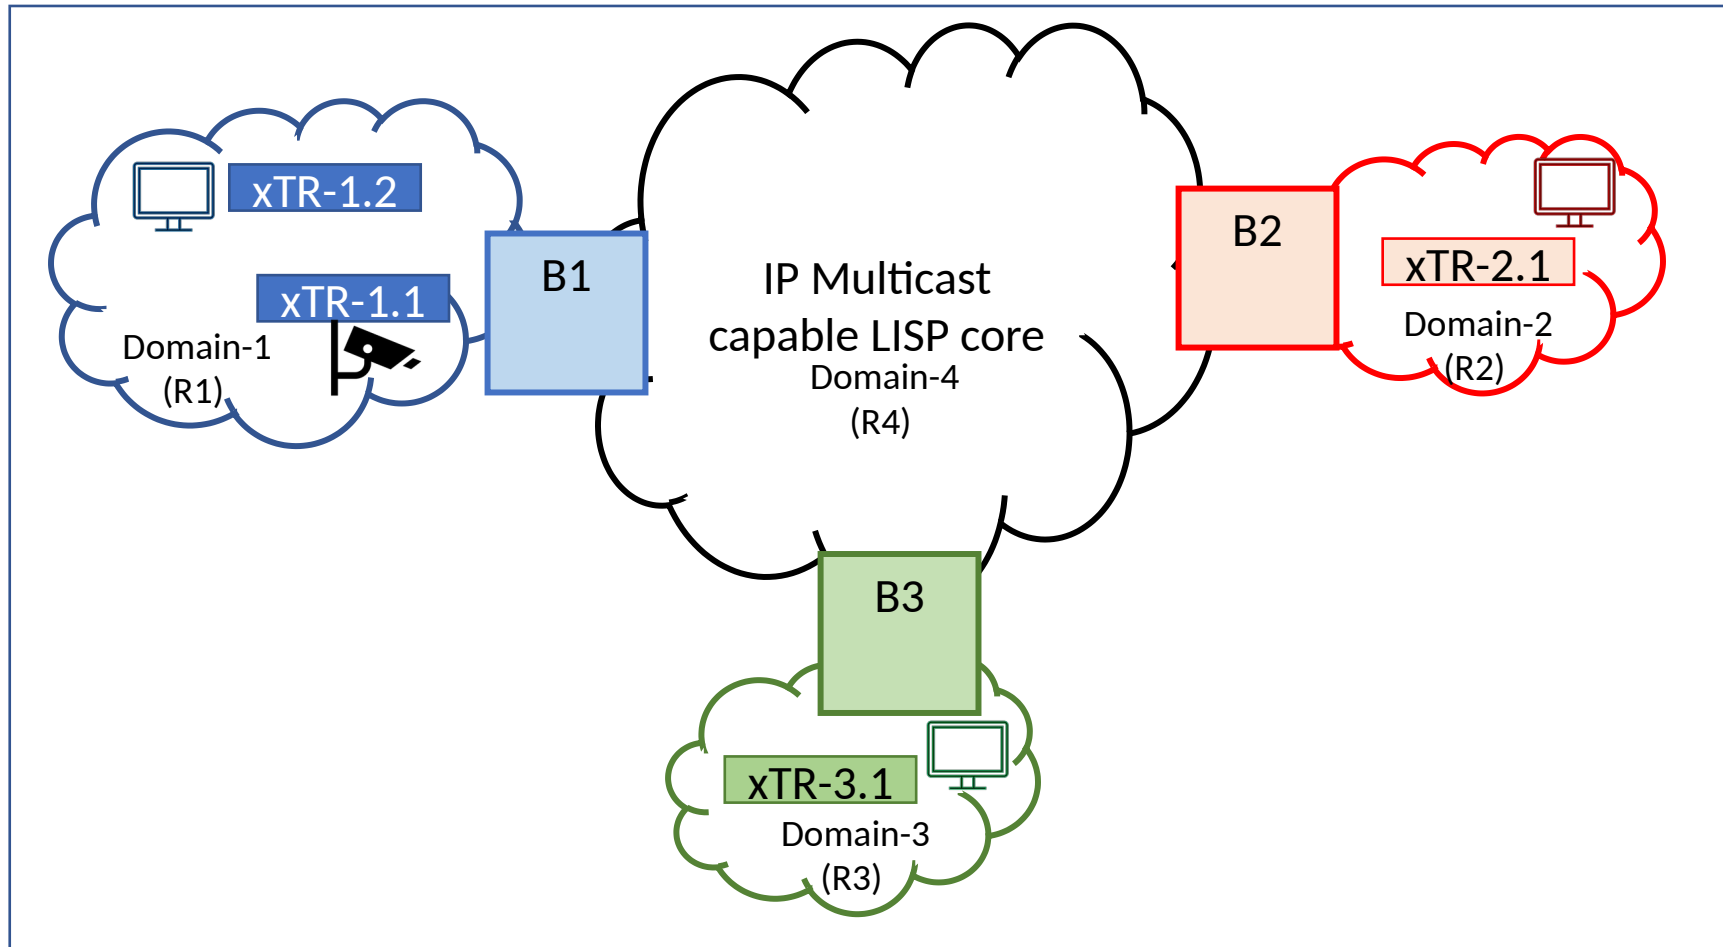

Receiver ETR Group address TLV

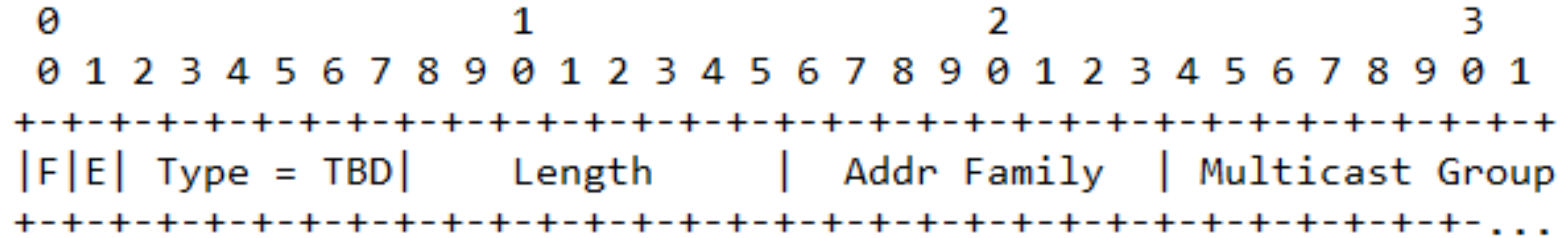

- A new TLV MAY be signaled in the PIM Join/ Prune attribute [RFC8059] [RFC7887].
- Definition of F, E, Type, Length and Address Family same as RFC8059
 - Multicast Group: The underlay group address (G-u) used for transporting the overlay multicast stream to which the downstream router is sending a join
 - The proposed TLV can be appended to the Joined Group Address (Encoded Group format) or the Joined Source Address (Encoded Source format)

Next Steps

- Get comments from WG and work towards WGLC