

Attachment Circuits: Updates & Next Steps

[draft-boro-opsawg-teas-common-ac](#)
[draft-boro-opsawg-teas-attachment-circuit](#)
[draft-boro-opsawg-ntw-attachment-circuit](#)
[draft-boro-opsawg-ac-lxsm-lxnm-glue](#) (*new*)

IETF#117
July 2023

Mohamed Boucadair (Orange), Richard Roberts (Juniper), Oscar Gonzalez de Dios (Telefonica), Samier Barguil Giraldo (Nokia), Bo Wu (Huawei), Victor Lopez (Nokia), Ivan Bykov (Ribbon Communications), Qin Wu (Huawei), Ogaki Kenichi (KDDI), ...

(Reminder) Scope

- Specify an AC library with reusable types, identities, and groupings: **ac-common**
- Specify a model for managing AC-as-a-Service: **ac-svc**
 - Does ***not make any assumption about the internal structure*** or even the nature or the services that will be delivered over an AC
 - Accommodates both ***integrated and separate provisioning models***
 - Includes ***reusable groupings*** for use by other service models
 - Exposes AC/bearer ***references*** that can be used in other service placement requests
 - Favor the approach of completely relying upon the AC service model ***instead of duplicating data nodes into specific modules*** of advanced services that are delivered over an AC
- Specify a network model for the AC management: **ac-ntw**
 - Augments the SAP model with required AC data nodes
 - Network-view of ACs
- Specify how to glue LxNMs and LxSMs with AC matters managed via ac-svc/ac-ntw: **ac-glue**

Updates Since IETF#116


- Released new versions to fix various issues (diversity, bearers' location, simplify profiles, MTU, bandwidth, record ACs that are bound to a bearer, explain how the provisioning of specific identifiers (e.g., VLAN-ID) can be coordinated, etc.)
- Bi-weekly meetings to review the issues and discuss how to address them

The screenshot shows a Kanban board titled "Attachment Circuits Data Models". At the top, there are navigation options: "Dashboard" and "+ New View". Below that is a search bar labeled "Filter by keyword or by field" and a "Discard" button. The board is divided into four columns:

- In Progress (6 items):** This column is actively being worked on. Items include:
 - attachment-circuit-model #60: should we add a constraint on bearer to identify the SP POP to which the bearer is attached?
 - attachment-circuit-model #52: Review Sections 1-3
 - attachment-circuit-model #54: Ease mapping between the AC and underlying device
 - attachment-circuit-model #84: oper-status
 - attachment-circuit-model #78: Bearer Life Cycle Management
- More Dig Is Needed (7 items):** Items include:
 - attachment-circuit-model #59: Change | +--rw bearer-reference? from string to list
 - attachment-circuit-model #14: bundling ACs (from Richard)
 - attachment-circuit-model #17: discuss the case of multiple CE reachable over a same AC
 - network-attachment-circuits #6: Bearer: add LAG parameters
 - attachment-circuit-model #46: discuss VRRP
 - network-attachment-circuits #3
- Candidate Features (5 items):** Items include:
 - attachment-circuit-model #67: Use case for MPLS/SRv6 as an AC
 - network-attachment-circuits #7: Bearer: add provider parameters
 - network-attachment-circuits #5: Bearer: add to model physical information of the connectivity
 - network-attachment-circuits #4: Bearer: missing customer port in "customer point" section
 - network-attachment-circuits #1: Attach (in/out) BGP policies
- Done (56 items):** This column has been completed. Items include:
 - attachment-circuit-model #62: Have a read-only leaf-list in the bearer-svc to report the ACes on the same bearer
 - attachment-circuit-model #47: Review bearer Section
 - attachment-circuit-model #51: Review the examples (appendix)
 - attachment-circuit-model #49: Review Section 3 (Use Cases)
 - attachment-circuit-model #48: Review Introduction
 - attachment-circuit-model #65

Updates Since IETF#116

- Received an LS from O-RAN
 - O-RAN-WG9-LS-2023-003-IETF on Transport Network Slicing Enhancement ([doc](#))

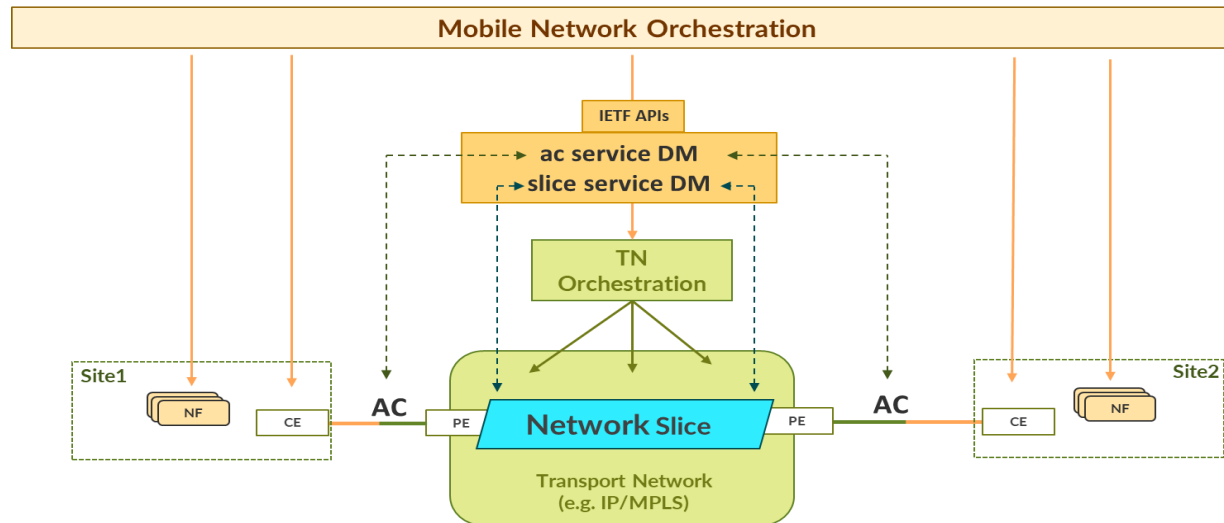

- No reply was sent so far by OPSAWG and TEAS (?)

Updates Since IETF#116

- A Change Request was accepted by the 3GPP ([S5-234742](#)) to enhance TS 28.541 (*Management and orchestration; 5G Network Resource Model (NRM); Stage 2 and stage 3*) with the required information to manage connections with "transport" domains:

An NRM touchpoint is needed containing sufficient information to resolve the associated connection point towards the transport domain. This includes well-defined, unambiguous identifier(s) which can be used to resolve, and associate, the appropriate model instance(s) in TN domain.

Excerpt from [TS 28.541](#) (June 30, 2023)

6.3.41 `ConnectionPointInfo` <<datatype>>

6.3.41.1 **Definition**

This datatype contains information required to identify a connection point outside of scope of 3GPP MIB (e.g. transport domain), for more details see RFC 8345 [89] and YANG Data Models for 'Attachment Circuits'-as-a-Service (ACaaS) [90].

Updates Since IETF#116

- TEAS WG Specifications
 - [draft-ietf-teas-5g-network-slice-application-01](#) discusses now how to map 3GPP NRM objects to ietf-ac-svc and ietf-bearer-svc data nodes
 - Gaps will be reported back to the 3GPP
 - [draft-ietf-teas-ietf-network-slice-nbi-yang-06](#) includes now the following data node
 - "ac-svc-name": Indicates the names of AC services, for association purposes, to refer to the ACs that have been created.
 - Using the references exposed in the ACaaS would be a clean design but the use of string is OK
 - Used to avoid normative dependency on the AC models
 - The spec also includes a discussion about how ACaaS and ac-common can be used for future extensions

Next Steps

- The scope and content are *more stable*
 - Build on OPSAWG RFCs 9181, 9182, 9291, and 9408
- The attachment circuit effort is being *leveraged* within the IETF and also in other SDOs
- Seek adoption *of the AC I-D set* in OPSAWG

Appendix

Sample Usage: Cloud

```

{
  "ietf-ac-svc:attachment-circuits": {
    "ac": [
      {
        "name": "ac--BXT-DC-customer-VPC-foo",
        "description": "Connection to Cloud Provider",
        "requested-start": "2023-12-12T05:00:00.00Z",
        "l2-connection": {
          "bearer-reference": "1243-56789"
        },
        "ip-connection": {
          "ipv4": {
            "local-address": "192.0.2.1",
            "prefix-length": 24,
            "address": [
              {
                "address-id": "1",
                "customer-address": "192.0.2.2"
              }
            ]
          }
        },
        "routing-protocols": {
          "routing-protocol": [
            {
              "id": "1",
              "type": "ietf-vpn-common:bgp-routing",
              "bgp": {
                "neighbor": [
                  {
                    "id": "1",
                    "peer-as": 65536,
                    "authentication": {
                      "keying-material": {
                        "md5-keychain": "nyxNER_c5sdn608fFQ13331d"
                      }
                    }
                  }
                ]
              }
            }
          ]
        }
      }
    ]
  }
}

```

