

GEOPRIV
Internet-Draft
Intended status: Standards Track
Expires: February 22, 2013

H. Schulzrinne, Ed.
Columbia University
H. Tschofenig, Ed.
Nokia Siemens Networks
J. Cuellar
Siemens
J. Polk
Cisco
J. Morris

M. Thomson
Microsoft
August 21, 2012

Geolocation Policy: A Document Format for Expressing Privacy Preferences
for Location Information
draft-ietf-geopriv-policy-27

Abstract

This document defines an authorization policy language for controlling access to location information. It extends the Common Policy authorization framework to provide location-specific access control. More specifically, this document defines condition elements specific to location information in order to restrict access to data based on the current location of the Target.

Furthermore, this document defines two algorithms for reducing the granularity of returned location information. The first algorithm is defined for usage with civic location information while the other one applies to geodetic location information. Both algorithms come with limitations. There are circumstances where the amount of location obfuscation provided is less than what is desired. These algorithms might not be appropriate for all application domains.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any

time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 22, 2013.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	5
2. Terminology	7
3. Generic Processing	8
3.1. Structure of Geolocation Authorization Documents	8
3.2. Rule Transport	8
4. Location-specific Conditions	9
4.1. Geodetic Location Condition Profile	9
4.2. Civic Location Condition Profile	10
5. Actions	11
6. Transformations	12
6.1. Set Retransmission-Allowed	12
6.2. Set Retention-Expiry	12
6.3. Set Note-Well	12
6.4. Keep Ruleset Reference	13
6.5. Provide Location	13
6.5.1. Civic Location Profile	14
6.5.2. Geodetic Location Profile	15
7. Examples	18
7.1. Rule Example with Civic Location Condition	18
7.2. Rule Example with Geodetic Location Condition	19
7.3. Rule Example with Civic and Geodetic Location Condition	19
7.4. Rule Example with Location-based Transformations	20
7.5. Location Obfuscation Example	22
8. XML Schema for Basic Location Profiles	26
9. XML Schema for Geolocation Policy	27
10. XCAP Usage	29
10.1. Application Unique ID	29
10.2. XML Schema	29
10.3. Default Namespace	29
10.4. MIME Media Type	29
10.5. Validation Constraints	29
10.6. Data Semantics	29
10.7. Naming Conventions	29
10.8. Resource Interdependencies	30
10.9. Authorization Policies	30
11. IANA Considerations	31
11.1. Geolocation Policy XML Schema Registration	31
11.2. Geolocation Policy Namespace Registration	31
11.3. Geolocation Policy Location Profile Registry	32
11.4. Basic Location Profile XML Schema Registration	32
11.5. Basic Location Profile Namespace Registration	33
11.6. XCAP Application Usage ID	34
12. Internationalization Considerations	35
13. Security Considerations	36
13.1. Introduction	36
13.2. Obfuscation	36

13.3. Algorithm Limitations	38
13.4. Usability	38
13.5. Location Obscuring Limitations	39
14. References	41
14.1. Normative References	41
14.2. Informative References	41
Appendix A. Acknowledgments	44
Appendix B. Pseudo-Code	45
Authors' Addresses	49

1. Introduction

Location information needs to be protected against unauthorized access to preserve the privacy of humans. In RFC 6280 [RFC6280], a protocol-independent model for access to geographic information is defined. The model includes a Location Generator (LG) that determines location information, a Location Server (LS) that authorizes access to location information, a Location Recipient (LR) that requests and receives location information, and a Rule Maker (RM) that writes authorization policies. An authorization policy is a set of rules that regulates an entity's activities with respect to privacy-sensitive information, such as location information.

The data object containing location information in the context of this document is referred to as a Location Object (LO). The basic rule set defined in the Presence Information Data Format Location Object (PIDF-LO) [RFC4119] can restrict how long the Location Recipient is allowed to retain the information, and it can prohibit further distribution. It also contains a reference to an enhanced rule set and a human readable privacy policy. The basic rule set does not access to location information. This document describes an enhanced rule set that provides richer constraints on the distribution of LOs.

The enhanced rule set allows the entity that uses the rules defined in this document to restrict the retention and to enforce access restrictions on location data, including prohibiting any dissemination to particular individuals, during particular times or when the Target is located in a specific region. The RM can also stipulate that only certain parts of the Location Object are to be distributed to recipients or that the resolution is reduced for parts of the Location Object.

In the typical sequence of operations, a Location Server receives a query for location information for a particular Target. The requestor's identity will likely be revealed as part of this request for location information. The authenticated identity of the Location Recipient, together with other information provided with the request or generally available to the server, is then used for searching through the rule set. If more than one rule matches the condition element, then the combined permission is evaluated according to the description in Section 10 of [RFC4745]. The result of the rule evaluation is applied to the location information, yielding a possibly modified Location Object that is delivered to the Location Recipient.

This document does not describe the protocol used to convey location information from the Location Server to the Location Recipient.

This document extends the Common Policy framework defined in [RFC4745]. That document provides an abstract framework for expressing authorization rules. As specified there, each such rule consists of conditions, actions and transformations. Conditions determine under which circumstances the entity executing the rules, such as a Location Server, is permitted to apply actions and transformations. Transformations regulate in a location information context how a Location Server modifies the information elements that are returned to the requestor by, for example, reducing the granularity of returned location information.

This document defines two algorithms for reducing the granularity of returned location information. The first algorithm is defined for usage with civic location information (see Section 6.5.1) while the other one applies to geodetic location information (see Section 6.5.2). Both algorithms come with limitations, i.e. they provide location obfuscation under certain conditions and may therefore not be appropriate for all application domains. These limitations are documented within the security consideration section (see Section 13). It is worth pointing out that the geodetic transformation algorithm Section 6.5.2 deals with privacy risks related to targets that are stationary, as well as to moving targets. However, with respect to movement there are restriction as to what information can be hidden from an adversary. To cover applications that have more sophisticated privacy requirements additional algorithms may need to be defined. This document foresees extensions in the form of new algorithms and therefore defines a registry (see Section 11.3).

The XML schema defined in Section 9 extends the Common Policy schema by introducing new child elements to the condition and transformation elements. This document does not define child elements for the action part of a rule.

2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [RFC2119].

This document reuses the terminology of RFC 6280 [RFC6280], such as Location Server (LS), Location Recipient (LR), Rule Maker (RM), Target, Location Generator (LG) and Location Object (LO). This document uses the following terminology:

Presentity or Target:

RFC 6280 [RFC6280] uses the term Target to identify the object or person of which location information is required. The presence model described in RFC 2778 [RFC2778] uses the term presentity to describe the entity that provides presence information to a presence service. A Presentity in a presence system is a Target in a location information system.

Watcher or Location Recipient:

The receiver of location information is the Location Recipient (LR) in the terminology of RFC 6280 [RFC6280]. A watcher in a presence system, i.e., an entity that requests presence information about a presentity, is a Location Recipient in a location information system.

Authorization policy:

An authorization policy is given by a rule set. A rule set contains an unordered list of (policy) rules. Each rule has a condition, an action and a transformation component.

Permission:

The term "permission" refers to the action and transformation components of a rule.

In this document we use the term Location Servers as the entities that evaluate the geolocation authorization policies. The geolocation privacy architecture is, as described in RFC 4079 [RFC4079], aligned with the presence architecture and a Presence Server is therefore an entity that distributes location information along with other presence-specific XML data elements.

3. Generic Processing

3.1. Structure of Geolocation Authorization Documents

A geolocation authorization document is an XML document, formatted according to the schema defined in [RFC4745]. Geolocation authorization documents inherit the media type of common policy documents, application/auth-policy+xml. As described in [RFC4745], this document is composed of rules which contain three parts - conditions, actions, and transformations. Each action or transformation, which is also called a permission, has the property of being a positive grant of information to the Location Recipient. As a result, there is a well-defined mechanism for combining actions and transformations obtained from several sources. This mechanism is privacy enabling, since the lack of any action or transformation can only result in less information being presented to a Location Recipient.

3.2. Rule Transport

There are two ways the authorization rules described in this document may be conveyed between different parties:

- o RFC 4119 [RFC4119] allows enhanced authorization policies to be referenced via a Uniform Resource Locator (URL) in the 'ruleset-reference' element. The ruleset-reference' element is part of the basic rules that always travel with the Location Object.
- o Authorization policies might, for example, also be stored at a Location Server / Presence Server. The Rule Maker therefore needs to use a protocol to create, modify and delete the authorization policies defined in this document. Such a protocol is available with the Extensible Markup Language (XML) Configuration Access Protocol (XCAP) [RFC4825].

4. Location-specific Conditions

This section describes the location-specific conditions of a rule. The `<conditions>` element contains zero or more `<location-condition>` child element(s). The `>conditions>` element only evaluates to TRUE if all child elements evaluate to TRUE, therefore multiple `<location-condition>` elements are not normally useful.

The `<location-condition>` element MUST contain at least one `<location>` child element. The `<location-condition>` element evaluates to TRUE if any of its child `>location>` elements matches the location of the target, i.e., `>location>` elements are combined using a logical OR.

The three attributes of `<location>` are `'profile'`, `'xml:lang'` and `'label'`. The `'profile'` indicates the location profile that is included as child elements in the `<location>` element. Two location profiles, geodetic and civic, are defined in Section 4.1 and Section 4.2. Each profile describes under what conditions a `<location>` element evaluates to TRUE.

The `'label'` attribute allows a human readable description to be added to each `<location>` element. The `'xml:lang'` attribute contains a language tag providing further information for rendering of the content of the `'label'` attribute.

The `<location-condition>` and the `<location>` elements provide extension points. An extension that is not understood by the entity evaluating the rules then this rule evaluates to FALSE. This causes a `>conditions>` element to evaluate to FALSE if a `>location-condition>` element is unsupported, but allows a `>location-condition>` to be TRUE if an child `>location>` is not understood as long as an understood `>location>` is TRUE.

4.1. Geodetic Location Condition Profile

The geodetic location profile is identified by the token `'geodetic-condition'`. Rule Makers use this profile by placing a GML [GML] `<Circle>` element within the `<location>` element (as described in Section 5.2.3 of [RFC5491]).

The `<location>` element containing the information for the geodetic location profile evaluates to TRUE if the current location of the Target is completely within the described location (see Section 6.1.15.3 of [OGC-06-103r4]). Note that the Target's actual location might be represented by any of the location shapes described in [RFC5491]. If the geodetic location of the Target is unknown then the `<location>` element containing the information for the geodetic location profile evaluates to FALSE.

Implementations MUST support the WGS 84 [NIMA.TR8350.2-3e] coordinate reference system using the formal identifier from the European Petroleum Survey Group (EPSG) Geodetic Parameter Dataset (as formalized by the Open Geospatial Consortium (OGC)):

2D: WGS 84 (latitude, longitude), as identified by the URN "urn:ogc:def:crs:EPSG::4326". This is a two dimensional CRS.

A CRS MUST be specified using the above URN notation only, implementations do not need to support user-defined CRSs.

Implementations MUST specify the CRS using the "srsName" attribute on the outermost geometry element. The CRS MUST NOT be changed for any sub-elements. The "srsDimension" attribute MUST be omitted, since the number of dimensions in these CRSs is known.

4.2. Civic Location Condition Profile

The civic location profile is identified by the token 'civic-condition'. Rule Makers use this profile by placing a <civicAddress> element, defined in [RFC5139], within the <location> element.

All child elements of <location> element that carry <civicAddress> elements MUST evaluate to TRUE (i.e., logical AND) in order for the <location> element to evaluate to TRUE. For each child element, the value of that element is compared to the value of the same element in the Target's civic location. The child element evaluates to TRUE if the two values are identical based on a octet-by-octet comparison.

A <location> element containing a >civic-condition> profile evaluates to FALSE if a civic address is not present for the Target. For example, this could occur if location information has been removed by other rules or other transmitters of location information or if only the geodetic location is known. In general, it is RECOMMENDED behavior for a LS not to apply a translation from geodetic location to civic location (i.e., geocode the location).

5. Actions

This document does not define location-specific actions.

6. Transformations

This document defines several elements that allow Rule Makers to specify transformations that

- o reduce the accuracy of the returned location information, and
- o set the basic authorization policies carried inside the PIDF-LO.

6.1. Set Retransmission-Allowed

This element specifies a change to or the creation of a value for the <retransmission-allowed> element in the PIDF-LO. The data type of the <set-retransmission-allowed> element is a boolean.

If the value of the <set-retransmission-allowed> element is set to TRUE then the <retransmission-allowed> element in the PIDF-LO MUST be set to TRUE. If the value of the <set-retransmission-allowed> element is set to FALSE, then the <retransmission-allowed> element in the PIDF-LO MUST be set to FALSE.

If the <set-retransmission-allowed> element is absent then the value of the <retransmission-allowed> element in the PIDF-LO MUST be kept unchanged or, if the PIDF-LO is created for the first time, then the value MUST be set to FALSE.

6.2. Set Retention-Expiry

This transformation asks the LS to change or set the value of the <retention-expiry> element in the PIDF-LO. The data type of the <set-retention-expiry> element is a non-negative integer.

The value provided with the <set-retention-expiry> element indicates seconds and these seconds are added to the time that the LS provides location. A value of zero requests that the information is not retained.

If the <set-retention-expiry> element is absent then the value of the <retention-expiry> element in the PIDF-LO is kept unchanged or, if the PIDF-LO is created for the first time, then the value MUST be set to the current date.

6.3. Set Note-Well

This transformation asks the LS to change or set the value of the <note-well> element in the PIDF-LO. The data type of the <set-note-well> element is a string.

The value provided with the <set-note-well> element contains a privacy statement as a human readable text string and an 'xml:lang' attribute denotes the language of the human readable text.

If the <set-note-well> element is absent, then the value of the <note-well> element in the PIDF-LO is kept unchanged or, if the PIDF-LO is created for the first time, then no content is provided for the <note-well> element.

6.4. Keep Ruleset Reference

This transformation specifies whether the <external-ruleset> element in the PIDF-LO carries the extended authorization rules defined in [RFC4745]. The data type of the <keep-rule-reference> element is Boolean.

If the value of the <keep-rule-reference> element is set to TRUE, then the <external-ruleset> element in the PIDF-LO is kept unchanged when included. If the value of the <keep-rule-reference> element is set to FALSE, then the <external-ruleset> element in the PIDF-LO MUST NOT contain a reference to an external rule set. The reference to the ruleset is removed and no rules are carried as MIME bodies (in case of Content-ID (cid:) URIs [RFC2392]).

If the <keep-rule-reference> element is absent, then the value of the <external-ruleset> element in the PIDF-LO is kept unchanged when available or, if the PIDF-LO is created for the first time then the <external-ruleset> element MUST NOT be included.

6.5. Provide Location

The <provide-location> element contains child elements of a specific location profile that controls the granularity of returned location information. This form of location granularity reduction is also called 'obfuscation' and is defined in [duckham05] as

"the means of deliberately degrading the quality of information about an individual's location in order to protect that individual's location privacy."

Location obscuring presents a number of technical challenges. The algorithms provided in this document are provided as examples only. A discussion of the technical constraints on location obscuring is included in Section 13.5.

The functionality of location granularity reduction depends on the type of location provided as input. This document defines two profiles for reduction, namely:

- o If the <provide-location> element has a <provide-civic> child element then civic location information is disclosed as described in Section 6.5.1, subject to availability.
- o If the <provide-location> element has a <provide-geo> child element then geodetic location information is disclosed as described in Section 6.5.2, subject to availability.


The <provide-location> element MUST contain the 'profile' attribute if it contains child elements and the 'profile' attribute MUST match with the contained child elements.

If the <provide-location> element has no child elements then civic, as well as, geodetic location information is disclosed without reducing its granularity, subject to availability. In this case the profile attribute MUST NOT be included.

6.5.1. Civic Location Profile

This profile uses the token 'civic-transformation'. This profile allows civic location transformations to be specified by means of the <provide-civic> element that restricts the level of civic location information the LS is permitted to disclose. The symbols of these levels are: 'country', 'region', 'city', 'building', 'full'. Each level is given by a set of civic location data items such as <country> and <A1>, ..., <POM>, as defined in [RFC5139]. Each level includes all elements included by the lower levels.

The 'country' level includes only the <country> element; the 'region' level adds the <A1> element; the 'city' level adds the <A2> and <A3> elements; the 'building' level and the 'full' level add further civic location data as shown below.

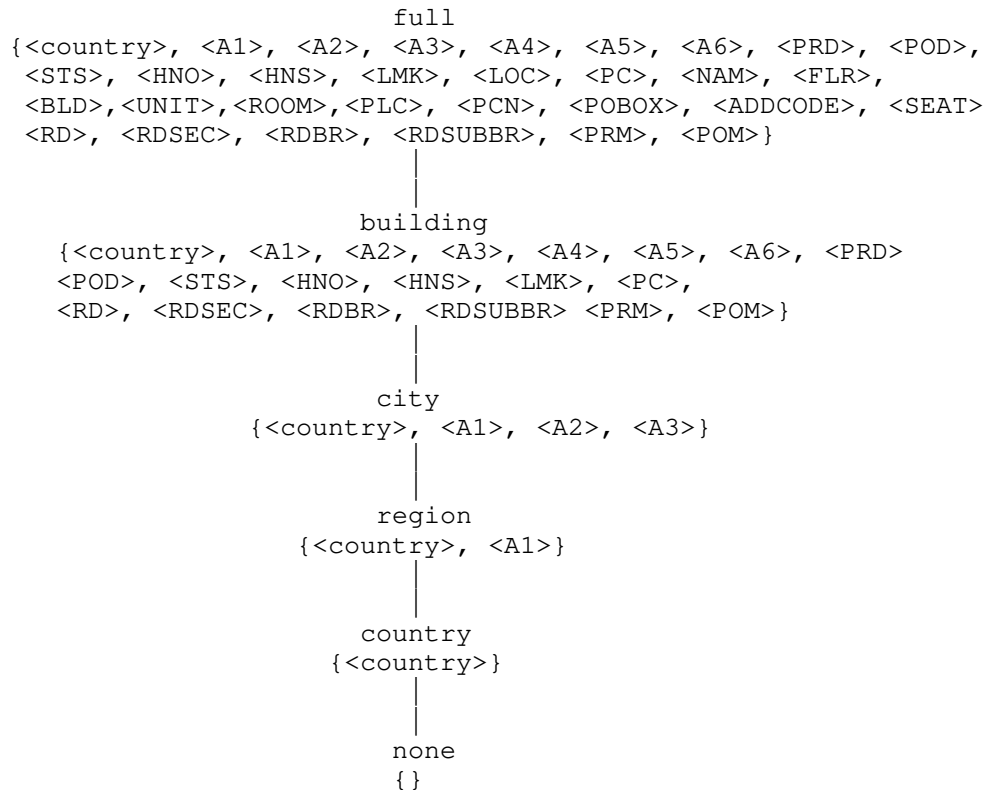

The default value is "none".

The schema of the <provide-civic> element is defined in Section 8.

6.5.2. Geodetic Location Profile

This profile uses the token 'geodetic-transformation' and refers only to the Coordinate Reference System (CRS) WGS 84 (urn:ogc:def:crs:EPSG::4326, 2D). This profile allows geodetic location transformations to be specified by means of the <provide-geo> element that may restrict the returned geodetic location information based on the value provided in the 'radius' attribute. The value of the 'radius' attribute expresses the radius in meters.

The schema of the <provide-geo> element is defined in Section 8.

The algorithm proceeds in 6 steps. The first two steps are independent of the measured position to be obscured. Those two steps should be run only once or rather seldom (for every region and desired uncertainty). The steps are:

1. Choose a geodesic projection with Cartesian coordinates and a surface you want to cover. The maximal distortion of the map may not be too much (see notes below).
2. Given uncertainty "d", choose a grid of so called "landmarks" at a distance (maximal) d of each other.
3. Given a measured location $M=(m,n)$ in the surface, calculate its 4 closest landmarks on the grid, with coordinates: $SW = (l,b)$, $SE=(r,b)$, $NW=(l,t)$, $NE=(r,t)$. Thus $l \leq m < r$ and $b \leq n < t$. See notes below.
4. Let $x=(m-l)/(r-l)$ and $y=(n-b)/(t-b)$

 x and y are thus the local coordinates of the point M in the small grid square that contains it. $0 \leq x, y < 1$.
5. Let $p = 0.2887$ ($=\sqrt{3}/6$) and $q = 0.7113$ ($=1-p$), determine which of the following 8 cases holds:
 - C1. $x < p$ and $y < p$
 - C2. $p \leq x < q$ and $y < x$ and $y < 1-x$
 - C3. $q \leq x$ and $y < p$
 - C4. $p \leq y < q$ and $x \leq y$ and $y < 1-x$
 - C5. $p \leq y < q$ and $y < x$ and $1-x \leq y$
 - C6. $x < p$ and $q \leq y$
 - C7. $p \leq x < q$ and $x \leq y$ and $1-x \leq y$
 - C8. $q \leq x$ and $q \leq y$
6. Depending on the case, let C (=Center) be
 - C1: SW
 - C2: SW or SE
 - C3: SE
 - C4: SW or NW
 - C5: SE or NE
 - C6: NW
 - C7: NW or NE
 - C8: NE

Return the circle with center C and radius d .

Notes:

Regarding Step 1:

The scale of a map is the ratio of a distance on (a straight line) on the map to the corresponding air distance on the ground. For maps covering larger areas, a map projection from a sphere (or ellipsoid) to the plane will introduce distortion and the scale of the map is not constant. Also, note that the real distance on the ground is taken along great circles, which may not correspond to straight lines in the map, depending on the projection used. Let us measure the (length) distortion of the map as the quotient between the maximal and the minimal scales in the map. The distortion MUST be below 1.5. (The minimum distortion is 1.0: If the region of the map is small, then the scale may be taken as a constant over the whole map).

Regarding Step3:

SW is mnemonic for south-west, b for bottom, l for left (SW=(l,b)), etc, but the directions of the geodesic projection may be arbitrary, and thus SW may be not south-west of M but it will be left and below M *on the map*.

7. Examples

This section provides a few examples for authorization rules using the extensions defined in this document.

7.1. Rule Example with Civic Location Condition

This example illustrates a single rule that employs the civic location condition. It matches if the current location of the Target equal the content of the child elements of the <location> element. Requests match only if the Target is at a civic location with country set to 'Germany', state (A1) set to 'Bavaria', city (A3) set to 'Munich', city division (A4) set to 'Perlach', street name (A6) set to 'Otto-Hahn-Ring' and house number (HNO) set to '6'.

No actions and transformation child elements are provided in this rule example. The actions and transformation could include presence specific information when the Geolocation Policy framework is applied to the Presence Policy framework (see [RFC5025]).

```
<?xml version="1.0" encoding="UTF-8"?>
<ruleset xmlns="urn:ietf:params:xml:ns:common-policy"
  xmlns:gp="urn:ietf:params:xml:ns:geolocation-policy">

  <rule id="AA56i09">
    <conditions>
      <gp:location-condition>
        <gp:location
          profile="civic-condition"
          xml:lang="en"
          label="Siemens Neuperlach site 'Legoland'"
          xmlns="urn:ietf:params:xml:ns:pidf:geopriv10:civicAddr">
            <country>DE</country>
            <A1>Bavaria</A1>
            <A3>Munich</A3>
            <A4>Perlach</A4>
            <A6>Otto-Hahn-Ring</A6>
            <HNO>6</HNO>
          </gp:location>
        </gp:location-condition>
      </conditions>
      <actions/>
      <transformations/>
    </rule>
  </ruleset>
```

7.2. Rule Example with Geodetic Location Condition

This example illustrates a rule that employs the geodetic location condition. The rule matches if the current location of the Target is inside the area specified by the polygon. The polygon uses the EPSG 4326 coordinate reference system. No altitude is included in this example.

```
<?xml version="1.0" encoding="UTF-8"?>
<ruleset
  xmlns="urn:ietf:params:xml:ns:common-policy"
  xmlns:gp="urn:ietf:params:xml:ns:geolocation-policy"
  xmlns:gml="http://www.opengis.net/gml"
  xmlns:gs="http://www.opengis.net/pidflo/1.0">

  <rule id="BB56A19">
    <conditions>
      <gp:location-condition>
        <gp:location
          xml:lang="en"
          label="Sydney Opera House"
          profile="geodetic-condition">
          <gs:Circle srsName="urn:ogc:def:crs:EPSG::4326">
            <gml:pos>-33.8570029378 151.2150070761</gml:pos>
            <gs:radius uom="urn:ogc:def:uom:EPSG::9001">1500
            </gs:radius>
          </gs:Circle>
        </gp:location>
      </gp:location-condition>
    </conditions>
    <transformations/>
  </rule>
</ruleset>
```

7.3. Rule Example with Civic and Geodetic Location Condition

This example illustrates a rule that employs a mixed civic and geodetic location condition. Depending on the available type of location information, namely civic or geodetic location information, one of the location elements may match.

```
<?xml version="1.0" encoding="UTF-8"?>
<ruleset
  xmlns="urn:ietf:params:xml:ns:common-policy"
  xmlns:gp="urn:ietf:params:xml:ns:geolocation-policy"
  xmlns:gml="http://www.opengis.net/gml"
  xmlns:gs="http://www.opengis.net/pidflo/1.0">

  <rule id="AA56i09">
    <conditions>
      <gp:location-condition>
        <gp:location profile="civic-condition"
          xmlns="urn:ietf:params:xml:ns:pidf:geopriv10:civicAddr">
          <country>DE</country>
          <A1>Bavaria</A1>
          <A3>Munich</A3>
          <A4>Perlach</A4>
          <A6>Otto-Hahn-Ring</A6>
          <HNO>6</HNO>
        </gp:location>
        <gp:location profile="geodetic-condition">
          <gs:Circle srsName="urn:ogc:def:crs:EPSG::4326">
            <gml:pos>-34.410649 150.87651</gml:pos>
            <gs:radius uom="urn:ogc:def:uom:EPSG::9001">1500
            </gs:radius>
          </gs:Circle>
        </gp:location>
      </gp:location-condition>
    </conditions>
    <actions/>
    <transformations/>
  </rule>
</ruleset>
```

7.4. Rule Example with Location-based Transformations

This example shows the transformations specified in this document. The <provide-civic> element indicates that the available civic location information is reduced to building level granularity. If geodetic location information is requested then a granularity reduction is provided as well.

```
<?xml version="1.0" encoding="UTF-8"?>
<ruleset xmlns="urn:ietf:params:xml:ns:common-policy"
  xmlns:gp="urn:ietf:params:xml:ns:geolocation-policy"
  xmlns:lp="urn:ietf:params:xml:ns:basic-location-profiles">

  <rule id="AA56i09">
    <conditions/>
    <actions/>
    <transformations>
      <gp:set-retransmission-allowed>false
      </gp:set-retransmission-allowed>
      <gp:set-retention-expiry>86400</gp:set-retention-expiry>
      <gp:set-note-well xml:lang="en">My privacy policy goes in here.
      </gp:set-note-well>
      <gp:keep-rule-reference>false
      </gp:keep-rule-reference>

      <gp:provide-location
        profile="civic-transformation">
        <lp:provide-civic>building</lp:provide-civic>
      </gp:provide-location>

      <gp:provide-location
        profile="geodetic-transformation">
        <lp:provide-geo radius="500"/>
      </gp:provide-location>

    </transformations>
  </rule>
</ruleset>
```

The following rule describes the short-hand notation for making the current location of the Target available to Location Recipients without granularity reduction.

```
<?xml version="1.0" encoding="UTF-8"?>
<ruleset xmlns="urn:ietf:params:xml:ns:common-policy"
  xmlns:gp="urn:ietf:params:xml:ns:geolocation-policy">

  <rule id="AA56ia9">
    <conditions/>
    <actions/>
    <transformations>
      <gp:provide-location/>
    </transformations>
  </rule>
</ruleset>
```

7.5. Location Obfuscation Example

Suppose you want to obscure positions in the continental USA.

Step 1:

First you choose a geodesic projection. If you are measuring location as latitude and longitude, a natural choice is to take a rectangular projection. One latitudinal degree corresponds approximately to 110.6 kilometers, while a good approximation of a longitudinal degree at latitude ϕ is $(\pi/180) * M * \cos(\phi)$, where π is approximately 3.1415, and M is the Earth's average meridional radius, approximately 6,367.5 km. For instance, one longitudinal degree at 30 degrees (say, New Orleans) is 96.39 km, while the formula given offers an estimation of 96.24, which is good for our purposes.

We will set up a grid not only for the continental US, but for the whole earth between latitudes 25 and 50 degrees, and thus will cover also the Mediterranean, South Europe, Japan and the north of China. As will be seen below, the grid distortion (for not too large grids in this region) is approx $\cos(25)/\cos(50)$, which is 1.4099.

As origin of our grid, we choose the point at latitude 25 degrees and longitude 0 (Greenwich). The latitude 25 degrees is chosen to be just south of Florida and thus south of the continental US. (On the south hemisphere the origin should be north of the region to be covered; if the region crosses the Equator, the origin should be on the Equator. In this way it is guaranteed that the latitudinal degree has largest distance at the latitude of the origin).

At 25 degrees one degree in east-west direction corresponds approx to $(\pi/180) * M * \cos(25) = 100.72$ km.

The same procedure, basically, produces grids for

- * 45 degrees south to 45 degrees north Tropics and subtropics
- * 25 to 50 degrees (both north or south) Continental US
- * 35 to 55 degrees (both north or south) South and Central Europe
- * 45 to 60 degrees (both north or south) Central and North Europe
- * 55 to 65 degrees (both north or south) Scandinavia

* 60 to 70 degrees (both north or south)

Since we do not want to often change grid system (this would leak more information about obscured locations when they are repeatedly visited), the algorithm should prefer to use the grids discussed above, with origin at the Greenwich meridian and at latitudes $o=0$, $o=25$, $o=35$, $o=45$, $o=55$, and $o=60$ degrees (north) or at latitudes $o=-25$, $o=-35$, $o=-45$, $o=-55$, and $o=-60$ degrees (the minus to indicate "south").

Our choice for the continental USA is $o=25$.

For locations close to the poles, a different projection should be used (not discussed here).

Step 2:

To construct the grid points, we start with our chosen origin and place the along the main axes (NS and EW) grid points at a distance d of each other.

We will now construct a grid for a desired uncertainty of $d = 100\text{km}$. At our origin, 100 km correspond roughly to $d_1 = 100/100.72 = 0.993$ degrees on east-west direction and to $d_2 = 100/110.6 = 0.904$ degrees in north-south direction.

The (i,j) -point in the grid (i and j are integers) has longitude d_1*i and latitude $25+d_2*j$, measured in degrees. More generally, if the grid has origin at coordinates $(0,o)$, measured in degrees, the (i,j) -point in the grid has coordinates (longitude = d_1*i , latitude = $o+d_2*j$). The grid has almost no distortion at the latitude of the origin, but it has as we go further away from it.

The distance between two points in the grid at 25 degrees latitude is indeed approx 100 km, but just above the Canadian border, on the 50th degree, it is $0.993*(\pi/180)*M*\cos(50) = 70.92\text{km}$. Thus, the grid distortion is $100/70.92 = 1.41$, which is acceptable (<1.5). (On north-south direction the grid has roughly no distortion, the vertical distance between two neighboring grid points is approximately 100 km).

Step 3:

Now suppose you measure a position at M , with longitude -105 (the minus sign is used to denote 105 degrees *west*; without minus, the point is in China, 105 degrees east) and latitude 40 degrees

(just north of Denver, CO). The point M is 105 degrees west and 15 degrees north of our origin (which has longitude 0 and latitude 25).

Let "floor" be the function that returns the largest integer smaller or equal to a floating point number. To calculate SW, the closest point of the grid on the south-west of $M=(m,n)$, we calculate

$$i = \text{floor}(m/d1) = \text{floor}(-105/0.993) = -106$$

$$j = \text{floor}(n-o/d2) = \text{floor}(15/0.904) = 16$$

Those are the indexes of SW on the grid. The coordinates of SW are then: $(d1*i, 25+d2*j) = (-105.242, 39.467)$.

Thus:

$$l = d1 * \text{floor}(m/d1) = -105.243$$

$$r = l + d1 = -105.243 + 0.993 = -104.250$$

$$b = o + d2 * \text{floor}(n-o/d2) = 39.467$$

$$t = b + d2 = 39.467 + 0.904 = 40.371$$

These are the formulas for l, r, b , and t in the general case of Cartesian projections based on latitude and longitude.

Step 4:

Calculate x and y , the local coordinates of the point M in the small grid square that contains it. This is easy:

$$x = (m-l)/(r-l) = [-105 - (-105.243)]/0.993 = 0.245$$

$$y = (n-b)/(t-b) = [40 - 39.467]/0.904 = 0.590$$

Step 5:

First compare x with p (0.2887) and (0.7113). x is smaller than p . Therefore, only cases 1, 4 or 6 could hold.

Also compare y with p (0.2887) and (0.7113). y is between them: $p \leq y < q$. Thus, we must be in case 4. To check, compare y (0.59) with x (0.245) and $1-x$. y is larger than x and smaller than $1-x$.

We are in case C4 ($p \leq y < q$ and $x \leq y$ and $y < 1-x$).

Step 6:

Now we choose either SW or NW as the center of the circle.

The obscured location is the Circle with radius 100 km and center in SW (coordinates: -105.243, 39.467), or NW (coordinates: -105.243, 40.371).

8. XML Schema for Basic Location Profiles

This section defines the location profiles used as child elements of the transformation element.

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
  targetNamespace="urn:ietf:params:xml:ns:basic-location-profiles"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">

  <!-- profile="civic-transformation" -->

  <xs:element name="provide-civic" default="none">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="full"/>
        <xs:enumeration value="building"/>
        <xs:enumeration value="city"/>
        <xs:enumeration value="region"/>
        <xs:enumeration value="country"/>
        <xs:enumeration value="none"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>

  <!-- profile="geodetic-transformation" -->

  <xs:element name="provide-geo">
    <xs:complexType>
      <xs:attribute name="radius" type="xs:integer"/>
    </xs:complexType>
  </xs:element>

</xs:schema>
```

9. XML Schema for Geolocation Policy

This section presents the XML schema that defines the Geolocation Policy schema described in this document. The Geolocation Policy schema extends the Common Policy schema (see [RFC4745]).

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
  targetNamespace="urn:ietf:params:xml:ns:geolocation-policy"
  xmlns:gp="urn:ietf:params:xml:ns:geolocation-policy"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">

  <!-- Import Common Policy-->
  <xs:import namespace="urn:ietf:params:xml:ns:common-policy"/>

  <!-- This import brings in the XML language attribute xml:lang-->
  <xs:import namespace="http://www.w3.org/XML/1998/namespace"
    schemaLocation="http://www.w3.org/2001/xml.xsd"/>

  <!-- Geopriv Conditions -->

  <xs:element name="location-condition"
    type="gp:locationconditionType"/>

  <xs:complexType name="locationconditionType">
    <xs:complexContent>
      <xs:restriction base="xs:anyType">
        <xs:choice minOccurs="1" maxOccurs="unbounded">
          <xs:element name="location" type="gp:locationType"
            minOccurs="1" maxOccurs="unbounded"/>
          <xs:any namespace="##other" processContents="lax"
            minOccurs="0" maxOccurs="unbounded"/>
        </xs:choice>
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

  <xs:complexType name="locationType">
    <xs:complexContent>
      <xs:restriction base="xs:anyType">
        <xs:choice minOccurs="1" maxOccurs="unbounded">
          <xs:any namespace="##other" processContents="lax"
            minOccurs="0" maxOccurs="unbounded"/>
        </xs:choice>
        <xs:attribute name="profile" type="xs:string"/>
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

</xs:schema>
```

```
        <xs:attribute name="label" type="xs:string"/>
        <xs:attribute ref="xml:lang" />
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

  <!-- Geopriv transformations -->
  <xs:element name="set-retransmission-allowed"
    type="xs:boolean" default="false"/>
  <xs:element name="set-retention-expiry"
    type="xs:integer" default="0"/>
  <xs:element name="set-note-well"
    type="gp:notewellType"/>
  <xs:element name="keep-rule-reference"
    type="xs:boolean" default="false"/>

  <xs:element name="provide-location"
    type="gp:providelocationType"/>

  <xs:complexType name="notewellType">
    <xs:simpleContent>
      <xs:extension base="xs:string">
        <xs:attribute ref="xml:lang" />
      </xs:extension>
    </xs:simpleContent>
  </xs:complexType>

  <xs:complexType name="providelocationType">
    <xs:complexContent>
      <xs:restriction base="xs:anyType">
        <xs:choice minOccurs="0" maxOccurs="unbounded">
          <xs:any namespace="##other" processContents="lax"
            minOccurs="0" maxOccurs="unbounded"/>
        </xs:choice>
        <xs:attribute name="profile" type="xs:string" />
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

</xs:schema>
```

10. XCAP Usage

The following section defines the details necessary for clients to manipulate geolocation privacy documents from a server using XCAP. If used as part of a presence system, it uses the same AUID as those rules. See [RFC5025] for a description of the XCAP usage in context with presence authorization rules.

10.1. Application Unique ID

XCAP requires application usages to define a unique application usage ID (AUID) in either the IETF tree or a vendor tree. This specification defines the "geolocation-policy" AUID within the IETF tree, via the IANA registration in Section 11.

10.2. XML Schema

XCAP requires application usages to define a schema for their documents. The schema for geolocation authorization documents is described in Section 9.

10.3. Default Namespace

XCAP requires application usages to define the default namespace for their documents. The default namespace is `urn:ietf:params:xml:ns:geolocation-policy`.

10.4. MIME Media Type

XCAP requires application usages to define the MIME media type for documents they carry. Geolocation privacy authorization documents inherit the MIME type of common policy documents, `application/auth-policy+xml`.

10.5. Validation Constraints

This specification does not define additional constraints.

10.6. Data Semantics

This document discusses the semantics of a geolocation privacy authorization.

10.7. Naming Conventions

When a Location Server receives a request to access location information of some user foo, it will look for all documents within `http://[xcaproot]/geolocation-policy/users/foo`, and use all documents

found beneath that point to guide authorization policy.

10.8. Resource Interdependencies

This application usage does not define additional resource interdependencies.

10.9. Authorization Policies

This application usage does not modify the default XCAP authorization policy, which is that only a user can read, write or modify his/her own documents. A server can allow privileged users to modify documents that they do not own, but the establishment and indication of such policies is outside the scope of this document.

11. IANA Considerations

There are several IANA considerations associated with this specification.

11.1. Geolocation Policy XML Schema Registration

This section registers an XML schema in the IETF XML Registry as per the guidelines in [RFC3688].

URI: urn:ietf:params:xml:schema:geolocation-policy

Registrant Contact: IETF Geopriv Working Group (geopriv@ietf.org),
Hannes Tschofenig (hannes.tschofenig@nsn.com).

XML: The XML schema to be registered is contained in Section 9. Its first line is

```
<?xml version="1.0" encoding="UTF-8"?>
```

and its last line is

```
</xs:schema>
```

11.2. Geolocation Policy Namespace Registration

This section registers a new XML namespace in the IETF XML Registry as per the guidelines in [RFC3688].

URI: urn:ietf:params:xml:ns:geolocation-policy

Registrant Contact: IETF Geopriv Working Group (geopriv@ietf.org),
Hannes Tschofenig (hannes.tschofenig@nsn.com).

XML:

```
BEGIN
<?xml version="1.0"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML Basic 1.0//EN"
  "http://www.w3.org/TR/xhtml-basic/xhtml-basic10.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
  <meta http-equiv="content-type"
    content="text/html; charset=iso-8859-1"/>
  <title>Geolocation Policy Namespace</title>
</head>
<body>
  <h1>Namespace for Geolocation Authorization Policies</h1>
  <h2>urn:ietf:params:xml:schema:geolocation-policy</h2>
<p>See <a href="[URL of published RFC]">RFCXXXX
  [NOTE TO IANA/RFC-EDITOR:
    Please replace XXXX with the RFC number of this
    specification.]</a>.</p>
</body>
</html>
END
```

11.3. Geolocation Policy Location Profile Registry

This document creates a registry of location profile names for the Geolocation Policy framework. Profile names are XML tokens. This registry will operate in accordance with RFC 5226 [RFC5226], Specification Required.

This document defines the following profile names:

geodetic-condition: Defined in Section 4.1.

civic-condition: Defined in Section 4.2.

geodetic-transformation: Defined in Section 6.5.2.

civic-transformation: Defined in Section 6.5.1.

11.4. Basic Location Profile XML Schema Registration

This section registers an XML schema in the IETF XML Registry as per the guidelines in [RFC3688].

URI: urn:ietf:params:xml:schema:basic-location-profiles

Registrant Contact: IETF Geopriv Working Group (geopriv@ietf.org),
Hannes Tschofenig (hannes.tschofenig@nsn.com).

XML: The XML schema to be registered is contained in Section 8. Its
first line is

```
<?xml version="1.0" encoding="UTF-8"?>
```

and its last line is

```
</xs:schema>
```

11.5. Basic Location Profile Namespace Registration

This section registers a new XML namespace in the IETF XML Registry
as per the guidelines in [RFC3688].

URI: urn:ietf:params:xml:ns:basic-location-profiles

Registrant Contact: IETF Geopriv Working Group (geopriv@ietf.org),
Hannes Tschofenig (hannes.tschofenig@nsn.com).

XML:

BEGIN

```
<?xml version="1.0"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML Basic 1.0//EN"
  "http://www.w3.org/TR/xhtml-basic/xhtml-basic10.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
  <meta http-equiv="content-type"
    content="text/html; charset=iso-8859-1"/>
  <title>Basic Location Profile Namespace</title>
</head>
<body>
  <h1>Namespace for Basic Location Profile</h1>
  <h2>urn:ietf:params:xml:ns:basic-location-profiles</h2>
  <p>See <a href="[URL of published RFC]">RFCXXXX
    [NOTE TO IANA/RFC-EDITOR:
      Please replace XXXX with the RFC number of this
      specification.]</a>.</p>
</body>
</html>
END
```

11.6. XCAP Application Usage ID

This section registers an XCAP Application Unique ID (AUID) in the "XML-XCAP Application Unique IDs" registry according to the IANA procedures defined in [RFC4825].

Name of the AUID: geolocation-policy

Description: Geolocation privacy rules are documents that describe the permissions that a Target has granted to Location Recipients that access information about his/her geographic location.

12. Internationalization Considerations

The policies described in this document are mostly meant for machine-to-machine communications; as such, many of its elements are tokens not meant for direct human consumption. If these tokens are presented to the end user, some localization may need to occur. The policies are, however, supposed to be created with the help of humans and some of the elements and attributes are subject to internationalization considerations. The content of the `<label>` element is meant to be provided by a human (the Rule Maker) and also displayed to a human. Furthermore, the location condition element (using the civic location profile, see Section 4.2) and the `<set-note-well>` element (see Section 6.3) may contain non-US-ASCII letters.

The geolocation policies utilize XML and all XML processors are required to understand UTF-8 and UTF-16 encodings, and therefore all entities processing these policies MUST understand UTF-8 and UTF-16 encoded XML. Additionally, geolocation policy aware entities MUST NOT encode XML with encodings other than UTF-8 or UTF-16.

13. Security Considerations

13.1. Introduction

This document aims to allow users to prevent unauthorized access to location information and to restrict access to information dependent on geolocation (via location based conditions). This is accomplished using authorization policies. This work builds on a series of other documents: Security requirements are described in [RFC6280] and a discussion of generic security threats is available with [RFC3694]. Aspects of combining permissions in cases of multiple occurrence are addressed in [RFC4745].

In addition to the authorization policies, mechanisms for obfuscating location information are described. A theoretical treatment of location obfuscation is provided in [duckham05] and in [ifip07]. [duckham05] provides the foundation and [ifip07] illustrates three different types of location obfuscation by enlarging the radius, by shifting the center, and by reducing the radius. The algorithm in Section 6.5.2 for geodetic location information obfuscation uses of these techniques.

The privacy protection requirements for altering location information vary. The two obfuscation algorithms in this document provide a basis for protecting against unauthorized disclosure of location information they have limitations. Application and user requirements vary widely; therefore, an extension mechanism is support for defining and using different algorithms.

13.2. Obfuscation

Whenever location information is returned to a location recipient it contains the location of the Target. This is also true when location is obfuscated, i.e. the location server does not lie about the Target's location but instead hides it within a larger location shape. Even without the Target's movement there is a danger that information will be revealed over time. While the target's location is not revealed within a particular region of the grid, the size of that returned region matters as well as the precise location of the Target within that region. Returning location shapes that are randomly computed will over time reveal more and more information about the Target.

Consider the drawing in Figure 1, which shows three ellipses, a dotted area in the middle, and the Target's true location marked as 'x'. The ellipses illustrate the location shapes as received by a potential location recipient over time for requests of a target's location information. Collecting information about the returned

location information over time allows the location recipient to narrow the potential location of the target down to the dotted area in the center of the graph.

For this purpose the algorithm described in Section 6.5.2 uses a grid that ensures the same location information is reported while the target remains in the same geographical area.

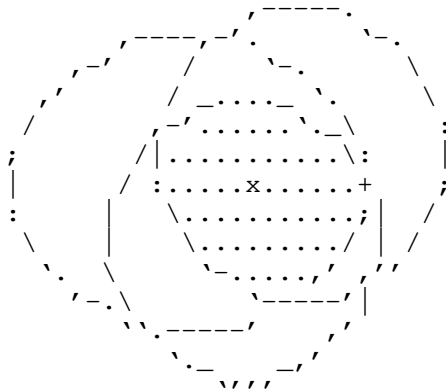


Figure 1: Obfuscation: A Static Target

An obscuring method that returns different results for consecutive requests can be exploited by recipients wishing to use this property. Rate limiting the generation of new obscured locations or providing the same obscured location to recipients for the same location might limit the information that can be obtained. Note however that providing a new obscured location based on a change in location provides some information to recipients when they observe a change in location.

When the Target is moving then the location transformations reveal information when switching from one privacy region to another one. For example, when a transformation indicates that civic location is provided at a 'building' level of granularity, floor levels, room numbers, and other details normally internal to a building would be hidden. However, when the Target moves from one building to the next one then the movement would still be recognizable as the disclosed location information would be reflected by the new civic location information indicating the new building. With additional knowledge about building entrances and floor plans it would be possible to learn additional amount of information.

13.3. Algorithm Limitations

The algorithm presented in Section 6.5.2 has some issues where information is leaked: when moving, switching from one privacy region to another one; and also when the user regularly visits the same location.

The first issue arises if the algorithm provides different location information (privacy region) only when the previous one becomes inapplicable. The algorithm discloses new information the moment that the target is on the border of the old privacy region.

Another issue arises if the algorithm produces the different values for the same location that is repeatedly visited. Suppose a user goes home every night. If the reported obfuscated locations are all randomly chosen, an analysis can reveal the home location with high precision.

In addition to these concerns, the combination of an obscured location with public geographic information (highways, lakes, mountains, cities, etc) may render a much more precise location information than is desired. But even without it, just observing movements, once or multiple times, any obscuring algorithm can leak information about velocities or positions. Suppose a user wants to disclose location information with a radius of r . The privacy region, a circle with that radius, has an area of $A = \pi * r^2$. An adversary, observing the movements, will deduce that the information that the target is, was, or regularly visits, a region of size A_1 , smaller than A . The quotient of the sizes A_1/A should be, even in the worst case, larger than a fixed known number, in order that the user knows what is the maximal information leakage he has. The choices of Section 6.5.2 are such that this maximum leakage can be established: by any statistical procedures, without using external information (highways, etc. as discussed above), the quotient A_1/A is larger than 0.13 ($= 1/(5*1.5)$). Thus, for instance, when choosing a provided location of size 1000 km², he will be leaking, in worst case, the location within a region of size 130 km².

13.4. Usability

There is the risk that end users are specifying their location-based policies in such a way that very small changes in location yields a significantly different level of information disclosure. For example, a user might want to set authorization policies differently when they are in a specific geographical area (e.g., at home, in the office). Location might be the only factor in the policy that triggers a very different action and transformation to be executed. The accuracy of location information is not always sufficient to

unequivocally determine whether a location is within a specific boundary [I-D.thomson-geopriv-uncertainty]. In some situations uncertainty in location information could produce unexpected results for end users. Providing adequate user feedback about potential errors arising from these limitation can help prevent unintentional information leakage.

Users might create policies that are non-sensical. To avoid such cases the software used to create the authorization policies should perform consistency checks and when authorization policies are uploaded to the policy servers then further checks can be performed. When XCAP is used to upload authorization policies then built-in features of XCAP can be utilized to convey error messages back to the user about an error condition. Section 8.2.5 of [RFC4825] indicates that some degree of application specific checking is provided when authorization policies are added, modified or deleted. The XCAP protocol may return a 409 response with a response that may contain a detailed conflict report containing the <constraint-failure> element. A human readable description of the problem can be indicated in the 'phrase' attribute of that element.

13.5. Location Obscuring Limitations

Location obscuring attempts to remove information about the location of a Target. The effectiveness of location obscuring is determined by how much uncertainty a Location Recipient has about the location of the Target. A location obscuring algorithm is effective if the Location Recipient cannot recover a location with better uncertainty than the obscuring algorithm was instructed to add.

Effective location obscuring is difficult. The amount of information that can be recovered by a determined and resourceful Location Recipient can be considerably more than is immediately apparent. A concise summary of the challenges is included in [duckham10].

A Location Recipient in possession of external information about the Target or geographical area that is reported can make assumptions or guesses aided by that information to recover more accurate location information. This is true even when a single location is reported, but it is especially true when multiple locations are reported for the same Target over time.

Furthermore, a Location Recipient that attempts to recover past locations for a Target can use later reported locations to further refine any recovered location. A location obscuring algorithm typically does not have any information about the future location of the Target.

The degree to which location information can be effectively degraded by an obscuring algorithm depends on the information that is used by the obscuring algorithm. If the information available to the obscuring algorithm is both more extensive and more effectively employed than the information available to the Location Recipient, then location obscuring might be effective.

Obscured locations can still serve a purpose where a Location Recipient is willing to respect privacy. A privacy-respecting Location Recipient can choose to interpret the existence of uncertainty as a request from a Rule Maker to not recover location.

Location obscuring is unlikely to be effective against a more determined or resourceful adversary. Withholding location information entirely is perhaps the most effective method of ensuring that it is not recovered.

A caution: omitted data also conveys some information. Selective withholding of information reveals that there is something worth hiding. That information might be used to reveal something of the information that is being withheld. For example, if location is only obscured around a user's home and office then the lack of location for that user and the current time will likely mean that the user is at home at night and in the office during the day, defeating the purpose of the controls.

14. References

14.1. Normative References

- [GML] OpenGIS, "OpenGIS Geography Markup Language (GML) Implementation Specification, Version 3.1.1, OGC 03-105r1",
http://portal.opengeospatial.org/files/?artifact_id=4700,
July 2004.
- [NIMA.TR8350.2-3e] OpenGIS, "US National Imagery and Mapping Agency,
"Department of Defense (DoD) World Geodetic System 1984
(WGS 84), Third Edition, NIMA TR8350.2", , January 2000.
- [OGC-06-103r4] OpenGIS, "OpenGIS Implementation Standard for Geographic
information - Simple feature access - Part 1: Common
architecture",
<http://www.opengeospatial.org/docs/06-103r4.pdf>,
May 2011.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate
Requirement Levels", BCP 14, RFC 2119, March 1997.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688,
January 2004.
- [RFC4745] Schulzrinne, H., Tschofenig, H., Morris, J., Cuellar, J.,
Polk, J., and J. Rosenberg, "Common Policy: A Document
Format for Expressing Privacy Preferences", RFC 4745,
February 2007.
- [RFC5139] Thomson, M. and J. Winterbottom, "Revised Civic Location
Format for Presence Information Data Format Location
Object (PIDF-LO)", RFC 5139, February 2008.
- [RFC5491] Winterbottom, J., Thomson, M., and H. Tschofenig, "GEOPRIV
Presence Information Data Format Location Object (PIDF-LO)
Usage Clarification, Considerations, and Recommendations",
RFC 5491, March 2009.

14.2. Informative References

- [I-D.thomson-geopriv-geo-shape] Thomson, M., "Geodetic Shapes for the Representation of
Uncertainty in PIDF-LO",
draft-thomson-geopriv-geo-shape-03 (work in progress),

December 2006.

- [I-D.thomson-geopriv-uncertainty]
Thomson, M. and J. Winterbottom, "Representation of Uncertainty and Confidence in PIDF-LO", draft-thomson-geopriv-uncertainty-07 (work in progress), March 2012.
- [RFC2392] Levinson, E., "Content-ID and Message-ID Uniform Resource Locators", RFC 2392, August 1998.
- [RFC2778] Day, M., Rosenberg, J., and H. Sugano, "A Model for Presence and Instant Messaging", RFC 2778, February 2000.
- [RFC3694] Danley, M., Mulligan, D., Morris, J., and J. Peterson, "Threat Analysis of the Geopriv Protocol", RFC 3694, February 2004.
- [RFC4079] Peterson, J., "A Presence Architecture for the Distribution of GEOPRIV Location Objects", RFC 4079, July 2005.
- [RFC4119] Peterson, J., "A Presence-based GEOPRIV Location Object Format", RFC 4119, December 2005.
- [RFC4825] Rosenberg, J., "The Extensible Markup Language (XML) Configuration Access Protocol (XCAP)", RFC 4825, May 2007.
- [RFC5025] Rosenberg, J., "Presence Authorization Rules", RFC 5025, December 2007.
- [RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", BCP 26, RFC 5226, May 2008.
- [RFC6280] Barnes, R., Lepinski, M., Cooper, A., Morris, J., Tschofenig, H., and H. Schulzrinne, "An Architecture for Location and Location Privacy in Internet Applications", BCP 160, RFC 6280, July 2011.
- [duckham05]
Duckham, M. and L. Kulik, "A formal model of obfuscation and negotiation for location privacy. In Proc. of the 3rd International Conference PERVASIVE 2005, Munich, Germany", May 2005.
- [duckham10]
Duckham, M., "Moving forward: Location privacy and

location awareness. In Proc. 3rd ACM SIGSPATIAL GIS Workshop on Security and Privacy in GIS and LBS (SPRINGL), ACM.", Nov 2010.

- [ifip07] Ardagna, C., Cremonini, M., Damiani, E., De Capitani di Vimercati, S., and S. Samarati, "Location-privacy protection through obfuscation-based techniques, in: Proceedings of the 21st Annual IFIP WG 11.3 Working Conference on Data and Applications Security, Redondo Beach, CA, USA", July 2007.

Appendix A. Acknowledgments

This document is informed by the discussions within the IETF GEOPRIV working group, including discussions at the GEOPRIV interim meeting in Washington, D.C., in 2003.

We particularly want to thank Allison Mankin <mankin@psg.com>, Randall Gellens <rg+ietf@qualcomm.com>, Andrew Newton <anewton@ecotroph.net>, Ted Hardie <hardie@qualcomm.com>, Jon Peterson <jon.peterson@neustar.biz> for their help in improving the quality of this document.

We would like to thank Christian Guenther for his help with an earlier version of this document. Furthermore, we would like to thank Johnny Vrancken for his document reviews in September 2006, December 2006 and January 2007. James Winterbottom provided a detailed review in November 2006. Richard Barnes gave a detailed review in February 2008.

This document uses text from [I-D.thomson-geopriv-geo-shape]. Therefore, we would like to thank Martin Thomson for his work in [I-D.thomson-geopriv-geo-shape]. We would also like to thank Martin Thomson, Matt Lepinski and Richard Barnes for their comments regarding the geodetic location transformation procedure. Richard provided us with a detailed text proposal.

Robert Sparks, Martin Thomson, and Warren Kumari deserve thanks for their input on the location obfuscation discussion. Robert implemented various versions of the algorithm in the graphical language "Processing" and thereby helped us tremendously to understand problems with the previously illustrated algorithm.

We would like to thank Dan Romascanu, Yoshiko Chong and Jari Urpalainen for their last call comments.

Finally, we would like to thank the following individuals for their feedback as part of the IESG, GenArt, and SecDir review: Jari Arkko, Eric Gray, Russ Housley, Carl Reed, Martin Thomson, Lisa Dusseault, Chris Newman, Jon Peterson, Sam Hartman, Cullen Jennings, Tim Polk, and Brian Rosen.

Appendix B. Pseudo-Code

This section provides an informal description for the algorithm described in Section 6.5.2 in form of pseudo-code.

Constants

```
P = sqrt(3)/6 // approx 0.2887
q = 1 - p     // approx 0.7113
```

Parameters

```
prob: real // prob is a parameter in the range
      // 0.5 <= prob <=1
      // recommended is a value for prob between 0.7 and 0.9
      // the default of prob is 0.8
```

Inputs

```
M = (m,n) : real * real
      // M is a pair of reals: m and n
      // m is the longitude and n the latitude,
      // respectively, of the measured location
      // The values are given as real numbers, in the
      // range: -180 < m <= 180; -90 < n < 90
      // minus values for longitude m correspond to "West"
      // minus values for latitude n correspond to "South"

radius : integer // the 'radius' or uncertainty,
              // measured in meters

prev-M = (prev-m1, prev-n1): real * real
      // the *previously* provided location, if available
      // prev-m1 is the longitude and
      // prev-n1 the latitude, respectively

o : real

// this is the reference latitude for the geodesic projection
// The value of 'o' is chosen according to the table below.
// The area you want to project MUST be included in
// between a minimal latitude and a maximal latitude
// given by the two first columns of the table.
// (Otherwise the transformation is not available).

//      +-----+-----+-----+-----+-----+
//      | min   | max   |                                     |
//      |-----|-----|-----|-----|-----|
```

//		lat		lat		Examples		o	
//	+-----+-----+-----+-----+								
//		-45		45		Tropics and subtropics		0	
//						Africa			
//						Australia			
//	+-----+-----+-----+-----+								
//		25		50		Continental US		25	
//						Mediterranean			
//						most of China			
//	+-----+-----+-----+-----+								
//		35		55		South and Central		35	
//						Europe			
//	+-----+-----+-----+-----+								
//		45		60		Central and North		45	
//						Europe			
//	+-----+-----+-----+-----+								
//		55		65		most of Scandinavia		55	
//	+-----+-----+-----+-----+								
//		60		70				60	
//	+-----+-----+-----+-----+								
//		-50		-25		most of		-50	
//						Chile and Argentina			
//						New Zealand			
//	+-----+-----+-----+-----+								
//		-35		-55				-35	
//	+-----+-----+-----+-----+								
//		-45		-60				-45	
//	+-----+-----+-----+-----+								
//		-55		-65				-55	
//	+-----+-----+-----+-----+								
//		-60		-70				-60	
//	+-----+-----+-----+-----+								

Outputs

```

M1 = (m1,n1) : real * real // longitude and latitude,
                    // respectively, of the provided location

Local Variables

d, d1, d2, l, r, b, t, x, y: real
SW, SE, NW, NE: real * real
    // pairs of real numbers, interpreted as coordinates
    // longitude and latitude, respectively

temp : Integer[1..8]

Function
choose(Ma, Mb: real * real): real * real;
    // This function chooses either Ma or Mb
    // depending on the parameter 'prob'
    // and on prev-M1, the previous value of M1:
    // If prev-M1 == Ma choose Ma with probability 'prob'
    // If prev-M1 == Mb choose Mb with probability 'prob'
    // Else choose Ma or Mb with probability 1/2
Begin
rand:= Random[0,1];
    // a real random number between 0 and 1
If      prev-M1 == Ma Then
    If rand < prob Then choose := Ma;
                        Else choose := Mb;  EndIf
Elseif prev-M1 == Mb Then
    If rand < prob Then choose := Mb;
                        Else choose := Ma;  EndIf
Else
    If rand < 0.5 Then choose := Ma;
                    Else choose := Mb;  EndIf
End // Function choose

Main // main procedure
Begin
d := radius/1000; // uncertainty, measured in km

d1:= (d * 180) / (pi*M*cos(o));

d2:= d / 110.6;

l := d1*floor(m/d1)
    // "floor" returns the largest integer
    // smaller or equal to a floating point number
r := l+d1;
b := o+d2*floor(n-o/d2);
t := b+d2;

```

```
x := (m-l)/(r-l);
y := (n-b)/(t-b);

SW := (l,b);
SE := (r,b);
NW := (l,t);
NE := (r,t);

If      x < p and y < p      Then M1 := SW;
Elseif  x < p and q <= y    Then M1 := NW;
Elseif  q <= x and y < p    Then M1 := SE;
Elseif  q <= x and q <= y   Then M1 := NE;
Elseif  p <= x and x < q and y < x and y < 1-x
      Then M1 := choose(SW,SE);
Elseif  p <= y and y < q and x <= y and y < 1-x
      Then M1 := choose(SW,NW);
Elseif  p <= y and y < q and y < x and 1-x <= y
      Then M1 := choose(SE,NE);
Elseif  p <= x and x < q and x <= y and 1-x <= y
      Then M1 := choose(NW,NE);
Endif

End // Main
```


Authors' Addresses

Henning Schulzrinne (editor)
Columbia University
Department of Computer Science
450 Computer Science Building
New York, NY 10027
USA

Phone: +1 212 939 7042
Email: schulzrinne@cs.columbia.edu
URI: <http://www.cs.columbia.edu/~hgs>

Hannes Tschofenig (editor)
Nokia Siemens Networks
Linnoitustie 6
Espoo 02600
Finland

Phone: +358 (50) 4871445
Email: Hannes.Tschofenig@gmx.net
URI: <http://www.tschofenig.priv.at>

Jorge R. Cuellar
Siemens
Otto-Hahn-Ring 6
Munich, Bavaria 81739
Germany

Email: Jorge.Cuellar@siemens.com

James Polk
Cisco
2200 East President George Bush Turnpike
Richardson, Texas 75082
USA

Email: jmpolk@cisco.com

John B. Morris, Jr.

Email: ietf@jmorris.org

Martin Thomson
Microsoft
3210 Porter Drive
Palo Alto, CA 94304
US

Phone: +1 650-353-1925
Email: martin.thomson@gmail.com

GEOPRIV
Internet-Draft
Intended status: Standards Track
Expires: September 11, 2011

M. Thomson
J. Winterbottom
Andrew Corporation
M. Barnes
Polycom
March 10, 2011

Device Capability Negotiation for Device-Based Location Determination
and Location Measurements in HELD
draft-thomson-geopriv-held-capabilities-09

Abstract

A Device is a valuable source of information about its location. A Location Information Server (LIS) that serves a location URI about a Device is unable to acquire this information. Extensions to HTTP-Enabled Location Delivery (HELD) are described for negotiating and exercising Device capabilities for location determination or location measurement collection.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 11, 2011.

Copyright Notice

Copyright (c) 2011 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect

to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	3
2. Conventions used in this document	4
3. Capabilities Exchange Overview	4
3.1. Capabilities Exchange	5
3.2. Capabilities Invocation	6
4. The Capability Exchange	7
4.1. Capabilities Advertisement	7
4.2. Capabilities Agreement	8
5. Capability Invocation	8
5.1. HTTP Polling	9
5.2. Invocation Resource	9
5.3. Invocation Time	10
5.4. Responding to a Capability Invocation	12
5.5. Error Reponse to an Invocation	13
5.6. Multiple Invocations	13
6. The Location Capability	13
6.1. Parameters	14
6.2. Invocation	14
7. Location Measurement Capability	14
7.1. Parameters	15
7.2. Invocation	15
8. Example Capabilities Exchange and Invocation	16
9. Security Considerations	19
9.1. Privacy Considerations	20
9.2. URI Secrecy	20
9.3. Location Veracity	21
10. IANA Considerations	21
10.1. Registration of HELD 'noMeasurement' Error Code	21
10.2. URN Sub-Namespace Registration for urn:ietf:params:xml:ns:held:cap	22
10.3. XML Schema Registration for HELD Capabilities	22
11. XML Schema for Capabilities	23
12. Acknowledgements	27
13. References	27
13.1. Normative References	27
13.2. Informative References	28
Authors' Addresses	29

1. Introduction

A Device is a good source of information about its location. Even where a Device is unable to independently determine its location, it can often make observations about its environment and network attachment that are of use in determining its position. Making this information available to the Location Information Server (LIS) in the access network can improve the quality of location estimates for the Device.

Requests that retrieve location information by value can benefit from Device-provided measurement data, as described in [I-D.thomson-geopriv-held-measurements]. However, location information provided through location URIs [RFC5808] cannot effectively use this information. The LIS that serves the URI is unable to contact the Device to acquire information.

Access to some form of location determination is a necessary precondition of providing a location URI. The LIS that serves that location URI is assumed to be capable of determining the location of the Device. A LIS might only have a limited capacity for determining location in serving a location URI. The quality and timeliness of responses can be improved with Device assistance.

Acquiring location measurements or information from a Device is made difficult by the nature of the relationship between the LIS, or access network, and the Device. The relationship between a LIS and the Devices that it serves is often transient. A Device is not necessarily a permanent part of an access network, so it is not possible to pre-arrange trust relationships between Device and LIS.

HELD [I-D.ietf-geopriv-http-location-delivery] provides a basis for the relationship between Device and LIS. LIS Discovery [I-D.ietf-geopriv-lis-discovery] provides a means for the Device to initiate the relationship. This document extends the basic HELD location request to include negotiation of a mechanism that allows the LIS to request information from the Device.

Location-related Device capabilities include the ability to generate or acquire location information, or the ability to make observations about the mode of network attachment or environment. For instance, a Device with Global Navigation Satellite System (GNSS) hardware can determine its own position by taking a set of measurements and performing a calculation, or it can provide GNSS measurement data.

This document describes how a Device can advertise its ability to locate itself or provide location-related measurement data to a LIS. This advertisement is made in a HELD location request where the

Device acquires a location URI (see [I-D.ietf-geopriv-http-location-delivery]). The LIS is then able to exercise advertised capabilities to acquire location-related measurement data or location information from the Device when serving the location URI.

2. Conventions used in this document

This document relies on definitions from [I-D.ietf-geopriv-arch]. Use of the terms LIS and Device is consistent with [I-D.ietf-geopriv-http-location-delivery]. Location-related measurement data (and location measurement) is defined in [I-D.thomson-geopriv-held-measurements] and location estimate is defined in [I-D.thomson-geopriv-uncertainty].

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

3. Capabilities Exchange Overview

A Device provides the LIS with a capabilities advertisement when it requests a location URI. A Device can advertise the ability to acquire location-related measurement data of any type (see [I-D.thomson-geopriv-held-measurements]), or the ability to autonomously determine its own location.

The LIS responds with a capabilities agreement, that includes which of these capabilities it might use. As part of the agreement, the LIS identifies an HTTP resource (the invocation resource) that it will use to request Device assistance. The Device monitors this resource as long as it is willing to provide the advertised data.

In the process of serving requests to a location URI, a LIS might determine that certain Device capabilities could be useful or necessary in completing the request. The LIS alters the invocation resource to include a request that details what data is desired. The Device acquires the updated resource and provides the requested information.

Figure 1 shows a logical overview of a simple scenario where the LIS uses a Device-provided measurement to service a request to a location URI.

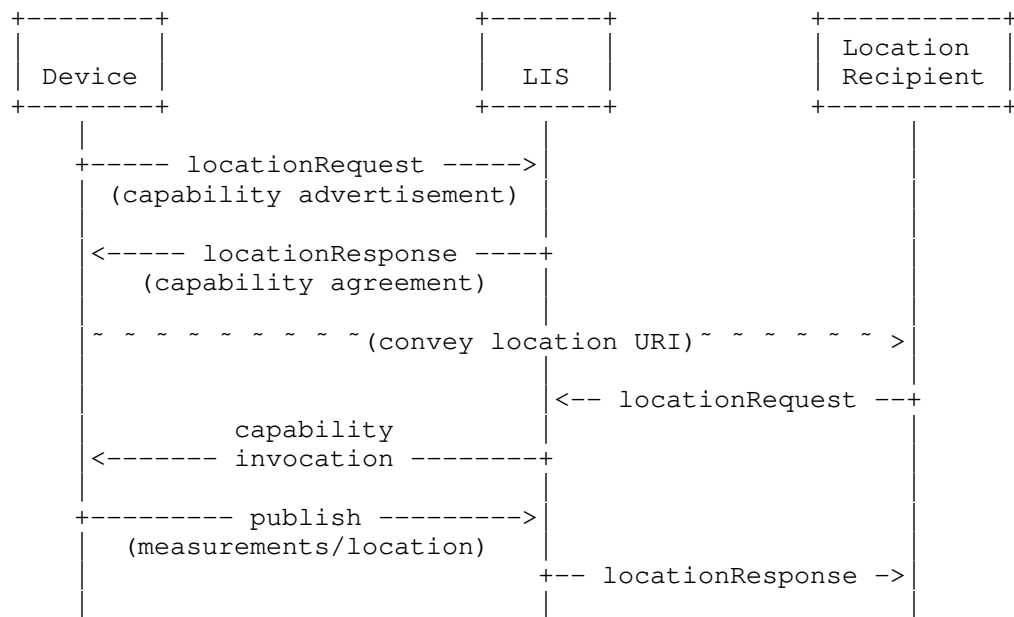


Figure 1: Logical Overview of Operation

In practice, this scheme relies on HTTP polling to provide a channel for capability invocation. This mechanism is described in more detail in Section 5.

3.1. Capabilities Exchange

To indicate capabilities to a LIS, a Device advertises its location determination or measurement capabilities to the LIS in a HELD "locationRequest" message. The LIS selects those capabilities that it might make use of and provides a capabilities agreement that includes the selected capabilities in the "locationResponse" message, along with the location URI.

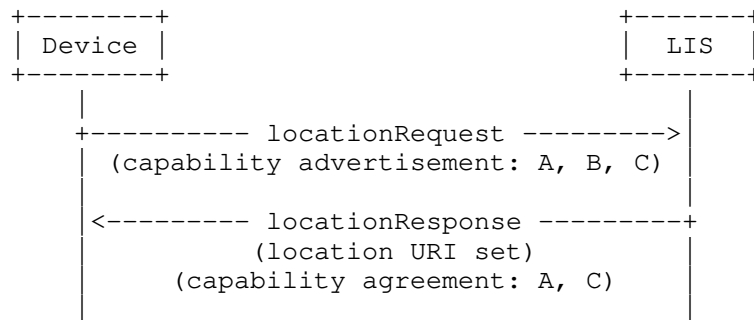


Figure 2: Capabilities Exchange

Once a common set of capabilities are agreed upon, the LIS is able invoke these capabilities to assist in the generation of location information. Agreed capabilities and associated parameters are stored in association with the contextual information necessary for serving the location URI.

3.2. Capabilities Invocation

The LIS invokes capabilities as it is necessary to service requests to the location URIs it provides.

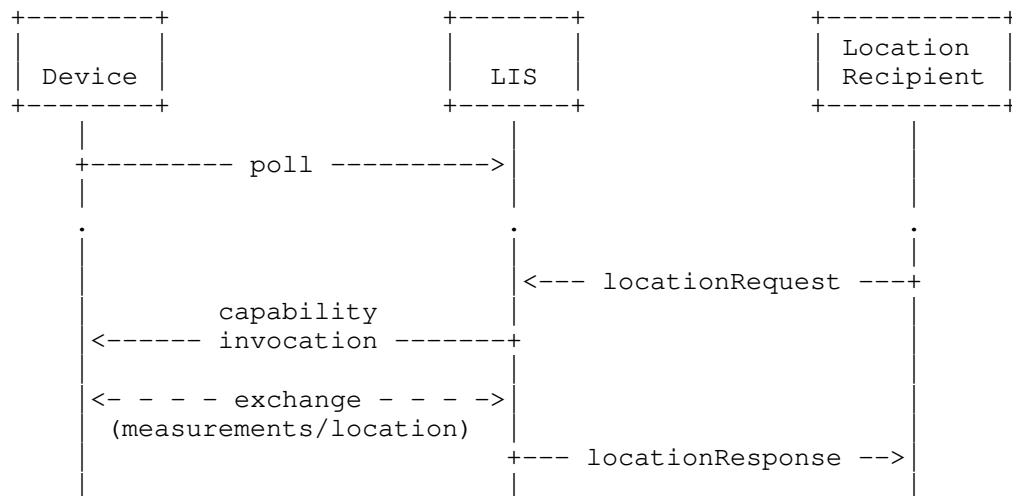


Figure 3: Invoking Capabilities

Capabilities are bound to the location URIs that are provided in the response that indicates the mutually agreed capabilities. The LIS MUST NOT use capabilities for any purpose other than serving those

location URIs.

The set of capabilities associated with a location URI is fixed. A Device instead applies local policy in determining whether to respond to a capability invocation. A Device can choose to discontinue selected capabilities by refusing to respond to a capability invocation. A Device can also cease to monitor the resource used for capability invocation to terminate all capabilities.

4. The Capability Exchange

A capabilities exchange is initiated with a location request from a Device. The Device includes a capabilities advertisement in the location request. The LIS responds with agreed capabilities in the location response.

4.1. Capabilities Advertisement

A Device capabilities advertisement (the "deviceCapabilities" element) is added to the HELD location request by the Device. This element can contain a "location" element to indicate that the Device is capable of determining its own location autonomously; it can also contain one or more "measurement" elements, each indicating that the Device is capable of providing location measurement data.

Each capability is uniquely identified with a "id" attribute.

A "responseTime" attribute indicates the expected time that acquiring the location or measurement data takes, in milliseconds. The advertised response time assists the LIS in deciding whether or not to invoke a capability when serving a request for location information.

The Device is only able to quantify the time for its own involvement in the process; additional delays from polling, network transit and LIS processing need to be included in any decision to invoke a Device capability.

Location measurement capabilities include a "type" attribute, which identifies the type of measurement. Types are identified using the qualified name of the XML element for the measurement, as with the "measurementRequest" element defined in [I-D.thomson-geopriv-held-measurements].

Each capability element can also contain arbitrary content that carries supplementary information specific to the capability. This supplementary information includes, but is not restricted to,

measurement parameters that identify specific aspects of a measurement capability. Different supplementary information can be provided by the Device and LIS.

The following figure shows a capabilities advertisement that might be made by a Device with GNSS capabilities. This includes both autonomous GNSS location determination capability as well as GNSS measurement capability with additional parameters.

```
<deviceCapabilities
  xmlns="urn:ietf:params:xml:ns:geopriv:held:cap">
  <location id="loc" responseTime="45000"/>
  <measurement xmlns:g="urn:ietf:params:xml:ns:geopriv:lm:gnss"
    type="g:gnss" id="gps" responseTime="12000">
    <g:gnss system="gps" signal="L1"/>
  </measurement>
</deviceCapabilities>
```

4.2. Capabilities Agreement

A capabilities agreement ("agreedCapabilities" element) is included in the HELD location response. This element contains a subset of the advertised capabilities, indicating which capabilities the LIS wishes to use. Capabilities are identified using the "id" attribute, but other attributes are omitted.

A capabilities agreement contains an HTTP URI for an invocation resource. The "monitor" element indicates a resource that the Device is requested to monitor for capability invocations (Section 5).

The following figure shows a capabilities agreement that might be made in response to a device capabilities advertisement. This includes an invoke resource and a reference to each device capability, using the "id" attribute for each location and measurement capability.

```
<agreedCapabilities
  xmlns="urn:ietf:params:xml:ns:geopriv:held:cap">
  <monitor>https://lis.example.com/inv/C90dXBsZT4KPC</monitor>
  <location id="loc"/>
  <measurement id="gps"/>
</agreedCapabilities>
```

5. Capability Invocation

The LIS includes a URI for an HTTP "invocation" resource in the capabilities agreement. A Device that wishes to provide advertised

capabilities monitors this resource.

The contents of the invocation resource identify the information that the LIS desires. The LIS updates the invocation resource when a request to a location URI is made that could benefit from location or measurement data acquired by the Device.

The invocation resource is updated to identify one or more capabilities when information is requested by the LIS. For each capability, the resource includes a destination URI for the requested data, and a time. By monitoring the invocation resource, the Device is informed when the LIS requires more information and the Device is then able to provide that information.

5.1. HTTP Polling

The Device monitors the invocation resource, using either HTTP long-polling [I-D.loreto-http-bidirectional] or periodic requests (short-polling). Both methods use the HTTP GET method. Client and server developers are reminded that full support of HTTP [RFC2616] facilities is expected.

The Device SHOULD retrieve an initial representation of the resource and poll for updates using conditional request headers, such as "If-Modified-Since" or "If-None-Match". The Device SHOULD use long-polling and indicate this using a Timeout header [I-D.loreto-http-timeout] [...or whatever replaces this, since Timeout is already taken]]. An HTTP 200 (OK) response is sent immediately when the resource is updated, or an HTTP 304 (Not Modified) response is sent if the timeout period lapses. In order to continue monitoring the state of the resource, the Device immediately sends another request upon receiving a response.

In the absence of the Timeout header, the server MAY assume that short-polling is in use. If short-polling is used, the Device MUST NOT continuously poll for updates. The server can limit the rate that a client is able to poll by sending a 503 (Service Unavailable) response with an appropriate "Retry-After" header. A client that receives this header MUST adjust its polling rate to match the indicated period.

5.2. Invocation Resource

The resource that the Device monitors identifies individual capabilities and when the information that they provide is requested.

The value of the invocation resource determines what information is required. This document is an XML document with the MIME type of

"application/held+xml" and a document element of "invokeCapability". Initially, this document is likely to be empty.

A Device monitors the invocation resource for changes. A change in the state of the invocation resource indicates that the LIS requests some data. The value of the invocation resource indicates the capability, where the data associated with the capability is to be pushed by the Device, and when the associated data is to be provided.

For instance, if the LIS wants to invoke the location capability of the Device, it updates the resource to produce the following representation:

```
<invokeCapabilities
  xmlns="urn:ietf:params:xml:ns:geopriv:held:cap">
  <measurement id="gps" before="2011-07-09T13:55:01+10:00">
    <push>https://lis.example.com/push/U2Nob29sIGlzIGNvb2wu</push>
  </measurement>
</invokeCapabilities>
```

The Device monitors the invocation resource as long as it is willing to respond to capability invocation requests, though it MAY suspend any monitoring while it responds to a request for data. Upon expiry of the location URI, the Device SHOULD stop monitoring the resource. An HTTP 404 (Not Found) or 410 (Gone) response can be provided to indicate to the Device that the resource no longer exists.

5.3. Invocation Time

The "before" attribute on the capability invocation serves to advise the Device on the latest time when a response is desired. This time is the latest moment that information from the Device is of use to the LIS. If this time has passed, or the requested information cannot be provided before this time, then the capability invocation can be ignored.


The "periodic" attribute on a capability requests periodic updates. The attribute contains a time interval in milliseconds, which specifies the periodicity desired. This indicates that the Device provide information before the time specified in the "before" attribute and periodically thereafter at the specified interval.

Periodic invocations continue until the invocation is modified or removed. The Device SHOULD continue to monitor the invocation resource to be informed of any changes.

For instance, the following invocation contains a request to provide measurements for the capability identified with the "id" attribute of "gps". This information should be provided before "2011-07-09T13:55:01+10:00" and at 60 second intervals thereafter (before 13:55:01, then before 13:56:01, then 13:57:01, and so on).

```
<invokeCapabilities
  xmlns="urn:ietf:params:xml:ns:geopriv:held:cap">
  <measurement id="gps" before="2011-07-09T13:55:01+10:00"
    periodic="60000">
    <push>https://lis.example.com/push/U2Nob29sIGlzIGNvb2wu</push>
  </measurement>
</invokeCapabilities>
```

The following figure shows that a Device acquires measurement data immediately upon receiving a capability invocation with a periodic interval. After these measurements are pushed to the LIS, the Device waits for a period. The time that is waited is the difference between the periodic interval (p) and the expected time to acquire measurement data (m). This ensures that measurement data is provided to the LIS prior to the requested time.

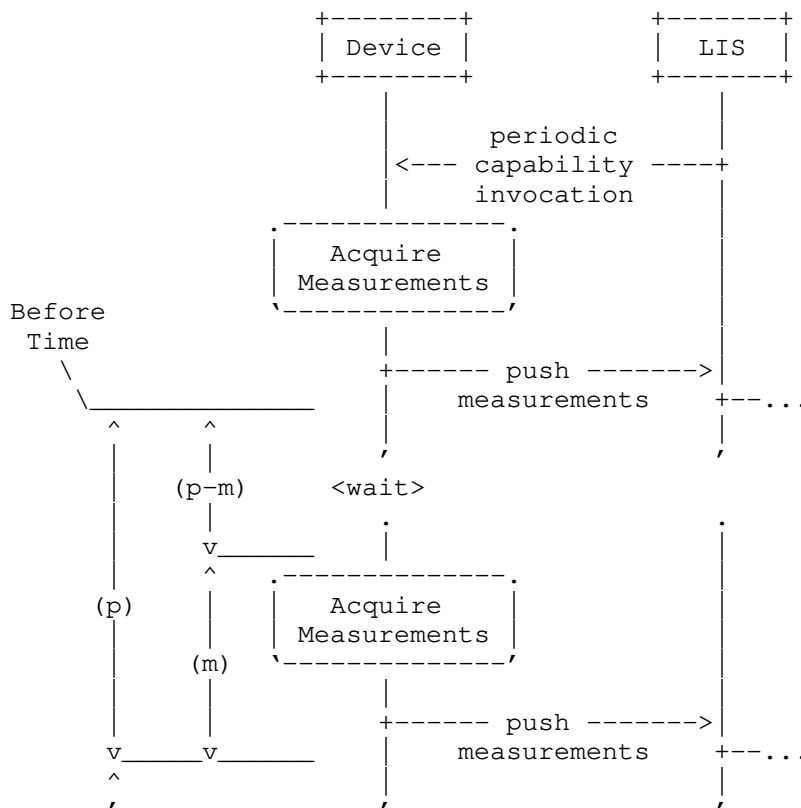

5.4. Responding to a Capability Invocation

A Device that wishes to provide information SHOULD do so when it receives an invocation that it can comply with. Any information is pushed to the URI indicated in the "push" element as an HTTP PUT. The format of the information provided depends on the capability.

A Device can choose to ignore a capability invocation at any time.

Information provided in this manner can be considered as additional supplementary information that is provided for the purposes of serving the location URI. The same authorization rules that apply to the location URI apply to this data. A LIS is able to redistribute this information and any results based on this information under the same policy that the location URI operates. Any information **MUST** only be used as permitted by the Device. Explicit data expiration indications, such as that used in [I-D.thomson-geopriv-held-measurements], **MUST** be respected.

5.5. Error Reponse to an Invocation

A Device might be unable to acquire the requested location or measurement information when it is requested. In this case, a HELD error message is sent to the resource indicated in the "push" element of the invocation, in place of the requested data. The HELD error message is defined in Section 5.3 of [I-D.ietf-geopriv-http-location-delivery].

Requests for location information can elicit a push containing any of the applicable HELD error codes (including "locationUnknown"). Requests for measurement data can result in the same set of codes, plus a newly defined error code: "noMeasurement" is defined in Section 10.1.

5.6. Multiple Invocations

The same invoke resource is used for multiple capabilities. Devices that support multiple capabilities identify the capability that the LIS desires to use through the "id" attribute on the capability. If multiple capabilities are invoked at the same time, the Device MAY choose to provide all information concurrently or separately, and in whole, in part or not at all.

The measurement capability inherently supports provision of multiple measurements concurrently. A single measurement container can be provided with multiple different forms of measurement. Measurement and location capabilities are pushed separately.

A LIS MUST provide a different push resource for each separate capability that it invokes. Without this, information from the Device cannot be reliably correlated with a specific capability. For instance, an error response for one capability might be misinterpreted as an error for all capabilities.

6. The Location Capability

The location capability indicates that the Device can determine its own location. This is represented by the inclusion of a "location" element.

The ability to locate itself is a trait that is applicable to Devices in a range of networks. This includes automated location determination, like Global Navigation Satellite Systems (GNSS), user input, an alternative location service, or a range of location techniques.

6.1. Parameters

The "location" element MAY include a "locationType" element that includes a value of "civic" or "geodetic", a space-separated list containing both values, or the value "any". A basic description of the semantics of location type is included in Section 6.3 of HELD [I-D.ietf-geopriv-http-location-delivery].

When included in the capabilities advertisement, the "locationType" element indicates the type of location information that the device is capable of providing. When included in other messages, the "locationType" element indicates the type of location information that the LIS requests that the Device provide. Omitting the "locationType" element indicates that the previous value from the most recent message is requested; if there is no such value, then any form of location information is acceptable.

6.2. Invocation

When invoked, the Device provides location information in the form of a PIDF-LO. The Device uses an HTTP PUT to the URI identified in the "push" element of the capability invocation. The PUT request includes a PIDF-LO document and a "Content-Type" of "application/pidf+xml".

Only the "location-info" element of the PIDF-LO is used by the LIS; other PIDF-LO fields SHOULD be minimally populated by the Device. It is RECOMMENDED that the Device generate an unlinked pseudonym for the "entity" attribute of the presence document to avoid providing identity information.

In providing location information in this manner, the Device implicitly grants the LIS the ability to redistribute location information under the same conditions that apply to the location URI that the capability was negotiated with.

7. Location Measurement Capability

The location capability indicates that the Device can acquire location-related measurement data of a specified type. This is represented by the inclusion of a "measurement" element.

Measurement data from the Device can be invaluable in improving the quality of location information. Measurement information from a Device can improve the accuracy of location estimates or enable positioning methods that would not otherwise be available. See [I-D.thomson-geopriv-held-measurements] for more information on

location measurements. Providing access to measurement data by using the capability exchange makes these advantages available when a location recipient uses a location URI to retrieve location information.

7.1. Parameters

A capability advertisement for location measurements includes the type of measurement that is supported, using the "type" attribute of the "measurement" element. Measurement types are identified using the XML qualified name of the measurement element, as defined for the measurement request in [I-D.thomson-geopriv-held-measurements].

The "type" attribute is omitted from the capabilities agreement and capability invocation. If the LIS supports or requires a subset of the measurement data, it MAY indicate this using measurement parameters in the agreement or the capability invocation. Omission of parameters in either message indicates that the last set parameters are to be applied. For instance, if parameters are included in the capabilities advertisement and revised in the capabilities agreement, a capability invocation can omit these and have the parameters from the agreement applied.

A capability invocation MAY include a "samples" parameter to request that the Device provide a certain number of samples of the indicated measurement type. The "samples" parameter defaults to 1.

The Device MAY ignore this parameter and provide a smaller (or larger) number of samples. However, a Device SHOULD indicate how many samples were acquired for a given measurement type, either by including multiple measurements, by providing multiple separate responses, or by setting the "samples" attribute for elements of the measurement where available.

7.2. Invocation

The Device acquires and pushes location measurements to the identified URI when a measurement capability is invoked. The Device uses an HTTP PUT to the URI identified in the "target" element of the capability indication. This document contains the MIME type "application/held+xml" and has a document element of "measurements". This document contains one or more measurement elements containing the requested measurement data.

Multiple measurements can be provided at the same time. The "measurements" element simply contains multiple measurement elements. This can be used to simultaneously provide information for multiple different invocations of this capability. Measurements that are

acquired at different times are provided in different requests.

8. Example Capabilities Exchange and Invocation

This section shows sample messages relating to a location request with capabilities, monitoring the invocation resource and the provision of measurement or location information. HTTP headers are shown on messages where it is relevant to do so.

The following HELD request from a Device includes a capabilities advertisement; HTTP headers are omitted:

```
<held:locationRequest
  xmlns:held="urn:ietf:params:xml:ns:geopriv:held">
  <held:locationType exact="true">locationURI</held:locationType>
  <requestPolicyUri
    xmlns="urn:ietf:params:xml:ns:geopriv:held:policy"/>

  <cap:deviceCapabilities
    xmlns:cap="urn:ietf:params:xml:ns:geopriv:held:cap">
    <cap:location id="loc" responseTime="45000">
      <held:locationType>geodetic</held:locationType>
    </cap:location>
    <cap:measurement
      xmlns:gnss="urn:ietf:params:xml:ns:geopriv:lm:gnss"
      type="gnss:gnss" id="gps" responseTime="12000">
        <gnss:gnss system="gps" signal="L1"/>
      </cap:measurement>
    </cap:deviceCapabilities>
  </held:locationRequest>
```

Two capabilities are included: location and measurement. The measurement capability indicates that GNSS measurements can be provided by the Device. The GNSS capability indicates that measurement for the GPS L1 signal are the only GNSS measurement supported.

The LIS response includes location URIs, along with a capabilities agreement:

```
<held:locationResponse
  xmlns:held="urn:ietf:params:xml:ns:geopriv:held">
  <held:locationUriSet expires="2011-07-11T15:06:00+10:00">
    <held:locationURI>
      https://lis.example.com/OnBhcmFtczp4bWw6bnM6c
    </held:locationURI>
  </held:locationUriSet>

  <cap:agreedCapabilities
    xmlns:cap="urn:ietf:params:xml:ns:geopriv:held:cap">
    <cap:monitor>
      https://lis.example.com/inv/OnBhcmFtczp4C90dXBsZT4KPC
    </cap:monitor>
    <cap:location id="loc"/>
    <cap:measurement id="gps"/>
  </cap:agreedCapabilities>
</held:locationResponse>
```

This indication instructs the Device to monitor a URI to determine when the LIS wants to invoke either capability.

The Device then monitors the state of the resource:

```
GET /inv/OnBhcmFtczp4C90dXBsZT4KPC HTTP/1.1
Host: lis.example.com
```

The resource initially contains no invocation instructions:

```
HTTP/1.1 200 OK
Server: Example LIS
Date: Sat, 9 Jul 2011 03:06:12 GMT
Expires: Sat, 9 Jul 2011 03:08:42 GMT
ETag: "xyzzzy"
Cache-Control: private
Content-Type: application/held+xml
Content-Length: 76
```

```
<invokeCapabilities
  xmlns="urn:ietf:params:xml:ns:geopriv:held:cap"/>
```

The Device then issues a long-polling request to monitor the state of the resource:

```
GET /inv/OnBhcmFtczp4C90dXBsZT4KPC HTTP/1.1
Host: lis.example.com
If-None-Match: "xyzzzy"
Timeout: 600
```

Some time later, the LIS receives a location request and decides that the GNSS measurement capability of the Device would be useful or necessary in completing the request. The LIS updates the invocation resource with instructions to the Device to provide location measurements:

```
HTTP/1.1 200 OK
Server: Example LIS
Date: Sat, 9 Jul 2011 03:54:44 GMT
Expires: Sat, 9 Jul 2011 03:55:01 GMT
Cache-Control: private
Content-Type: application/held+xml
Content-Length: 245
```

```
<invokeCapabilities
  xmlns="urn:ietf:params:xml:ns:geopriv:held:cap">
  <measurement id="gps" before="2011-07-09T13:55:01+10:00">
    <push>https://lis.example.com/push/U2Nob29sIGlzIGNvb2wu</push>
  </measurement>
</invokeCapabilities>
```

The Device decides that it is able to provide these data. It takes the requested measurement and pushes the measurement data to the indicated destination:

```
PUT /push/U2Nob29sIGlzIGNvb2wu HTTP/1.1
Host: lis.example.com
Content-Type: application/held+xml
Content-Length: 688
```

```
<measurements xmlns="urn:ietf:params:xml:ns:geopriv:lm"
               time="2011-07-09T13:54:56.490+10:00" timeError="2e-5">
  <gnss xmlns="urn:ietf:params:xml:ns:geopriv:lm:gnss"
        system="gps" signal="L1">
    <sat num="19">
      <doppler>499.9395</doppler>
      <codephase rmsError="1.6e-9">0.87595747</codephase>
      <cn0>45</cn0>
    </sat>
    <sat num="27">
      <doppler>378.2657</doppler>
      <codephase rmsError="1.6e-9">0.56639479</codephase>
      <cn0>52</cn0>
    </sat>
    <sat num="20">
      <doppler>-633.0309</doppler>
      <codephase rmsError="1.6e-9">0.57016835</codephase>
      <cn0>48</cn0>
    </sat>
  </gnss>
</measurements>
```

The LIS immediately provides an empty response to the Device:

```
HTTP/1.1 204 No Content
Server: Example LIS
Date: Sat, 9 Jul 2011 03:54:58 GMT
```

The LIS is then able to use the provided measurement data to provide highly accurate location information in response to the request it received.

9. Security Considerations

Use of location or measurement capabilities has privacy considerations (Section 9.1). Protecting privacy depends on the secrecy of the URIs used (Section 9.2). Use of Device capability

also exposes a LIS to the possibility of a Device that falsifies location or measurement data (Section 9.3).

9.1. Privacy Considerations

The information provided by a Device in the course of responding to a capabilities invocation privacy-sensitive data. This is either location information, or measurement data that could be used to produce location information. The GEOPRIV architecture [I-D.ietf-geopriv-arch] provides a framework for the handling of location and location-related information.

Information about the capabilities of a Device might be privacy sensitive. Similarly, willingness to provide capabilities might be sensitive.

HTTP over TLS [RFC2818] MUST be used to provide confidentiality for Device capabilities and the location or measurement data that is provided by the Device.

All data acquired by the LIS in relation to a location URI MUST only be used for the purpose of serving the location URI. Any access control policy - such as that installed using [I-D.barnes-geopriv-policy-uri] - that applies to the location URI also applies to any information acquired using Device capabilities.

Any information that is provided to the LIS by the Device increases the impact of LIS impersonation. Measures that aim to prevent impersonation, as outlined in [I-D.ietf-geopriv-lis-discovery], MUST be applied if a Device provides capability information to a LIS. These measures include server authentication [I-D.saintandre-tls-server-id-check] for all stages of the process.

Server authentication MUST be used for the HELD location request containing the capability exchange, for retrieving the capabilities invocation and for publishing any requested information. Resources that are identified by the LIS do not need to be provided by the same server identity, but each resource MUST be authenticated based on the domain name in the URI. HTTP over TLS [RFC2818] is strongly RECOMMENDED for each of these exchanges.

9.2. URI Secrecy

Using capabilities offers attackers a means to provide invalid location or measurement data. The URI offered by the LIS for receiving location or measurement data is not protected by an access policy. Knowledge of this URI is all that is required to provide information. If an attacker is able to learn this URI, they could

provide misleading information that could be used by the LIS.

The only protection provided is secrecy. Only the Device is given the URI to the invocation resource, which is where the URI used for providing information is made available. To guarantee this secrecy, the URI of the invocation resource and any URIs contained therein need to be difficult to acquire or guess.

The LIS MUST use confidentiality protection on the channel it uses to provide all resources used in the capability exchange and subsequent requests: the LIS URI used for the location request, the invocation resource, and the resource that location or measurement data is pushed to. HTTP over TLS [RFC2818] MUST be used unless confidentiality can be guaranteed by other means.

To lower the probability of these URIs being discovered by guessing or inference, these URIs MUST include sufficient randomness. The LIS SHOULD also periodically change the URIs it provides to limit any exposure in the case that these URIs become known to an attacker.

9.3. Location Veracity

The LIS is responsible for the veracity of location information it provides, especially when serving a location URI. Information acquired from a location URI is attributed to the LIS, unless there is an explicit indication as to the provenance of the data.

A Device might exploit this by spoofing location or measurement data. A Device thereby falsely gains any credibility that recipients of that data might attribute to the LIS.

This and other related considerations described in [I-D.thomson-geopriv-held-measurements] apply to the use of Device-provided information. At a minimum, a LIS SHOULD mark location tuples with the "source" element.

10. IANA Considerations

This section registers a URN for a HELD capabilities XML namespace (Section 10.2) and a corresponding schema (Section 10.3).

10.1. Registration of HELD 'noMeasurement' Error Code

This section registers the "noMeasurement" error code in the "Geopriv HELD Registries, Error codes for HELD" IANA registry.

noMeasurement This error code indicates that all requested location-related measurement data could not be acquired by the Device.

10.2. URN Sub-Namespace Registration for urn:ietf:params:xml:ns:held:cap

This section registers a new XML namespace,
"urn:ietf:params:xml:ns:held:cap", as per the guidelines in
[RFC3688].

URI: urn:ietf:params:xml:ns:held:cap

Registrant Contact: IETF, GEOPRIV working group,
(geopriv@ietf.org), Martin Thomson (martin.thomson@andrew.com).

XML:

```
BEGIN
  <?xml version="1.0"?>
  <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
    "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
  <html xmlns="http://www.w3.org/1999/xhtml" xml:lang="en">
    <head>
      <title>HELD Capabilities Indication</title>
    </head>
    <body>
      <h1>Namespace for HELD Capabilities Indication</h1>
      <h2>urn:ietf:params:xml:ns:held:cap</h2>
      [[NOTE TO IANA/RFC-EDITOR: Please update RFC URL and replace XXXX
        with the RFC number for this specification.]]
      <p>See <a href="[[RFC URL]]">RFCXXXX</a>.</p>
    </body>
  </html>
END
```

10.3. XML Schema Registration for HELD Capabilities

This section registers an XML schema as per the guidelines in
[RFC3688].

URI: urn:ietf:params:xml:ns:schema:held:cap

Registrant Contact: IETF, GEOPRIV working group, (geopriv@ietf.org),
Martin Thomson (martin.thomson@andrew.com).

Schema: The XML for this schema can be found as the entirety of Section 11 of this document.

11. XML Schema for Capabilities

```
<?xml version="1.0"?>
<xs:schema
  xmlns:cap="urn:ietf:params:xml:ns:geopriv:held:cap"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:ietf:params:xml:ns:geopriv:held:cap"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">

  <xs:annotation>
    <xs:appinfo
      source="urn:ietf:params:xml:schema:geopriv:held:cap">
        HELD Capabilities
      </xs:appinfo>
    <xs:documentation source="http://www.ietf.org/rfc/rfcXXXX.txt">
<!-- [[NOTE TO RFC-EDITOR: Please replace above URL with URL of
      published RFC and remove this note.]] -->
      This schema is the basis for HELD capabilities negotiation.
    </xs:documentation>
  </xs:annotation>

  <xs:element name="deviceCapabilities" type="cap:deviceCapType"/>
  <xs:complexType name="deviceCapType">
    <xs:complexContent>
      <xs:restriction base="xs:anyType">
        <xs:sequence>
          <xs:element name="location"
            type="cap:deviceCapLocationType"
            minOccurs="0" maxOccurs="unbounded"/>
          <xs:element name="measurement"
            type="cap:deviceCapMeasurementType"
            minOccurs="0" maxOccurs="unbounded"/>
          <xs:any namespace="##other" processContents="lax"
            minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
        <xs:anyAttribute namespace="##any" processContents="lax"/>
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

  <xs:complexType name="deviceCapLocationType">
    <xs:complexContent>
      <xs:extension base="cap:agreedCapLocationType">
```

```
        <xs:attribute name="responseTime" type="xs:nonNegativeInteger"
                      use="required"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>

  <xs:complexType name="deviceCapMeasurementType">
    <xs:complexContent>
      <xs:extension base="cap:agreedCapMeasurementType">
        <xs:attribute name="responseTime" type="xs:nonNegativeInteger"
                      use="required"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>

  <xs:element name="agreedCapabilities" type="cap:agreedCapType"/>
  <xs:complexType name="agreedCapType">
    <xs:complexContent>
      <xs:restriction base="xs:anyType">
        <xs:sequence>
          <xs:element name="monitor" type="xs:anyURI"/>
          <xs:element name="location"
                    type="cap:agreedCapLocationType"
                    minOccurs="0" maxOccurs="unbounded"/>
          <xs:element name="measurement"
                    type="cap:agreedCapMeasurementType"
                    minOccurs="0" maxOccurs="unbounded"/>
          <xs:any namespace="##other" processContents="lax"
                minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
        <xs:anyAttribute namespace="##any" processContents="lax"/>
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

  <xs:attributeGroup name="baseCapAttrs">
    <xs:attribute name="id" type="xs:NCName" use="required"/>
    <xs:anyAttribute namespace="##local" processContents="strict"/>
  </xs:attributeGroup>

  <xs:complexType name="agreedCapLocationType">
    <xs:complexContent>
      <xs:restriction base="xs:anyType">
        <xs:sequence>
          <xs:any namespace="##any" processContents="lax"
                minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
        <xs:attributeGroup ref="cap:baseCapAttrs"/>
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>
```

```
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>

<xs:complexType name="agreedCapMeasurementType">
  <xs:complexContent>
    <xs:restriction base="xs:anyType">
      <xs:sequence>
        <xs:any namespace="##any" processContents="lax"
          minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
      <xs:attribute name="type" type="xs:QName" use="optional"/>
      <xs:attributeGroup ref="cap:baseCapAttrs"/>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>

<!-- not included in agreedCapLocationType due to UPA -->
<xs:element name="locationType" type="cap:locationTypeType"/>
<xs:simpleType name="locationTypeType">
  <xs:union>
    <xs:simpleType>
      <xs:restriction base="xs:token">
        <xs:enumeration value="any"/>
      </xs:restriction>
    </xs:simpleType>
    <xs:simpleType>
      <xs:restriction base="cap:locationTypeList">
        <xs:minLength value="1"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:union>
</xs:simpleType>

<xs:simpleType name="locationTypeList">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:token">
        <xs:enumeration value="civic"/>
        <xs:enumeration value="geodetic"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>

<xs:element name="invokeCapabilities" type="cap:invokeCapType"/>
<xs:complexType name="invokeCapType">
  <xs:complexContent>
```

```
<xs:restriction base="xs:anyType">
  <xs:sequence>
    <xs:element name="location"
      type="cap:invokeCapLocationType"
      minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="measurement"
      type="cap:invokeCapMeasurementType"
      minOccurs="0" maxOccurs="unbounded"/>
    <xs:any namespace="##other" processContents="lax"
      minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:anyAttribute namespace="##any" processContents="lax"/>
</xs:restriction>
</xs:complexContent>
</xs:complexType>

<xs:attributeGroup name="invokeTimeGroup">
  <xs:attribute name="before" type="xs:dateTime" use="required"/>
  <xs:attribute name="periodic" type="xs:positiveInteger"
    use="optional"/>
</xs:attributeGroup>

<xs:complexType name="invokeCapLocationType">
  <xs:complexContent>
    <xs:restriction base="cap:agreedCapLocationType">
      <xs:sequence>
        <xs:element name="push" type="xs:anyURI"/>
        <xs:any namespace="##any" processContents="lax"
          minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
      <xs:attributeGroup ref="cap:invokeTimeGroup"/>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>

<xs:complexType name="invokeCapMeasurementType">
  <xs:complexContent>
    <xs:restriction base="cap:agreedCapMeasurementType">
      <xs:sequence>
        <xs:element name="push" type="xs:anyURI"/>
        <xs:any namespace="##any" processContents="lax"
          minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
      <xs:attributeGroup ref="cap:invokeTimeGroup"/>
      <xs:attribute name="samples" type="xs:positiveInteger"
        use="optional" default="1"/>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>
```

```
</xs:complexType>

</xs:schema>
```

12. Acknowledgements

Richard Barnes provided useful input on the state management mechanisms that are used in this document.

13. References

13.1. Normative References

- [I-D.ietf-geopriv-http-location-delivery]
Barnes, M., Winterbottom, J., Thomson, M., and B. Stark,
"HTTP Enabled Location Delivery (HELD)",
draft-ietf-geopriv-http-location-delivery-16 (work in
progress), August 2009.
- [I-D.ietf-geopriv-lis-discovery]
Thomson, M. and J. Winterbottom, "Discovering the Local
Location Information Server (LIS)",
draft-ietf-geopriv-lis-discovery-15 (work in progress),
March 2010.
- [I-D.loreto-http-timeout]
Loreto, S., Thomson, M., and G. Wilkins, "Hypertext
Transfer Protocol (HTTP) Timeouts",
draft-loreto-http-timeout-00 (work in progress),
June 2010.
- [I-D.saintandre-tls-server-id-check]
Saint-Andre, P. and J. Hodges, "Representation and
Verification of Domain-Based Application Service Identity
within Internet Public Key Infrastructure Using X.509
(PKIX) Certificates in the Context of Transport Layer
Security (TLS)", draft-saintandre-tls-server-id-check-14
(work in progress), January 2011.
- [I-D.thomson-geopriv-held-measurements]
Thomson, M. and J. Winterbottom, "Using Device-provided
Location-Related Measurements in Location Configuration
Protocols", draft-thomson-geopriv-held-measurements-06
(work in progress), May 2010.
- [I-D.winterbottom-geopriv-deref-protocol]

Winterbottom, J., Tschofenig, H., Schulzrinne, H., Thomson, M., and M. Dawson, "A Location Dereferencing Protocol Using HELD", draft-winterbottom-geopriv-deref-protocol-05 (work in progress), January 2010.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.
- [RFC2616] Fielding, R., Gettys, J., Mogul, J., Frystyk, H., Masinter, L., Leach, P., and T. Berners-Lee, "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999.
- [RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, January 2004.

13.2. Informative References

- [I-D.barnes-geopriv-policy-uri]
Barnes, R., Thomson, M., Winterbottom, J., and H. Tschofenig, "Location Configuration Extensions for Policy Management", draft-barnes-geopriv-policy-uri-02 (work in progress), November 2010.
- [I-D.ietf-geopriv-arch]
Barnes, R., Lepinski, M., Cooper, A., Morris, J., Tschofenig, H., and H. Schulzrinne, "An Architecture for Location and Location Privacy in Internet Applications", draft-ietf-geopriv-arch-03 (work in progress), October 2010.
- [I-D.loreto-http-bidirectional]
Loreto, S., Saint-Andre, P., Salsano, S., and G. Wilkins, "Known Issues and Best Practices for the Use of Long Polling and Streaming in Bidirectional HTTP", draft-loreto-http-bidirectional-07 (work in progress), January 2011.
- [I-D.thomson-geopriv-uncertainty]
Thomson, M. and J. Winterbottom, "Representation of Uncertainty and Confidence in PIDF-LO", draft-thomson-geopriv-uncertainty-05 (work in progress), May 2010.
- [RFC2141] Moats, R., "URN Syntax", RFC 2141, May 1997.

[RFC5808] Marshall, R., "Requirements for a Location-by-Reference Mechanism", RFC 5808, May 2010.

Authors' Addresses

Martin Thomson
Andrew Corporation
Andrew Building (39)
Wollongong University Campus
Northfields Avenue
Wollongong, NSW 2522
AU

Email: martin.thomson@andrew.com

James Winterbottom
Andrew Corporation
Andrew Building (39)
Wollongong University Campus
Northfields Avenue
Wollongong, NSW 2522
AU

Email: james.winterbottom@andrew.com

Mary Barnes
Polycom
US

Email: mary.ietf.barnes@gmail.com

