

Internet Engineering Task Force
Internet-Draft
Intended status: Informational
Expires: January 12, 2012

G. Chen
China Mobile
C. Williams
Consultant
July 11, 2011

Happy Eyeballs Extension for Multiple Interfaces
draft-chen-mif-happy-eyeballs-extension-02

Abstract

The memo has been proposed to extend happy eyeballs algorithm to fit into multiple interfaces environment. Based on this extended heuristic algorithm, a client with multiple interface could determine the optimal flow path in which specific interface has been chosen. Furthermore, an appropriate IP address family for each interface can be also identified to guarantee user experiences during IPv6 transition period.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 12, 2012.

Copyright Notice

Copyright (c) 2011 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Table of Contents

1. Introduction	3
2. Heuristic Happy Eyeballs Extension Algorithm	3
2.1. The Framework for Extended Algorithm	3
2.2. Interface Weighting Consideration	4
2.3. Interface Selection Process	5
2.4. IPv4/IPv6 Selection Algorithm for Individual Interface	6
3. Additional Considerations	6
3.1. Usage Scope	6
3.2. Flow Continuity	6
3.3. Default Address Selection	6
4. IANA Considerations	6
5. Security Considerations	6
6. Normative References	6
Authors' Addresses	7

1. Introduction

In multiple interface context, the problems raised by hosts with multiple interfaces have been discussed. The MIF problem statement[MIF-PS] has described the various issues when using a MIF node on which multiple interfaces are used and results in wrong domain selection. Happy Eyeballs [HAPPY-EYEBALLS] has described how a dual-stack client can determine the functioning path to a dual-stack server. It's using heuristic algorithm help applications to quickly determine if IPv6 or IPv4 is the most optimal to connect to a server. That is a good method to achieve intelligent path selection. However, the assumption here is single-homed host. The interaction with multiple interfaces is still waiting for further study.

This memo has been proposed to extend happy eyeballs algorithm to fit into multiple interfaces environment. That could achieve win-win situation. Based on this extended heuristic algorithm, a client with multiple interface could determine the optimal flow path in which specific interface has been chosen. Furthermore, an appropriate IP address family for each interface can be also identified to guarantee user experiences during IPv6 transition period.

2. Heuristic Happy Eyeballs Extension Algorithm

The section details extended Happy Eyeballs algorithm, including defined framework, interface weighting consideration and and computation process.

2.1. The Framework for Extended Algorithm

The Figure 1 shows the proposed framework for extended algorithm.

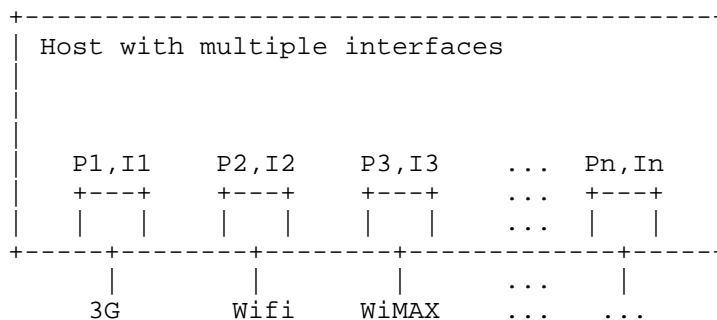


Figure 1: Multiple Interface Mode for Extended Algorithm

Each interface will be configured with weighting coefficient, which is composed of pair values. Apart from value P, which is following current definition in [HAPPY-EYEBALLS], value I is defined to indicate preference of interfaces selection. In general, value I is responsible for interface selection; value P is a indication to identify IPv4 or IPv6 family has been preferred.

2.2. Interface Weighting Consideration

According to the definition, applications will take account of value I to identify which interface has been chosen before sending out data packages .

Each interface is configured with one value, I. I is served as an indication to identify which interface is preferred for a specific destination or hostname. A positive value indicates preference of specific interface compared to others. The value is justified by taking various factors into account. The impact factors could be categorized in two groups.

- o Hard preconditions: It's mandatory indications that interface behaviour should comply with such preconditions guidance. The following factors belong to hard preconditions.
 - * Operator policies: operators would deliver the customized policies in particular network environments due to charging or area regulation considerations.
 - * User preferences: Users might configure to enable a specific interface to access network. for example, user may choose wifi interface to surf Internet considering low cost.
- o Soft preconditions: It's optimal choice for transmitting data packages through a specific interface compared to others. The following factors would contribute soft preconditions justification.
 - * Routing policies: DHCPv6 Route Option[draft-ietf-mif-dhcpv6-route-option-01] and RFC4191[RFC4191] allow configuration of specific routes and influence a nodes' ability to pick an appropriate route to a destination. A weighting for an interface headed to

destination address that matches a specific route would be increased.

- * DNS selection: if improved DNS server selection [draft-ietf-mif-dns-server-selection-03] takes effects, the weighting for those interfaces over which DNS suffix matching the requested name should also be increased.
- * Other factors: There are many other factors could contribute optimal interface selection. This documents would like to focus on the main ones and treat others in a best effort manner. The key factors are expected to be added in future discussion.

2.3. Interface Selection Process

The selection of a particular interface from the viable set implies a selection of one particular network path in preference to other viable paths. Interface weighting must be computed in advance but also be recomputed during session. The whole process for interface selection could be divided into two stages.

At stage I, upon the connection attempt, interface set should be filtered through the hard preconditions, and then aggregate the results within that kind of "policy group".

At stage II, the soft preconditions should be applied to the resulted interface set. According to particular soft preconditions, the preferred interface would be chosen by increasing I and delaying the connection attempts on the "undesirable" interfaces. This would allow to dial the preference between the different interfaces. The less desirable interface would get penalised a-priori.

To be specific, when one interface defeats others, the corresponding value I will be set to positive value. Other interfaces will be set negative value. A value of 0 indicates equal weight for multiple interfaces.

When interface values I have been configured, the traffic flow targeted to specific destination address or hostname will follow this guidance to choose proper interface. Hence, initial connection attempt would be sent over the interface that has matching particular rules and other interfaces would be tried only if no reply on the preferred one. Network condition may change during the session, interface reselection should be triggered. When connection problems are occurred to preferred connection, the value I need to be adjusted. The adjustment of value I will do polling-based scheme. The value I corresponding to suboptimal interface will be configured

as positive. And previously optimal value I will be set to most-negative.

2.4. IPv4/IPv6 Selection Algorithm for Individual Interface

For a specific interface in a dual-stack single interface node, the choice of IP address family relies on Happy Eyeballs algorithm, which is defined in [HAPPY-EYEBALLS].

3. Additional Considerations

3.1. Usage Scope

Happy Eyeballs is targeting to HTTP context, but it is useful and applicable to other time-sensitive applications.

3.2. Flow Continuity

Usually, interface changing happens at the beginning of new session. So, there is no flow continuity issues for ongoing TCP session. Dynamic movement of traffic flows are addressed by other IETF protocols as well.

3.3. Default Address Selection

If more than one IPv6 address is assigned to the interface, the native IPv6 address is given preference.

4. IANA Considerations

This memo includes no request to IANA.

5. Security Considerations

TBD

6. Normative References

[HAPPY-EYEBALLS]

Wing, D., "Happy Eyeballs: Success with Dual-Stack Hosts", draft-ietf-v6ops-happy-eyeballs-03.txt (work in progress), July 2011.

[MIF-PS] Blanchet, M., "Multiple Interfaces and Provisioning

Domains Problem Statement",
draft-ietf-mif-problem-statement-15.txt (work in
progress), May 2011.

[RFC4191] Draves, R. and D. Thaler, "Default Router Preferences and
More-Specific Routes", RFC 4191, November 2005.

[draft-ietf-mif-dhcpv6-route-option-01]
Dec , W., "DHCPv6 Route Option",
draft-ietf-mif-dhcpv6-route-option-01 (work in progress),
March 2011.

[draft-ietf-mif-dns-server-selection-03]
Savolainen, T., "Improved DNS Server Selection for Multi-
Homed Nodes", draft-ietf-mif-dns-server-selection-03.txt
(work in progress), June 2011.

Authors' Addresses

Gang Chen
China Mobile
53A,Xibianmennei Ave.,
Xuanwu District,
Beijing 100053
China

Email: chengang@chinamobile.com

Carl Williams
Consultant
El Camino Real
Palo Alto, CA 94306
USA

Email: carlw@mcsr-labs.org

