

draft-tsou-stateless-nat44-00

Tina Tsou <tina.tsou.zouting@huawei.com>
Will Liu <Liushucheng@huawei.com>
Simon Perreault <simon.perreault@viagenie.ca>

Sunset4
IETF 84, Vancouver

2012-07-30


Problem

- Stateful NAT44 in CGN
 - Fragile
 - Complex
 - Hard to scale up
 - Hard to log mappings
 - Doesn't like asymmetric routing
 - Etc.

Solution overview

- Each subscriber gets part of an external address (port set)
- The external address and port set are encoded in the internal address that is assigned to the CPE.
- The CPE restricts itself to its allowed port set.
- The stateless NAT44 only translates addresses, extracting the needed information from the address itself.

Address formats

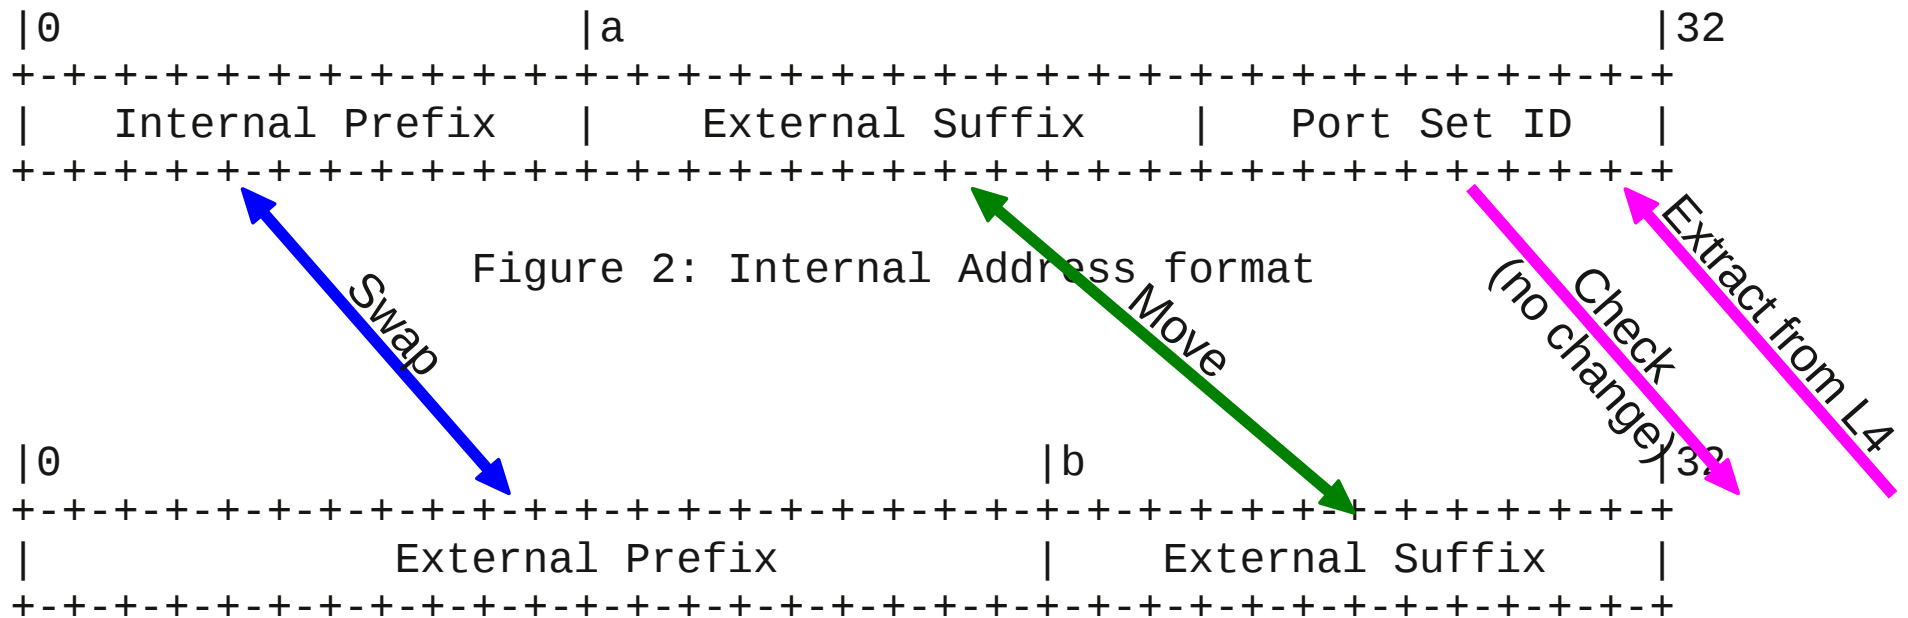

Fragment handling

- Address translation depends on L4 port number, therefore fragments need to be reassembled
- Same considerations as NAT64, text adapted from RFC 6146

Non-contiguous port sets

- Optionally, non-contiguous port sets can be used.
- Requires provisioning a port set **mask** to the CPE.

```

|0          |5
+-+--+--+--+
|1 1 1 0 1|  Port Set ID (length n = 5 bits)
+-+--+--+--+
& & & & &
+-+--+--+--+
|1 1 1 1 1|  Port Set Mask
+-+--+--+--+
| | | | |
V V V V V
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|1 1 1 0 1 x x x x x x x x x x x x|  Port Set = 59392-61439
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|0          |16

```

```

|0          |8
+-+--+--+--+--+--+--+--+--+
|0 0 1 0 1 1 1 1|  Port Set ID (length n = 8 bits)
+-+--+--+--+--+--+--+--+--+
& & & & & & &
+-+--+--+--+--+--+--+--+--+
|0 0 1 1 1 1 1 1|  Port Set Mask
+-+--+--+--+--+--+--+--+--+
| | | | | | | |
V V V V V V V V
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|x x 1 0 1 1 1 1 x x x x x x x x x|  Port Set = 12032-12287, 28416-28671,
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
                                         44800-45055, 61184-61439
|0          |16

```

Advantages

- Stateless CGN
 - No logging
 - Robust, scalable, etc.
 - Allows asymmetric routing (careful with fragments)
- Minimal modifications to CPE
 - A vanilla Linux home router can do this today.
- Fits into existing infrastructure and operational practices
- Very flexible port set definition

How is this different from...

- SD-NAT44 [draft-penno-software-sdnat-01]
 - SD-NAT has per-customer state.
SLNAT44 has no state at all.
 - SLNAT44 supports non-contiguous port sets.
 - SLNAT44 has no signaling between CGN and CPE.
 - SD-NAT44 has been dropped from draft -02.
- MAP, 4rd
 - SLNAT44 is IPv4-only, no impact on IPv6.

Next steps

- Is Sunset4 interested in this draft?
- What would be the next steps to progress this draft?