



IETF 94 ROLL

Routing over Low-Power And Lossy Networks

Chairs:

Michael Richardson

Ines Robles



Note Well

Any submission to the IETF intended by the Contributor for publication as all or part of an IETF Internet-Draft or RFC and any statement made within the context of an IETF activity is considered an "IETF Contribution". Such statements include oral statements in IETF sessions, as well as written and electronic communications made at any time or place, which are addressed to:

- The IETF plenary session
- The IESG, or any member thereof on behalf of the IESG
- Any IETF mailing list, including the IETF list itself, any working group or design team list, or any other list functioning under IETF auspices
- Any IETF working group or portion thereof
- Any Birds of a Feather (BOF) session
- The IAB or any member thereof on behalf of the IAB
- The RFC Editor or the Internet-Drafts function

All IETF Contributions are subject to the rules of [RFC 5378](#) and [RFC 3979](#) (updated by [RFC 4879](#)).

Statements made outside of an IETF session, mailing list or other function, that are clearly not intended to be input to an IETF activity, group or function, are not IETF Contributions in the context of this notice. Please consult [RFC 5378](#) and [RFC 3979](#) for details.

A participant in any IETF activity is deemed to accept all IETF rules of process, as documented in Best Current Practices RFCs and IESG Statements.

A participant in any IETF activity acknowledges that written, audio and video records of meetings may be made and may be available to the public.

Source: <https://www.ietf.org/about/note-well.html>

Meeting Materials

- Remote Participation
 - Jabber Room: roll@jabber.ietf.org
 - Meetecho: <http://www.meetecho.com/ietf94/roll>
- Etherpad:
 - <http://tools.ietf.org/wg/roll/minutes>
- Audio Streaming:
- Minutes taker:
- Jabber Scribe:
- **Please sign blue sheets :-)**

Agenda

- State of: (20 minutes)
 - Work item
 - ROLL I-D
 - Related I-D
 - Open Issues
- draft-robles-roll-useofrplinfo-02 (20 min)
- draft-thubert-roll-dao-projection-02 (10 min)
- Open floor (10 minute)

Milestones (cont.)

Milestone	Schedule
Submit draft about when to use RFC 6553, RFC 6554, and IPv6-in-IPv6 encapsulation to the IESG.	Aug 2015
Submit draft about how to compress RFC 6553, RFC 6554, and IP headers in the 6LoWPAN adaptation layer context to the IESG.	Nov 2015
Evaluate WG progress, recharter or close	Nov 2015

State of Active Internet-Drafts

draft-ietf-roll-admin-local-policy-03	RFC Editor Queue
draft-ietf-roll-applicability-ami-11	Ready to be submitted to IESG
draft-ietf-roll-applicability-home-building-12	RFC Editor Queue
draft-ietf-roll-applicability-template-07	Stable - not to be published
draft-ietf-roll-trickle-mcast-12	RFC Editor Queue
draft-ietf-roll-mpl-parameter-configuration-08	New version should address comments of IESG

Related Internet-Drafts

draft-robles-roll-useofrplinfo-02	When to use RFC 6553, 6554 and IPv6-in-IPv6	Slides Today
draft-thubert-roll-dao-projection-02	Root initiated routing state in RPL	Slides Today
draft-tan-roll-clustering-00	RPL-based Clustering Routing Protocol	Future Discussion
draft-turner-roll-dio-ctx-00	RPL DIO Option for Specifying Compression Contexts	Future Discussion
draft-wang-roll-adaptive-data-aggregation	Design of Adaptive Data Aggregation Schemes	Future Discussion

Open Tickets


Ticket	Summary
#169	Work Item Proposals
#170	Use of ESC Dispatch value in new IETF header compression

RPL RPI/RH3 uses


draft-robles-roll-useofrpi

Michael Richardson
Pascal Thubert
Ines Robles

structure of network - reference diagram

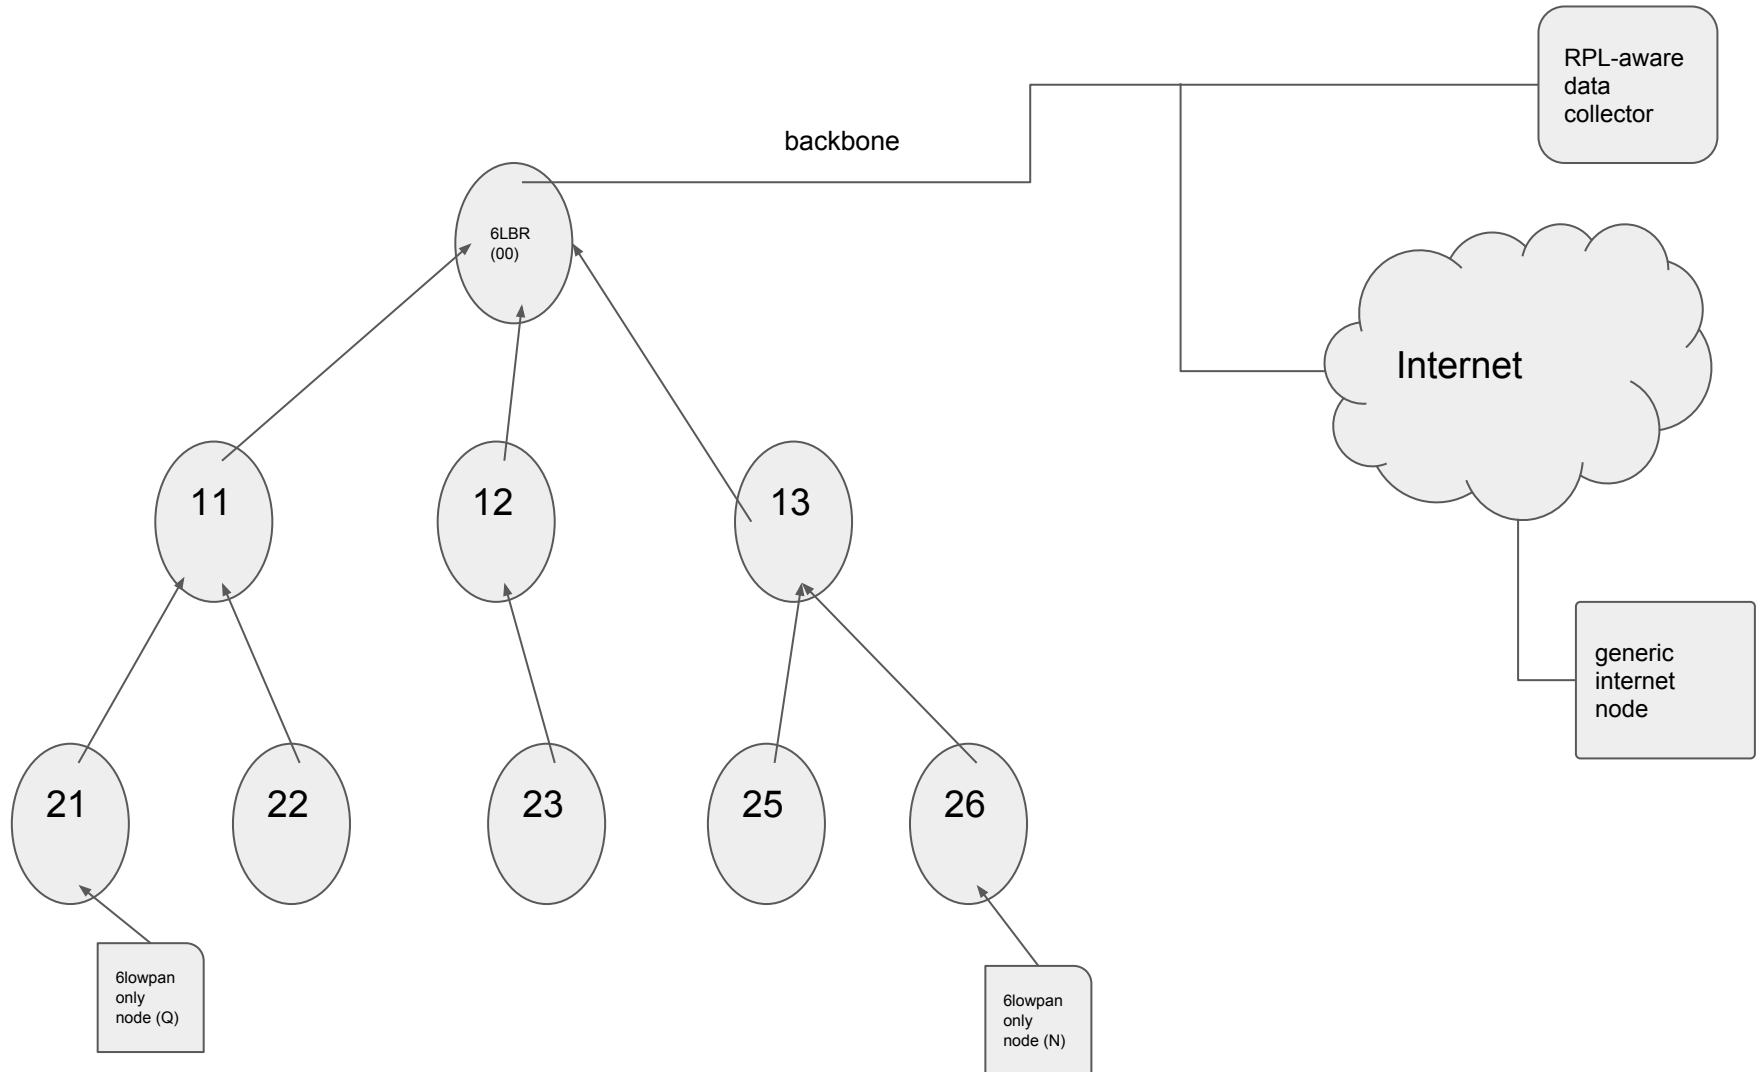

RPL Domain Architecture

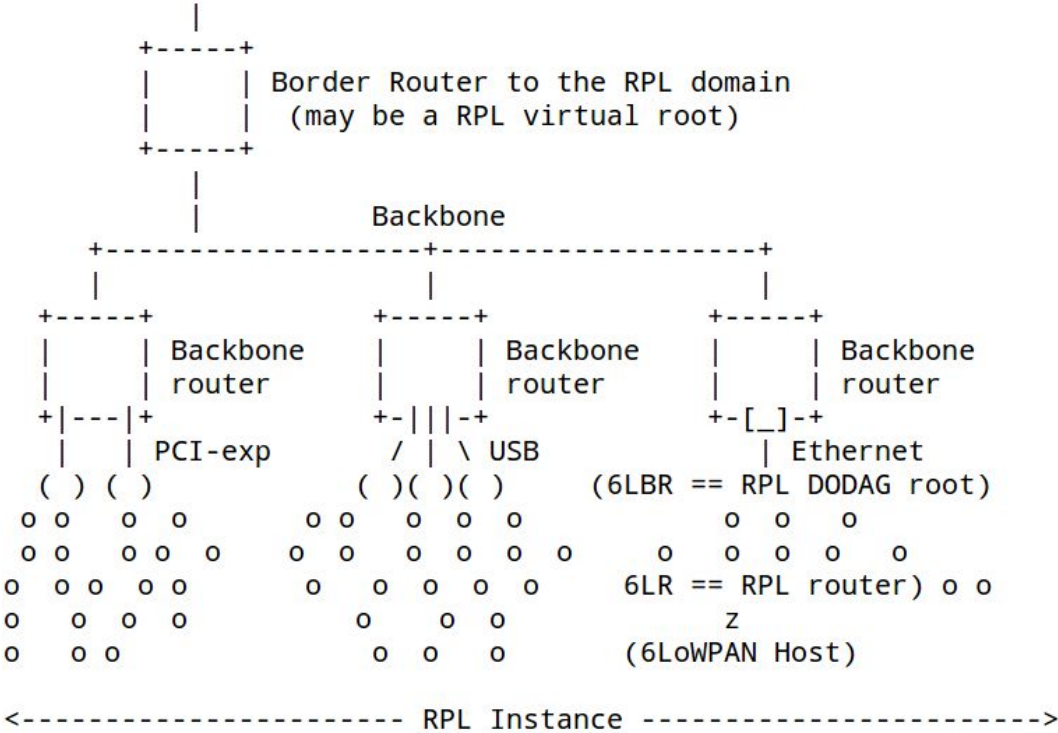

Rules for the Proposed Scenarios

-This document assumes a rule that a **Header cannot be inserted or removed on the fly inside an IPv6 packet that is being routed.**

- This means that an **intermediate router that needs to add a header must encapsulate the packet in an outer IP header where the new header can be placed.**

- This also means that a Header can only be removed by an intermediate router if

- it is placed in an encapsulating IPv6 Header,
- and that the IPv6 header is *addressed* to that intermediate router!

The whole encapsulating header must be removed - a replacement may be added though.

- **RPI should be present in every single RPL data packet**

the **rank** is important, especially in storing-mode, even if there is only one RPLinstanceID

There is an exception in non-storing mode, when a packet is going down from the route: the entire route is written, so there are no loops of confusion about which table to use (purpose of instanceID).

Scenarios analyzed in draft-robles-roll-useofrpi work done at virtual interim working meeting, September 29.

{Storing,Non-Storing} X {RPL-aware-leaf,non-RPL-aware,root, Internet} X {RPL-aware-leaf,non-RPL-aware,root,Internet}

(but Internet->Internet cases removed, so 24, not 32)


STORING

1. Flow from RPL-aware-leaf to root
2. Flow from root to RPL-aware-leaf
3. Flow from non-RPL-aware-leaf to root
4. Flow from root to non-RPL-aware-leaf
5. Flow from RPL-aware-leaf to Internet
6. Flow from Internet to RPL-aware-leaf
7. Flow from non-RPL-aware-leaf to Internet
8. Flow from Internet to non-RPL-aware-leaf
9. Flow from RPL-aware-leaf to RPL-aware-leaf
10. Flow from RPL-aware-leaf to non-RPL-aware-leaf
11. Flow from non-RPL-aware-leaf to RPL-aware-leaf
12. Flow from non-RPL-aware-leaf to non-RPL-aware-leaf

NON-STORING


13. Flow from RPL-aware-leaf to root
14. Flow from root to RPL-aware-leaf
15. Flow from non-RPL-aware-leaf to root
16. Flow from root to non-RPL-aware-leaf
17. Flow from RPL-aware-leaf to Internet
18. Flow from Internet to RPL-aware-leaf
19. Flow from non-RPL-aware-leaf to Internet
20. Flow from Internet to non-RPL-aware-leaf
21. Flow from RPL-aware-leaf to RPL-aware-leaf
22. Flow from RPL-aware-leaf to non-RPL-aware-leaf
23. Flow from non-RPL-aware-leaf to RPL-aware-leaf
24. Flow from non-RPL-aware-leaf to non-RPL-aware-leaf

no problems: storing-mode, Flow from RPL-aware-leaf to root

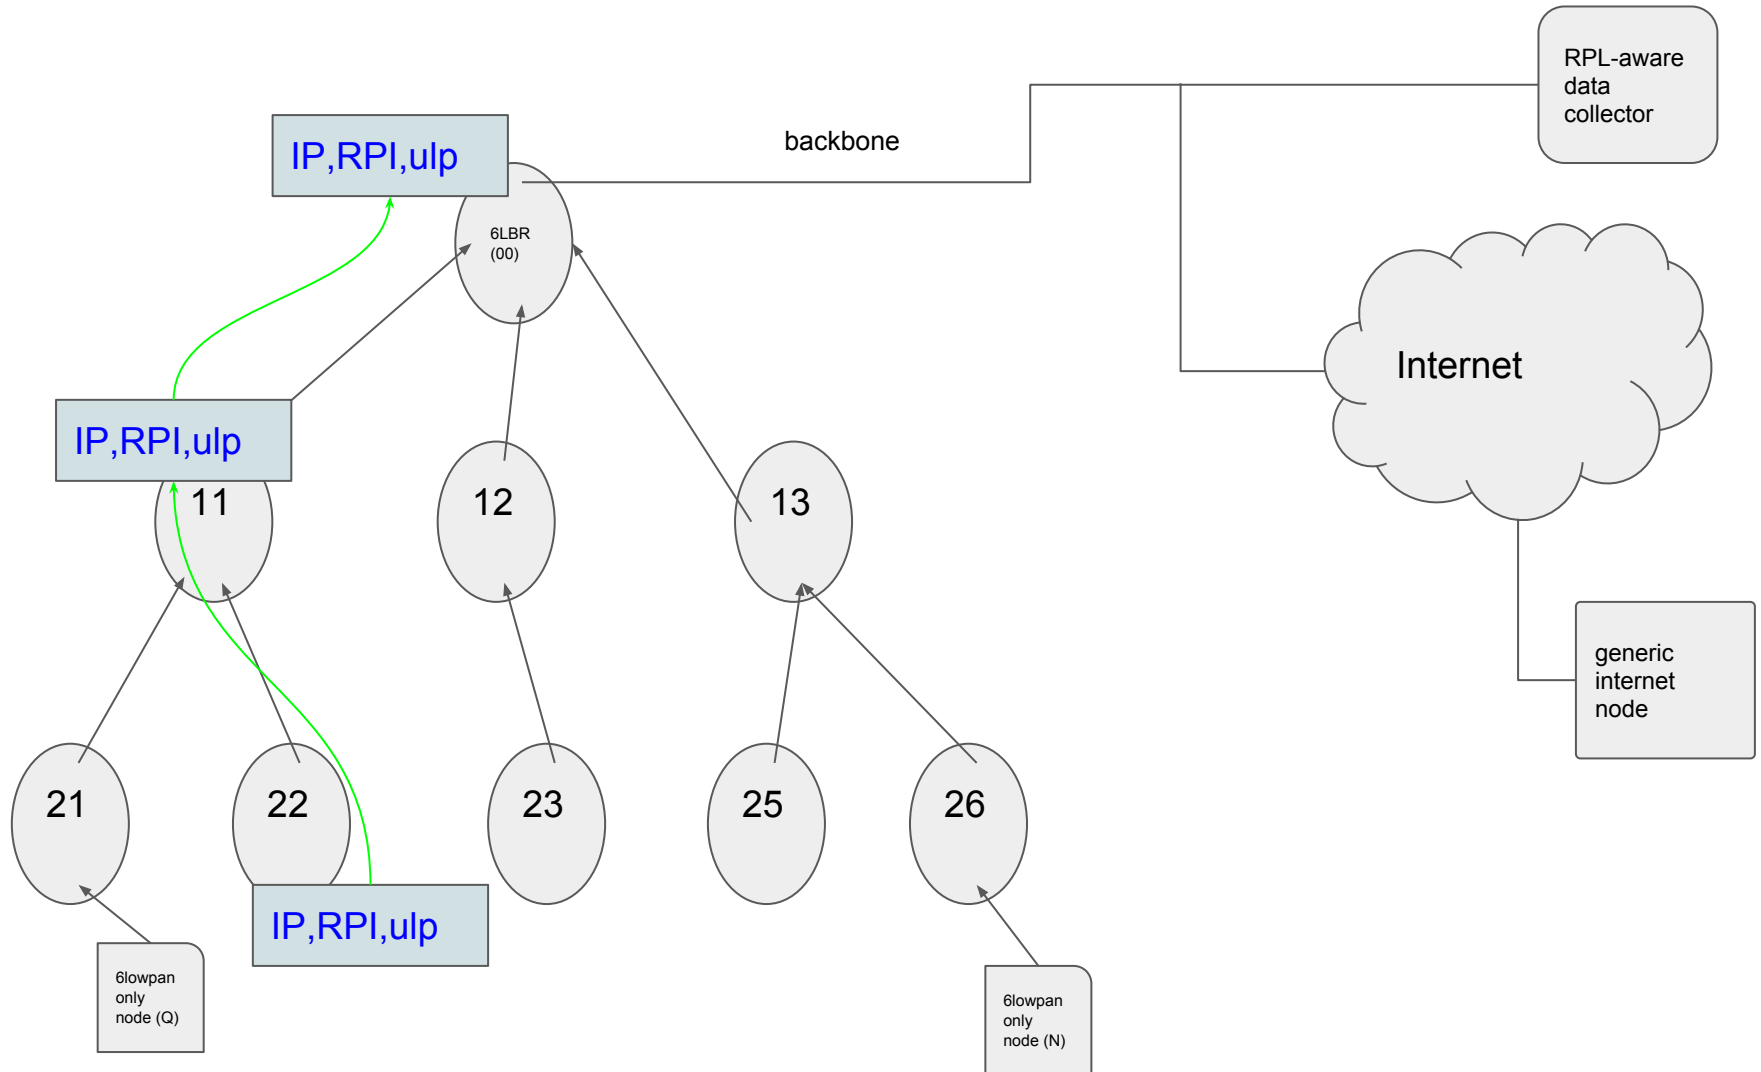


ulp - upper layer payload/protocol (e.g. UDP, TCP, etc.)


few problems: storing-mode, Flow from RPL-aware-leaf to Internet

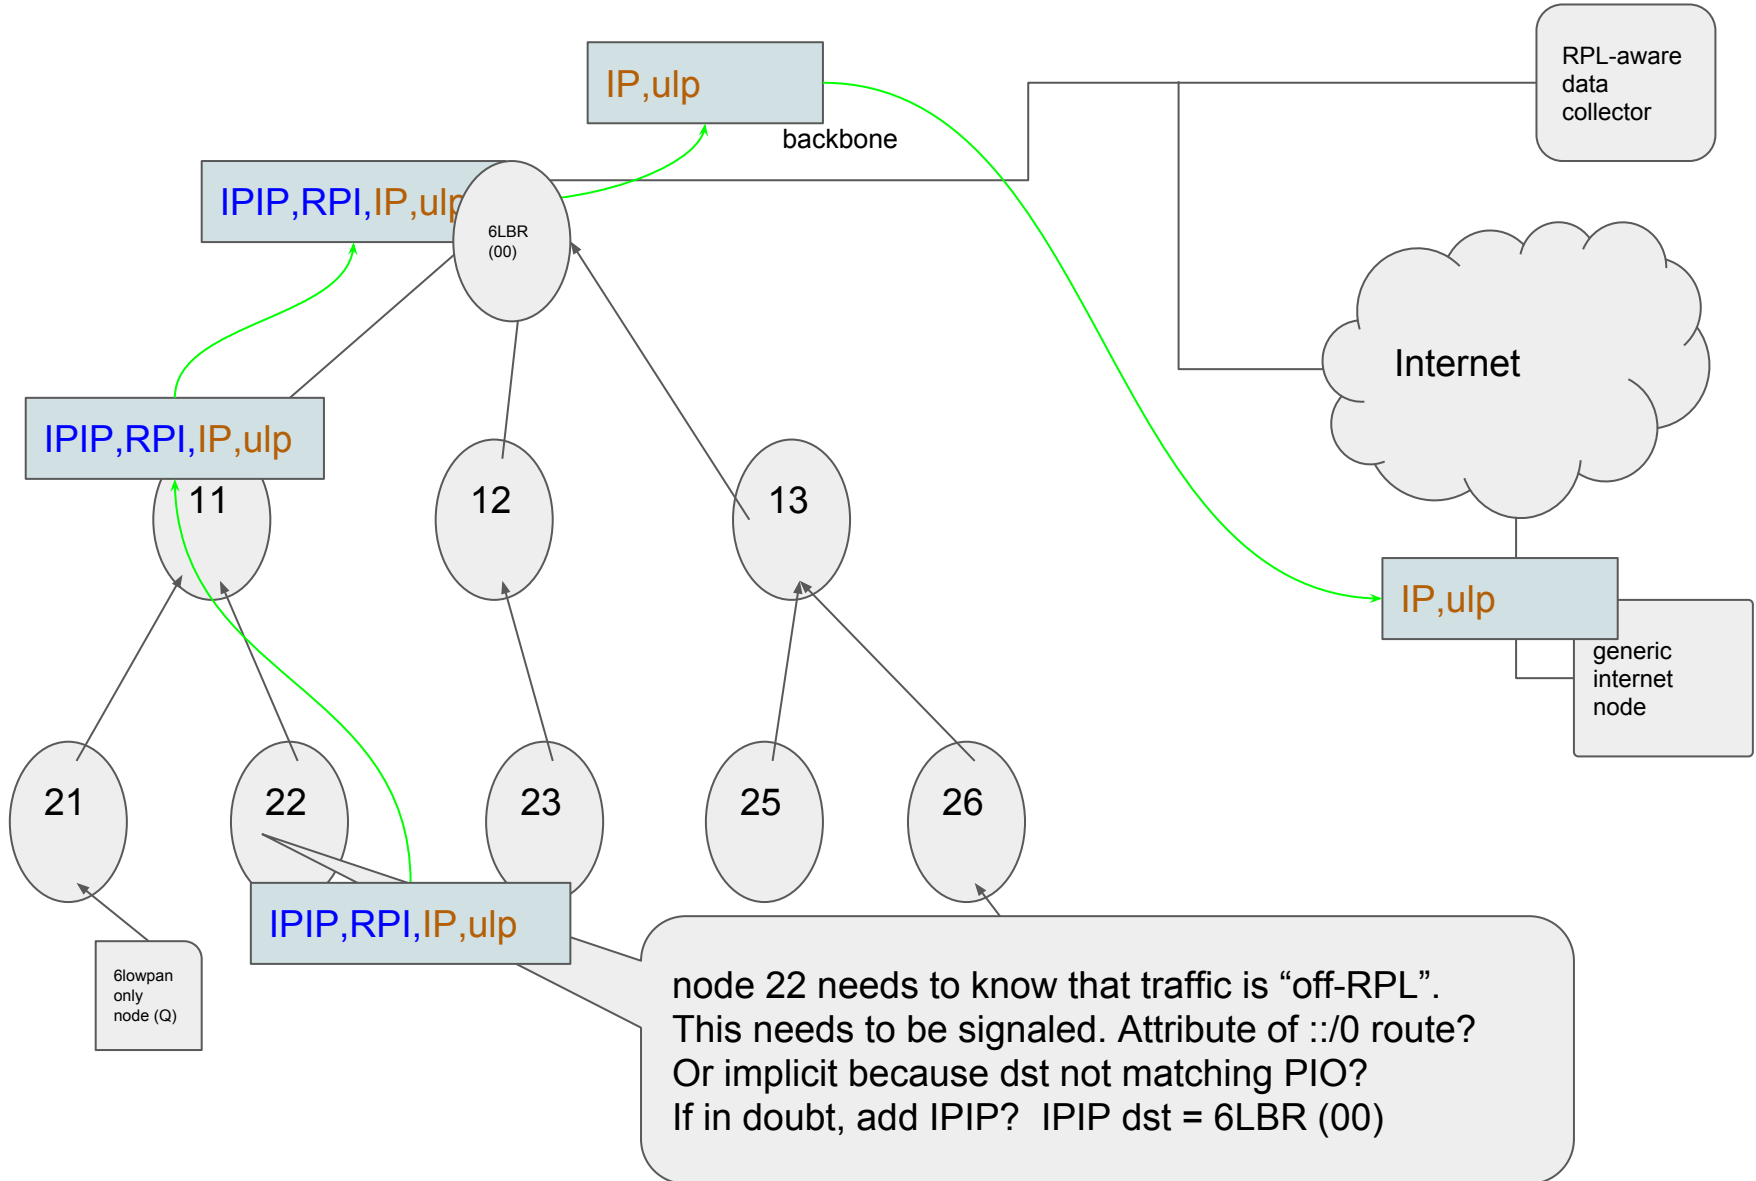


few problems: non-storing-mode Internet to non-RPL-aware-Leaf

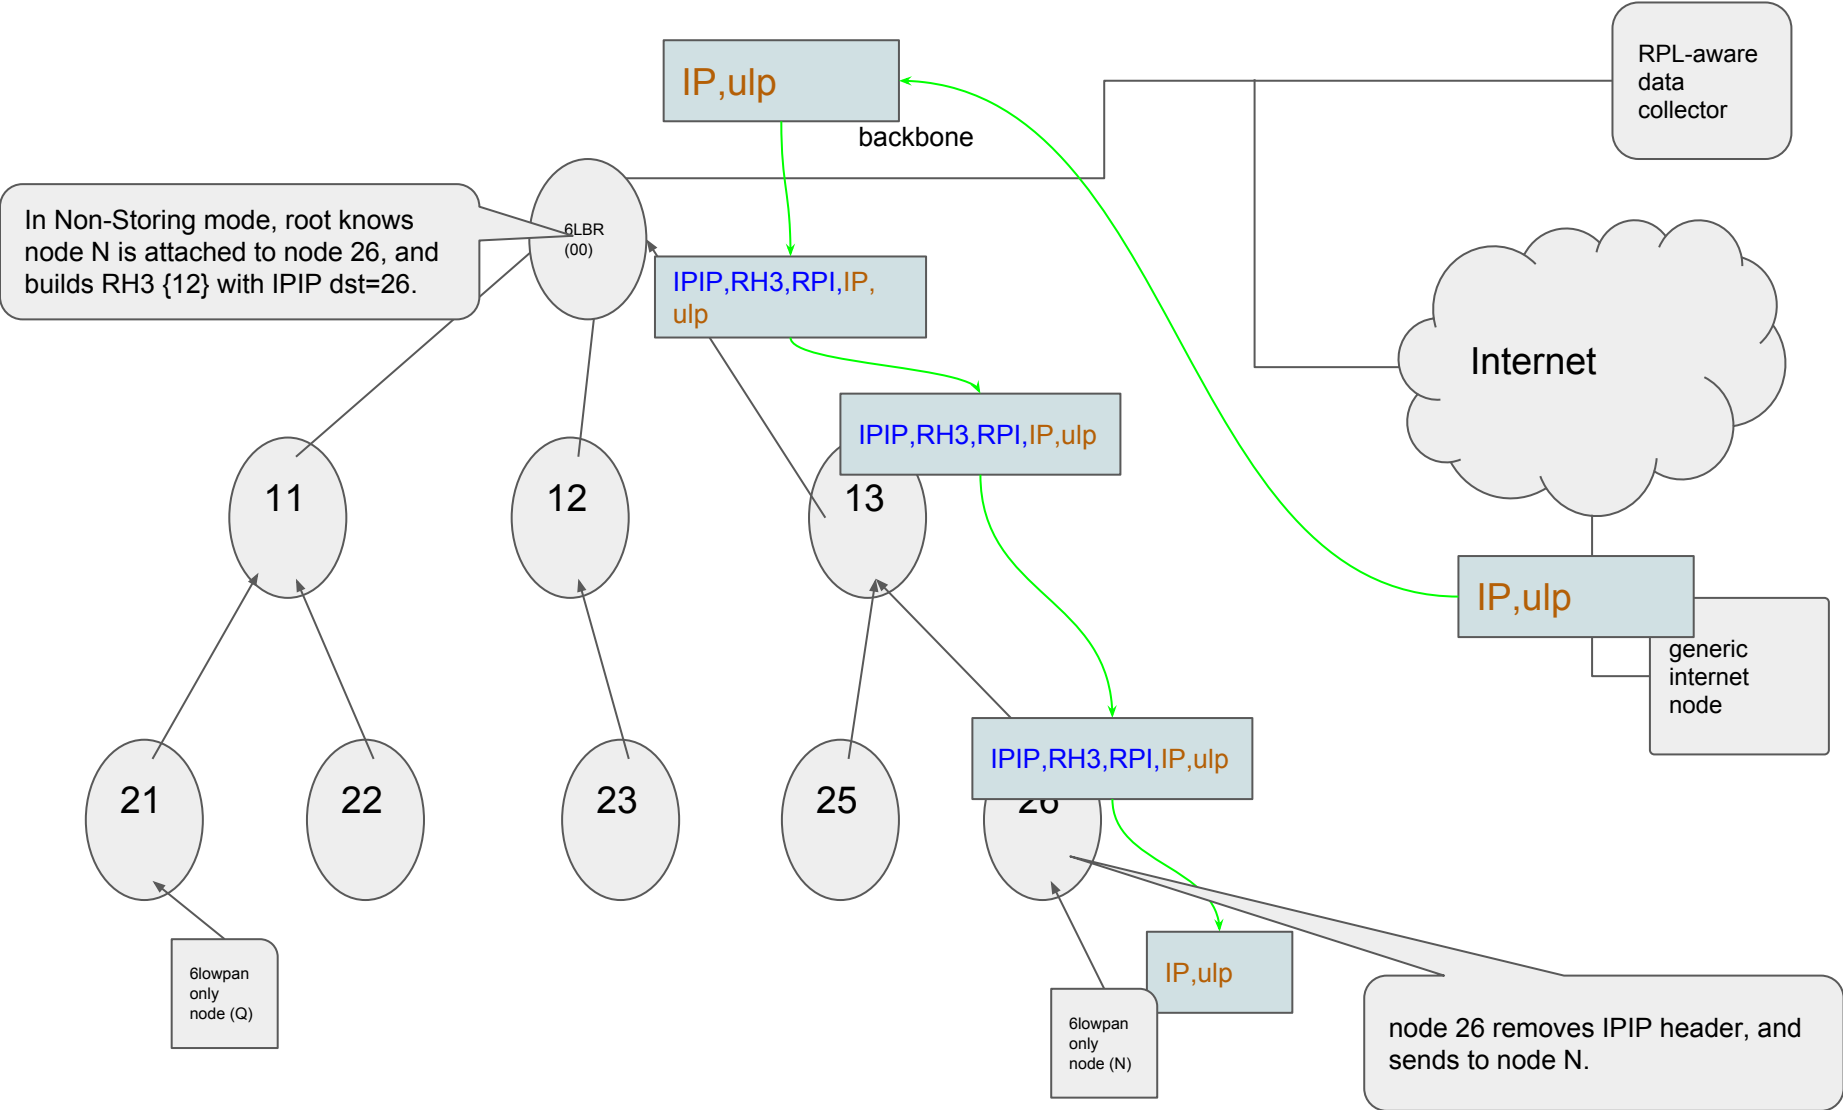


big problems: storing-mode Internet to non-RPL-aware-Leaf

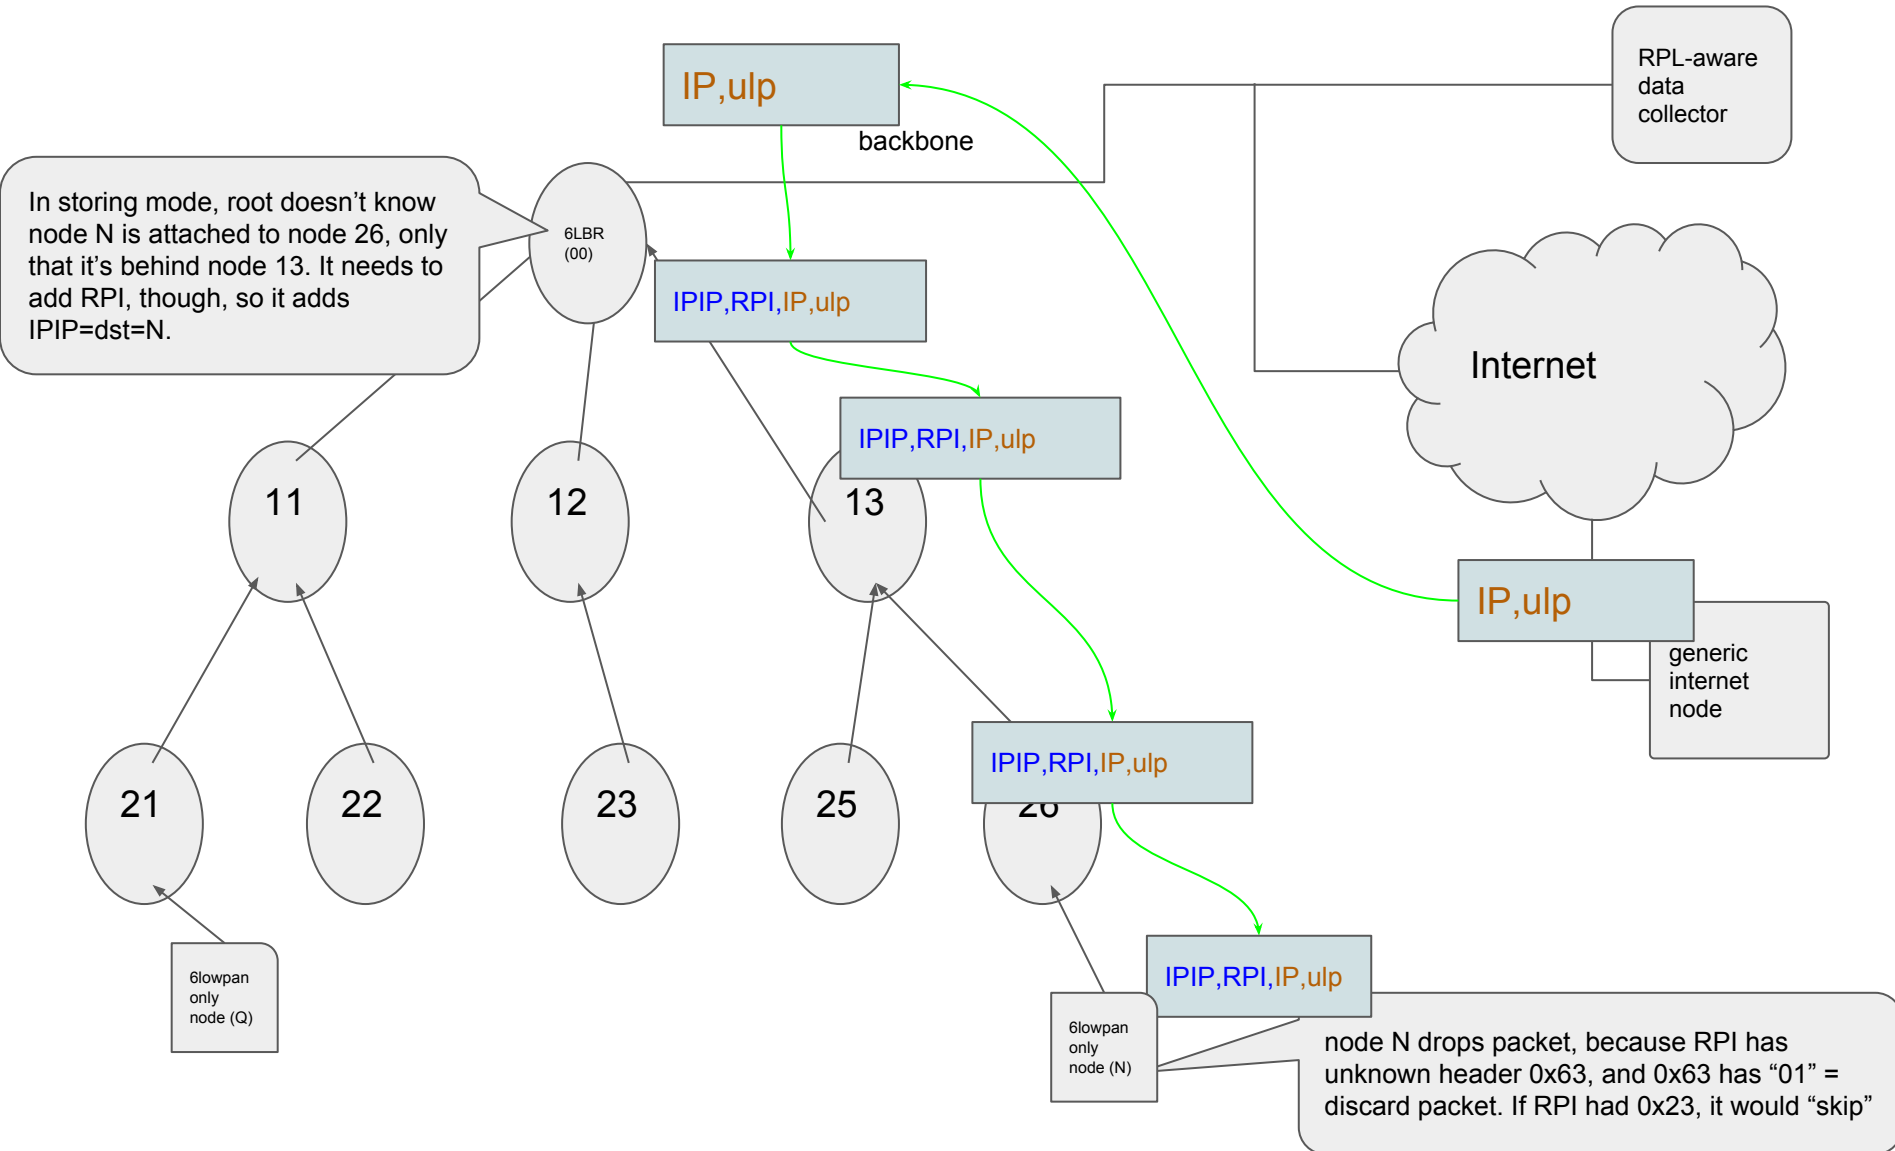

no problems: non-storing-mode from RPL-aware-leaf to RPL-aware-leaf

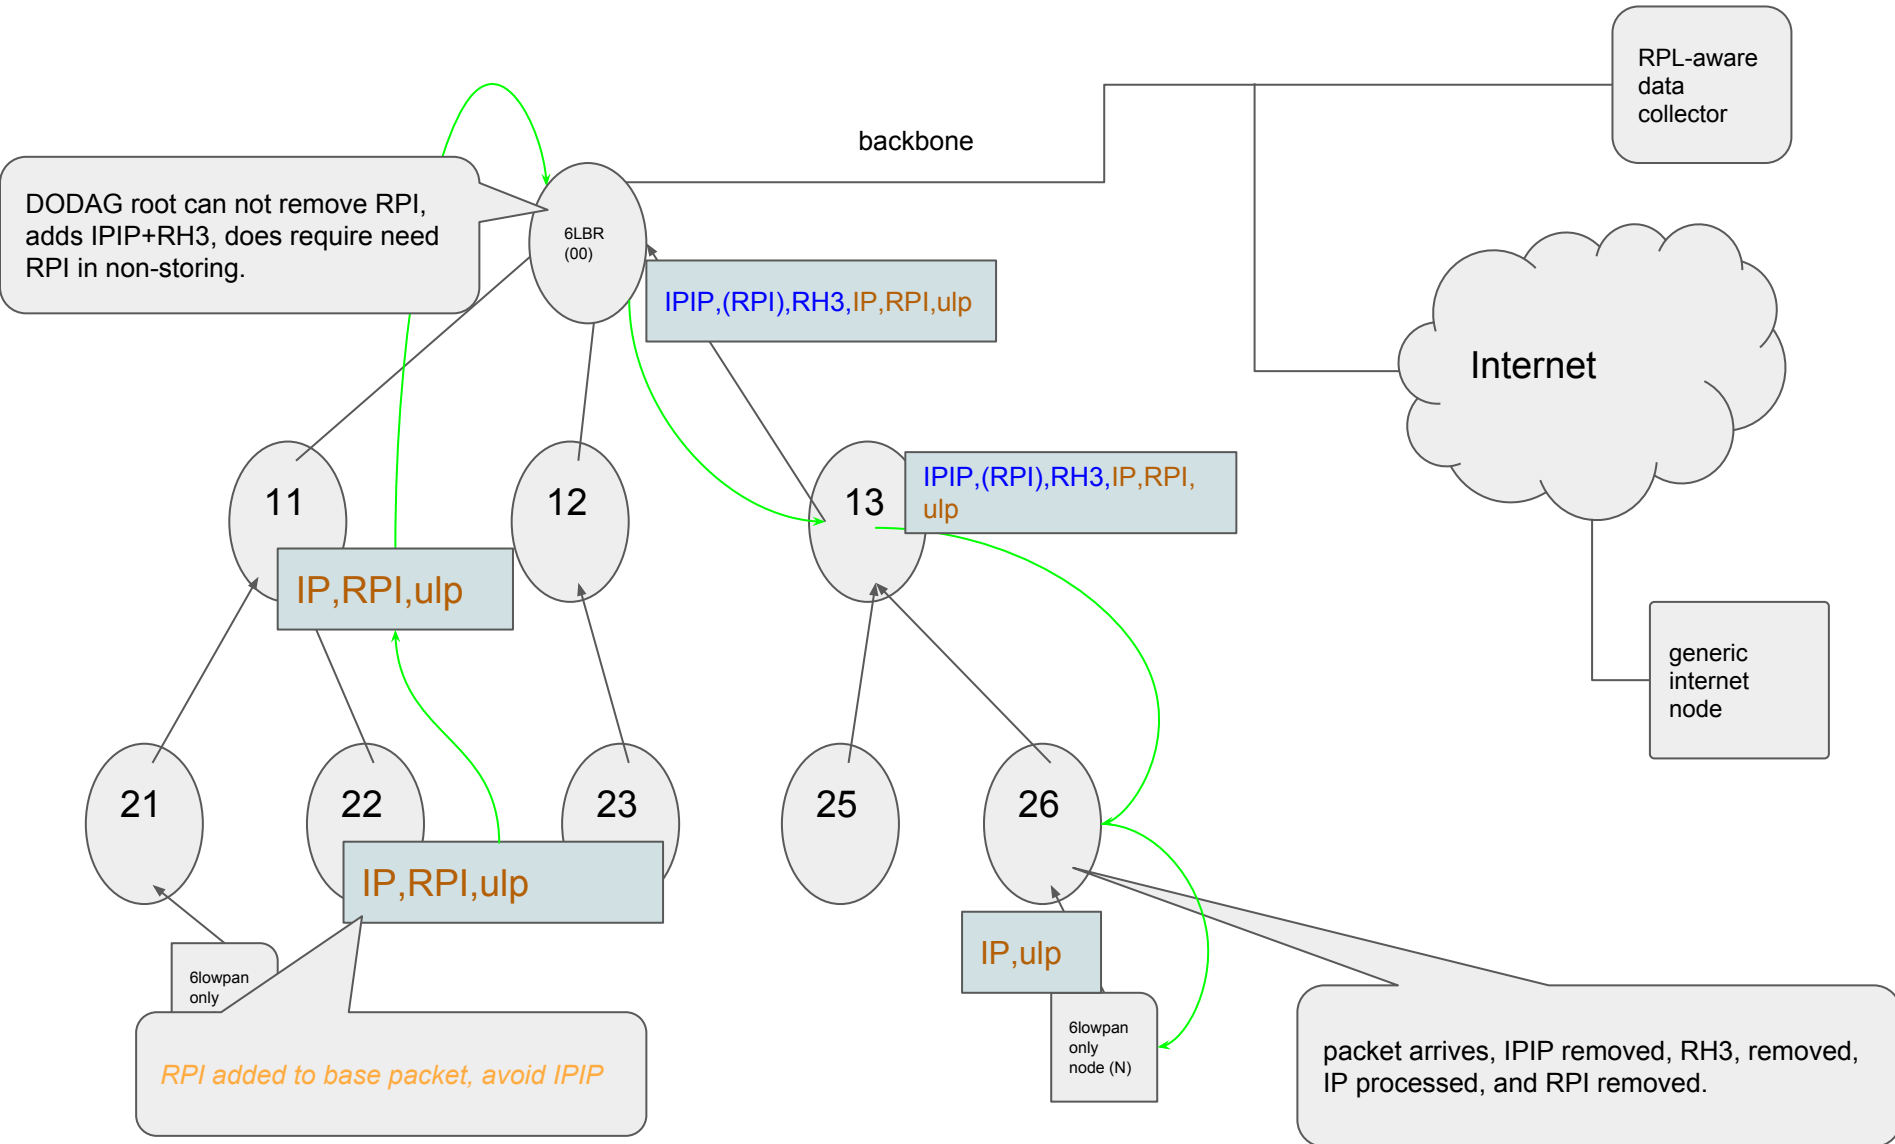

few problems: non-storing-mode from RPL-aware-leaf to RPL-aware-leaf

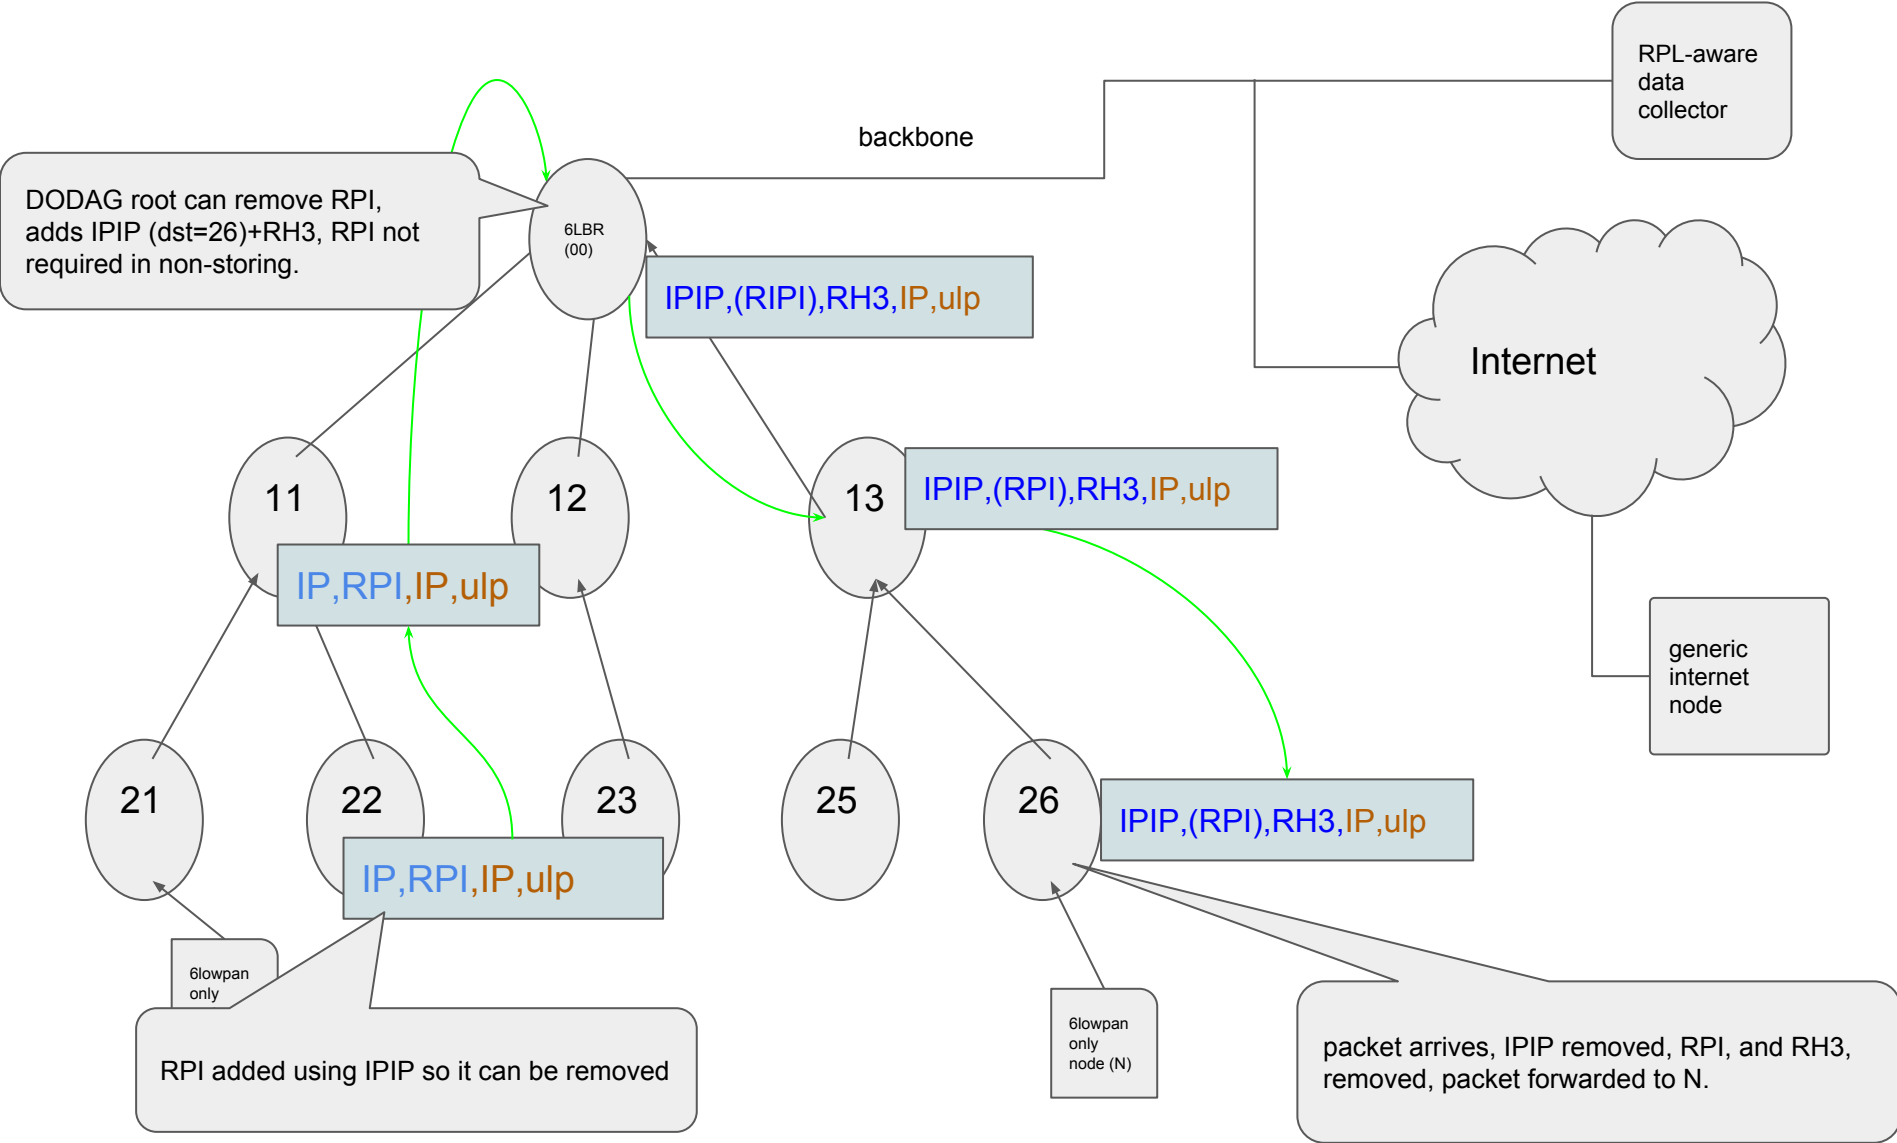

Next Steps.

TODO

Root initiated routing state in RPL

draft-thubert-dao-projection

Pascal Thubert
IETF 94

Yokohama, November 2025


Highlights

- Allows for centralized routing computation with RPL
E.g. Root coordinates with PCE
- Need topological information and / or device constraints
e.g. how many routes can a given RPL router store?
Can leverage TEAS / DETNET work
Enough topology info in non-storing route optimization at the root
- New: Added support for transversal route
Works for storing and non storing routes

New generic route optimization




Application
Server D

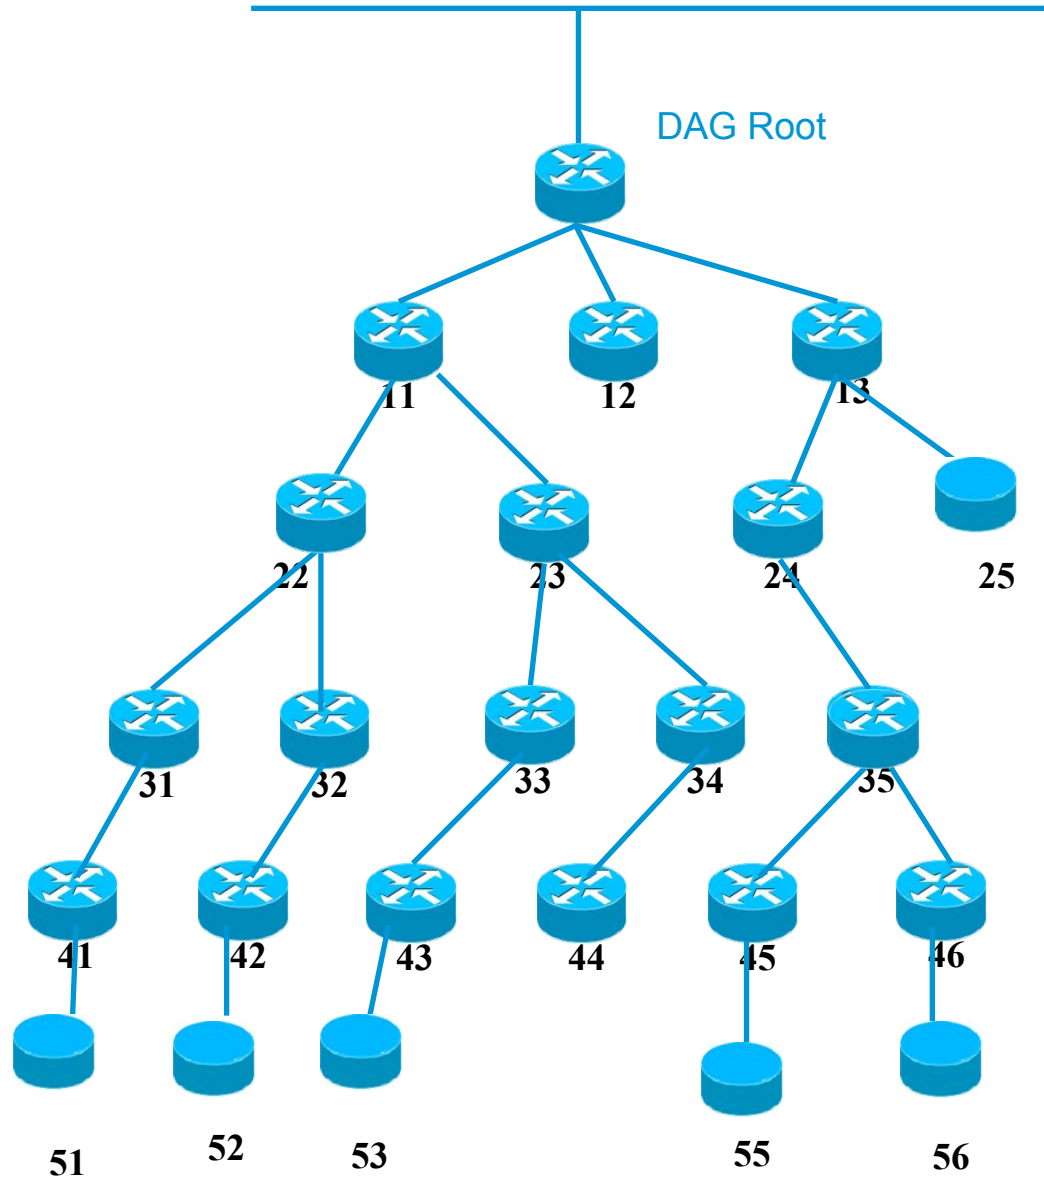



Application
Server D


Stretch in non-storing mode

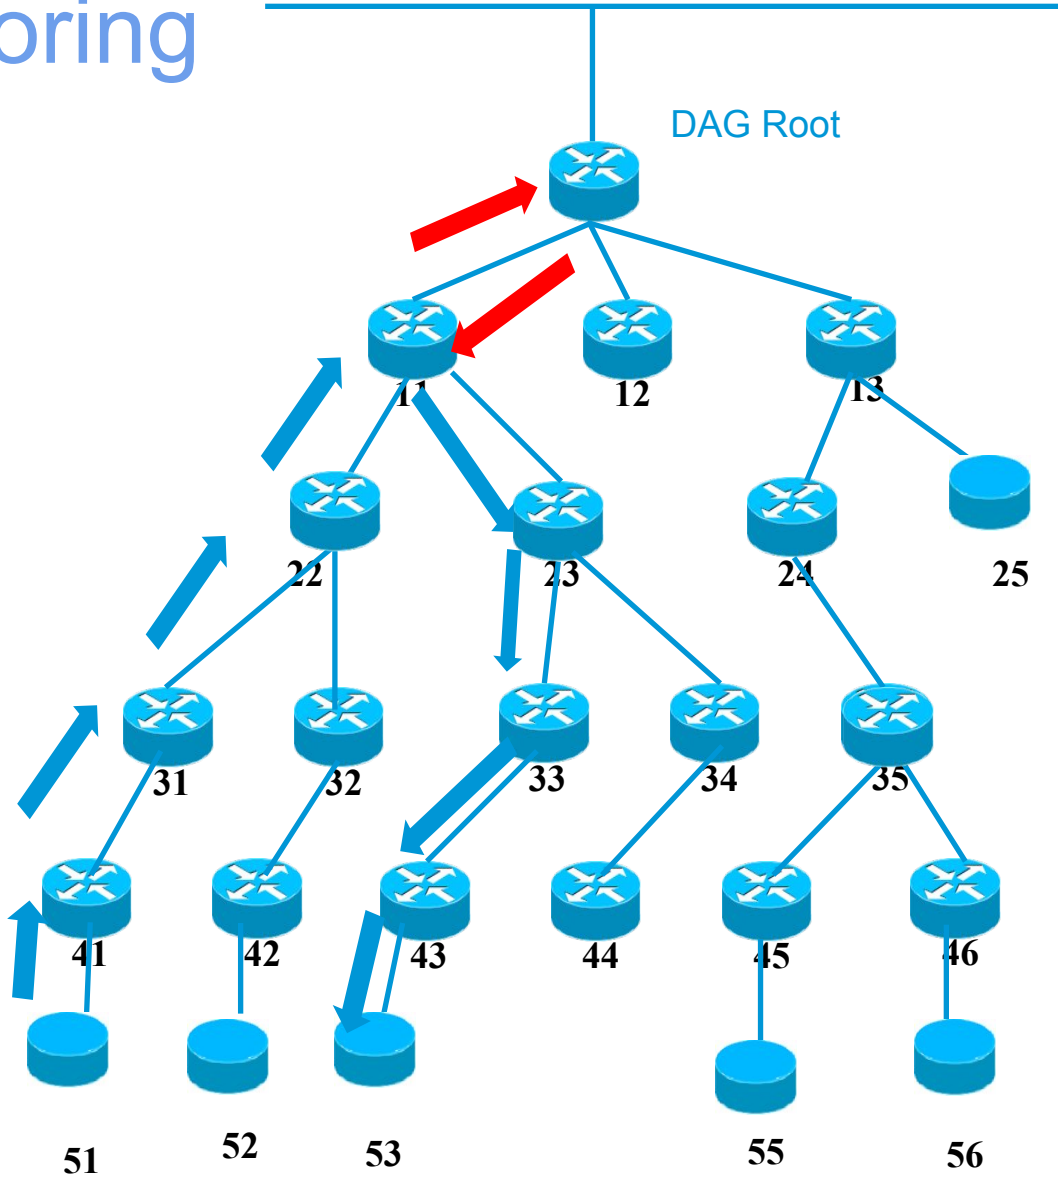

Stretch in storing mode



Application Server D

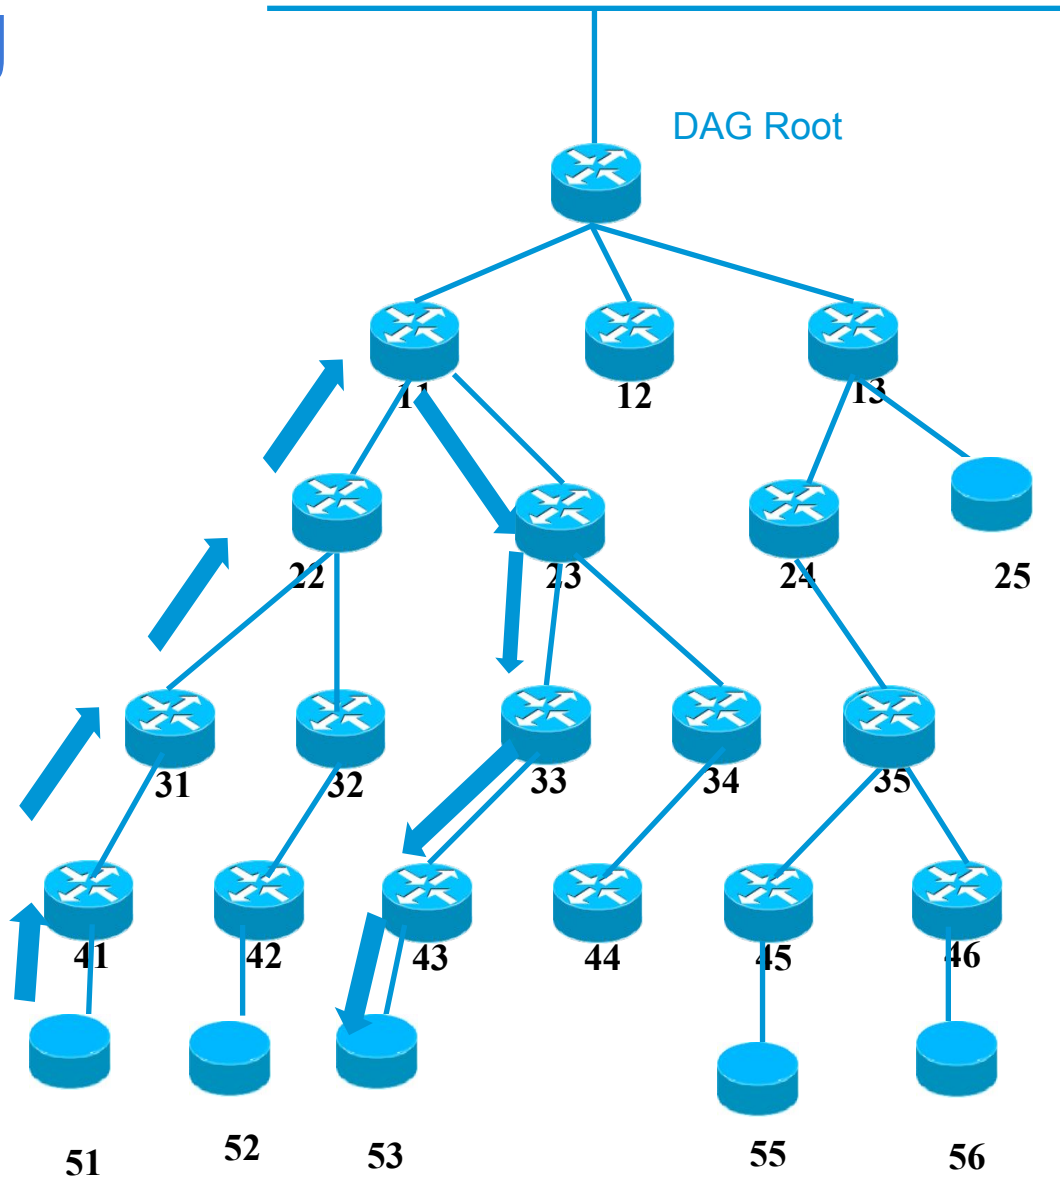




Application Server D

DAO projection

New (projected) DAO with path segment unicast to target 53 via 41 (ingress), 42 and 43 (egress)

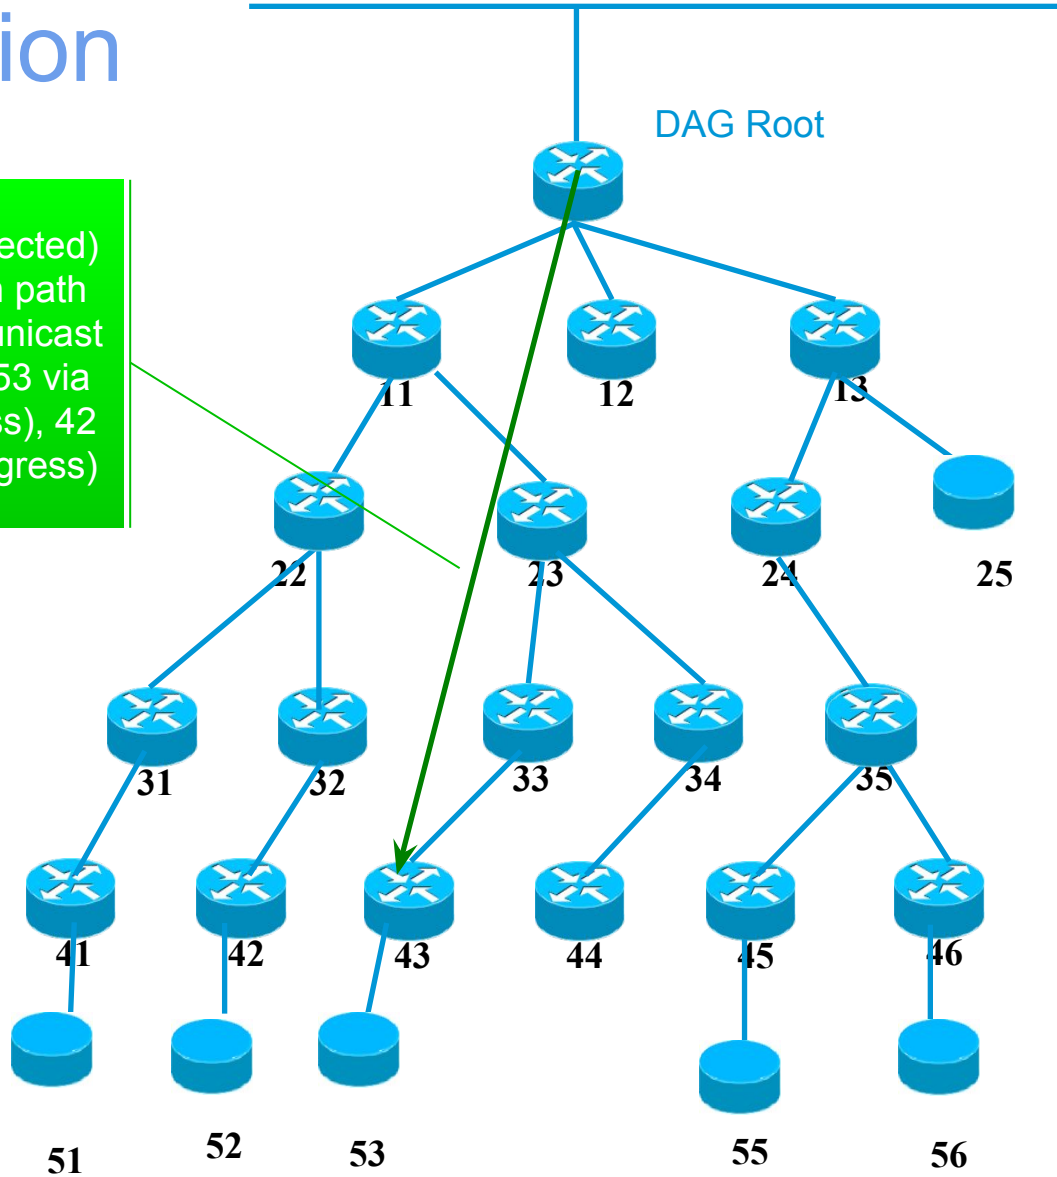




Application Server D

DAO projection

Storing mode DAO (forced) with lifetime along segment

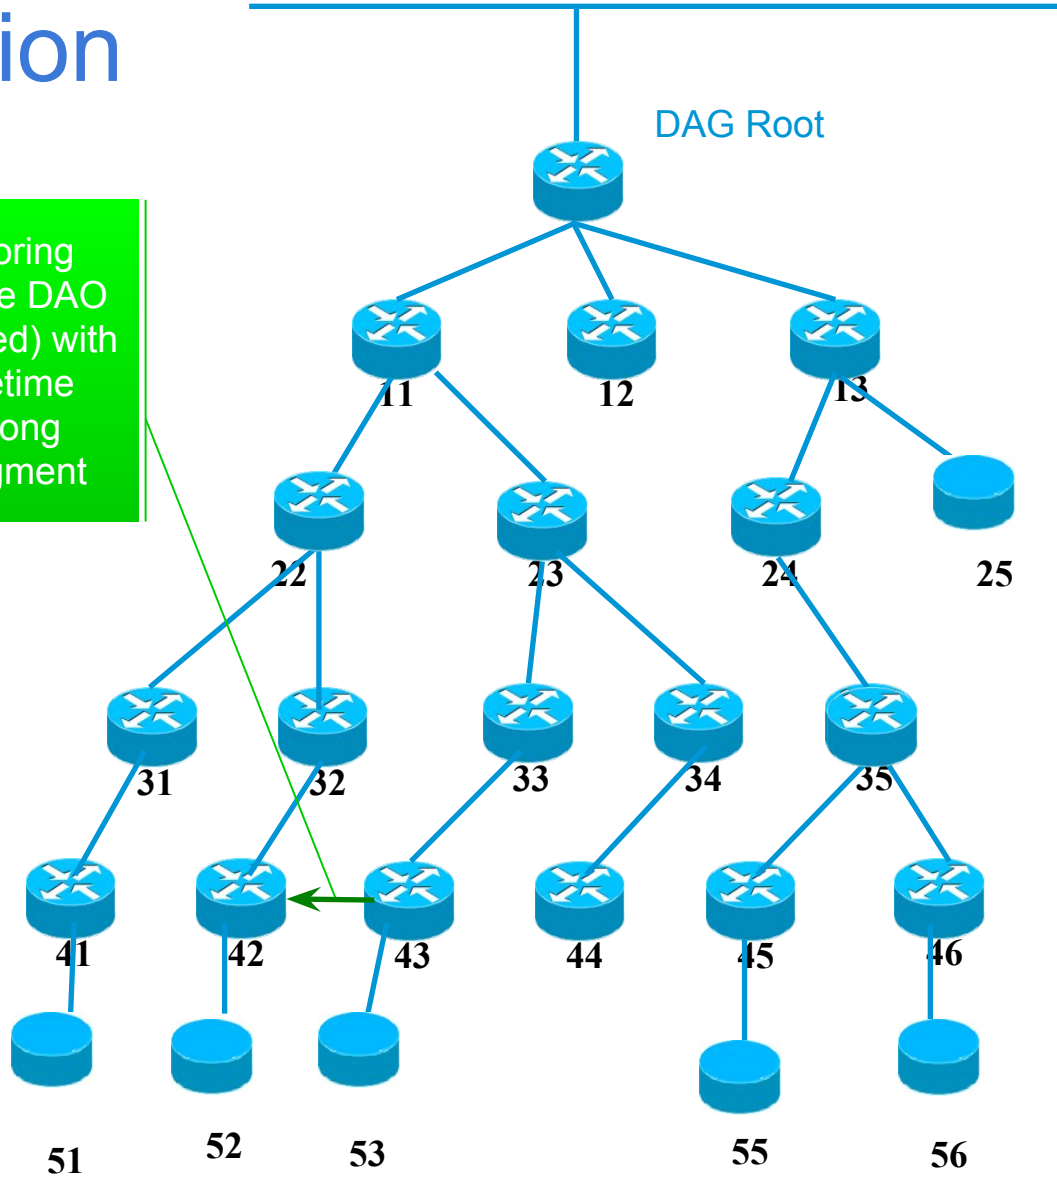




Application
Server D

DAO projection

Storing
mode DAO
(forced) with
lifetime
along
segment

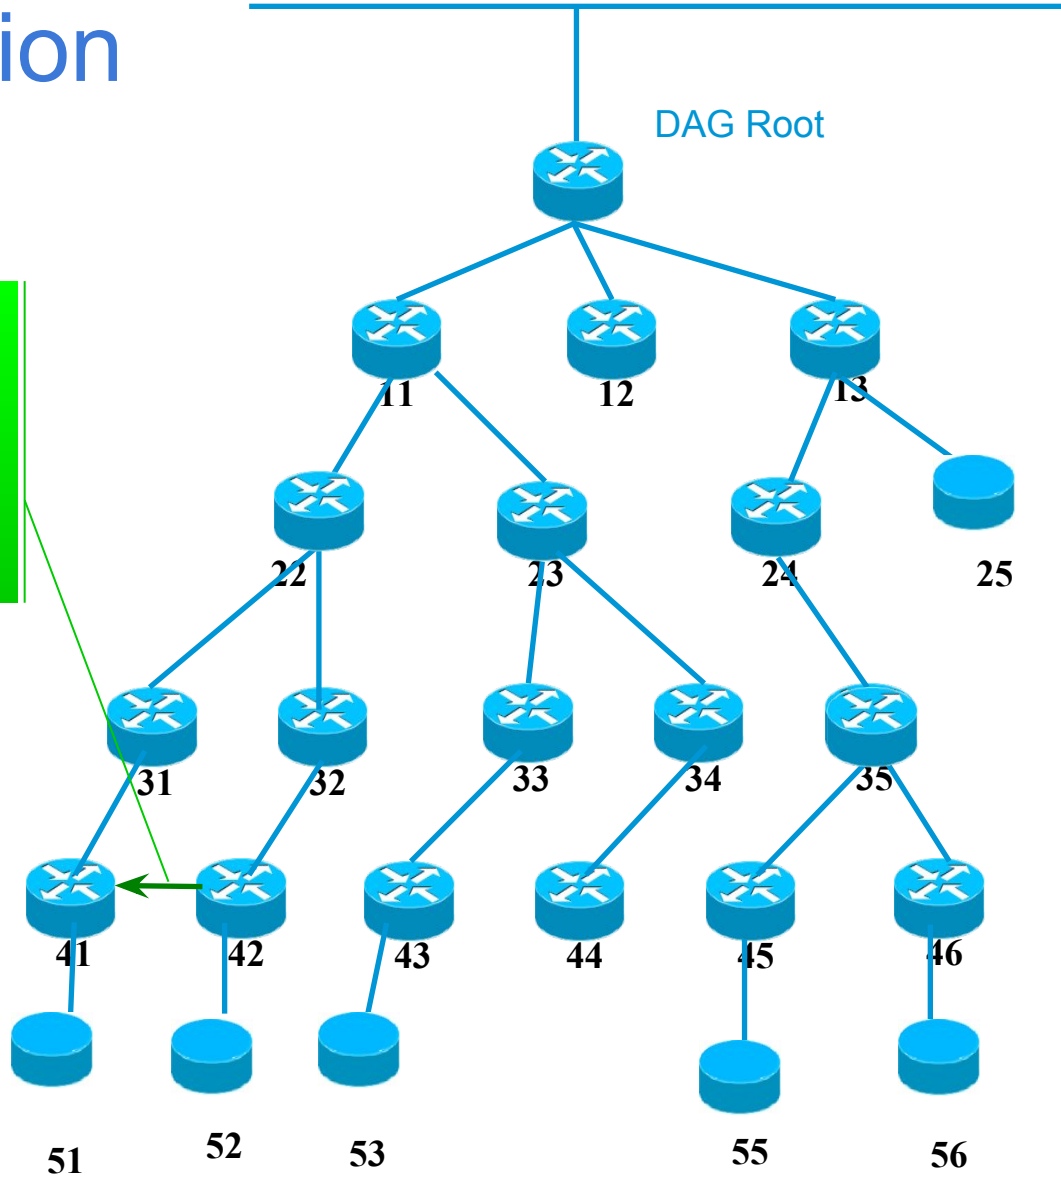




Application Server D

DAO projection


DAO-ACK unicast, self 41 as parent, final destination 53 as target

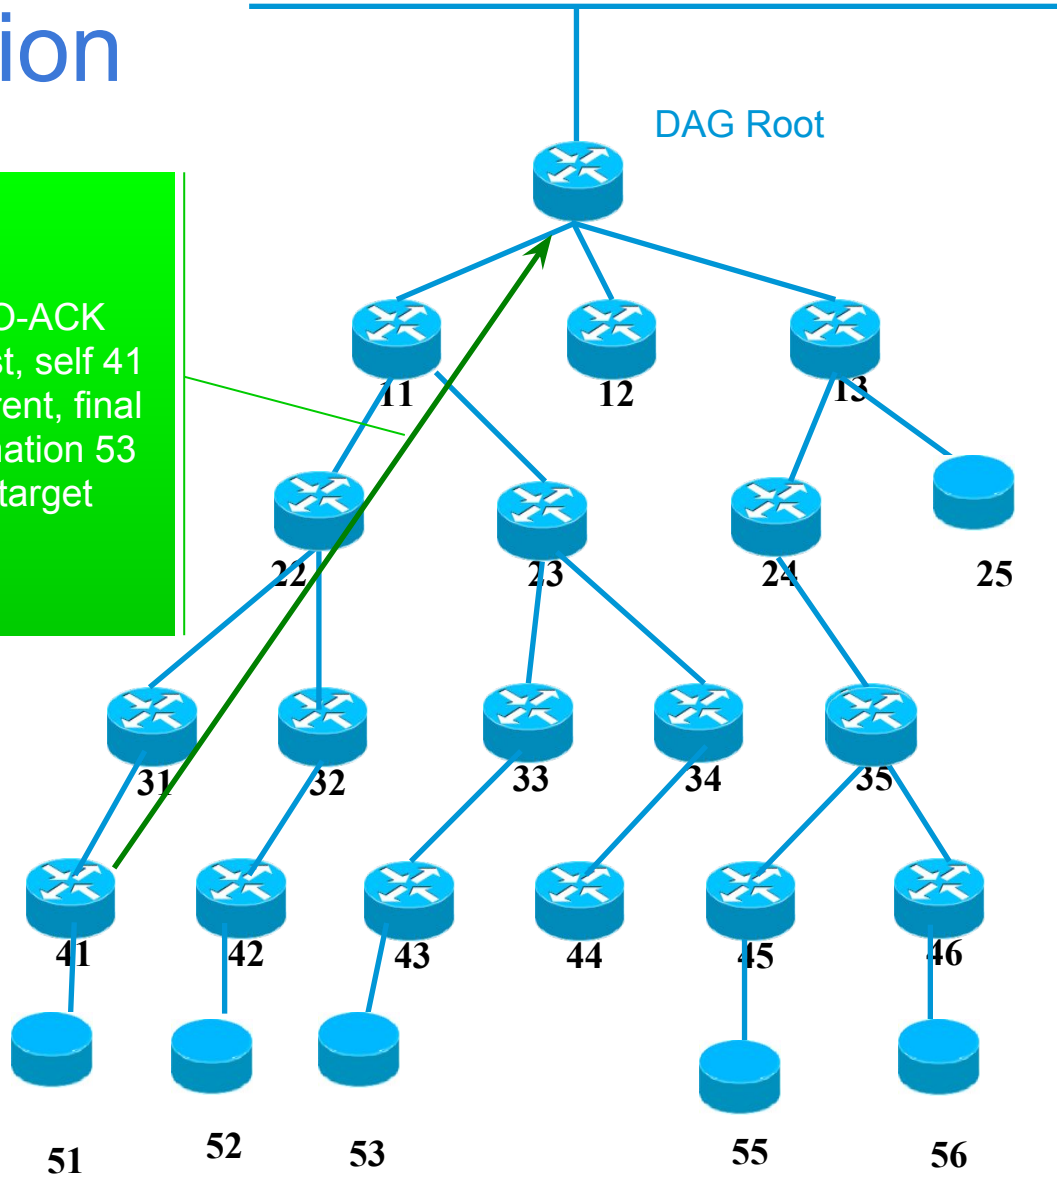



Application Server D


Optimized Path

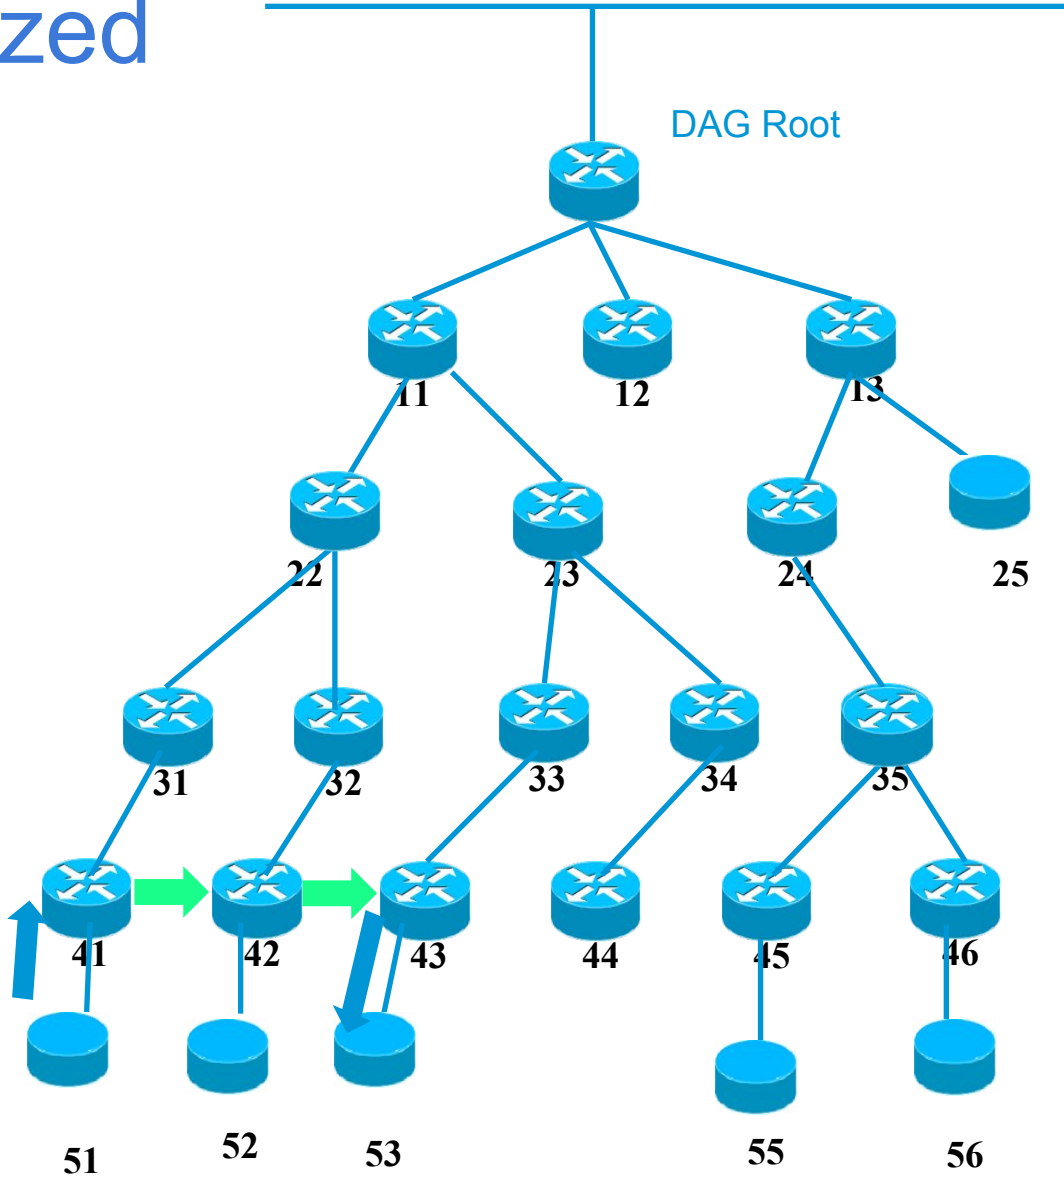

Existing non storing optimization




Application Server D

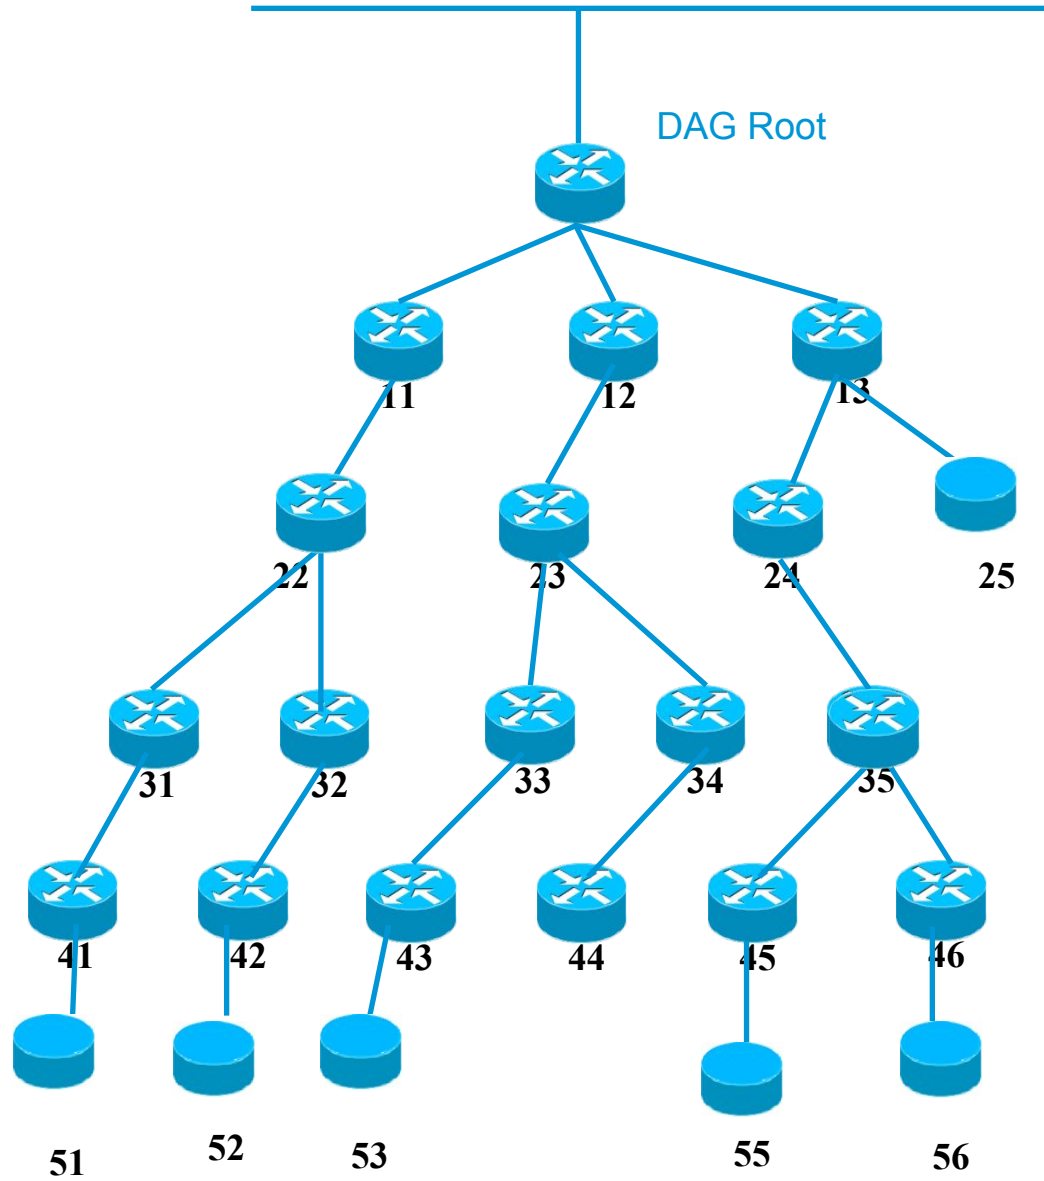




Application Server D

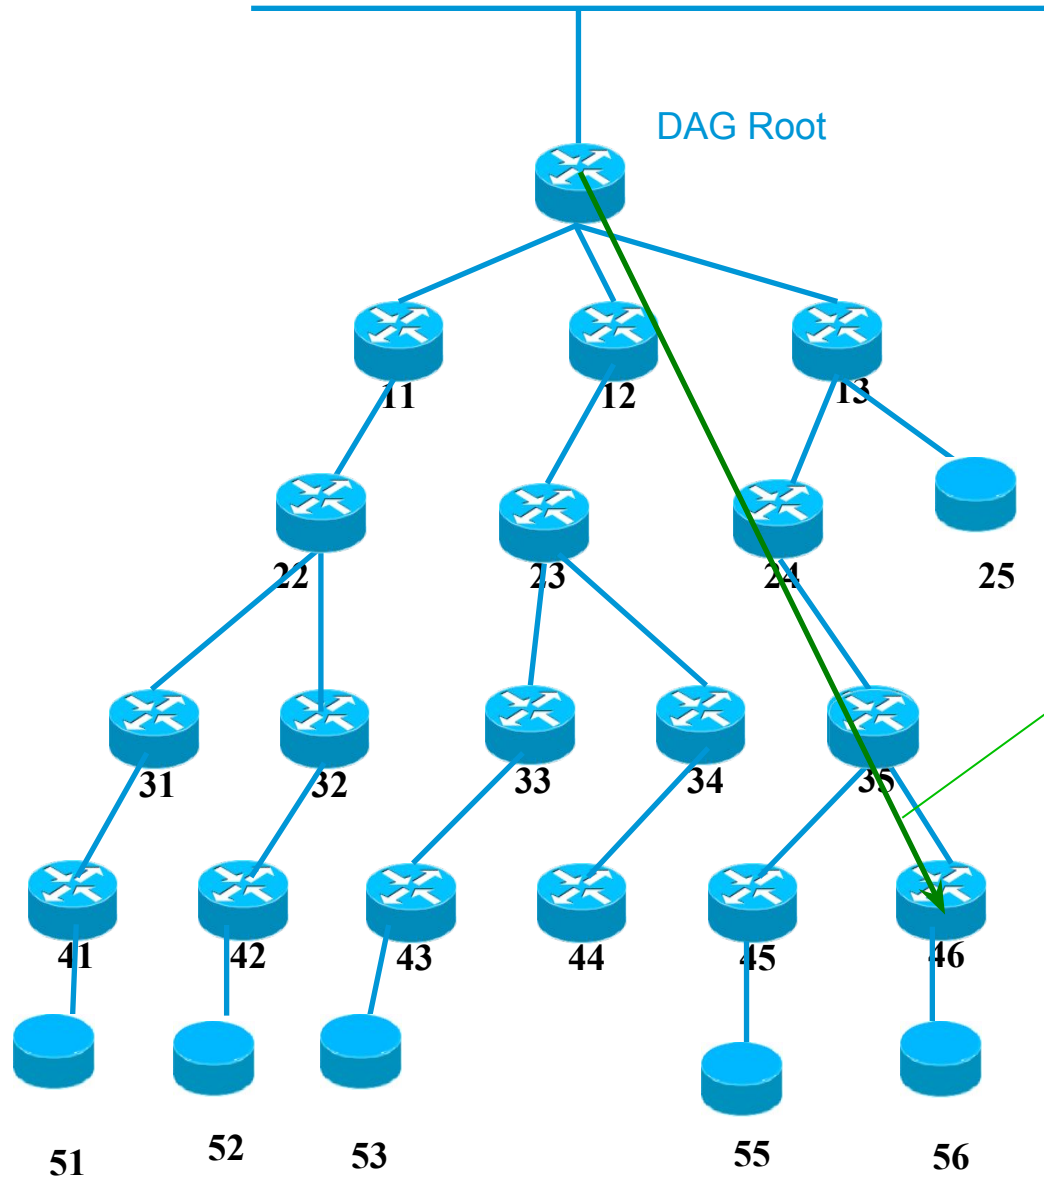

New (projected) DAO with path segment unicast to target 56 via 35 (ingress) and 46 (egress)




Application
Server D

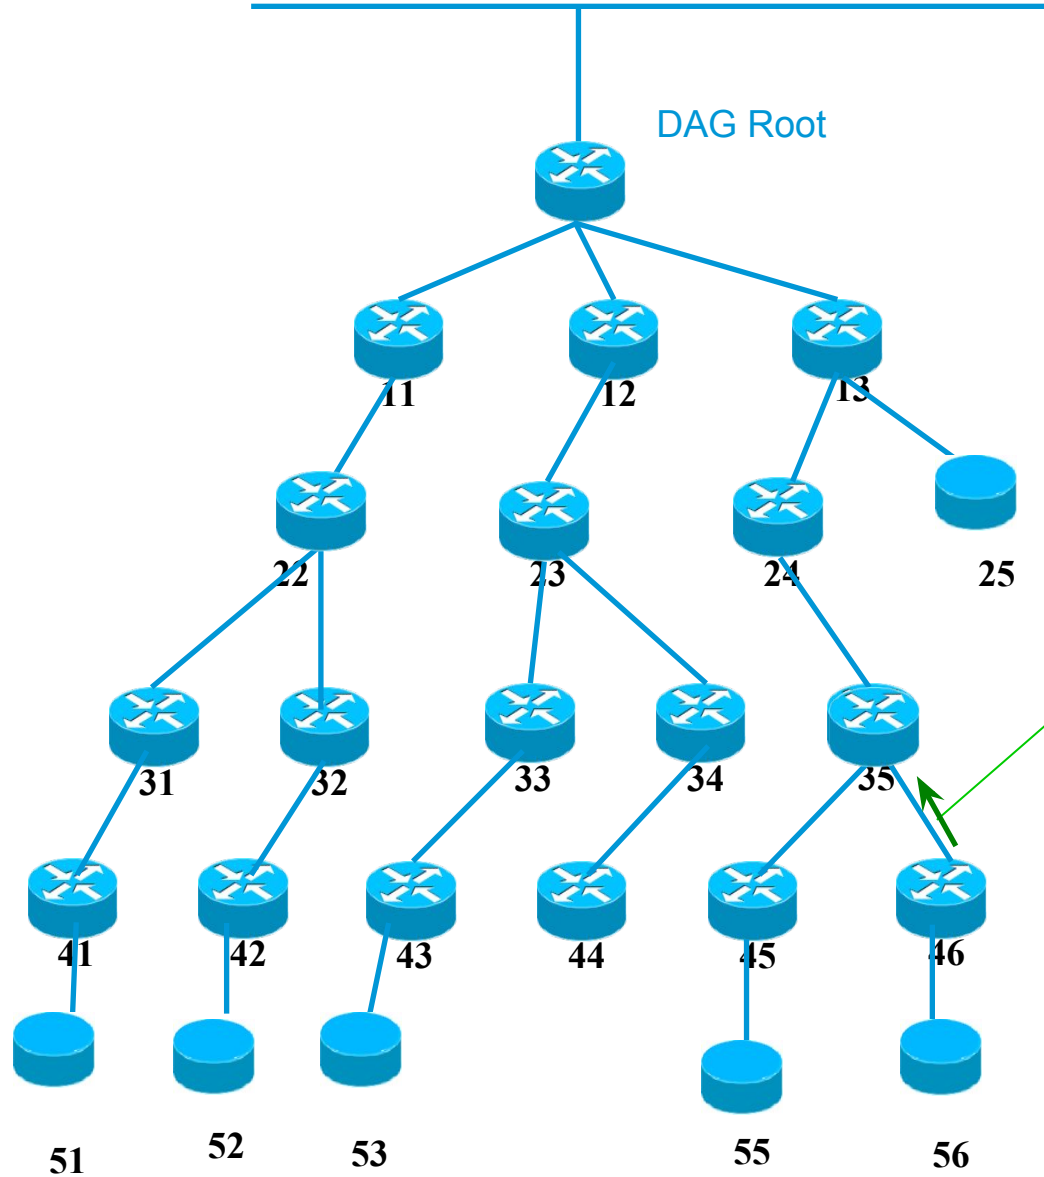

mode
DAO
(forced)
with
lifetime
along




Application
Server D

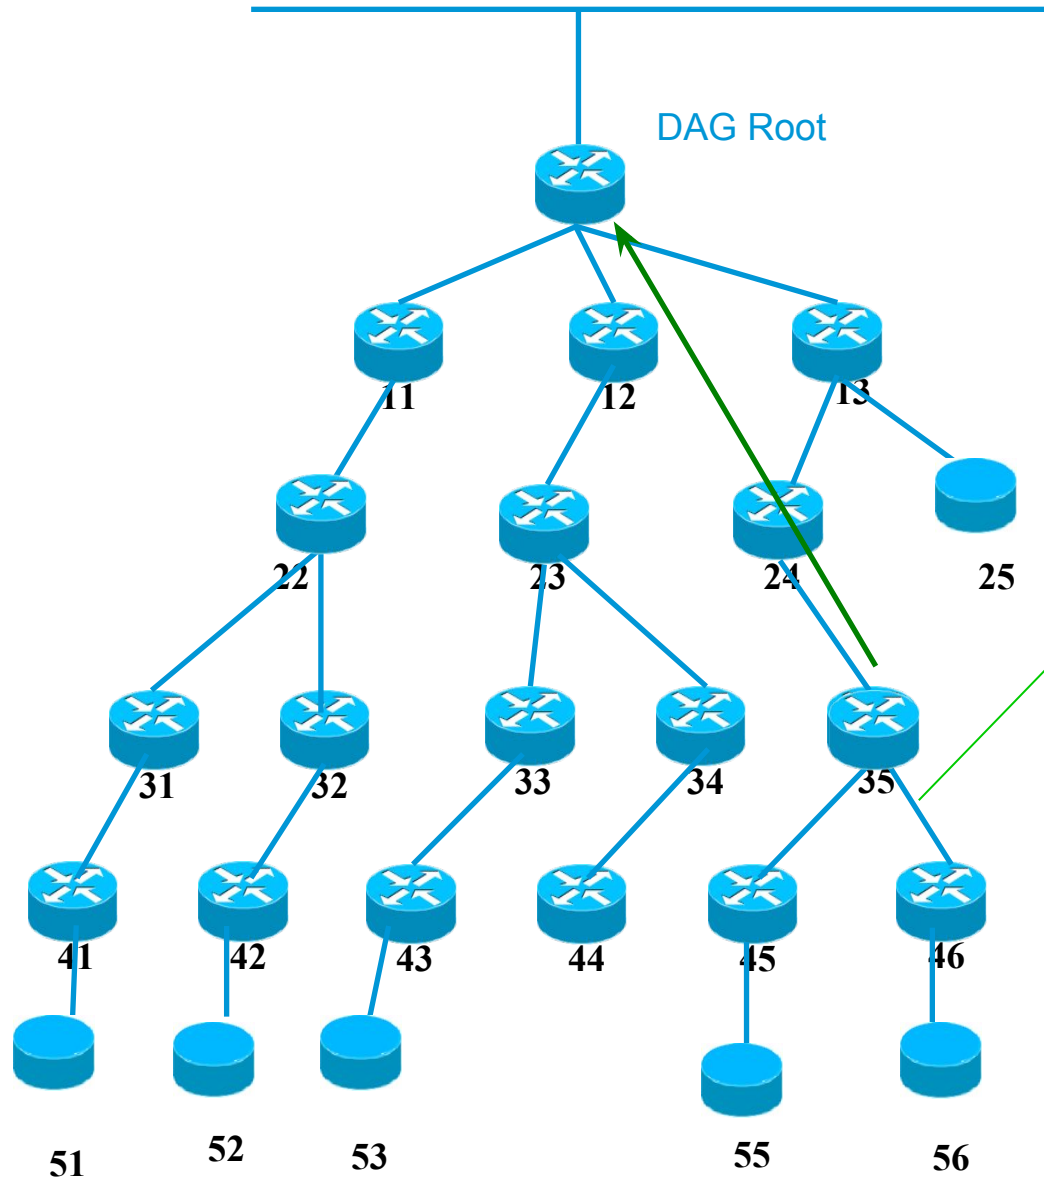

DAO-ACK (alt:
non storing
DAO) unicast,
self 35 as
parent, final
destination 56
as target



Application
Server D

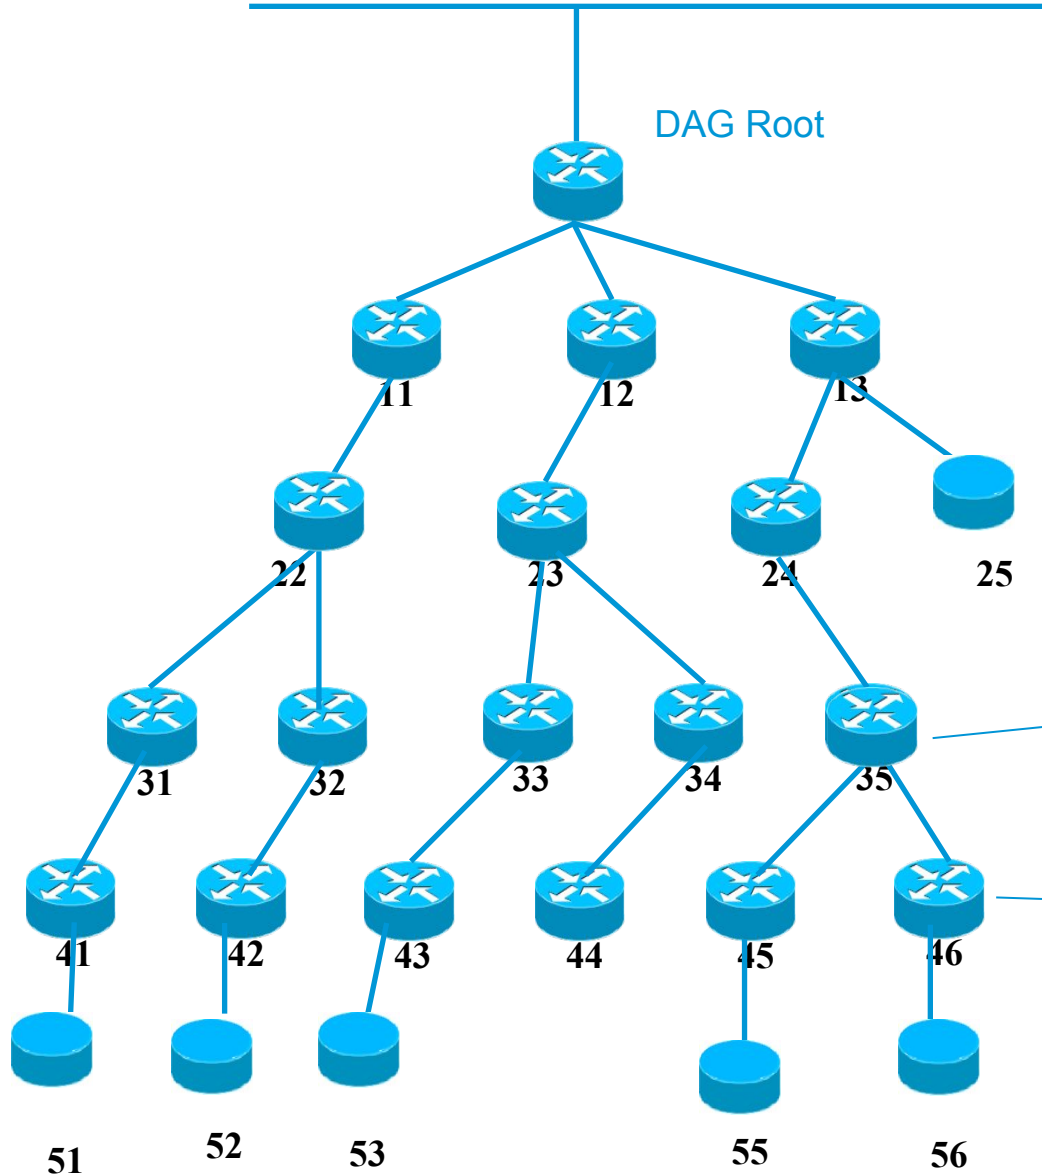


DAO from 46 installs a route to 56 in 35 (all nodes in projected route from ingress included to egress excluded) => egress should already have a route to target

56 via 46

Preexisting connected route to 56




Application Server D

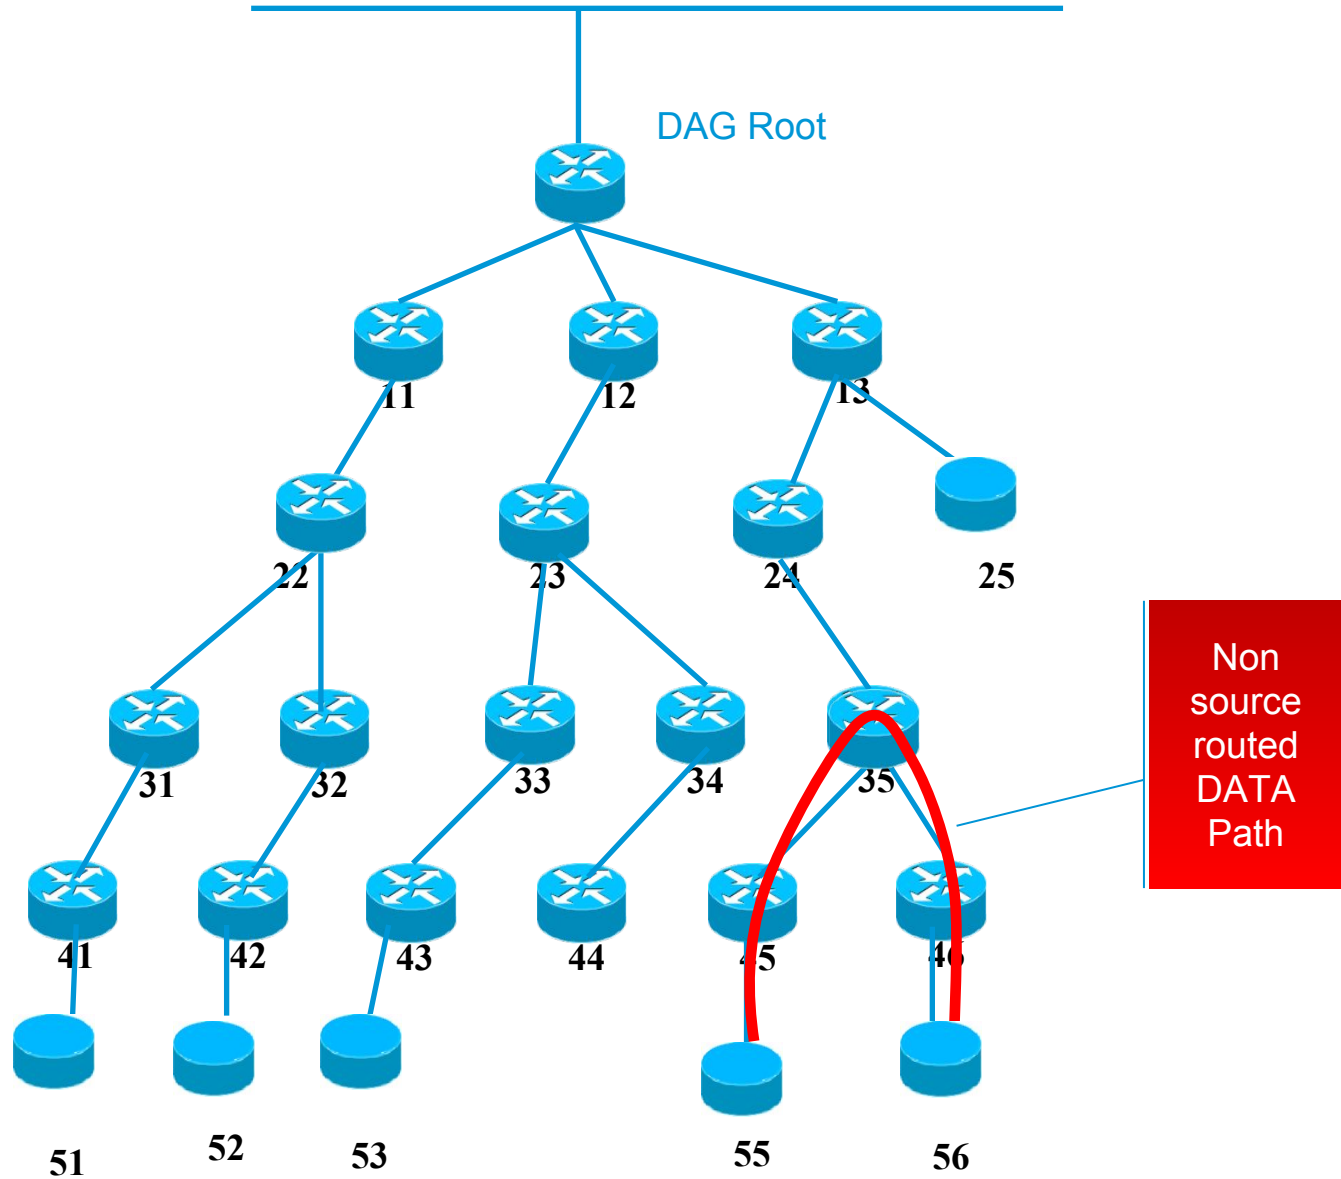



Application Server D

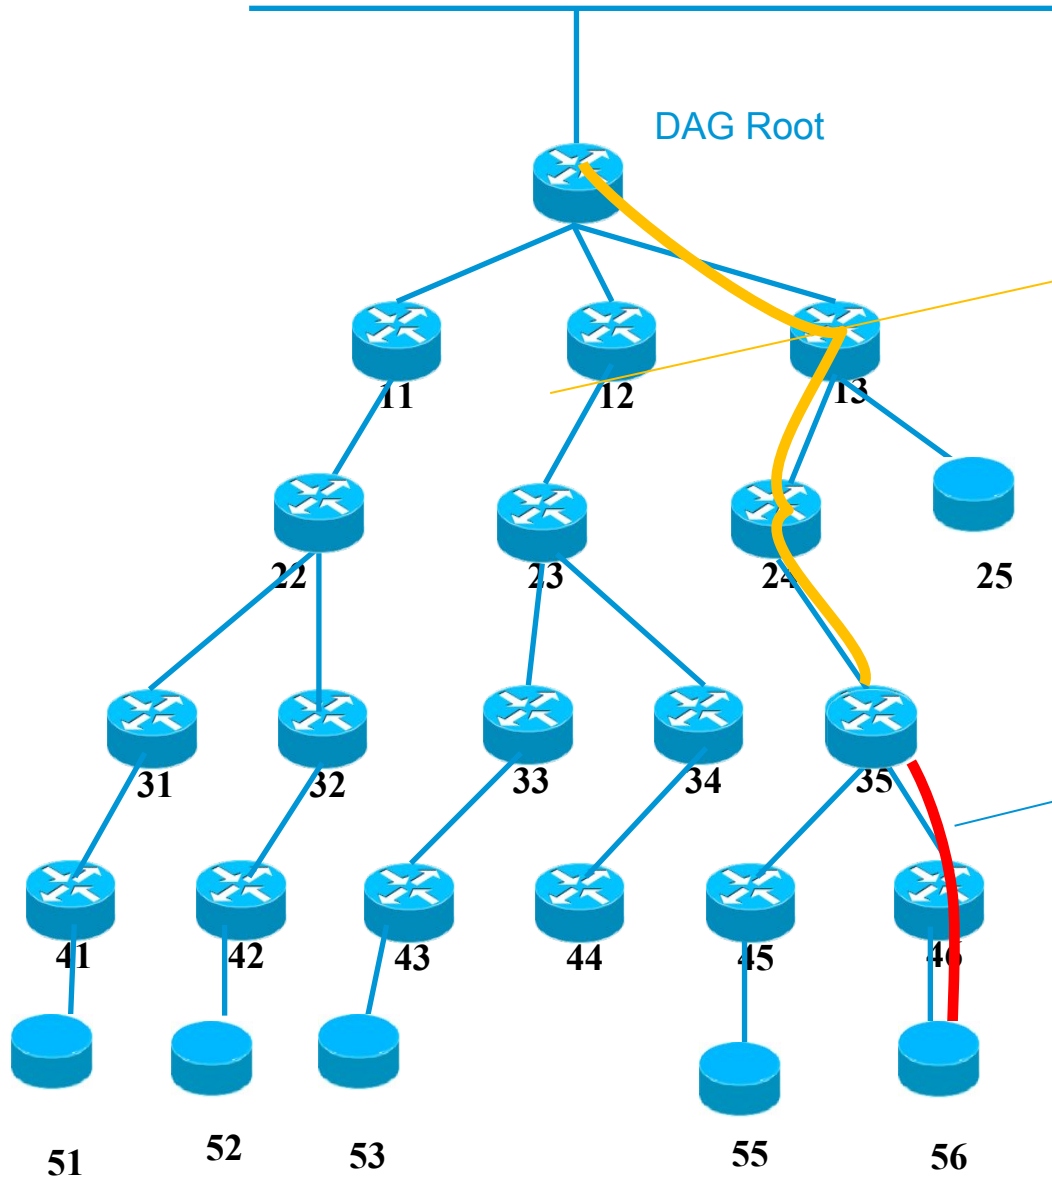


Loose Source routed DATA Path Packet to 13, RH 24, 35, 56

Non source routed DATA Path




Application
Server D

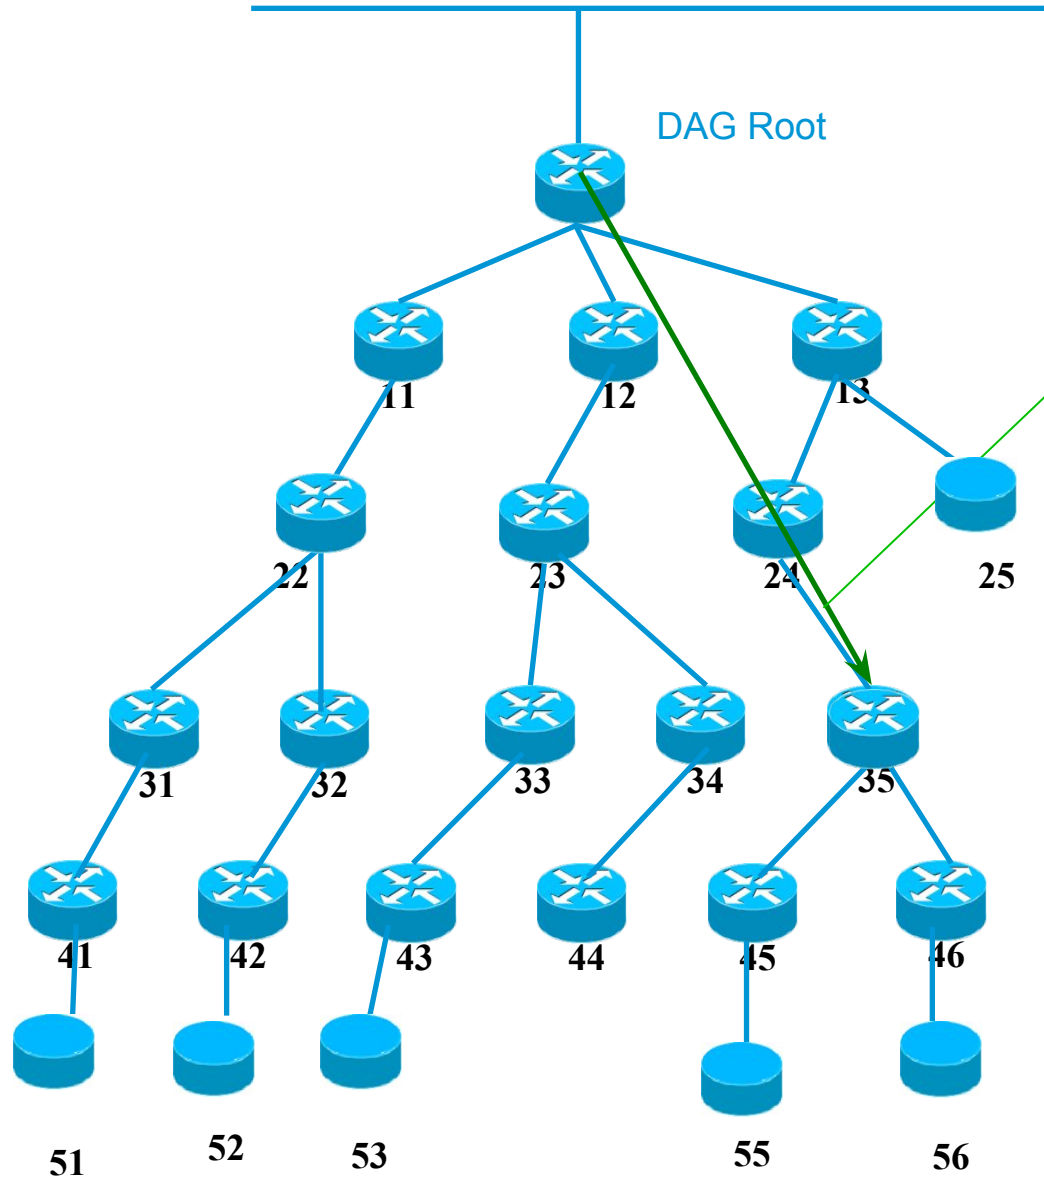

Adding New
(projected) DAO
with path
segment unicast
to target 56 via
13 (ingress), 24,
and 35 (egress)




Application Server D

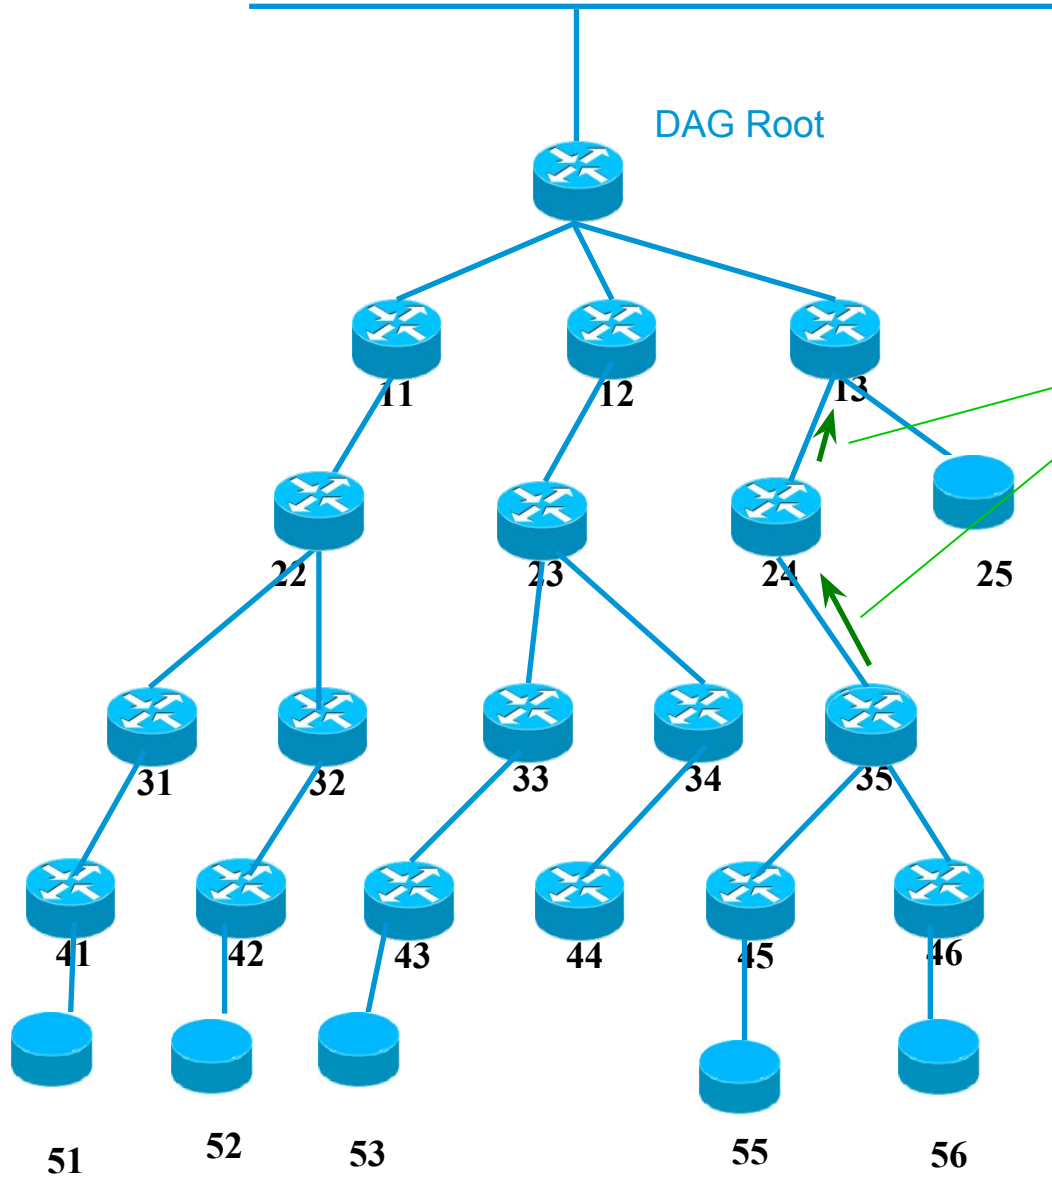

Storing mode DAO (forced) with lifetime along segment




Application
Server D

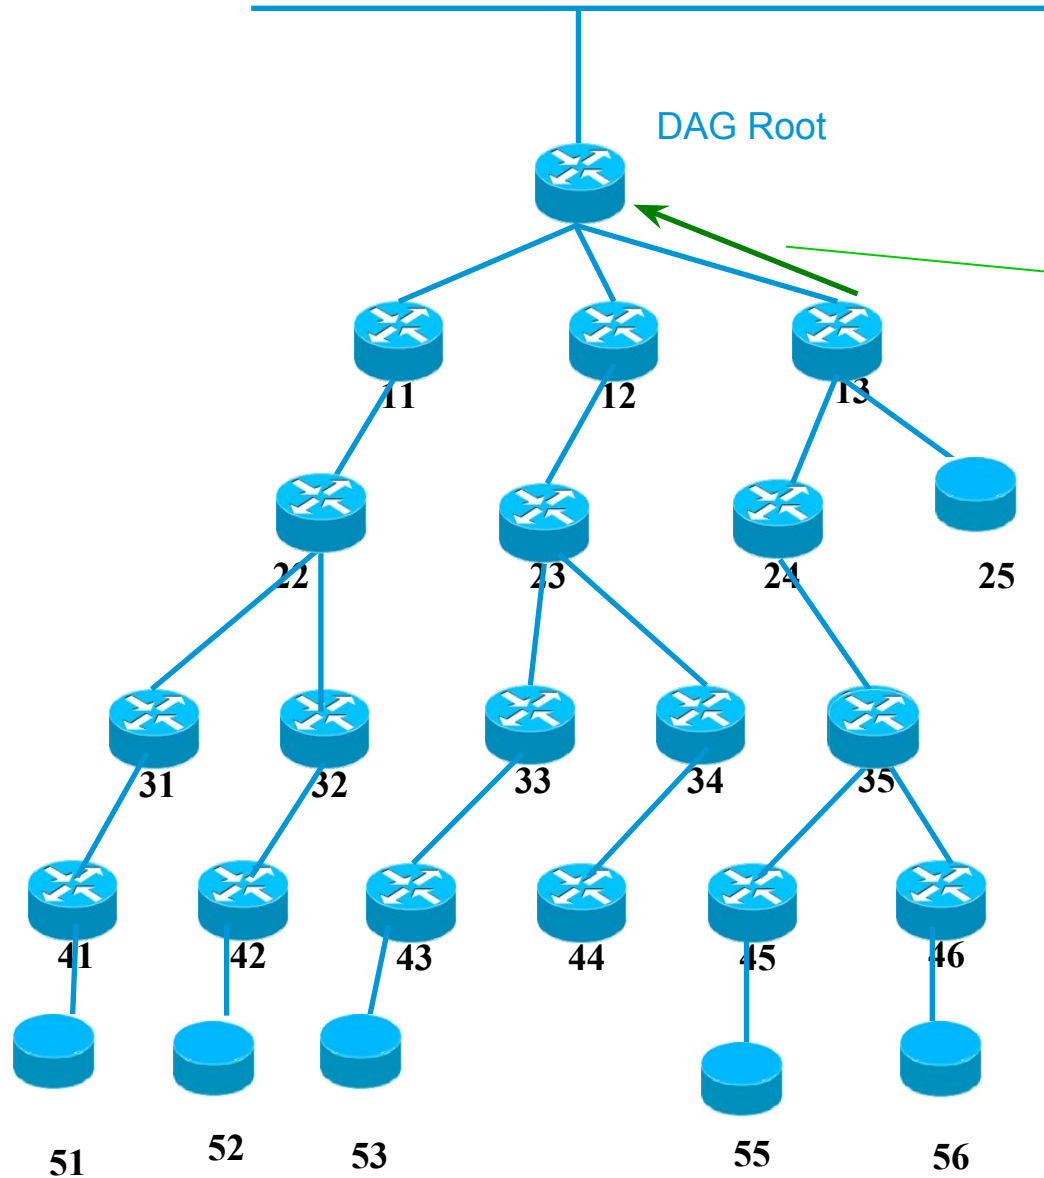

DAO-ACK (alt:
non storing
DAO) unicast,
self 13 as
parent, final
destination 56
as target




Application Server D

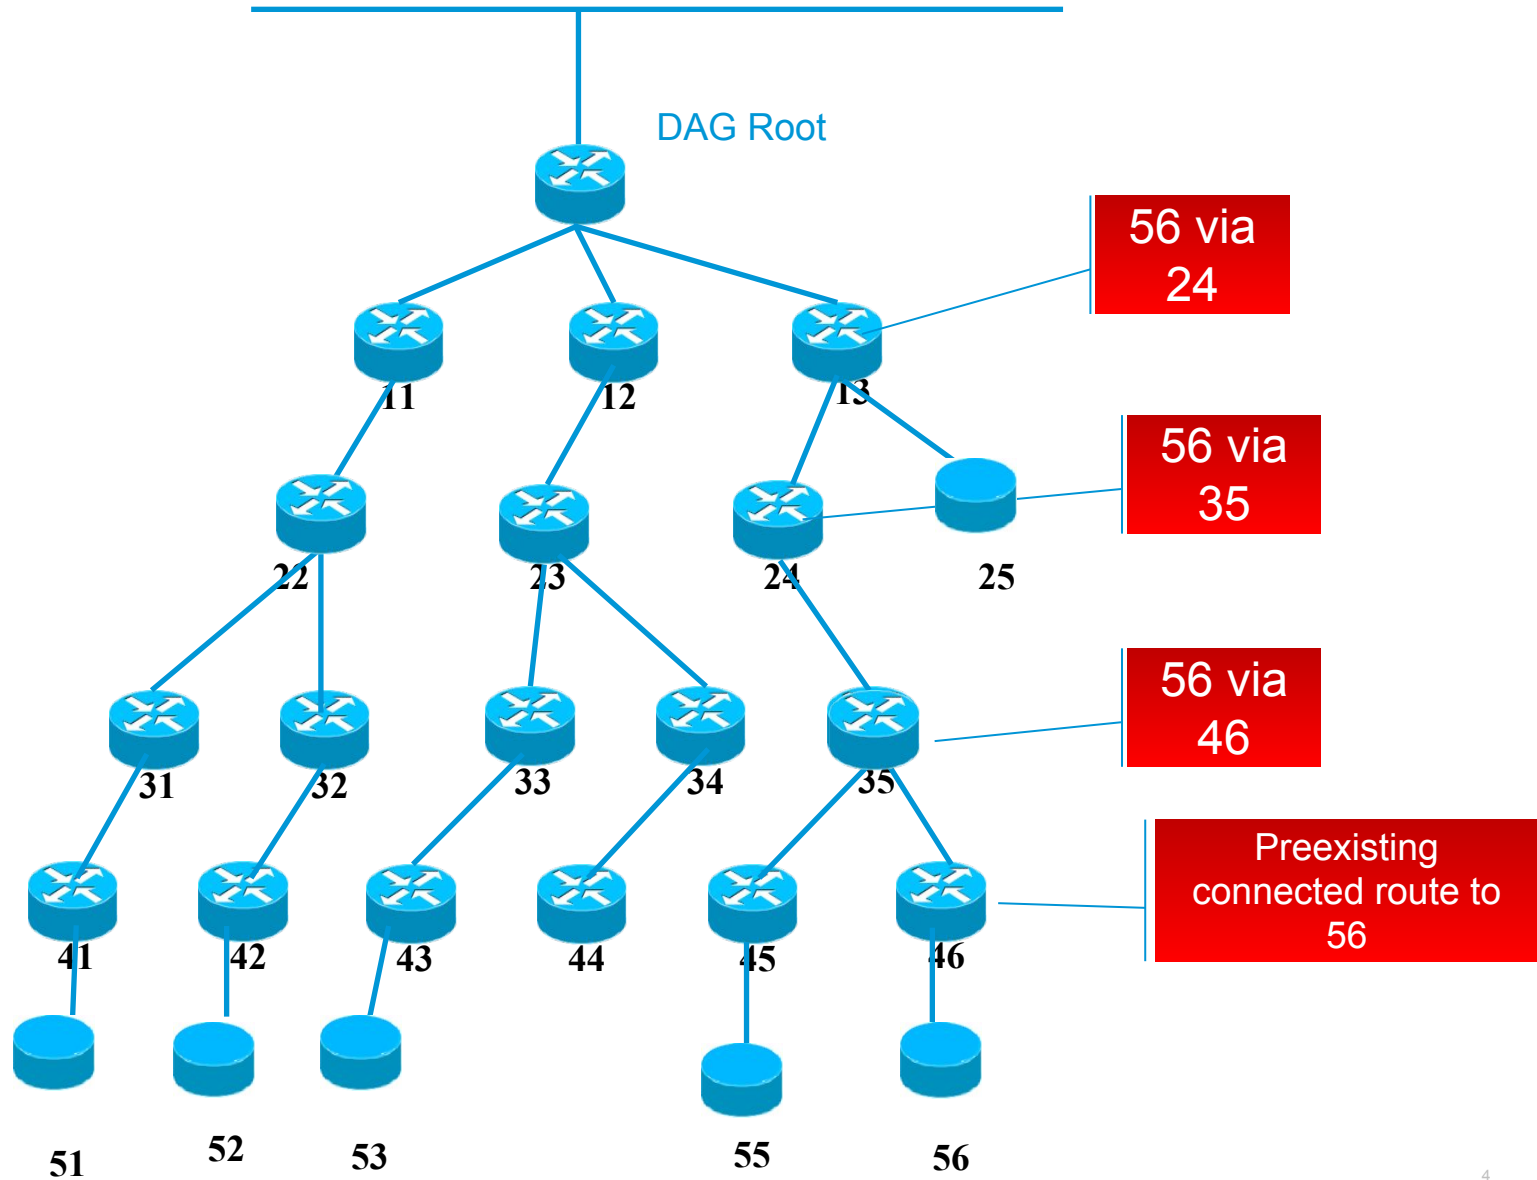



Application
Server D

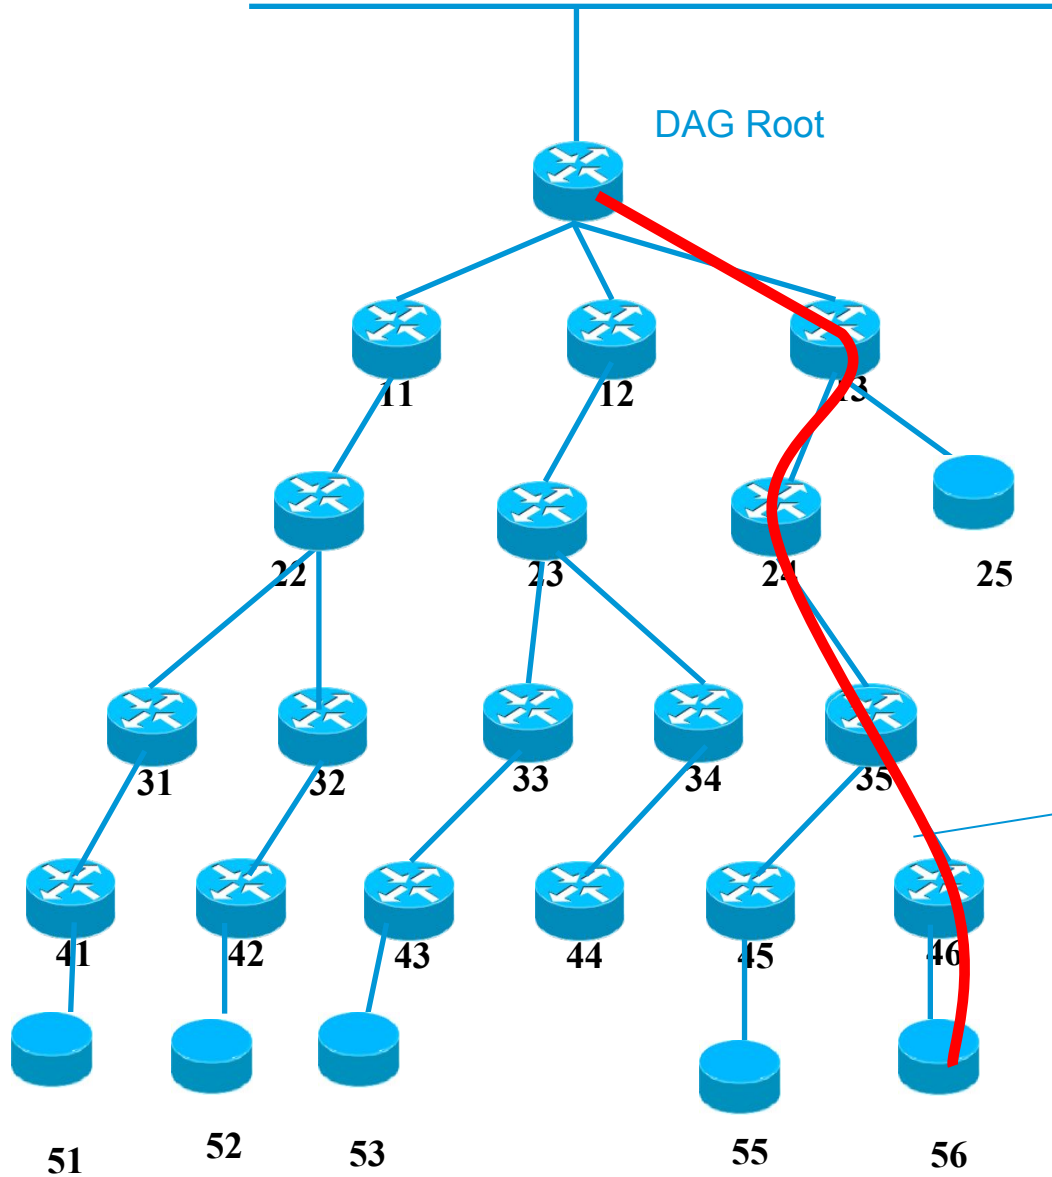


Non source
routed
DATA Path



Application Server D


Alternate Programming By the root (Michael)

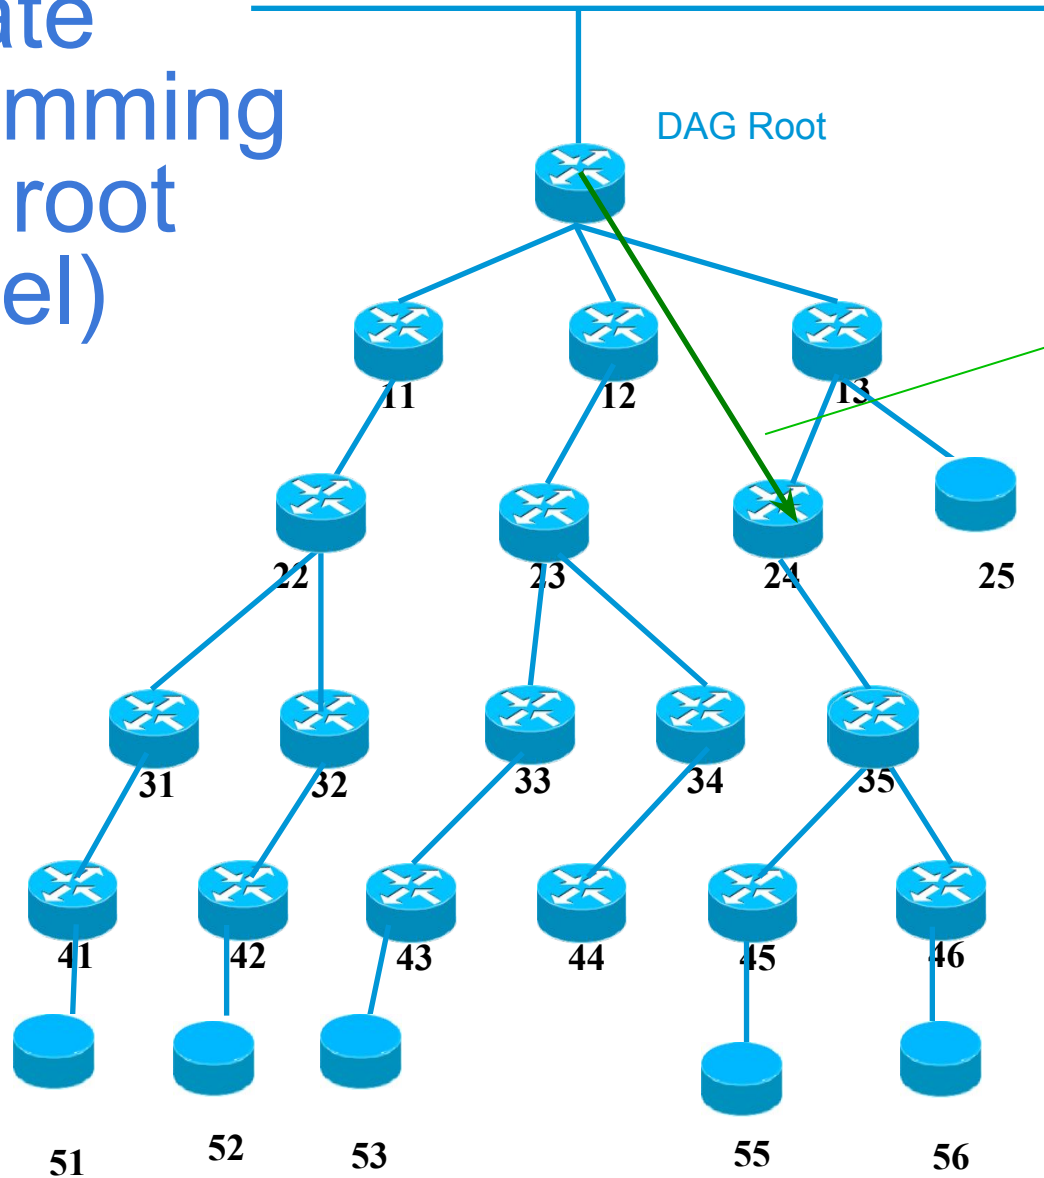

ALT: Adding New (projected) DAO with path segment unicast to target 35 via 13 (ingress) and 24 (egress)




Application
Server D

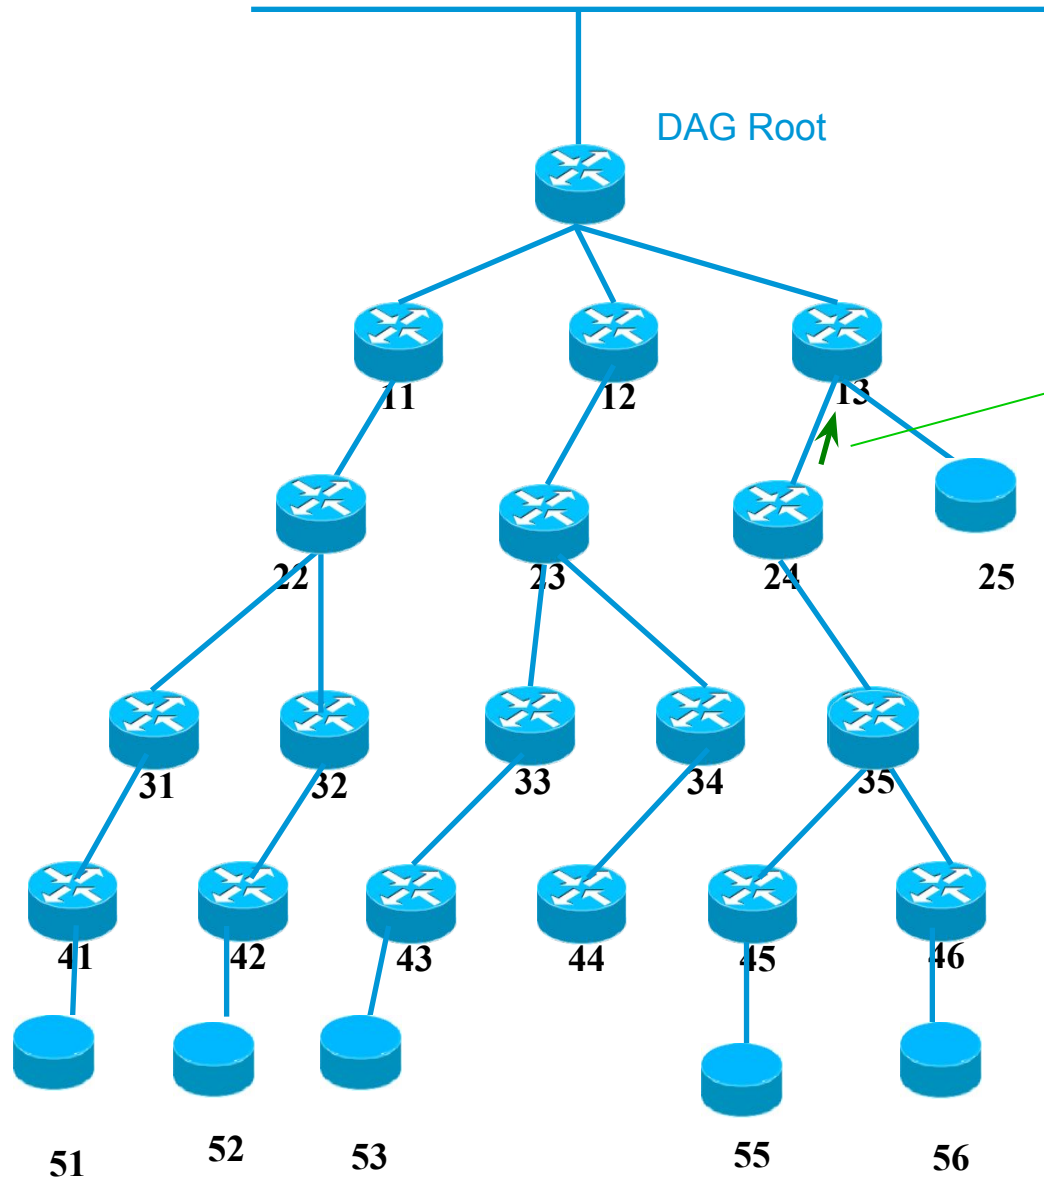

Storing
mode DAO
(forced) with
lifetime
along
segment




Application
Server D

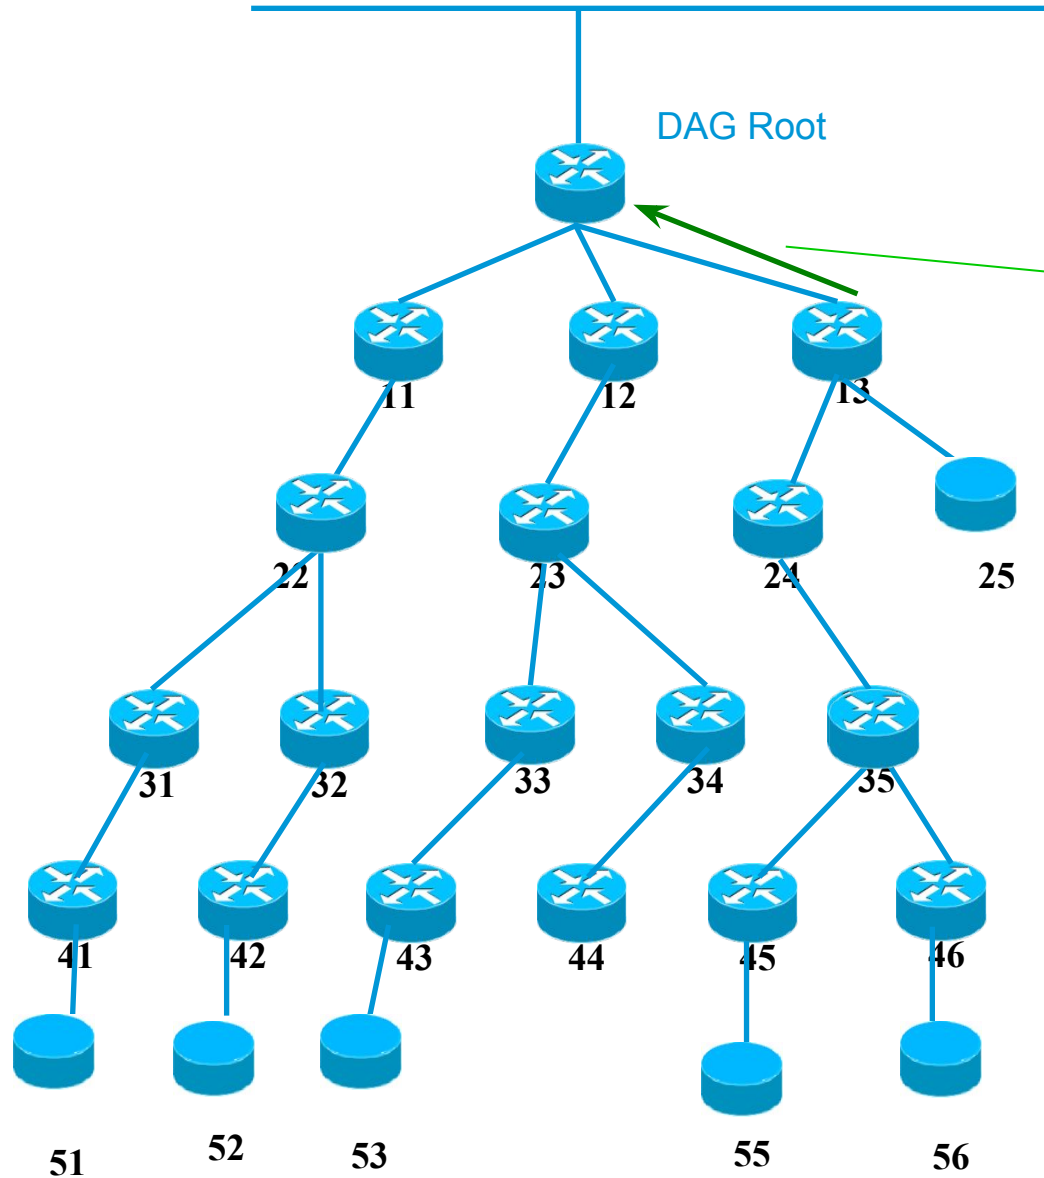

DAO-ACK (alt:
non storing
DAO) unicast,
self 13 as
parent, final
destination 56
as target




Application Server D

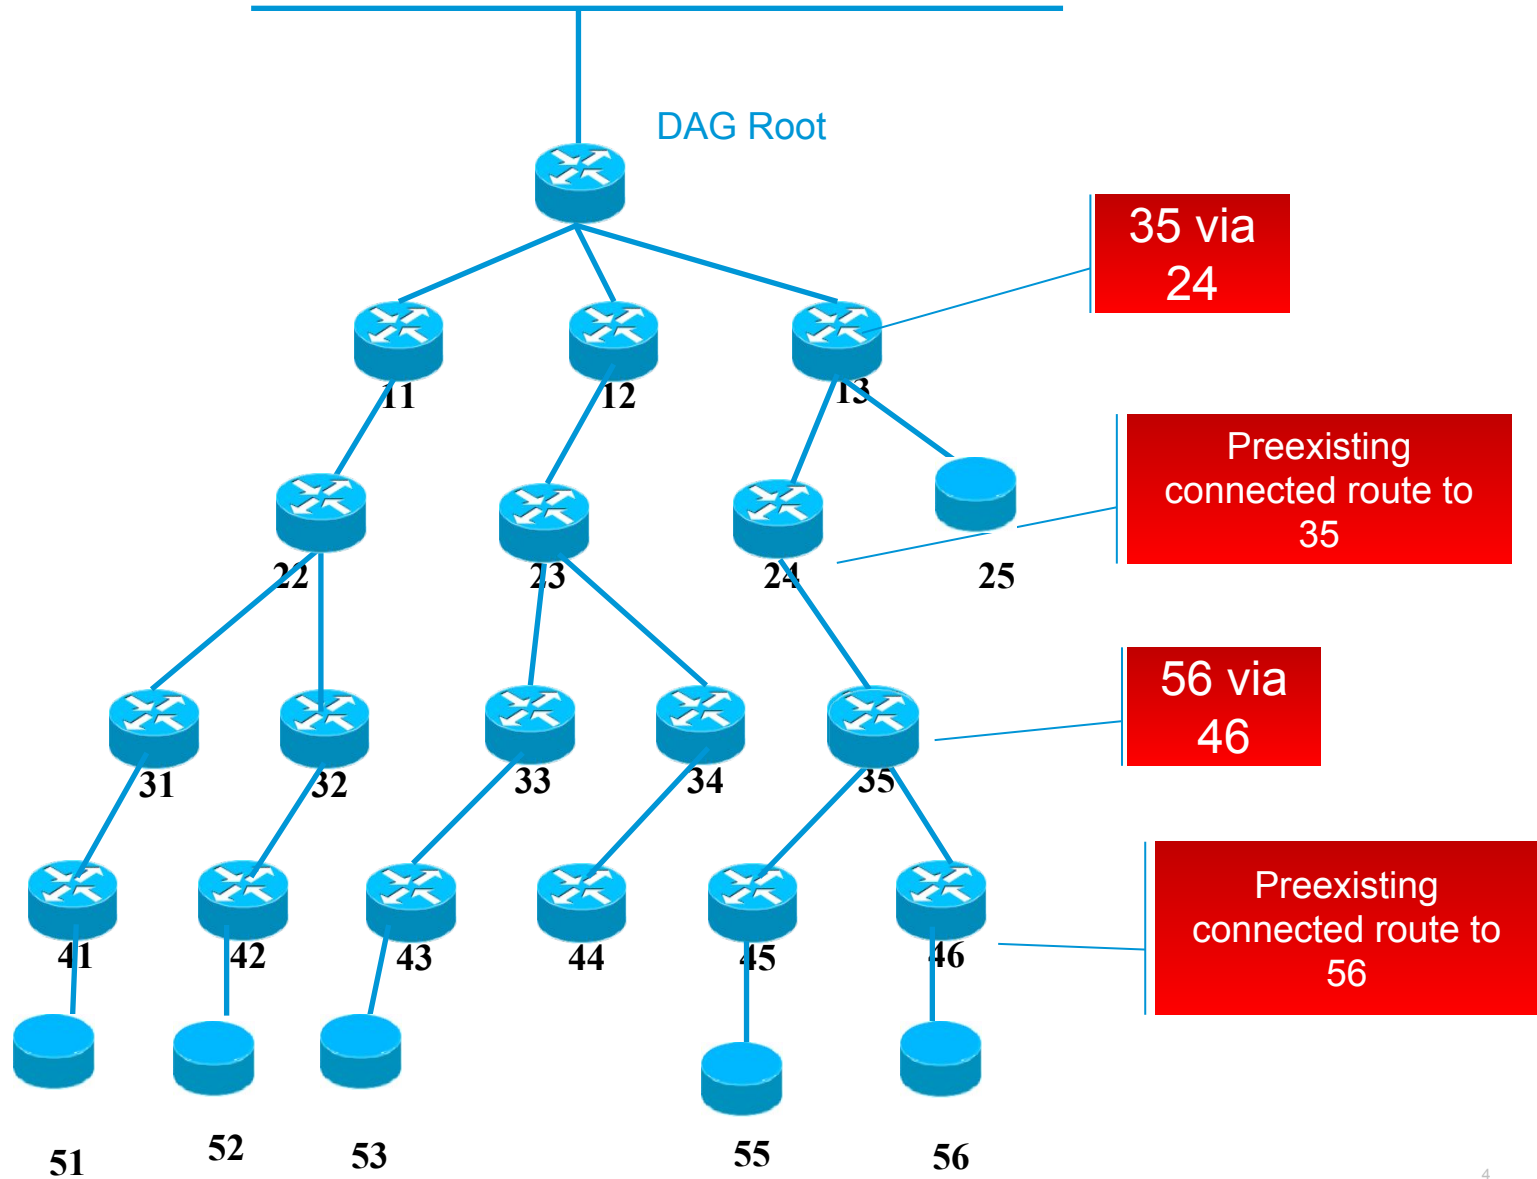



Application Server D

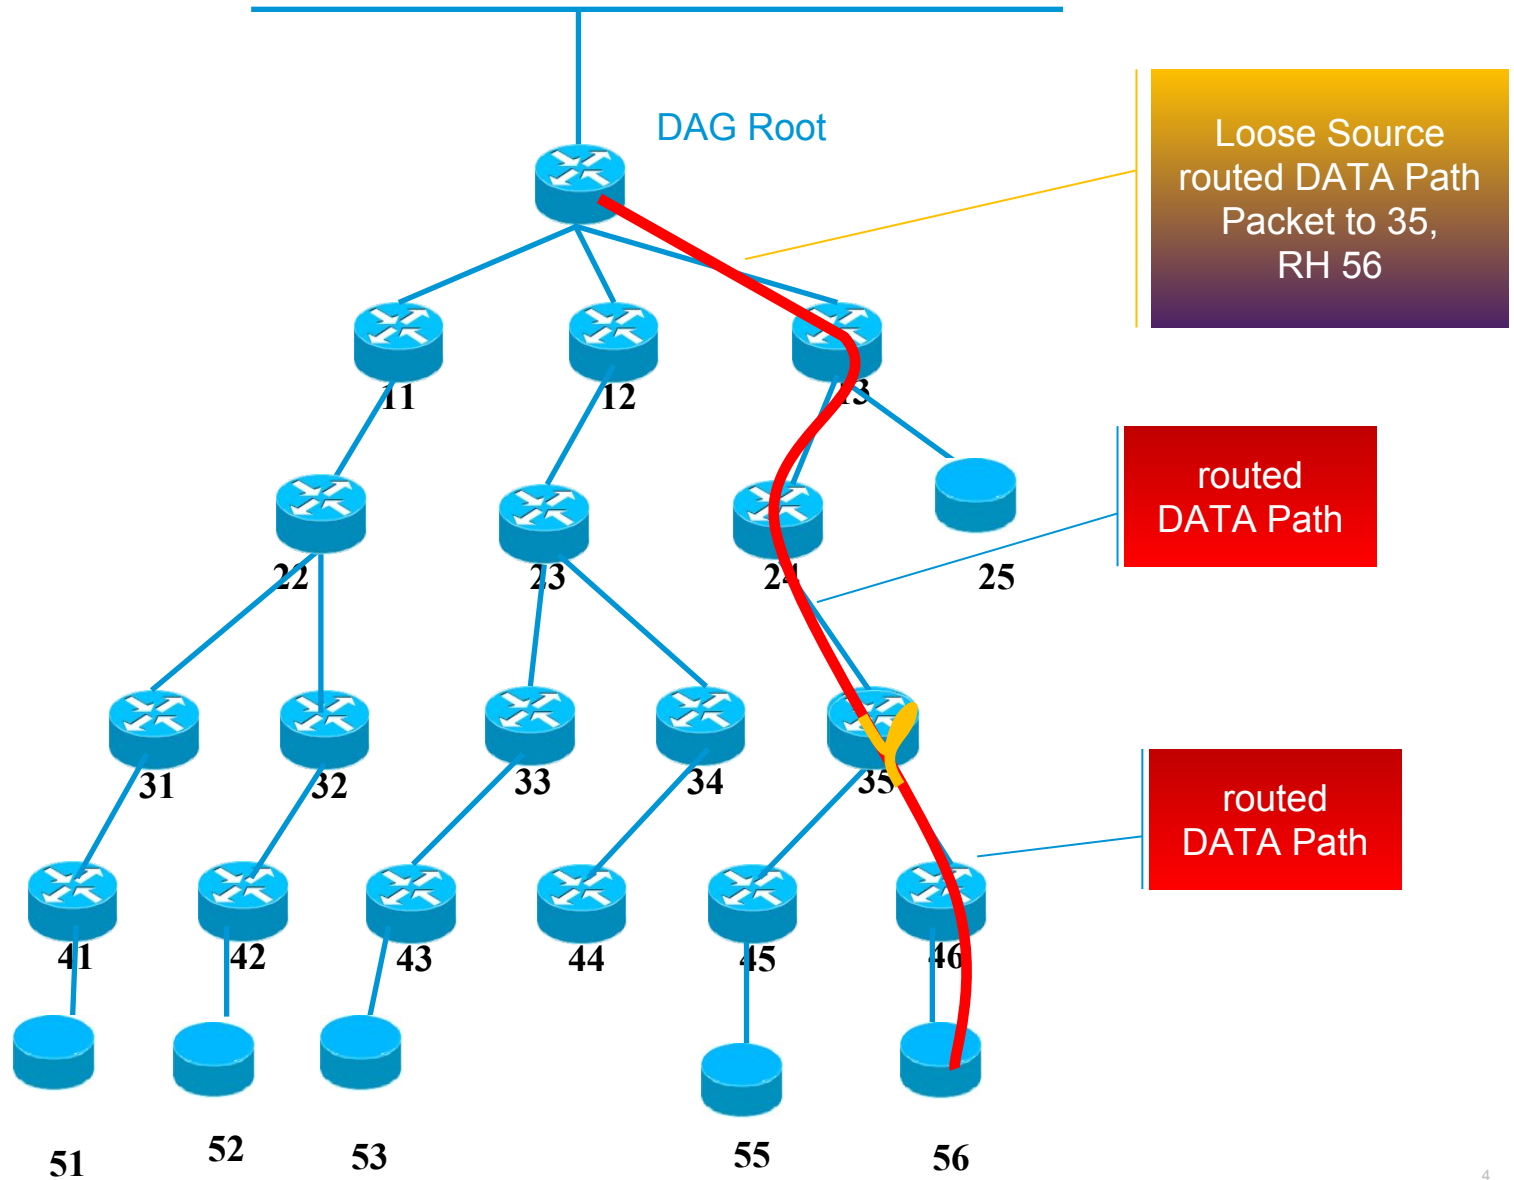

Questions on the list

- Terminology:
 - Segment vs. projected route
 - New msg for “projected DAO”
- Need for a new MOP?
 - Suggestion to add a capability option in node’s original DAOs
- DAO direction, clarify flows
- Transversal routes
- DAO-ACK request bit setting
- -> or non storing DAO?

Arigatou!

A&Q