

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: September 21, 2016

T. Senevirathne
Consultant
N. Finn
D. Kumar, Ed.
S. Salam
Cisco
Q. Wu, Ed.
M. Wang
Huawei
March 20, 2016

Generic YANG Data Model for Connection Oriented Operations,
Administration, and Maintenance(OAM) protocols
draft-ietf-lime-yang-oam-model-03

Abstract

This document presents a base YANG Data model for connection oriented OAM protocols. It provides a technology-independent abstraction of key OAM constructs for connection oriented protocols. Based model presented here can be extended to include technology specific details. This is leading to uniformity between OAM protocols and support nested OAM workflows (i.e., performing OAM functions at different levels through a unified interface).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 21, 2016.

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
2. Conventions used in this document	4
2.1. Terminology	5
3. Architecture of Generic YANG Model for OAM	6
4. Overview of the OAM Model	7
4.1. Maintenance Domain (MD) configuration	7
4.2. Maintenance Association (MA) configuration	8
4.3. Maintenance Endpoint (MEP) configuration	9
4.4. rpc definitions	9
4.5. OAM data hierarchy	12
5. OAM YANG Module	17
6. Base Mode	41
6.1. MEP Address	41
6.2. MEP ID for Base Mode	41
6.3. Maintenance Domain	41
6.4. Maintenance Association	41
7. Note	42
8. Security Considerations	42
9. IANA Considerations	43
10. Acknowledgments	43
11. References	43
11.1. Normative References	43
11.2. Informative References	44
Authors' Addresses	46

1. Introduction

Operations, Administration, and Maintenance (OAM) are important networking functions that allow operators to:

1. Monitor networks connections (Connectivity Verification, Continuity Check).
2. Troubleshoot failures (Fault verification and localization).
3. Monitor Performance

An overview of OAM tools is presented at [RFC7276].

Ping and Traceroute [RFC792], [RFC4443] are well-known fault verification and isolation tools, respectively, for IP networks. Over the years, different technologies have developed similar tools for similar purposes.

[IEEE802.1Q] Connectivity Fault Management is a well-established OAM standard that is widely adopted for Ethernet networks. ITU-T [Y.1731][Y.1731], MEF Service OAM, MPLS-TP [RFC6371], TRILL [RFC7455][RFC7455] all define OAM methods based on manageability frame work of [IEEE802.1Q] [IEEE802.1Q]CFM.

Given the wide adoption of the underlying OAM concepts defined in [IEEE802.1Q][IEEE802.1Q] CFM, it is a reasonable choice to develop the unified management framework for connection oriented OAM based on those concepts. In this document, we take the [IEEE802.1Q][IEEE802.1Q] CFM model and extend it to a technology independent framework and build the corresponding YANG model accordingly. The YANG model presented in this document is the base model for connection oriented OAM protocols and supports generic continuity check, connectivity verification and path discovery. The generic YANG model for connection oriented OAM is designed such that it can be extended to cover various connection oriented technologies. Technology dependent nodes and RPC (remote process call) commands are defined in technology specific YANG models, which use and extend the base model defined here. As an example, VXLAN uses source UDP port number for flow entropy, while TRILL uses either MAC addresses, the VLAN tag or fine grain label or IP addresses for flow entropy in the hashing for multipath selection. To capture this variation, corresponding YANG models would define the applicable structures as augmentation to the generic base model presented here. This accomplishes three purposes: first it keeps each YANG model smaller and manageable. Second, it allows independent development of corresponding YANG models. Third, implementations can limit support to only the applicable set of YANG models. (e.g. TRILL RBridge may only need to implement Generic model and the TRILL YANG model).

All implementations that follow the YANG framework presented in this document MUST implement the generic connection oriented YANG model presented here.

The YANG data model presented in this document is generated at the management layer. Encapsulations and state machines may differ according to each OAM protocol. A user who wishes to issues a Continuity Check command or a Loop back or initiate a performance monitoring session can do so in the same manner regardless of the underlying protocol or technology or specific vendor implementation.

As an example, consider a scenario where Loopback from device A to Device B failed. Between device A and B there are IEEE 802.1 bridges a,b and c. Let's assume a,b and c are using [IEEE802.1Q] CFM. A user upon detecting the Loopback failures may decide to drill down to the lower level at the different portion of the path and issue the corresponding fault verification (LBM) and fault isolation (LTM) tools, using the same API. This ability to go down to the different portion of path at lower level for Fault localization and troubleshooting is referred to as "nested OAM workflow" and is a useful concept that leads to efficient network troubleshooting and maintenance. The connection oriented OAM YANG model presented in this document facilitates that without needing changes to the underlying protocols.

2. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

The following notations are used within the data tree and carry the meaning as below.

Each node is printed as:

<status> <flags> <name> <opts> <type>

<status> is one of:

- + for current
- x for deprecated
- o for obsolete

<flags> is one of:

- rw for configuration data
- ro for non-configuration data
- x for rpcs
- n for notifications

<name> is the name of the node

If the node is augmented into the tree from another module, its name is printed as <prefix>:<name>.

<opts> is one of:

- ? for an optional leaf or choice
- ! for a presence container
- * for a leaf-list or list
- [<keys>] for a list's keys

<type> is the name of the type for leafs and leaf-lists

In this document, these words will appear with that interpretation only when in ALL CAPS. Lower case uses of these words are not to be interpreted as carrying RFC-2119 significance.

2.1. Terminology

CCM - Continuity Check Message [IEEE802.1Q].

ECMP - Equal Cost Multipath.

LBM - Loopback Message [IEEE802.1Q].

MP - Maintenance Point [IEEE802.1Q].

MEP - Maintenance End Point [RFC7174] [IEEE802.1Q] [RFC6371].

MIP - Maintenance Intermediate Point [RFC7174] [IEEE802.1Q] [RFC6371].

MA - Maintenance Association [IEEE802.1Q] [RFC7174].

MD - Maintenance Domain [IEEE802.1Q]

MTV - Multi-destination Tree Verification Message.

OAM - Operations, Administration, and Maintenance [RFC6291].

TRILL - Transparent Interconnection of Lots of Links [RFC6325].

CFM - Connectivity Fault Management [RFC7174] [IEEE802.1Q].

RPC - Remote Process Call.

CC - Continuity Check [RFC7276]. Continuity Checks are used to verify that a destination is reachable and therefore also referred to as reachability verification.


CV - Connectivity Verification [RFC7276]. Connectivity Verifications are also referred to as path verification and

used to verify not only that the two MPs are connected, but also that they are connected through the expected path, allowing detection of unexpected topology changes.

3. Architecture of Generic YANG Model for OAM

In this document we define a generic YANG model for connection oriented OAM protocols. The YANG model defined here is generic such that other technologies can extend it for technology specific needs. The Generic YANG model acts as the root for other OAM YANG models. This allows users to traverse between different OAM protocols at ease through a uniform API set. This is also provides a nested OAM workflow. Figure 1 depicts the relationship of different OAM YANG models to the Generic YANG Model for connection oriented OAM. The Generic YANG model for OAM provides a framework where technology-specific YANG models can inherit constructs from the base YANG models without needing to redefine them within the sub-technology.

Figure 1 depicts relationship of different YANG modules.

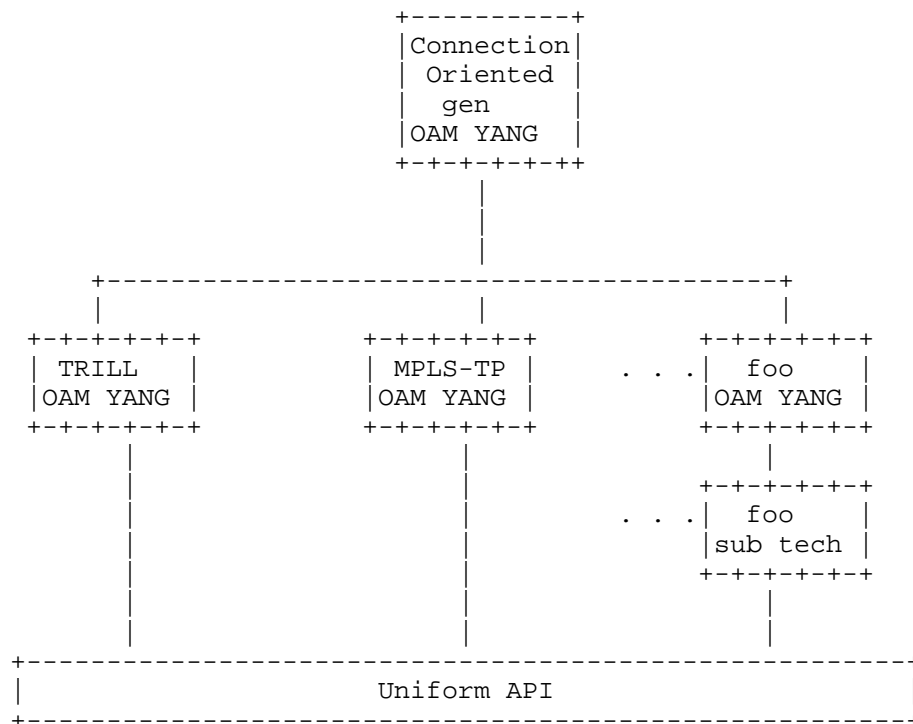

Relationship of OAM YANG model to generic (base) YANG model

4. Overview of the OAM Model

In this document we adopt the concepts of the [IEEE802.1Q] CFM model and structure it such that it can be adapted to different OAM protocols for connection oriented technology.

At the top of the Model is the Maintenance Domain. Each Maintenance Domain is associated with a Maintenance Name and a Domain Level.

Under each Maintenance Domain there is one or more Maintenance Association (MA). In TRILL this can be per Fine-Grained Label or for VPLS this can be per VPLS instance.

Under each MA, there can be two or more MEPs (Maintenance Association End Points). MEPs are addressed by their respective technology specific address identifiers. The YANG model presented here provides flexibility to accommodate different addressing schemes.

In the vertical direction orthogonal to the Maintenance Domain, presented are the commands. Those, in YANG terms, are the rpc commands. These rpc commands provide uniform APIs for continuity check, connectivity verification, path discovery and their equivalents as well as other OAM commands.

The generic YANG model defined here does not require explicit configuration of OAM entities prior to using any of the OAM tools. The OAM tools used here are limited to OAM toolset specified in section 5.1 of [RFC7276]. In order to facilitate zero-touch experience, this document defines a default mode of OAM. The default mode of OAM is referred to as the Base Mode and specifies default values for each of model parameters, such as Maintenance Domain Level, Name of the Maintenance Association and Addresses of MEP and so on. The default values of these depend on the technology. Base Mode for TRILL is defined in [RFC7455]. Base mode for other technologies such as MPLS-TP and future extensions will be defined in their corresponding documents.

It is important to note that, no specific enhancements are needed in the YANG model to support Base Mode. Implementations that comply with this document, by default implement the data nodes of the applicable technology. Data nodes of the Base Mode are read-only nodes.

4.1. Maintenance Domain (MD) configuration

The container "domains" is the top level container within the gen-oam module. Within the container "domains", separate list is maintained per MD. The MD list uses the key MD-name-string for indexing. MD-

name-string is a leaf and derived from type string. Additional name formats as defined in [IEEE802.1Q] or other standards can be included by association of the MD-name-format with an identity-ref. MD-name-format indicates the format of the augmented MD-names. MD-name is presented as choice/case construct. Thus, it is easily augmentable by derivative work.

```

module: ietf-conn-oam
  +--rw domains
    +--rw domain* [technology MD-name-string]
      +--rw technology          identityref
      +--rw MD-name-string      MD-name-string
      +--rw MD-name-format?     identityref
      +--rw (MD-name)?
        | +--:(MD-name-null)
        |   +--rw MD-name-null?      empty
      +--rw md-level            MD-level  .

```

Snippet of data hierarchy related to OAM domains

4.2. Maintenance Association (MA) configuration

Within a given Maintenance Domain there can be one or more Maintenance Associations (MA). MAs are represented as a list and indexed by the MA-name-string. Similar to MD-name defined previously, additional name formats can be added by augmenting the name-format identity-ref and adding applicable case statements to MA-name.

```

module: ietf-conn-oam
  +--rw domains
    +--rw domain* [technology MD-name-string]
      .
      .
    +--rw MAs
      +--rw MA* [MA-name-string]
        +--rw MA-name-string      MA-name-string
        +--rw MA-name-format?     identityref
        +--rw (MA-name)?
          | +--:(MA-name-null)
          |   +--rw MA-name-null?      empty

```

Snippet of data hierarchy related to Maintenance Associations (MA)

4.3. Maintenance Endpoint (MEP) configuration

Within a given Maintenance Association (MA), there can be one or more Maintenance End Points (MEP). MEPs are represented as a list within the data hierarchy and indexed by the key MEP-name.

```

module: ietf-conn-oam
  +--rw domains
    +--rw domain* [technology MD-name-string]
      +--rw technology          identityref
      .
      +--rw MAs
        +--rw MA* [MA-name-string]
          +--rw MA-name-string      MA-name-string
          .
          +--rw MEP* [mep-name]
            +--rw mep-name          MEP-name
            +--rw (MEP-ID)?
              +--:(MEP-ID-int)
                +--rw MEP-ID-int?      int32
              +--:(MEP-ID-tlv)
                +--rw MEP-ID-type?      int16
                +--rw MEP-ID-len?      int16
                +--rw MEP-ID-value?    binary
            +--rw MEP-ID-format?      identityref
            +--rw (mp-address)?
              +--:(mac-address)
                +--rw mac-address?      yang:mac-address
              +--:(ipv4-address)
                +--rw ipv4-address?    inet:ipv4-address
              +--:(ipv6-address)
                +--rw ipv6-address?    inet:ipv6-address
            .
            .
            .

```

Snippet of data hierarchy related to Maintenance Endpoint (MEP)

4.4. rpc definitions

The rpc model facilitates issuing commands to a NETCONF server (in this case to the device that need to execute the OAM command) and obtain a response. rpc model defined here abstracts OAM specific commands in a technology independent manner.

There are several rpc commands defined for the purpose of OAM. In this section we present a snippet of the continuity check command for illustration purposes. Please refer to Section 4 for the complete data hierarchy and Section 5 for the YANG model.

```

module: ietf-conn-oam
  +---rw domains
    +---rw domain* [technology MD-name-string]
    +---rw technology          identityref
  .
  .
rpcs:
  +---x continuity-check
    +---w input
      +---w technology          identityref
      +---w MD-name-string      MD-name-string
      +---w MA-name-string?     MA-name-string
      +---w (flow-entropy)?
        +---:(flow-entropy-null)
          +---w flow-entropy-null?  empty
      +---w priority?           uint8
      +---w ttl?                uint8
      +---w session-type-enum?  enumeration
      +---w ecmp-choice?        ecmp-choices
      +---w sub-type?           identityref
      +---w outgoing-interfaces* [interface]
        +---w interface        if:interface-ref
      +---w source-mep?         MEP-name
      +---w destination-mp
        +---w (mp-address)?
          +---:(mac-address)
            +---w mac-address?      yang:mac-address
          +---:(ipv4-address)
            +---w ipv4-address?     inet:ipv4-address
          +---:(ipv6-address)
            +---w ipv6-address?     inet:ipv6-address
        +---w (MEP-ID)?
          +---:(MEP-ID-int)
            +---w MEP-ID-int?       int32
          +---:(MEP-ID-tlv)
            +---w MEP-ID-type?      int16
            +---w MEP-ID-len?       int16
            +---w MEP-ID-value?     binary
          +---w MEP-ID-format?      identityref
      +---w count?              uint32
      +---w transmit-interval?   Interval
      +---w packet-size?         uint32
    +---ro output
      +---ro (monitor-stats)?
        +---:(monitor-null)
          +---ro monitor-null?     empty

```

Snippet of data hierarchy related to rpc call continuity-check

4.5. OAM data hierarchy

The complete data hierarchy related to the connection oriented OAM YANG model is presented below.

```

module: ietf-conn-oam
  +--rw domains
    +--rw domain* [technology MD-name-string]
      +--rw technology          identityref
      +--rw MD-name-string      MD-name-string
      +--rw MD-name-format?     identityref
      +--rw (MD-name)?
      |   +--:(MD-name-null)
      |   |   +--rw MD-name-null?      empty
      +--rw md-level?          MD-level
      +--rw MAs
        +--rw MA* [MA-name-string]
          +--rw MA-name-string      MA-name-string
          +--rw MA-name-format?     identityref
          +--rw (MA-name)?
          |   +--:(MA-name-null)
          |   |   +--rw MA-name-null?      empty
          +--rw (connectivity-context)?
          |   +--:(context-null)
          |   |   +--rw context-null?      empty
          +--rw mep-direction      MEP-direction
          +--rw transmit-interval?  Interval
          +--rw loss-threshold?     uint32
          +--rw ttl?                uint8
          +--rw (flow-entropy)?
          |   +--:(flow-entropy-null)
          |   |   +--rw flow-entropy-null?  empty
          +--rw priority?           uint8
          +--rw MEP* [mep-name]
            +--rw mep-name          MEP-name
            +--rw (MEP-ID)?
            |   +--:(MEP-ID-int)
            |   |   +--rw MEP-ID-int?      int32
            |   +--:(MEP-ID-tlv)
            |   |   +--rw MEP-ID-type?     int16
            |   |   +--rw MEP-ID-len?     int16
            |   |   +--rw MEP-ID-value?   binary
            +--rw MEP-ID-format?     identityref
            +--rw (mp-address)?
            |   +--:(mac-address)
            |   |   +--rw mac-address?     yang:mac-address
            |   +--:(ipv4-address)
            |   |   +--rw ipv4-address?    inet:ipv4-address

```

```

|   +---:(ipv6-address)
|   |   +---rw ipv6-address?          inet:ipv6-address
+---rw (connectivity-context)?
|   +---:(context-null)
|   |   +---rw context-null?          empty
+---rw Interface?                    if:interface-ref
+---rw (topology)?
|   +---:(topo-null)
|   |   +---rw topo-null?             empty
+---ro admin-status?                -> /if:interfaces-state/interface/a
dmin-status
|   +---ro oper-status?               -> /if:interfaces-state/interface/o
per-status
|   +---rw (flow-entropy)?
|   |   +---:(flow-entropy-null)
|   |   |   +---rw flow-entropy-null?  empty
+---rw priority?                    uint8
+---rw session* [session-cookie]
|   +---rw session-cookie             uint32
|   +---rw ttl?                       uint8
|   +---rw transmit-interval?         Interval
|   +---rw enable?                    boolean
|   +---rw ecmp-choice?               ecmp-choices
|   +---rw source-mep?                MEP-name
|   +---rw destination-mep
|   |   +---rw (MEP-ID)?
|   |   |   +---:(MEP-ID-int)
|   |   |   |   +---rw MEP-ID-int?     int32
|   |   |   +---:(MEP-ID-tlv)
|   |   |   |   +---rw MEP-ID-type?     int16
|   |   |   |   +---rw MEP-ID-len?     int16
|   |   |   |   +---rw MEP-ID-value?   binary
|   |   +---rw MEP-ID-format?         identityref
+---rw destination-mep-address
|   +---rw (mp-address)?
|   |   +---:(mac-address)
|   |   |   +---rw mac-address?        yang:mac-address
|   |   +---:(ipv4-address)
|   |   |   +---rw ipv4-address?       inet:ipv4-address
|   |   +---:(ipv6-address)
|   |   |   +---rw ipv6-address?       inet:ipv6-address
+---rw (connectivity-context)?
|   +---:(context-null)
|   |   +---rw context-null?          empty
+---rw (flow-entropy)?
|   +---:(flow-entropy-null)
|   |   +---rw flow-entropy-null?     empty
+---rw priority?                    uint8
+---rw outgoing-interface* [interface]
|   +---rw interface                 if:interface-ref

```

```

    +--rw MIP* [interface]
    |   +--rw interface    if:interface-ref
    +--rw related-oam-layer* [offset]
        +--rw offset          int32
        +--rw technology      identityref
        +--rw MD-name-string  MD-name-string
        +--rw MA-name-string? MA-name-string

rpcs:
  +---x continuity-check
  |   +---w input
  |   |   +---w technology      identityref
  |   |   +---w MD-name-string  MD-name-string
  |   |   +---w MA-name-string? MA-name-string
  |   |   +---w (flow-entropy)?
  |   |   |   +---:(flow-entropy-null)
  |   |   |   |   +---w flow-entropy-null?    empty
  |   |   +---w priority?      uint8
  |   |   +---w ttl?           uint8
  |   |   +---w session-type-enum? enumeration
  |   |   +---w ecmp-choice?   ecmp-choices
  |   |   +---w sub-type?      identityref
  |   |   +---w outgoing-interfaces* [interface]
  |   |   |   +---w interface    if:interface-ref
  |   |   +---w source-mep?      MEP-name
  |   |   +---w destination-mp
  |   |   |   +---w (mp-address)?
  |   |   |   |   +---:(mac-address)
  |   |   |   |   |   +---w mac-address?      yang:mac-address
  |   |   |   |   +---:(ipv4-address)
  |   |   |   |   |   +---w ipv4-address?      inet:ipv4-address
  |   |   |   |   +---:(ipv6-address)
  |   |   |   |   |   +---w ipv6-address?      inet:ipv6-address
  |   |   +---w (MEP-ID)?
  |   |   |   +---:(MEP-ID-int)
  |   |   |   |   +---w MEP-ID-int?          int32
  |   |   |   +---:(MEP-ID-tlv)
  |   |   |   |   +---w MEP-ID-type?          int16
  |   |   |   |   +---w MEP-ID-len?          int16
  |   |   |   |   +---w MEP-ID-value?        binary
  |   |   +---w MEP-ID-format?  identityref
  |   |   +---w count?          uint32
  |   |   +---w transmit-interval? Interval
  |   |   +---w packet-size?    uint32
  |   +---ro output
  |   |   +---ro (monitor-stats)?
  |   |   |   +---:(monitor-null)
  |   |   |   |   +---ro monitor-null?    empty
  +---x continuity-verification {connectivity-verification}?

```

```

+---w input
|   +---w technology                identityref
|   +---w MD-name-string            MD-name-string
|   +---w MA-name-string?           MA-name-string
|   +---w (flow-entropy)?
|   |   +---:(flow-entropy-null)
|   |   |   +---w flow-entropy-null?    empty
|   +---w priority?                uint8
|   +---w ttl?                     uint8
|   +---w session-type-enum?        enumeration
|   +---w ecmp-choice?              ecmp-choices
|   +---w sub-type?                 identityref
|   +---w outgoing-interfaces* [interface]
|   |   +---w interface            if:interface-ref
|   +---w source-mep?              MEP-name
|   +---w destination-mp
|   |   +---w (mp-address)?
|   |   |   +---:(mac-address)
|   |   |   |   +---w mac-address?      yang:mac-address
|   |   |   +---:(ipv4-address)
|   |   |   |   +---w ipv4-address?     inet:ipv4-address
|   |   |   +---:(ipv6-address)
|   |   |   |   +---w ipv6-address?     inet:ipv6-address
|   |   +---w (MEP-ID)?
|   |   |   +---:(MEP-ID-int)
|   |   |   |   +---w MEP-ID-int?       int32
|   |   |   +---:(MEP-ID-tlv)
|   |   |   |   +---w MEP-ID-type?      int16
|   |   |   |   +---w MEP-ID-len?      int16
|   |   |   |   +---w MEP-ID-value?    binary
|   |   +---w MEP-ID-format?         identityref
|   +---w count?                   uint32
|   +---w transmit-interval?        Interval
|   +---w packet-size?              uint32
+--ro output
|   +--ro (monitor-stats)?
|   |   +---:(monitor-null)
|   |   |   +--ro monitor-null?    empty
+---x path-discovery
|   +---w input
|   |   +---w technology                identityref
|   |   +---w MD-name-string            MD-name-string
|   |   +---w MA-name-string?           MA-name-string
|   |   +---w (flow-entropy)?
|   |   |   +---:(flow-entropy-null)
|   |   |   |   +---w flow-entropy-null?    empty
|   |   +---w priority?                uint8
|   |   +---w ttl?                     uint8

```

```

| +---w session-type-enum?      enumeration
| +---w command-sub-type?      identityref
| +---w ecmp-choice?           ecmp-choices
| +---w outgoing-interfaces* [interface]
| | +---w interface            if:interface-ref
| +---w source-mep?            MEP-name
| +---w destination-mp
| | +---w (mp-address)?
| | | +---:(mac-address)
| | | | +---w mac-address?      yang:mac-address
| | | +---:(ipv4-address)
| | | | +---w ipv4-address?     inet:ipv4-address
| | | +---:(ipv6-address)
| | | | +---w ipv6-address?     inet:ipv6-address
| | +---w (MEP-ID)?
| | | +---:(MEP-ID-int)
| | | | +---w MEP-ID-int?      int32
| | | +---:(MEP-ID-tlv)
| | | | +---w MEP-ID-type?     int16
| | | | +---w MEP-ID-len?      int16
| | | | +---w MEP-ID-value?    binary
| | +---w MEP-ID-format?      identityref
| +---w count?                uint32
| +---w transmit-interval?     Interval
+--ro output
+--ro response* [response-index]
+--ro response-index          uint8
+--ro ttl?                    uint8
+--ro destination-mp
+--ro (mp-address)?
+--ro | +---:(mac-address)
+--ro | | +---ro mac-address?    yang:mac-address
+--ro | +---:(ipv4-address)
+--ro | | +---ro ipv4-address?   inet:ipv4-address
+--ro | +---:(ipv6-address)
+--ro | | +---ro ipv6-address?   inet:ipv6-address
+--ro (MEP-ID)?
+--ro | +---:(MEP-ID-int)
+--ro | | +---ro MEP-ID-int?     int32
+--ro | +---:(MEP-ID-tlv)
+--ro | | +---ro MEP-ID-type?    int16
+--ro | | +---ro MEP-ID-len?     int16
+--ro | | +---ro MEP-ID-value?   binary
+--ro MEP-ID-format?          identityref
+--ro (monitor-stats)?
+--ro | +---:(monitor-null)
+--ro | | +---ro monitor-null?   empty
notifications:

```



```

+---n defect-condition-notification
+--ro technology          identityref
+--ro MD-name-string      MD-name-string
+--ro MA-name-string?     MA-name-string
+--ro mep-name?           MEP-name
+--ro defect-type?        identityref
+--ro generating-mepid
|   +--ro (MEP-ID)?
|   |   +--:(MEP-ID-int)
|   |   |   +--ro MEP-ID-int?      int32
|   |   +--:(MEP-ID-tlv)
|   |   |   +--ro MEP-ID-type?      int16
|   |   |   +--ro MEP-ID-len?      int16
|   |   |   +--ro MEP-ID-value?    binary
|   +--ro MEP-ID-format?  identityref
+--ro (error)?
+--:(error-null)
|   +--ro error-null?      empty
+--:(error-code)
|   +--ro error-code?      int32

```

data hierarchy of OAM

5. OAM YANG Module

<CODE BEGINS> file "ietf-conn-oam.yang"

```

module ietf-conn-oam {
  namespace "urn:ietf:params:xml:ns:yang:ietf-conn-oam";
  prefix goam;

  import ietf-interfaces {
    prefix if;
  }
  import ietf-yang-types {
    prefix yang;
  }
  import ietf-inet-types {
    prefix inet;
  }

  organization "IETF LIME Working Group";
  contact
    "Tissa Senevirathne tsenevir@cisco.com";
  description
    "This YANG module defines the generic configuration,
    statistics and rpc for connection oriented OAM"

```

```
        to be used within IETF in a protocol independent manner.
        Functional level abstraction is indendent
        with YANG modeling. It is assumed that each protocol
        maps corresponding abstracts to its native format.
        Each protocol may extend the YANG model defined
        here to include protocol specific extensions";

revision 2016-03-15 {
  description
    "Initial revision. - 05 version";
  reference "draft-ietf-lime-yang-oam-model";
}

/* features */
feature connectivity-verification {
  description
    "This feature indicates that the server supports
    executing connectivity verification OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    connectivity verification command or rpc model for
    connectivity verification command.";
}

/* Identities */

identity technology-types {
  description
    "this is the base identy of technology types which are
    TRILL,MPLS-TP,vpls etc";
}

identity command-sub-type {
  description
    "defines different rpc command subtypes, e.g rfc6905 trill OAM,
    this is optional for most cases";
}

identity name-format {
  description
    "This defines the name format, IEEE 8021Q CFM defines varying
    styles of names. It is expected name format as an identity ref
    to be extended with new types.";
}

identity name-format-null {
  base name-format;
}
```

```
    description
      "defines name format as null";
  }

  identity identifier-format {
    description
      "identifier-format identity can be augmented to define other
       format identifiers used in MEP-ID etc";
  }

  identity identifier-format-integer {
    base identifier-format;
    description
      "defines identifier-format to be integer";
  }

  identity defect-types {
    description
      "defines different defect types, e.g. remote rdi,
       mis-connection defect, loss of continuity";
  }

  identity remote-rdi {
    base defect-types;
    description
      " Indicates the aggregate health of the remote MEPs. ";
  }

  identity remote-mep-error{
    base defect-types;
    description
      "Indicates that one or more of the remote MEPs is
       reporting a failure ";
  }

  identity invaline-oam-error{
    base defect-types;
    description
      "Indicates that one or more invalid OAM messages has been
       received and that 3.5 times that OAM message transmission
       interval has not yet expired.
      ";
  }

  identity cross-connect-error{
    base defect-types;
    description
      "Indicates that one or more cross-connect oam messages has been
       received and that 3.5 times that OAM message transmission
       interval has not yet expired.
```

```
    ";
  }

  /* typedefs */
  typedef MEP-direction {
    type enumeration {
      enum "Up" {
        value 0;
      }
      description
        "Indicates when OAM frames are transmitted towards and
        received from the bridging/routing function.";
    }
    enum "Down" {
      value 1;
    }
    description
      "Indicates when OAM frames are transmitted towards and
      received from the wire.";
  }
  }
  description
    "MEP direction.";
}

typedef MEP-name {
  type string;
  description
    "Generic administrative name for a MEP";
}

typedef Interval{
  type decimal64{
    fraction-digits 2;
  }
  units "milliseconds";
  description
    "Interval between packets in milliseconds.
    0 means no packets are sent.";
}

typedef ecmp-choices {
  type enumeration {
    enum "ecmp-use-platform-hash" {
      value 0;
    }
  }
  description
    "Use Platform hashing.";
}
```

```
        enum "ecmp-use-round-robin" {
            value 1;
description
    "Use round robin hashing.";
        }
        description
            "Equal cost multi Path Choices";
    }

typedef MD-name-string {
    type string;
    default "";
    description
        "Generic administrative name for an MD";
}

typedef MA-name-string {
    type string;
    default "";
    description
        "Generic administrative name for an MA";
}

typedef oam-counter32 {
    type yang:zero-based-counter32;
    description
        "defines 32 bit counter for OAM";
}

typedef MD-level {
    type uint32 {
        range "0..255";
    }
    description
        "Maintenance Domain level. The level may be restricted in
        certain protocols (eg to 0-7)";
}

/* groupings */

grouping topology {
    choice topology {
        case topo-null {
            description

                "this is a placeholder when no topology is needed";
            leaf topo-null {
```

```
        type empty;
        description
            "there is no topology define, it will be defined
            in technology specific model.";
    }
}
description
    "Topology choices";
}
description
    "Topology";
}

grouping error-message {
    choice error {
        case error-null {
            description
                "this is a placeholder when no error status is needed";
            leaf error-null {
                type empty;
                description
                    "there is no error define, it will be defined in
                    technology specific model.";
            }
        }
        case error-code {
            description
                "this is a placeholder to display error code.";
            leaf error-code {
                type int32;
                description
                    "error code is integer value specific to technology.";
            }
        }
    }
    description
        "Error Message choices.";
}
description
    "Error Message.";
}

grouping mp-address {
    choice mp-address {
        case mac-address {
            leaf mac-address {
                type yang:mac-address;
            }
        }
    }
    description
```

```
        "MAC Address";
    }
    description
        "MAC Address based MP Addressing.";
    }
    case ipv4-address {
        leaf ipv4-address {
            type inet:ipv4-address;
        }
        description
            "Ipv4 Address";
    }
    description
        "Ip Address based MP Addressing.";
    }
    case ipv6-address {
        leaf ipv6-address {
            type inet:ipv6-address;
        }
        description
            "Ipv6 Address";
    }
    description
        "ipv6 Address based MP Addressing.";
    }
    }
    description
        "MP Addressing.";
    }
    description
        "MP Address";
    }
}

grouping maintenance-domain-id {
    description
        "Grouping containing leaves sufficient to identify an MD";
    leaf technology {
        type identityref {
            base technology-types;
        }
        mandatory true;

        description
            "Defines the technology";
    }
    leaf MD-name-string {
        type MD-name-string;
        mandatory true;
        description
            "Defines the generic administrative maintenance domain name";
    }
}
```

```
    }  
  }  
  
  grouping MD-name {  
    leaf MD-name-format {  
      type identityref {  
        base name-format;  
      }  
      description  
        "Name format.";  
    }  
    choice MD-name {  
      case MD-name-null {  
        leaf MD-name-null {  
when "../.../MD-name-format = name-format-null" {  
          description  
            "MD name format is equal to null format.";  
        }  
        type empty;  
      }  
      description  
        "MD name Null.";  
    }  
    }  
    description  
      "MD name.";  
  }  
  description  
    "MD name";  
}  
  
grouping ma-identifier {  
  description  
    "Grouping containing leaves sufficient to identify an MA";  
  leaf MA-name-string {  
    type MA-name-string;  
    description  
      "MA name string.";  
  }  
}  
  
grouping MA-name {  
  description  
    "MA name";  
  leaf MA-name-format {  
    type identityref {  
      base name-format;  
    }  
    description
```



```
        "Ma name format";
    }
    choice MA-name {
        case MA-name-null {
            leaf MA-name-null {
                when "../..../MA-name-format = name-format-null" {
description
    "MA";
                }
            }
            type empty;
description
    "empty";
        }
        description
            "MA name";
    }
}

grouping MEP-ID {
    choice MEP-ID {
        default "MEP-ID-int";
        case MEP-ID-int {
            leaf MEP-ID-int {
                type int32;
description
    "MEP ID in integer format";
            }
        }
        case MEP-ID-tlv {
            leaf MEP-ID-type {
                type int16;
description
    "Type of MEP-ID";
            }
        }
    }
    leaf MEP-ID-len {
        type int16;
description
    "Length of MEP-ID value";
    }
    leaf MEP-ID-value {
        type binary {
            length "12..255";
        }
description
    "Value please refer RFC6428.";
    }
}
```

```
        description
            "MEP-ID";
    }
    leaf MEP-ID-format {
        type identityref {
            base identifier-format;
        }
        description
            "MEP ID format.";
    }
    description
        "MEP-ID";
}

grouping MEP {
    description
        "Defines elements within the MEP";
    leaf mep-name {
        type MEP-name;
        mandatory true;
        description
            "Generic administrative name of the MEP";
    }
    uses MEP-ID;

    uses mp-address;
    uses connectivity-context;
    leaf Interface {
        type if:interface-ref;
        description
            "Interface name as defined by ietf-interfaces";
    }
    uses topology;
}

grouping session-type {
    description
        "This object indicates the current session
        definition.";
    leaf session-type-enum {
        type enumeration {
            enum proactive {
                description
                    "The current session is proactive";
            }
            enum on-demand {
                description
                    "The current session is on-demand.";
            }
        }
    }
}
```

```
    }
  }
  description
    "session type enum";
}

grouping monitor-stats {
  description
    "grouping for monitoring statistics, this will be augmented
    by others who use this component";
  choice monitor-stats {
    default "monitor-null";
    case monitor-null {
      description
        "this is a place holder when
        no monitoring statistics is needed";
      leaf monitor-null {
        type empty;
        description
          "there is no monitoring statistics to be defined";
      }
    }
  }
  description
    "define the monitor stats";
}

grouping MIP {
  description
    "defines MIP";
  leaf interface {
    type if:interface-ref;
    description
      "Interface";
  }
}

grouping related-oam-layer {
  leaf offset {
    type int32 {
      range "-255..255";
    }
  }
  description
    "defines offset (in MD levels) to a related OAM layer
    +1 is the layer immediately above
    -1 is the layer immediately below";
}
```

```
    uses maintenance-domain-id;
    uses ma-identifier;
    description
        "related OAM layer";
}

grouping interface-status {
    description
        "collection of interface related status";
    leaf admin-status {
        type leafref {
            path "/if:interfaces-state/if:interface/if:admin-status";
        }
        config false;
        description
            "oper status from ietf-interface module";
    }
    leaf oper-status {
        type leafref {
            path "/if:interfaces-state/if:interface/if:oper-status";
        }
        config false;
        description
            "oper status from ietf-interface module";
    }
}

grouping connectivity-context {
    description
        "Grouping defining the connectivity context for an MA; for
        example, a VRF for VPLS, or an LSP for MPLS-TP. This will be
        augmented by each protocol who use this component";
    choice connectivity-context {
        default "context-null";
        case context-null {
            description
                "this is a place holder when no context is needed";
            leaf context-null {
                type empty;
                description
                    "there is no context define";
            }
        }
    }
    description
        "connectivity context";
}
}
```

```
grouping priority {
  description
    "Priority used in transmitted packets; for example, in the
     TOS/DSCP field in IP or the Traffic Class field in MPLS";
  leaf priority {
    type uint8;
    description
      "priority";
  }
}

grouping flow-entropy {
  description
    "defines the grouping statement for flow-entropy";
  choice flow-entropy {
    default "flow-entropy-null";
    case flow-entropy-null {
      description
        "this is a place holder when no flow entropy is needed";
      leaf flow-entropy-null {
        type empty;
        description
          "there is no flow entropy defined";
      }
    }
  }
  description
    "Flow entropy";
}

grouping measurement-timing-group {
  description
    "This grouping includes objects used for
     proactive and on-demand
     scheduling of PM measurement sessions.";

  container start-time {
    description
      "This container defines the session start time.";
  }
  choice start-time {
    description
      "Measurement sessions tart time can be immediate, relative, or
       absolute.";
    container immediate {
      presence "Start the measurement session immediately.";
      description
        "Start Time of probe immediately.";
    }
  }
}
```

```
leaf absolute {
  type yang:date-and-time;
  description
    "This objects specifies the scheduled start time
    to perform the on-demand monitoring operations.";
}

}

container stop-time {
description
  "This container defines the session stop time.";
choice stop-time {
  description
    "Measurement session stop time can be none, or absolute.";
  container none {
    presence "Never end the measurement session.";
    description
      "Stop time is never to end.";

  }

leaf absolute {
  type yang:date-and-time;
  description
    "This objects specifies the scheduled stop time
    to perform the on-demand monitoring operations.";
}

}

}

container domains {
  description
    "Contains configuration related data. Within the container
    is list of fault domains. Wihin each domian has List of MA.";
  list domain {
    key "technology MD-name-string";
    ordered-by system;
    description
      "Define the list of Domains within the IETF-OAM";
    uses maintenance-domain-id;
    uses MD-name;
    leaf md-level {
      type MD-level;
      description
        "Defines the MD-Level";
    }
  }
}
```

```
    container MAs {
      description
        "This container defines MA, within that have multiple MA
        and within MA have MEP, MIP";
      list MA {
key "MA-name-string";
        ordered-by system;
        uses ma-identifier;
        uses MA-name;
        uses connectivity-context;
        leaf mep-direction {
          type MEP-direction;
          mandatory true;
          description
            "Direction for MEPs in this MA";
        }
        leaf transmit-interval {
          type Interval;
          default "0";
          description
            "Defines default Keepalive/CC Interval. May be
            overridden for specific sessions if supported by the
            protocol.";
        }
        leaf loss-threshold {
type uint32;
          default "3";
          description
            "number of consecutive Keepalive/CC messages missed
            before declaring loss of continuity fault. This is
            monitored per each remote MEP session";
        }
        leaf ttl {
          type uint8;
          default "255";
description
          "Time to Live";
        }
        uses flow-entropy {
          description
            "Default flow entropy in this MA, which may be
            overridden for particular MEPs, sessions or
            operations";
        }
        uses priority {
          description
            "Default priority for this MA, which may be overridden
            for particular MEPs, sessions or operations.";
        }
      }
    }
  }
```

```
    }
    list MEP {
        key "mep-name";
        ordered-by system;
        description
            "contain list of MEPS";
        uses MEP;
        uses interface-status {
            description
                "status of associated interface";
        }
        uses flow-entropy;
        uses priority;
        list session {
            key "session-cookie";
            ordered-by user;
            description
                "Monitoring session to/from a particular remote MEP.
                Depending on the protocol, this could represent CC
                messages received from a single remote MEP (if the
                protocol uses multicast CCs) or a target to which
                unicast echo request CCs are sent and from which
                responses are received (if the protocol uses a
                unicast request/response mechanism).";
            leaf session-cookie {
                type uint32;
                description
                    "Cookie to identify different sessions, when there
                    are multiple remote MEPS or multiple sessions to
                    the same remote MEP.";
            }
            leaf ttl {
                type uint8;
                default "255";
            }
        }
        description
            "Time to Live.";
    }
    leaf transmit-interval {
        type Interval;
        description
            "Transmission interval for CC packets for this
            session.";
    }
    leaf enable {
        type boolean;
        default "false";
        description
            "enable or disable a monitor session";
    }
}
```



```
    }
    leaf ecmp-choice {
      type ecmp-choices;
      description
        "0 means use the specified interface
         1 means use round robin";
    }
    leaf source-mep {
      type MEP-name;
      description
        "Source MEP for this session, if applicable";
    }
    container destination-mep {
      uses MEP-ID;
description
  "Destination MEP";
    }
    container destination-mep-address {
      uses mp-address;
description
  "Destination MEP Address";
    }
    uses connectivity-context;
    uses flow-entropy;
    uses priority;
    list outgoing-interface {
      key "interface";
      leaf interface {
        type if:interface-ref;
description
  "Outgoing Interface";
      }
    }
    }
    }
    list MIP {
      key "interface";
      uses MIP;
description
  "Maintenance Intermediate Point";
    }
    list related-oam-layer {
      key "offset";
      description
        "List of OAM layers above and below that are related to
         current MA. This allow users to easily navigate up and
```

```
        down to efficiently troubleshoot a connectivity
        issue";
        uses related-oam-layer;
    }
description
    "Maintenance Association list";
}
}
}

notification defect-condition-notification {
    description
        "When defect condition is met this notificiation is sent";
    uses maintenance-domain-id {
        description
            "defines the MD (Maintenance Domain) identifier, which is the
            Generic MD-name-string and the technology.";
    }
    uses ma-identifier;
    leaf mep-name {
        type MEP-name;
        description
            "Indicate which MEP is seeing the error";
    }
    leaf defect-type {
        type identityref {
            base defect-types;
        }
        description
            "The currently active defects on the specific MEP.";
    }
    container generating-mepid {
        uses MEP-ID;
        description
            "Who is generating the error (if known) if
            unknown make it 0.";
    }
    uses error-message {
        description
            "Error message to indicate more details.";
    }
}

rpc continuity-check {
    description
        "Generates continuity-check as per RFC7276 Table 4.";
    input {
        uses maintenance-domain-id {
```

```
        description
            "defines the MD (Maintenance Domain) identifier, which is
            the generic
            MD-name-string and the technology.";
    }
    uses ma-identifier {
        description
            "identifies the Maintenance association";
    }
    uses flow-entropy;
    uses priority;
    leaf ttl {
        type uint8;
        default "255";
    }
    description
        "Time to Live";
    }
    uses session-type;
    leaf ecmp-choice {
        type ecmp-choices;
        description
            "0 means use the specified interface
            1 means use round robin";
    }
    leaf sub-type {
        type identityref {
            base command-sub-type;
        }
        description
            "defines different command types";
    }
    list outgoing-interfaces {
        key "interface";
        leaf interface {
            type if:interface-ref;
        }
        description
            "outgoing interface";
    }
    description
        "outgoing Interfaces";
    }
    leaf source-mep {
        type MEP-name;
    }
    description
        "Source MEP";
    }
    container destination-mp {
        uses mp-address;
```

```
        uses MEP-ID {
            description "Only applicable if the destination is a MEP";
        }
    description
        "Destination MEP";
    }
    leaf count {
        type uint32;
        default "3";
        description

            "Number of ping echo request message to send";
    }
    leaf transmit-interval {
        type Interval;
        description
            "Interval between echo requests";
    }
    leaf packet-size {
        type uint32 {
            range "64..10000";
        }
        default "64";
        description
            "Size of ping echo request packets, in octets";
    }
}
output {
    uses monitor-stats {
        description
            "Stats of continuity check.";
    }
}
}

rpc continuity-verification {
    if-feature connectivity-verification;
    description
        "Generates continuity-verification as per RFC7276 Table 4.";
    input {
        uses maintenance-domain-id {
            description
                "defines the MD (Maintenance Domain) identifier, which is
                the generic
                MD-name-string and the technology.";
        }
        uses ma-identifier {
```

```
        description
            "identifies the Maintenance association";
    }
    uses flow-entropy;
    uses priority;
    leaf ttl {
        type uint8;
        default "255";
description
    "Time to Live";
    }
    uses session-type;
    leaf ecmp-choice {
        type ecmp-choices;
        description
            "0 means use the specified interface
             1 means use round robin";
    }
    leaf sub-type {
        type identityref {
            base command-sub-type;
        }
        description
            "defines different command types";
    }
    list outgoing-interfaces {
        key "interface";
        leaf interface {
            type if:interface-ref;
description
    "outgoing interface";
        }
description
    "outgoing Interfaces";
    }
    leaf source-mep {
        type MEP-name;
description
    "Source MEP";
    }
    container destination-mp {
        uses mp-address;
        uses MEP-ID {
            description "Only applicable if the destination is a MEP";
        }
description
    "Destination MEP";
    }
```

```
    leaf count {
      type uint32;
      default "3";
      description
        "Number of ping echo request message to send";
    }
    leaf transmit-interval {
      type Interval;
      description
        "Interval between echo requests";
    }
    leaf packet-size {
      type uint32 {
        range "64..10000";
      }
      default "64";
      description
        "Size of ping echo request packets, in octets";
    }
  }
  output {
    uses monitor-stats {
      description
        "Stats of continuity check.";
    }
  }
}
rpc path-discovery {
  description
    "Generates Trace-route or Path Trace and return response.
    Referencing RFC7276 for common Toolset name, for
    MPLS-TP OAM it's Route Tracing, and for TRILL OAM It's
    Path Tracing tool. Starts with TTL of one and increment
    by one at each hop. Untill destination reached or TTL
    reach max valune";
  input {
    uses maintenance-domain-id {
      description
        "defines the MD (Maintenance Domain) identifier, which is
        the generic MD-name-string and the technology.";
    }
    uses ma-identifier {
      description
        "identfies the Maintenance association";
    }
    uses flow-entropy;
    uses priority;
    leaf ttl {
```

```
        type uint8;
        default "255";
description
  "Time to Live";
    }
    uses session-type;
    leaf command-sub-type {
      type identityref {

        base command-sub-type;
      }
      description
        "defines different command types";
    }
    leaf ecmp-choice {
      type ecmp-choices;
      description
        "0 means use the specified interface
        1 means use round robin";
    }
    list outgoing-interfaces {
      key "interface";
      leaf interface {
        type if:interface-ref;
      }
      description
        "Interface.";
    }
description
  "Outgoing interface list.";
    }
    leaf source-mep {
      type MEP-name;
    }
description
  "Source MEP";
    }
    container destination-mp {
      uses mp-address;
      uses MEP-ID {
        description "Only applicable if the destination is a MEP";
      }
    }
description
  "Destination MEP";
    }
    leaf count {
      type uint32;
      default "1";
      description
```

```

        "Number of traceroute probes to send.  In protocols where a
        separate message is sent at each TTL, this is the number
        of packets to send at each TTL.";
    }
    leaf transmit-interval {
        type Interval;
        description
            "Interval between echo requests";
    }
}
output {
    list response {
        key "response-index";
        leaf response-index {
            type uint8;
            description
                "Arbitrary index for the response.  In protocols that
                guarantee there is only a single response at each TTL
                , the TTL can be used as the response
                index.";
        }
        leaf ttl {
            type uint8;
            description
                "Time to Live";
        }
        container destination-mp {
            description "MP from which the response has been received";
            uses mp-address;
            uses MEP-ID {
                description
                    "Only applicable if the destination is a MEP";
            }
        }
        uses monitor-stats {
            description
                "Stats of path-discovery.";
        }
        description
            "List of response.";
    }
}
}
}

```

YANG module of OAM

<CODE ENDS>

6. Base Mode

The Base Mode defines default configuration that MUST be present in the devices that comply with this document. Base Mode allows users to have "zero-touch" experience. Several parameters require technology specific definition.

6.1. MEP Address

In the Base Mode of operation, the MEP Address is by default the IP address of the interface on which the MEP is located.

6.2. MEP ID for Base Mode

In the Base Mode of operation, each device creates a single UP MEP associated with a virtual OAM port with no physical layer (NULL PHY). The MEPID associated with this MEP is zero (0). The choice of MEP-ID zero is explained below.

MEPID is 2 octet field by default. It is never used on the wire except when using CCM. Ping, traceroute and session monitoring does not use the MEPID on its message header. It is important to have method that can derive MEP ID of base mode in an automatic manner with no user intervention. IP address cannot be directly used for this purpose as the MEP ID is much smaller field. For Base Mode of operation we propose to use MEP ID zero (0) as the default MEP-ID.

CCM packet use MEP-ID on the payload. CCM MUST NOT be used in the Base Mode. Hence CCM MUST be disabled on the Maintenance Association of the Base Mode.

If CCM is required, users MUST configure a separate Maintenance association and assign unique value for the corresponding MEP IDs.

[IEEE802.1Q] CFM defines MEP ID as an unsigned integer in the range 1 to 8191. In this document we propose to extend the range to 0 to 65535. Value 0 is reserved for MEP ID of Base Mode operation and MUST NOT be used for other purposes.

6.3. Maintenance Domain

Default MD-LEVEL is set to 3.

6.4. Maintenance Association

MAID [IEEE802.1Q] has a flexible format and includes two parts: Maintenance Domain Name and Short MA name. In the Based Mode of operation, the value of the Maintenance Domain Name must be the

character string "GenericBaseMode" (excluding the quotes "). In Base Mode operation Short MA Name format is set to 2-octet integer format (value 3 in Short MA Format field [IEEE802.1Q]) and Short MA name set to 65532 (0xFFFC).

7. Note

This section will be removed or subject to change in the future if any agreement is reached. As per investigation of RFC7276 for performance Monitoring for Loss and Delay are defined for MPLS OAM(RFC6374[RFC6374]), OWAMP (RFC4656[RFC4656]) and TWAMP (RFC5357[RFC5357]) and TRILL OAM (RFC7456[RFC7456]). In case of Performance Monitoring Statistics are common between these technologies thus generic Yang model for Performance will be worked out through separate draft with Augmentation of Generic LIME model. In case of Other Function, it's technology specific and thus should be dealt in technology specific Yang model instead of Generic Model.

8. Security Considerations

The YANG module defined in this memo is designed to be accessed via the NETCONF protocol [RFC6241] [RFC6241]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [RFC6242] [RFC6242]. The NETCONF access control model [RFC6536] [RFC6536] provides the means to restrict access for particular NETCONF users to a pre-configured subset of all available NETCONF protocol operations and content.

There are a number of data nodes defined in the YANG module which are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., <edit-config>) to these data nodes without proper protection can have a negative effect on network operations.

The vulnerable "config true" subtrees and data nodes are the following:

/goam:domains/goam:domain/

/goam:domains/goam:domain/goam:MAS/goam:MA/

/goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP

/goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP/goam:session/

Unauthorized access to any of these lists can adversely affect OAM management system handling of end-to-end OAM and coordination of OAM

within underlying network layers This may lead to inconsistent configuration, reporting, and presentation for the OAM mechanisms used to manage the network.

9. IANA Considerations

This document registers a URI in the IETF XML registry [RFC3688] [RFC3688]. Following the format in RFC 3688, the following registration is requested to be made:

URI: urn:ietf:params:xml:ns:yang:ietf-gen-oam

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

This document registers a YANG module in the YANG Module Names registry [RFC6020].

name: ietf-gen-oam namespace: urn:ietf:params:xml:ns:yang:ietf-gen-oam
prefix: goam reference: RFC XXXX

10. Acknowledgments

Giles Heron came up with the idea of developing a YANG model as a way of creating a unified OAM API set (interface), work in this document is largely an inspiration of that. Alexander Clemm provided many valuable tips, comments and remarks that helped to refine the YANG model presented in this document.

Carlos Pignataro, David Ball, Mahesh Jethanandani, Benoit Claise, Ladislav Lhotka, GUBALLA JENS, Yuji Tochio, Gregory Mirsky, Huub van Helvoort, Tom Taylor, Dapeng Liu, Mishael Wexler, Adi Molkho participated and contributed to this document.

11. References

11.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, DOI 10.17487/RFC3688, January 2004, <<http://www.rfc-editor.org/info/rfc3688>>.

- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<http://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<http://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", RFC 6242, DOI 10.17487/RFC6242, June 2011, <<http://www.rfc-editor.org/info/rfc6242>>.
- [RFC6536] Bierman, A. and M. Bjorklund, "Network Configuration Protocol (NETCONF) Access Control Model", RFC 6536, DOI 10.17487/RFC6536, March 2012, <<http://www.rfc-editor.org/info/rfc6536>>.
- [RFC792] Postel, J., "Internet Control Message Protocol", RFC 792, September 1981.

11.2. Informative References

- [IEEE802.1Q] "Media Access Control (MAC) Bridges and Virtual Bridged Local Area Networks", IEEE Std 802.1Q-2011, August 2011.
- [RFC4443] Conta, A., Deering, S., and M. Gupta, Ed., "Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification", RFC 4443, DOI 10.17487/RFC4443, March 2006, <<http://www.rfc-editor.org/info/rfc4443>>.
- [RFC4656] Shalunov, S., Teitelbaum, B., Karp, A., Boote, J., and M. Zekauskas, "A One-way Active Measurement Protocol (OWAMP)", RFC 4656, DOI 10.17487/RFC4656, September 2006, <<http://www.rfc-editor.org/info/rfc4656>>.
- [RFC5357] Hedayat, K., Krzanowski, R., Morton, A., Yum, K., and J. Babiarz, "A Two-Way Active Measurement Protocol (TWAMP)", RFC 5357, DOI 10.17487/RFC5357, October 2008, <<http://www.rfc-editor.org/info/rfc5357>>.

- [RFC6291] Andersson, L., van Helvoort, H., Bonica, R., Romascanu, D., and S. Mansfield, "Guidelines for the Use of the "OAM" Acronym in the IETF", BCP 161, RFC 6291, DOI 10.17487/RFC6291, June 2011, <<http://www.rfc-editor.org/info/rfc6291>>.
- [RFC6325] Perlman, R., Eastlake 3rd, D., Dutt, D., Gai, S., and A. Ghanwani, "Routing Bridges (RBrigdes): Base Protocol Specification", RFC 6325, DOI 10.17487/RFC6325, July 2011, <<http://www.rfc-editor.org/info/rfc6325>>.
- [RFC6371] Busi, I., Ed. and D. Allan, Ed., "Operations, Administration, and Maintenance Framework for MPLS-Based Transport Networks", RFC 6371, DOI 10.17487/RFC6371, September 2011, <<http://www.rfc-editor.org/info/rfc6371>>.
- [RFC6374] Frost, D. and S. Bryant, "Packet Loss and Delay Measurement for MPLS Networks", RFC 6374, DOI 10.17487/RFC6374, September 2011, <<http://www.rfc-editor.org/info/rfc6374>>.
- [RFC7174] Salam, S., Senevirathne, T., Aldrin, S., and D. Eastlake 3rd, "Transparent Interconnection of Lots of Links (TRILL) Operations, Administration, and Maintenance (OAM) Framework", RFC 7174, DOI 10.17487/RFC7174, May 2014, <<http://www.rfc-editor.org/info/rfc7174>>.
- [RFC7276] Mizrahi, T., Sprecher, N., Bellagamba, E., and Y. Weingarten, "An Overview of Operations, Administration, and Maintenance (OAM) Tools", RFC 7276, DOI 10.17487/RFC7276, June 2014, <<http://www.rfc-editor.org/info/rfc7276>>.
- [RFC7455] Senevirathne, T., Finn, N., Salam, S., Kumar, D., Eastlake 3rd, D., Aldrin, S., and Y. Li, "Transparent Interconnection of Lots of Links (TRILL): Fault Management", RFC 7455, DOI 10.17487/RFC7455, March 2015, <<http://www.rfc-editor.org/info/rfc7455>>.
- [RFC7456] Mizrahi, T., Senevirathne, T., Salam, S., Kumar, D., and D. Eastlake 3rd, "Loss and Delay Measurement in Transparent Interconnection of Lots of Links (TRILL)", RFC 7456, DOI 10.17487/RFC7456, March 2015, <<http://www.rfc-editor.org/info/rfc7456>>.
- [Y.1731] "OAM functions and mechanisms for Ethernet based networks", ITU-T Recommendation G.8013/Y.1731, 2013.

Authors' Addresses

Tissa Senevirathne
Consultant

Email: tsenevir@gmail.com

Norman Finn
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035
USA

Email: nfinn@cisco.com

Deepak Kumar (editor)
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035
USA

Email: dekumar@cisco.com

Samer Salam
CISCO Systems
595 Burrard St. Suite 2123
Vancouver, BC V7X 1J1
Canada

Email: ssalam@cisco.com

Qin Wu (editor)
Huawei
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: bill.wu@huawei.com

Michael Wang
Huawei Technologies, Co., Ltd
101 Software Avenue, Yuhua District
Nanjing 210012
China

Email: wangzitao@huawei.com

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: October 11, 2017

D. Kumar
Cisco
Q. Wu
M. Wang
Huawei
April 9, 2017

Generic YANG Data Model for Connection Oriented Operations,
Administration, and Maintenance(OAM) protocols
draft-ietf-lime-yang-oam-model-10

Abstract

This document presents a base YANG Data model for connection oriented OAM protocols. It provides a technology-independent abstraction of key OAM constructs for such protocols. The model presented here can be extended to include technology specific details. This guarantees uniformity in the management of OAM protocols and provides support for nested OAM workflows (i.e., performing OAM functions at different levels through a unified interface)

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 11, 2017.

Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	3
2. Conventions used in this document	4
2.1. Terminology	5
3. Architecture of Generic YANG Model for OAM	6
4. Overview of the OAM Model	7
4.1. Maintenance Domain (MD) configuration	8
4.2. Maintenance Association (MA) configuration	9
4.3. Maintenance Endpoint (MEP) configuration	9
4.4. RPC definitions	10
4.5. Notifications	13
4.6. Monitor statistics	13
4.7. OAM data hierarchy	13
5. OAM YANG Module	18
6. Base Mode	40
6.1. MEP Address	40
6.2. MEP ID for Base Mode	41
6.3. Maintenance Association	41
7. Connection-oriented OAM YANG model applicability	41
7.1. Generic YANG Model extension for TRILL OAM	42
7.1.1. MD Configuration Extension	42
7.1.2. MA Configuration Extension	43
7.1.3. MEP Configuration Extension	43
7.1.4. RPC extension	44
7.2. Generic YANG Model extension for MPLS-TP OAM	45
7.2.1. MD Configuration Extension	45
7.2.2. MA Configuration Extension	47
7.2.3. MEP Configuration Extension	47
8. Security Considerations	48
9. IANA Considerations	48
10. Acknowledgments	49
11. References	49
11.1. Normative References	49
11.2. Informative References	50
Appendix A. Contributors' Addresses	51
Authors' Addresses	52

1. Introduction

Operations, Administration, and Maintenance (OAM) are important networking functions that allow operators to:

1. Monitor networks connections (Connectivity Verification, Continuity Check).
2. Troubleshoot failures (Fault verification and localization).
3. Monitor Performance

An overview of OAM tools is presented in [RFC7276]. Over the years, many technologies have developed similar tools for fault and performance management.

[IEEE802.1ag] Connectivity Fault Management is a well-established OAM standard that is widely adopted for Ethernet networks. ITU-T [G.8013], MEF Service OAM, MPLS-TP [RFC6371], TRILL [RFC7455] all define OAM mechanisms based on the manageability frame work of CFM [IEEE802.1ag].

Given the wide adoption of the underlying OAM concepts defined in CFM [IEEE802.1ag], it is a reasonable choice to develop the unified management framework for connection oriented OAM based on those concepts. In this document, we take the CFM [IEEE802.1ag] model and extend it to a technology independent framework and define the corresponding YANG model accordingly. The YANG model presented in this document is the base model for connection oriented OAM protocols and supports generic continuity check, connectivity verification and path discovery (traceroute). The generic YANG model for connection oriented OAM is designed to be extensible to other connection oriented technologies. Technology dependent nodes and remote process call (RPC) commands are defined in technology specific YANG models, which use and extend the base model defined here. As an example, VXLAN uses source UDP port number for flow entropy, while TRILL uses either MAC addresses, the VLAN tag or fine grain label, and/or IP addresses for flow entropy in the hashing for multipath selection. To capture this variation, corresponding YANG models would define the applicable structures as augmentation to the generic base model presented here. This accomplishes three goals: First it keeps each YANG model smaller and more manageable. Second, it allows independent development of corresponding YANG models. Third, implementations can limit support to only the applicable set of YANG models. (e.g. TRILL RBridge may only need to implement Generic model and the TRILL YANG model).

All implementations that follow the YANG framework presented in this document MUST implement the generic connection oriented YANG model presented here.

The YANG data model presented in this document is generated at the management layer. Encapsulations and state machines may differ according to each OAM protocol. A user who wishes to issues a Continuity Check command or a Loopback or initiate a performance monitoring session can do so in the same manner regardless of the underlying protocol or technology or specific vendor implementation.

As an example, consider a scenario where Loopback from device A to Device B fails. Between device A and B there are IEEE 802.1 bridges a, b and c. Let's assume a,b and c are using CFM [IEEE802.1ag]. Upon detecting the Loopback failures, a user may decide to drill down to the lower level at different segments of the path and issue the corresponding fault verification (LBM) and fault isolation (LTM) tools, using the same API. This ability to drill down to a lower layer of the protocol stack at a specific segment within a path for fault localization and troubleshooting is referred to as "nested OAM workflow". It is a useful concept that leads to efficient network troubleshooting and maintenance workflows. The connection oriented OAM YANG model presented in this document facilitates that without needing changes to the underlying protocols.

2. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119]. In this document, these words will appear with that interpretation only when in ALL CAPS. Lower case uses of these words are not to be interpreted as carrying [RFC2119] significance.

The following notations are used within the data tree and carry the meaning as below.

Each node is printed as:

<status> <flags> <name> <opts> <type>

<status> is one of:

- + for current

<flags> is one of:

- rw for configuration data
- ro for non-configuration data
- x for rpcs
- n for notifications
- w for writable

<name> is the name of the node

If the node is augmented into the tree from another module, its name is printed as <prefix>:<name>.

<opts> is one of:

- ? for an optional leaf or choice
- ! for a presence container
- * for a leaf-list or list
- [<keys>] for a list's keys
- (choice)/(case) Parentheses enclose choice and case nodes, and case nodes are also marked with a colon (":")

<type> is the name of the type for leafs and leaf-lists

2.1. Terminology

CCM - Continuity Check Message [IEEE802.1ag].

ECMP - Equal Cost Multipath.

LBM - Loopback Message [IEEE802.1ag].

MP - Maintenance Point [IEEE802.1ag].

MEP - Maintenance End Point [RFC7174] (Maintenance association End Point [IEEE802.1ag], MEG End Points [RFC6371]).

MIP - Maintenance Intermediate Point [RFC7174] (Maintenance domain Intermediate Point [IEEE802.1ag], MEG Intermediate Point [RFC6371]).


MA - Maintenance Association [IEEE802.1ag] [RFC7174].

- MD - Maintenance Domain [IEEE802.1ag]
 - MEG - Maintenance Entity Group [RFC6371]
 - MTV - Multi-destination Tree Verification Message.
 - OAM - Operations, Administration, and Maintenance [RFC6291].
 - TRILL - Transparent Interconnection of Lots of Links [RFC6325].
 - CFM - Connectivity Fault Management [RFC7174] [IEEE802.1ag].
 - RPC - Remote Process Call.
 - CC - Continuity Check [RFC7276]. Continuity Checks are used to verify that a destination is reachable and therefore also referred to as reachability verification.
 - CV - Connectivity Verification [RFC7276]. Connectivity Verification are used to verify that a destination is connected. It are also referred to as path verification and used to verify not only that the two MPs are connected, but also that they are connected through the expected path, allowing detection of unexpected topology changes.
- Proactive OAM - The proactive OAM refers to OAM actions which are carried out continuously to permit proactive reporting of fault. Proactive OAM method requires persistent configuration.
- On-demand OAM - The on-demand OAM refers to OAM actions which are initiated via manual intervention for a limited time to carry out diagnostics. On-demand OAM method requires only transient configuration.

3. Architecture of Generic YANG Model for OAM

In this document we define a generic YANG model for connection oriented OAM protocols. The YANG model defined here is generic in a sense that other technologies can extend it for technology specific needs. The Generic YANG model acts as the root for other OAM YANG models. This allows users to traverse between different OAM protocols with ease through a uniform API set. This also enables a nested OAM workflow. Figure 1 depicts the relationship of different OAM YANG models to the Generic YANG Model for connection oriented OAM. The Generic YANG model for OAM provides a framework where technology- specific YANG models can inherit constructs from the base YANG models without needing to redefine them within the sub-technology.

Figure 1 depicts relationship of different YANG modules.

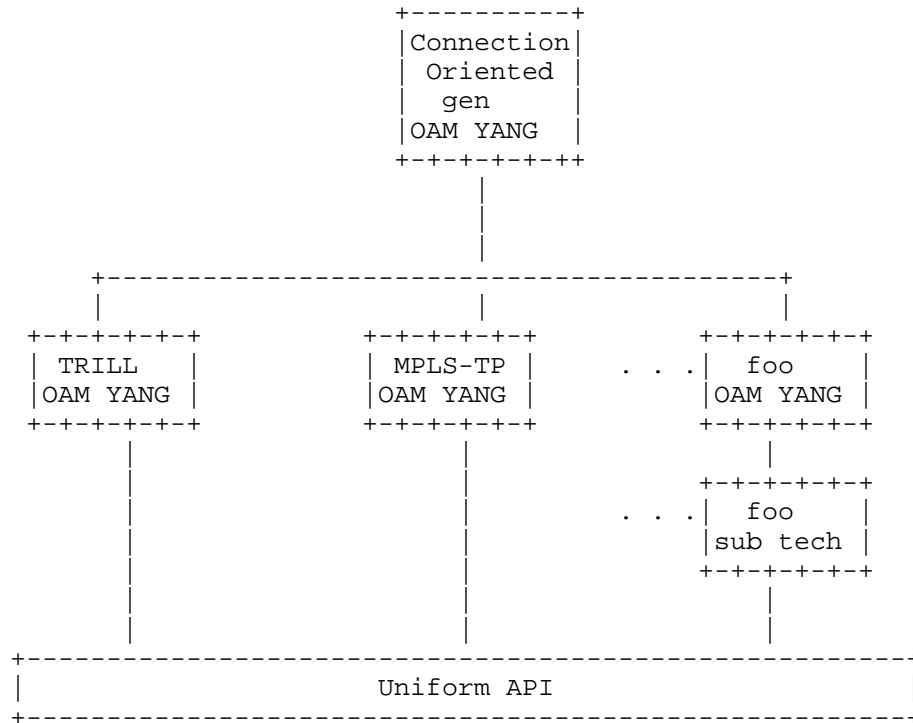

Relationship of OAM YANG model to generic (base) YANG model

4. Overview of the OAM Model

In this document we adopt the concepts of the CFM [IEEE802.1ag] model and structure it such that it can be adapted to different connection oriented OAM protocols.

At the top of the Model is the Maintenance Domain. Each Maintenance Domain is associated with a Maintenance Name and a Domain Level.

Under each Maintenance Domain there is one or more Maintenance Association (MA). In TRILL this can be per Fine-Grained Label or for VPLS this can be per VPLS instance [RFC6136].

Under each MA, there can be two or more MEPs (Maintenance End Points). MEPs are addressed by their respective technology specific address identifiers. The YANG model presented here provides flexibility to accommodate different addressing schemes.

In the vertical direction orthogonal to the Maintenance Domain, presented are the commands. Those, in YANG terms, are the RPC commands. These RPC commands provide uniform APIs for continuity check, connectivity verification, path discovery(traceroute) and their equivalents as well as other OAM commands.

The OAM entities in the generic YANG model defined here will be either explicitly or implicitly configured using any of the OAM tools. The OAM tools used here are limited to OAM toolset specified in section 5.1 of [RFC7276]. In order to facilitate zero-touch experience, this document defines a default mode of OAM. The default mode of OAM is referred to as the Base Mode and specifies default values for each of model parameters, such as Maintenance Domain Level, Name of the Maintenance Association, Addresses of MEPs and so on. The default values of these depend on the technology. Base Mode for TRILL is defined in [RFC7455]. Base mode for other technologies and future extensions developed in IETF will be defined in their corresponding documents.

It is important to note that, no specific enhancements are needed in the YANG model to support Base Mode. Implementations that comply with this document, by default implement the data nodes of the applicable technology. Data nodes of the Base Mode are read-only nodes.

4.1. Maintenance Domain (MD) configuration

The container "domains" is the top level container within the gen-oam module. Within the container "domains", separate list is maintained per MD. The MD list uses the key MD-name-string for indexing. MD-name-string is a leaf and derived from type string. Additional name formats as defined in [IEEE802.lag] or other standards can be included by association of the MD-name-format with an identity-ref. MD-name-format indicates the format of the augmented MD-names. MD-name is presented as choice/case construct. Thus, it is easily augmentable by derivative work.

```

module: ietf-conn-oam
+--rw domains
  +--rw domain* [technology MD-name-string]
    +--rw technology          identityref
    +--rw MD-name-string      MD-name-string
    +--rw MD-name-format?    identityref
    +--rw (MD-name)?
      | +--:(MD-name-null)
      |   +--rw MD-name-null?      empty
    +--rw md-level?          MD-level

```

Snippet of data hierarchy related to OAM domains

4.2. Maintenance Association (MA) configuration

Within a given Maintenance Domain there can be one or more Maintenance Associations (MA). MAs are represented as a list and indexed by the MA-name-string. Similar to MD-name defined previously, additional name formats can be added by augmenting the name-format identity-ref and adding applicable case statements to MA-name.

```

module: ietf-conn-oam
+--rw domains
  +--rw domain* [technology MD-name-string]
    .
    .
    +--rw MAs
      +--rw MA* [MA-name-string]
        +--rw MA-name-string      MA-name-string
        +--rw MA-name-format?    identityref
        +--rw (MA-name)?
          | +--:(MA-name-null)
          |   +--rw MA-name-null?      empty

```

Snippet of data hierarchy related to Maintenance Associations (MA)

4.3. Maintenance Endpoint (MEP) configuration

Within a given Maintenance Association (MA), there can be one or more Maintenance End Points (MEP). MEPs are represented as a list within the data hierarchy and indexed by the key MEP-name.


```

module: ietf-conn-oam
  +--rw domains
    +--rw domain* [technology MD-name-string]
      +--rw technology          identityref
      .
      .
    +--rw MAs
      +--rw MA* [MA-name-string]
        +--rw MA-name-string    MA-name-string
        .
        .
      +--rw MEP* [mep-name]
        | +--rw mep-name          MEP-name
        | +--rw (MEP-ID)?
        | | +--:(MEP-ID-int)
        | | +--rw MEP-ID-int?      int32
        | +--rw MEP-ID-format?    identityref
        | +--rw (mep-address)?
        | | +--:(mac-address)
        | | | +--rw mac-address?  yang:mac-address
        | | +--:(ipv4-address)
        | | | +--rw ipv4-address? inet:ipv4-address
        | | +--:(ipv6-address)
        | | | +--rw ipv6-address? inet:ipv6-address
        | .
        | .
        | .

```

Snippet of data hierarchy related to Maintenance Endpoint (MEP)

4.4. RPC definitions

The RPC model facilitates issuing commands to a NETCONF server (in this case to the device that need to execute the OAM command) and obtain a response. RPC model defined here abstracts OAM specific commands in a technology independent manner.

There are several RPC commands defined for the purpose of OAM. In this section we present a snippet of the continuity check command for illustration purposes. Please refer to Section 4.5 for the complete data hierarchy and Section 5 for the YANG model.

```

module: ietf-conn-oam
  +--rw domains
    +--rw domain* [technology MD-name-string]
      +--rw technology          identityref
      .
      .

```

```

rpcs:
  +---x continuity-check {continuity-check}?
    |
    |   +---w input
    |   |
    |   |   +---w technology?          identityref
    |   |   +---w MD-name-string  -> /domains/domain/MD-name-string
    |   |   +---w md-level?        -> /domains/domain/md-level
    |   |   +---w MA-name-string  -> /domains/domain/MAs/MA/MA-name-string
    |   |   +---w cos-id?          uint8
    |   |   +---w ttl?            uint8
    |   |   +---w sub-type?        identityref
    |   |   +---w source-mep?      -> /domains/domain/MAs/MA/MEP/mep-name
    |   |   +---w destination-mep
    |   |   |
    |   |   |   +---w (mep-address)?
    |   |   |   |
    |   |   |   |   +---:(mac-address)
    |   |   |   |   |   +---w mac-address?      yang:mac-address
    |   |   |   |   +---:(ipv4-address)
    |   |   |   |   |   +---w ipv4-address?     inet:ipv4-address
    |   |   |   |   +---:(ipv6-address)
    |   |   |   |   |   +---w ipv6-address?     inet:ipv6-address
    |   |   |   +---w (MEP-ID)?
    |   |   |   |   +---:(MEP-ID-int)
    |   |   |   |   |   +---w MEP-ID-int?       int32
    |   |   |   +---w MEP-ID-format? identityref
    |   |   +---w count?          uint32
    |   |   +---w cc-transmit-interval? Interval
    |   |   +---w packet-size?    uint32
    |   +---ro output
    |   |
    |   |   +---ro (monitor-stats)?
    |   |   |   +---:(monitor-null)
    |   |   |   +---ro monitor-null? empty
    |   +---x continuity-verification {connectivity-verification}?
    |   |
    |   |   +---w input
    |   |   |
    |   |   |   +---w MD-name-string  -> /domains/domain/MD-name-string
    |   |   |   +---w md-level?        -> /domains/domain/md-level
    |   |   |   +---w MA-name-string  -> /domains/domain/MAs/MA/MA-name-string
    |   |   |   +---w cos-id?          uint8
    |   |   |   +---w ttl?            uint8
    |   |   |   +---w sub-type?        identityref
    |   |   |   +---w source-mep?      -> /domains/domain/MAs/MA/MEP/mep-name
    |   |   |   +---w destination-mep
    |   |   |   |
    |   |   |   |   +---w (mep-address)?
    |   |   |   |   |
    |   |   |   |   |   +---:(mac-address)
    |   |   |   |   |   |   +---w mac-address?      yang:mac-address
    |   |   |   |   |   +---:(ipv4-address)
    |   |   |   |   |   |   +---w ipv4-address?     inet:ipv4-address
    |   |   |   |   |   +---:(ipv6-address)
    |   |   |   |   |   |   +---w ipv6-address?     inet:ipv6-address
    |   |   |   +---w (MEP-ID)?

```

```

| | | | +---:(MEP-ID-int)
| | | | | +---w MEP-ID-int? int32
| | | | +---w MEP-ID-format? identityref
| | | +---w count? uint32
| | | +---w interval? Interval
| | | +---w packet-size? uint32
| | +--ro output
| | | +--ro (monitor-stats)?
| | | | +---:(monitor-null)
| | | | | +--ro monitor-null? empty
+---x traceroute {traceroute}?
| | +---w input
| | | +---w MD-name-string -> /domains/domain/MD-name-string
| | | +---w md-level? -> /domains/domain/md-level
| | | +---w MA-name-string -> /domains/domain/MAs/MA/MA-name-string
| | | +---w cos-id? uint8
| | | +---w ttl? uint8
| | | +---w command-sub-type? identityref
| | | +---w source-mep? -> /domains/domain/MAs/MA/MEP/mep-name
| | | +---w destination-mep
| | | | +---w (mep-address)?
| | | | | +---:(mac-address)
| | | | | | +---w mac-address? yang:mac-address
| | | | | +---:(ipv4-address)
| | | | | | +---w ipv4-address? inet:ipv4-address
| | | | | +---:(ipv6-address)
| | | | | | +---w ipv6-address? inet:ipv6-address
| | | | +---w (MEP-ID)?
| | | | | +---:(MEP-ID-int)
| | | | | | +---w MEP-ID-int? int32
| | | | | +---w MEP-ID-format? identityref
| | | +---w count? uint32
| | | +---w interval? Interval
| | +--ro output
| | | +--ro response* [response-index]
| | | | +--ro response-index uint8
| | | | +--ro ttl? uint8
| | | | +--ro destination-mep
| | | | | +--ro (mep-address)?
| | | | | | +---:(mac-address)
| | | | | | | +--ro mac-address? yang:mac-address
| | | | | | +---:(ipv4-address)
| | | | | | | +--ro ipv4-address? inet:ipv4-address
| | | | | | +---:(ipv6-address)
| | | | | | | +--ro ipv6-address? inet:ipv6-address
| | | | +--ro (MEP-ID)?
| | | | | +---:(MEP-ID-int)
| | | | | | +--ro MEP-ID-int? int32

```

```

|   +--ro MEP-ID-format?   identityref
+--ro mip {mip}?
|   +--ro interface?       if:interface-ref
|   +--ro (mip-address)?
|   |   +--:(mac-address)
|   |   |   +--ro mac-address?   yang:mac-address
|   |   +--:(ipv4-address)
|   |   |   +--ro ipv4-address?   inet:ipv4-address
|   |   +--:(ipv6-address)
|   |   |   +--ro ipv6-address?   inet:ipv6-address
+--ro (monitor-stats)?
|   +--:(monitor-null)
|   |   +--ro monitor-null?       empty

```

Snippet of data hierarchy related to RPC call continuity-check

4.5. Notifications

Notification is sent on defect condition and defect clears with Maintenance Domain Name, MA Name, defect-type (The currently active defects), generating-mepid, and defect-message to indicate more details.

4.6. Monitor statistics

Grouping for monitoring statistics is to be used by Yang modules which Augment Yang to provide statistics due to pro-active OAM like CCM Messages. For example CCM Transmit, CCM Receive, CCM Errors, etc.

4.7. OAM data hierarchy

The complete data hierarchy related to the connection oriented OAM YANG model is presented below.

module: ietf-conn-oam

```

+--rw domains
|   +--rw domain* [technology MD-name-string]
|   |   +--rw technology       identityref
|   |   +--rw MD-name-string   MD-name-string
|   |   +--rw MD-name-format?  identityref
|   |   +--rw (MD-name)?
|   |   |   +--:(MD-name-null)
|   |   |   |   +--rw MD-name-null?       empty
|   |   +--rw md-level?        MD-level
|   +--rw MAs
|   |   +--rw MA* [MA-name-string]
|   |   |   +--rw MA-name-string   MA-name-string

```

```

+--rw MA-name-format?  identityref
+--rw (MA-name)?
|   +--:(MA-name-null)
|   |   +--rw MA-name-null?      empty
+--rw (connectivity-context)?
|   +--:(context-null)
|   |   +--rw context-null?      empty
+--rw cos-id?          uint8
+--rw cc-enable?       boolean
+--rw MEP* [mep-name]
|   +--rw mep-name      MEP-name
|   +--rw (MEP-ID)?
|   |   +--:(MEP-ID-int)
|   |   |   +--rw MEP-ID-int?      int32
+--rw MEP-ID-format?  identityref
+--rw (mep-address)?
|   +--:(mac-address)
|   |   +--rw mac-address?      yang:mac-address
|   |   +--:(ipv4-address)
|   |   |   +--rw ipv4-address?    inet:ipv4-address
|   |   |   +--:(ipv6-address)
|   |   |   |   +--rw ipv6-address?  inet:ipv6-address
+--rw cos-id?          uint8
+--rw cc-enable?       boolean
+--rw session* [session-cookie]
|   +--rw session-cookie      uint32
|   +--rw destination-mep
|   |   +--rw (MEP-ID)?
|   |   |   +--:(MEP-ID-int)
|   |   |   |   +--rw MEP-ID-int?      int32
|   |   |   |   +--rw MEP-ID-format?  identityref
+--rw destination-mep-address
|   +--rw (mep-address)?
|   |   +--:(mac-address)
|   |   |   +--rw mac-address?      yang:mac-address
|   |   |   +--:(ipv4-address)
|   |   |   |   +--rw ipv4-address?    inet:ipv4-address
|   |   |   |   +--:(ipv6-address)
|   |   |   |   |   +--rw ipv6-address?  inet:ipv6-address
+--rw cos-id?          uint8
+--rw MIP* [interface] {mip}?
|   +--rw interface      if:interface-ref
+--rw (mip-address)?
|   +--:(mac-address)
|   |   +--rw mac-address?      yang:mac-address
+--:(ipv4-address)
|   +--rw ipv4-address?    inet:ipv4-address
+--:(ipv6-address)

```

```

    +--rw ipv6-address?    inet:ipv6-address

```

```

rpcs:

```

```

  +---x continuity-check {continuity-check}?
  |   +---w input
  |   |   +---w technology?                identityref
  |   |   +---w MD-name-string  -> /domains/domain/MD-name-string
  |   |   +---w md-level?       -> /domains/domain/md-level
  |   |   +---w MA-name-string  -> /domains/domain/MAs/MA/MA-name-string
  |   |   +---w cos-id?         uint8
  |   |   +---w ttl?           uint8
  |   |   +---w sub-type?      identityref
  |   |   +---w source-mep?    -> /domains/domain/MAs/MA/MEP/mep-name
  |   |   +---w destination-mep
  |   |   |   +---w (mep-address)?
  |   |   |   |   +---:(mac-address)
  |   |   |   |   |   +---w mac-address?    yang:mac-address
  |   |   |   |   +---:(ipv4-address)
  |   |   |   |   |   +---w ipv4-address?    inet:ipv4-address
  |   |   |   |   +---:(ipv6-address)
  |   |   |   |   |   +---w ipv6-address?    inet:ipv6-address
  |   |   |   +---w (MEP-ID)?
  |   |   |   |   +---:(MEP-ID-int)
  |   |   |   |   |   +---w MEP-ID-int?      int32
  |   |   |   |   +---w MEP-ID-format?    identityref
  |   |   +---w count?                uint32
  |   |   +---w cc-transmit-interval?  Interval
  |   |   +---w packet-size?          uint32
  |   +--ro output
  |   |   +--ro (monitor-stats)?
  |   |   |   +---:(monitor-null)
  |   |   |   +--ro monitor-null?    empty
  |   +---x continuity-verification {connectivity-verification}?
  |   |   +---w input
  |   |   |   +---w MD-name-string  -> /domains/domain/MD-name-string
  |   |   |   +---w md-level?       -> /domains/domain/md-level
  |   |   |   +---w MA-name-string  -> /domains/domain/MAs/MA/MA-name-string
  |   |   |   +---w cos-id?         uint8
  |   |   |   +---w ttl?           uint8
  |   |   |   +---w sub-type?      identityref
  |   |   |   +---w source-mep?    -> /domains/domain/MAs/MA/MEP/mep-name
  |   |   |   +---w destination-mep
  |   |   |   |   +---w (mep-address)?
  |   |   |   |   |   +---:(mac-address)
  |   |   |   |   |   |   +---w mac-address?    yang:mac-address
  |   |   |   |   +---:(ipv4-address)
  |   |   |   |   |   +---w ipv4-address?    inet:ipv4-address
  |   |   |   |   +---:(ipv6-address)

```

```

| | | | |      +---w ipv6-address?      inet:ipv6-address
| | | | |      +---w (MEP-ID)?
| | | | |      |      +---:(MEP-ID-int)
| | | | |      |      +---w MEP-ID-int?      int32
| | | | |      +---w MEP-ID-format?      identityref
| | | | |      +---w count?      uint32
| | | | |      +---w interval?      Interval
| | | | |      +---w packet-size?      uint32
| | | | |      +--ro output
| | | | |      +--ro (monitor-stats)?
| | | | |      |      +---:(monitor-null)
| | | | |      |      +--ro monitor-null?      empty
| | | | |      +---x traceroute {traceroute}?
| | | | |      +---w input
| | | | |      |      +---w MD-name-string -> /domains/domain/MD-name-string
| | | | |      |      +---w md-level?      -> /domains/domain/md-level
| | | | |      |      +---w MA-name-string -> /domains/domain/MAs/MA/MA-name-string
| | | | |      |      +---w cos-id?      uint8
| | | | |      |      +---w ttl?      uint8
| | | | |      |      +---w command-sub-type?      identityref
| | | | |      |      +---w source-mep?      -> /domains/domain/MAs/MA/MEP/mep-name
| | | | |      |      +---w destination-mep
| | | | |      |      |      +---w (mep-address)?
| | | | |      |      |      |      +---:(mac-address)
| | | | |      |      |      |      |      +---w mac-address?      yang:mac-address
| | | | |      |      |      |      |      +---:(ipv4-address)
| | | | |      |      |      |      |      |      +---w ipv4-address?      inet:ipv4-address
| | | | |      |      |      |      |      |      +---:(ipv6-address)
| | | | |      |      |      |      |      |      +---w ipv6-address?      inet:ipv6-address
| | | | |      |      |      +---w (MEP-ID)?
| | | | |      |      |      |      +---:(MEP-ID-int)
| | | | |      |      |      |      +---w MEP-ID-int?      int32
| | | | |      |      |      +---w MEP-ID-format?      identityref
| | | | |      |      +---w count?      uint32
| | | | |      |      +---w interval?      Interval
| | | | |      +--ro output
| | | | |      +--ro response* [response-index]
| | | | |      |      +--ro response-index      uint8
| | | | |      |      +--ro ttl?      uint8
| | | | |      |      +--ro destination-mep
| | | | |      |      |      +--ro (mep-address)?
| | | | |      |      |      |      +---:(mac-address)
| | | | |      |      |      |      |      +--ro mac-address?      yang:mac-address
| | | | |      |      |      |      |      +---:(ipv4-address)
| | | | |      |      |      |      |      |      +--ro ipv4-address?      inet:ipv4-address
| | | | |      |      |      |      |      |      +---:(ipv6-address)
| | | | |      |      |      |      |      |      +--ro ipv6-address?      inet:ipv6-address
| | | | |      |      |      +--ro (MEP-ID)?

```

```

    | | +---:(MEP-ID-int)
    | | | +---ro MEP-ID-int? int32
    | | +---ro MEP-ID-format? identityref
+---ro mip {mip}?
    | +---ro interface? if:interface-ref
    | +---ro (mip-address)?
    | | +---:(mac-address)
    | | | +---ro mac-address? yang:mac-address
    | | +---:(ipv4-address)
    | | | +---ro ipv4-address? inet:ipv4-address
    | | +---:(ipv6-address)
    | | | +---ro ipv6-address? inet:ipv6-address
+---ro (monitor-stats)?
    | +---:(monitor-null)
    | | +---ro monitor-null? empty

```

notifications:

```

+---n defect-condition-notification
    | +---ro technology? identityref
    | +---ro MD-name-string -> /domains/domain/MD-name-string
    | +---ro MA-name-string -> /domains/domain/MAs/MA/MA-name-string
    | +---ro mep-name? -> /domains/domain/MAs/MA/MEP/mep-name
    | +---ro defect-type? identityref
    | +---ro generating-mepid
    | | +---ro (MEP-ID)?
    | | | +---:(MEP-ID-int)
    | | | | +---ro MEP-ID-int? int32
    | | | +---ro MEP-ID-format? identityref
    | +---ro (defect)?
    | | +---:(defect-null)
    | | | +---ro defect-null? empty
    | | +---:(defect-code)
    | | | +---ro defect-code? int32
+---n defect-cleared-notification
    | +---ro technology? identityref
    | +---ro MD-name-string -> /domains/domain/MD-name-string
    | +---ro MA-name-string -> /domains/domain/MAs/MA/MA-name-string
    | +---ro mep-name? -> /domains/domain/MAs/MA/MEP/mep-name
    | +---ro defect-type? identityref
    | +---ro generating-mepid
    | | +---ro (MEP-ID)?
    | | | +---:(MEP-ID-int)
    | | | | +---ro MEP-ID-int? int32
    | | | +---ro MEP-ID-format? identityref
    | +---ro (defect)?
    | | +---:(defect-null)
    | | | +---ro defect-null? empty
    | | +---:(defect-code)

```


+--ro defect-code? int32

 data hierarchy of OAM

5. OAM YANG Module

 <CODE BEGINS> file "ietf-conn-oam.yang"

```
module ietf-conn-oam {
  namespace "urn:ietf:params:xml:ns:yang:ietf-conn-oam";
  prefix goam;

  import ietf-yang-types {
    prefix yang;
  }
  import ietf-inet-types {
    prefix inet;
  }
  import ietf-interfaces {
    prefix if;
  }

  organization "IETF LIME Working Group";
  contact
    "WG Web:      http://tools.ietf.org/wg/lime
    WG List:      mailto:lime@ietf.org
    WG Chair:     Carlos Pignataro cpignata@cisco.com
    WG Chair:     Ron Bonica rbonica@juniper.net
    Editor:       Deepak Kumar dekumar@cisco.com
    Editor:       Qin Wu bill.wu@huawei.com
    Editor:       Zitao Wang wangzitao@huawei.com";
  description
    "This YANG module defines the generic configuration,
    statistics and rpc for connection oriented OAM
    to be used within IETF in a protocol independent manner.
    Functional level abstraction is indendent
    with YANG modeling. It is assumed that each protocol
    maps corresponding abstracts to its native format.
    Each protocol may extend the YANG model defined
    here to include protocol specific extensions";

  revision 2017-04-10 {
    description
      "Initial revision. - 08 version";

    reference "draft-ietf-lime-yang-oam-model";
  }
}
```

```
/* features */
feature connectivity-verification {
  description
    "This feature indicates that the server supports
    executing connectivity verification OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    connectivity verification command or rpc model for
    connectivity verification command.";
}
feature continuity-check{
  description
    "This feature indicates that the server supports
    executing continuity check OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    continuity check command or rpc model for
    continuity check command.";
}

feature traceroute{
  description
    "This feature indicates that the server supports
    executing traceroute OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    traceroute command or rpc model for
    traceroute command.";
}
feature mip {
  description
    "This feature indicates that the MIP (Maintenance Intermediate Point)
    need to
    be explicit configured";
}
/* Identities */

identity technology-types {
  description
    "This is the base identity of technology types which are
    TRILL,MPLS-TP,vpls etc";
}

identity command-sub-type {
  description
    "Defines different rpc command subtypes,
    e.g rfc6905 trill OAM, this is optional for most cases";
}
```

```
identity on-demand {
  base command-sub-type;
  description
    "On demand activation - indicates that the tool is activated
    manually to detect a specific anomaly.
    On-demand OAM method requires only transient configuration.";
}

identity proactive {
  base command-sub-type;
  description
    "Proactive activation - indicates that the tool is activated on a
    continual basis, where messages are sent periodically, and errors
    are detected when a certain number of expected messages are not
    received. Proactive OAM method requires persistent configuration.";
}

identity name-format {

  description
    "This defines the name format, IEEE 802lag CFM defines varying
    styles of names. It is expected name format as an identity ref
    to be extended with new types.";
}

identity name-format-null {
  base name-format;
  description
    "Defines name format as null";
}

identity identifier-format {
  description
    "Identifier-format identity can be augmented to define other
    format identifiers used in MEP-ID etc";
}

identity identifier-format-integer {
  base identifier-format;
  description
    "Defines identifier-format to be integer";
}

identity defect-types {
  description
    "Defines different defect types, e.g. rdi
    (Remote Defect Indication), loss of continuity";
}
```

```
}
identity rdi {
  base defect-types;
  description
    "Indicates the aggregate health of the remote MEPs. ";
}

identity remote-mep-defect{
  base defect-types;
  description
    "Indicates that one or more of the remote MEPs is
    reporting a failure ";
}

identity loss-of-continuity{
  base defect-types;
  description
    "If no proactive CC OAM packets from the source
    MEP (and in the case of CV, this includes the
    requirement to have the expected unique,
    technology dependent source MEP identifier)
    are received within the interval. ";
}

identity cv-defect {
  base defect-types;
  description
    "This function should support monitoring between the MEPs and,
    in addition, between a MEP and MIP.[RFC6371] highlights,
    when performing Connectivity Verification, the need for the
    Continuity Check and Connectivity Verification (CC-V) messages
    to include unique identification of the MEG that is being
    monitored and the MEP that originated the message.";
}

identity invalid-oam-defect{
  base defect-types;
  description
    "Indicates that one or more invalid OAM messages has been
    received and that 3.5 times that OAM message transmission
    interval has not yet expired.";
}

identity cross-connect-defect{
  base defect-types;
  description
    "Indicates that one or more cross-connect defect
```

```
(for example, a service ID does not match the VLAN.)
messages has been received and that 3.5 times that OAM message
transmission interval has not yet expired.";
}

/* typedefs */

typedef MEP-name {
    type string;
    description
        "Generic administrative name for a MEP";
}

typedef Interval{
    type decimal64{
        fraction-digits 2;
    }
    units "milliseconds";
    description
        "Interval between packets in milliseconds.
        0 means no packets are sent.";
}

typedef MD-name-string {
    type string;
    description
        "Generic administrative name for an MD";
}

typedef MA-name-string {
    type string;
    description
        "Generic administrative name for an MA";
}

typedef oam-counter32 {
    type yang:zero-based-counter32;
    description
        "Defines 32 bit counter for OAM";
}

typedef MD-level {
    type uint32 {
        range "0..255";
    }
    description
        "Maintenance Domain level. The level may be restricted in
        certain protocols (eg to 0-7)";
}
```

```
    }

    /* groupings */

    grouping maintenance-domain-reference {
    description
        "This grouping uniquely identifies a maintenance domain.";
    leaf maintenance-domain {
        type leafref {
            path "/goam:domains/goam:domain/goam:MD-name-string";
        }
    description
        "A reference to a specific Maintenance Domain.";
    }
    }

    grouping maintenance-association-reference {
    description
        "This grouping uniquely identifies a
        maintenance association. It consists
        of a maintenance-domain-reference and
        a maintenance-association leafref";
    uses maintenance-domain-reference;
    leaf maintenance-association {
        type leafref {
            path "/goam:domains/goam:domain"
                + "[goam:MD-name-string = current()/"
                + "../maintenance-domain]/goam:MA"
                + "goam:MA/goam:MA-name-string";
        }
    description
        "A reference to a specific Maintenance Association.";
    }
    }

    grouping maintenance-association-end-point-reference {
    description
        "This grouping uniquely identifies
        a maintenance association. It consists
        of a maintenance-association-reference and
        a maintenance-association-end-point leafref";
    uses maintenance-association-reference;
    leaf maintenance-association-end-point {
        type leafref {
            path "/goam:domains/goam:domain"
                + "[goam:MD-name-string = current()/"
                + "../maintenance-domain]/goam:MA"
                + "goam:MA[goam:MA-name-string = "
```

```
        +"current()/../maintenance-association]"
        +"/goam:MEP/goam:mep-name";
    }
    description
        "A reference to a specific Maintenance
        association End Point.";
}
}

grouping time-to-live {
    leaf ttl{
        type uint8;
        description
            "Time to Live.";
    }
    description
        "Time to Live grouping.";
}

grouping defect-message {
    choice defect {
        case defect-null {
            description
                "This is a placeholder when no defect status is needed";
            leaf defect-null {
                type empty;
                description
                    "there is no defect define, it will be defined in
                    technology specific model.";
            }
        }
        case defect-code {
            description
                "This is a placeholder to display defect code.";
            leaf defect-code {
                type int32;
                description
                    "Defect code is integer value specific to technology.";
            }
        }
    }

    description
        "Defect Message choices.";
}

description
    "Defect Message.";
}
```

```
grouping mep-address {
  choice mep-address {
    case mac-address {
      leaf mac-address {
        type yang:mac-address;
        description
          "MAC Address";
      }
    }
    description
      "MAC Address based MEP Addressing.";
  }
  case ipv4-address {
    leaf ipv4-address {
      type inet:ipv4-address;
      description
        "IPv4 Address";
    }
    description
      "IP Address based MEP Addressing.";
  }
  case ipv6-address {
    leaf ipv6-address {
      type inet:ipv6-address;
      description
        "IPv6 Address";
    }
    description
      "IPv6 Address based MEP Addressing.";
  }
  description
    "MEP Addressing.";
}
description
  "MEP Address";
}
grouping mip-address {
  choice mip-address {
    case mac-address {
      leaf mac-address {
        type yang:mac-address;
        description
          "MAC Address";
      }
    }
    description
      "MAC Address based MIP Addressing.";
  }
  case ipv4-address {
    leaf ipv4-address {
```



```
        type inet:ipv4-address;
        description
            "IPv4 Address";
    }

    description
        "IP Address based MIP Addressing.";
    }
    case ipv6-address {
        leaf ipv6-address {
            type inet:ipv6-address;
            description
                "IPv6 Address";
        }
        description
            "IPv6 Address based MIP Addressing.";
    }
    description
        "MIP Addressing.";
    }
    description
        "MIP Address";
    }
    grouping maintenance-domain-id {
        description
            "Grouping containing leaves sufficient to identify an MD";
        leaf technology {
            type identityref {
                base technology-types;
            }
            mandatory true;
            description
                "Defines the technology";
        }
        leaf MD-name-string {
            type MD-name-string;
            mandatory true;
            description
                "Defines the generic administrative maintenance domain name";
        }
    }
    }

    grouping MD-name {
        leaf MD-name-format {
            type identityref {
                base name-format;
            }
            description
```

```
        "Name format.";
    }
    choice MD-name {
        case MD-name-null {
            leaf MD-name-null {
                when "'../ ../ ../MD-name-format' = 'name-format-null'" {
                    description
                        "MD name format is equal to null format.";
                }
                type empty;
                description
                    "MD name Null.";
            }
        }
        description
            "MD name.";
    }
    description
        "MD name";
}

grouping ma-identifier {
    description
        "Grouping containing leaves sufficient to identify an MA";
    leaf MA-name-string {
        type MA-name-string;

        description
            "MA name string.";
    }
}

grouping MA-name {
    description
        "MA name";
    leaf MA-name-format {
        type identityref {
            base name-format;
        }
        description
            "Ma name format";
    }
    choice MA-name {
        case MA-name-null {
            leaf MA-name-null {
                when "'../ ../ ../MA-name-format' = 'name-format-null'" {
                    description
```

```
        "MA";
    }
    type empty;

    description
        "Empty";
    }
}
description
    "MA name";
}
}

grouping MEP-ID {
    choice MEP-ID {
        default "MEP-ID-int";
        case MEP-ID-int {
            leaf MEP-ID-int {
                type int32;
            }
        }
        description
            "MEP ID in integer format";
    }
    description
        "MEP-ID";
}

leaf MEP-ID-format {
    type identityref {
        base identifier-format;
    }
    description
        "MEP ID format.";
}
description
    "MEP-ID";
}

grouping MEP {
    description
        "Defines elements within the MEP";
    leaf mep-name {
        type MEP-name;
        mandatory true;
        description
            "Generic administrative name of the MEP";
    }
}
```

```
    uses MEP-ID;
    uses mep-address;
}

grouping monitor-stats {
  description
    "grouping for monitoring statistics, this will be augmented
    by others who use this component";
  choice monitor-stats {

    default "monitor-null";
    case monitor-null {
      description
        "This is a place holder when
        no monitoring statistics is needed";
      leaf monitor-null {
        type empty;
        description
          "There is no monitoring statistics to be defined";
      }
    }
    description
      "Define the monitor stats";
  }
}

grouping connectivity-context {
  description
    "Grouping defining the connectivity context for an MA; for
    example, a VRF for VPLS, or an LSP for MPLS-TP. This will be
    augmented by each protocol who use this component";
  choice connectivity-context {
    default "context-null";
    case context-null {
      description
        "This is a place holder when no context is needed";
      leaf context-null {
        type empty;
        description
          "There is no context define";
      }
    }
    description
      "Connectivity context";
  }
}

grouping cos {
  description
```

```
"Priority used in transmitted packets; for example, in the
EXP field in MPLS-TP.";

leaf cos-id {
  type uint8;
  description
    "Class of service";
}
}
grouping MIP-grouping {
  uses mip-address;
  description
    "Grouping for MIP configuration";
}

container domains {
  description
    "Contains configuration related data. Within the container
    is list of fault domains. Within each domain has List of MA.";
  list domain {
    key "technology MD-name-string";
    ordered-by system;
    description
      "Define the list of Domains within the IETF-OAM";
    uses maintenance-domain-id;
    uses MD-name;
    leaf md-level {
      type MD-level;
      description
        "Defines the MD-Level";
    }
  }
  container MAs {
    description
      "This container defines MA, within that have multiple MA
      and within MA have MEP";
    list MA {
      key "MA-name-string";
      ordered-by system;
      uses ma-identifier;
      uses MA-name;
      uses connectivity-context;
      uses cos {
        description
          "Default class of service for this MA,
          which may be overridden
          for particular MEPs,
          sessions or operations.";
      }
    }
  }
}
```

```
    leaf cc-enable{
      type boolean;
      description
        "Indicate whether the CC enable.";
    }
  list MEP {
    key "mep-name";

    ordered-by system;
    description
      "Contain list of MEPS";
    uses MEP;
    uses cos;
    leaf cc-enable{
      type boolean;
      description
        "Indicate whether the CC enable.";
    }
    list session {
      key "session-cookie";
      ordered-by user;
      description
        "Monitoring session to/from a particular remote MEP.
        Depending on the protocol, this could represent CC
        messages received from a single remote MEP (if the
        protocol uses multicast CCs) or a target to which
        unicast echo request CCs are sent and from which
        responses are received (if the protocol uses a
        unicast request/response mechanism).";
      leaf session-cookie {
        type uint32;
        description
          "Cookie to identify different sessions, when there
          are multiple remote MEPS or multiple sessions to
          the same remote MEP.";
      }
      container destination-mep {
        uses MEP-ID;
        description
          "Destination MEP";
      }
      container destination-mep-address {
        uses mep-address;
        description
          "Destination MEP Address";
      }
    }
    uses cos;
  }
}
```

```
    }
    list MIP {
      if-feature mip;
      key "interface";
      leaf interface {
        type if:interface-ref;
        description
          "Interface";
      }
      uses MIP-grouping;
      description
        "List for MIP";
    }
    description
      "Maintenance Association list";
  }
}

notification defect-condition-notification {
  description
    "When defect condition is met this notification is sent";
  leaf technology {
    type identityref {
      base technology-types;
    }
    description
      "The technology";
  }
  leaf MD-name-string {
    type leafref{
      path "/domains/domain/MD-name-string";
    }
    mandatory true;
    description
      "Indicate which MD is seeing the defect";
  }
  leaf MA-name-string{
    type leafref{
      path "/domains/domain/MAs/MA/MA-name-string";
    }
    mandatory true;
    description
      "Indicate which MA is seeing the defect";
  }
  leaf mep-name {
```

```
    type leafref{
      path "/domains/domain/MAs/MA/MEP/mep-name";
    }
    description
      "Indicate which MEP is seeing the defect";
  }
  leaf defect-type {
    type identityref {
      base defect-types;
    }
    description
      "The currently active defects on the specific MEP.";
  }
  container generating-mepid {

    uses MEP-ID;
    description
      "Who is generating the defect (if known) if
      unknown make it 0.";
  }
  uses defect-message {
    description
      "Defect message to indicate more details.";
  }
}

notification defect-cleared-notification {
  description
    "When defect cleared is met this notification is sent";
  leaf technology {
    type identityref {
      base technology-types;
    }
    description
      "The technology";
  }
  leaf MD-name-string {
    type leafref{
      path "/domains/domain/MD-name-string";
    }
    mandatory true;
    description
      "Indicate which MD is seeing the defect";
  }
  leaf MA-name-string{
    type leafref{
      path "/domains/domain/MAs/MA/MA-name-string";
    }
  }
}
```



```
    mandatory true;
    description
      "Indicate which MA is seeing the defect";
  }
  leaf mep-name {
    type leafref{
      path "/domains/domain/MAs/MA/MEP/mep-name";
    }
    description
      "Indicate which MEP is seeing the defect";
  }

  leaf defect-type {
    type identityref {
      base defect-types;
    }
    description
      "The currently active defects on the specific MEP.";
  }
  container generating-mepid {
    uses MEP-ID;
    description
      "Who is generating the defect (if known) if
      unknown make it 0.";
  }
  uses defect-message {
    description
      "Defect message to indicate more details.";
  }
}

rpc continuity-check {
  if-feature "continuity-check";
  description
    "Generates continuity-check as per RFC7276 Table 4.";
  input {
    leaf technology {
      type identityref {
        base technology-types;
      }
      description
        "The technology";
    }
    leaf MD-name-string {
      type leafref{
        path "/domains/domain/MD-name-string";
      }
      mandatory true;
    }
  }
}
```

```
    description
      "Indicate which MD is seeing the defect";
  }
  leaf md-level {
    type leafref {
      path "/domains/domain/md-level";
    }
    description
      "The maintenance domain level.";
  }
  leaf MA-name-string{
    type leafref{
      path "/domains/domain/MAs/MA/MA-name-string";
    }
    mandatory true;
    description
      "Indicate which MA is seeing the defect";
  }
  uses cos;
  uses time-to-live;
  leaf sub-type {
    type identityref {
      base command-sub-type;
    }
    description
      "Defines different command types";
  }
  leaf source-mep {
    type leafref{
      path "/domains/domain/MAs/MA/MEP/mep-name";
    }
    description
      "Source MEP";
  }
  container destination-mep {
    uses mep-address;
    uses MEP-ID {
      description
        "Only applicable if the destination is a MEP";
    }
    description
      "Destination MEP";
  }
  leaf count {
    type uint32;
    default "3";
    description
```

```
        "Number of continuity-check message to send";
    }
    leaf cc-transmit-interval {
        type Interval;
        description
            "Interval between echo requests";
    }
    leaf packet-size {
        type uint32 {
            range "0..10000";
        }
        default "64";
        description
            "Size of continuity-check packets, in octets";
    }
}
output {
    uses monitor-stats {
        description
            "Stats of continuity check.";
    }
}
}

rpc continuity-verification {
    if-feature connectivity-verification;
    description
        "Generates continuity-verification as per RFC7276 Table 4.";
    input {
        leaf MD-name-string {
            type leafref {
                path "/domains/domain/MD-name-string";
            }
            mandatory true;
            description
                "Indicate which MD is seeing the defect";
        }

        leaf md-level {
            type leafref {
                path "/domains/domain/md-level";
            }
            description
                "The maintenance domain level.";
        }

        leaf MA-name-string{
```

```
type leafref{
  path "/domains/domain/MAs/MA/MA-name-string";
}
mandatory true;
description
  "Indicate which MA is seeing the defect";
}
uses cos;
uses time-to-live;
leaf sub-type {
  type identityref {
    base command-sub-type;
  }
  description
    "Defines different command types";
}
leaf source-mep {
  type leafref{
    path "/domains/domain/MAs/MA/MEP/mep-name";
  }
  description
    "Source MEP";
}
container destination-mep {
  uses mep-address;
  uses MEP-ID {
    description "Only applicable if the destination is a MEP";
  }
  description
    "Destination MEP";
}
leaf count {
  type uint32;
  default "3";
  description
    "Number of continuity-verification message to send";
}
leaf interval {
  type Interval;
  description
    "Interval between echo requests";
}
leaf packet-size {
  type uint32 {
    range "64..10000";
  }
  default "64";
}
```

```
        description
          "Size of continuity-verification packets, in octets";
      }
    }

    output {
      uses monitor-stats {
        description
          "Stats of continuity check.";
      }
    }
  }
  rpc traceroute {
    if-feature traceroute;
    description
      "Generates Traceroute or Path Trace and return response.
      Referencing RFC7276 for common Toolset name, for
      MPLS-TP OAM it's Route Tracing, and for TRILL OAM It's
      Path Tracing tool. Starts with TTL of one and increment
      by one at each hop. Untill destination reached or TTL
      reach max value";
    input {
      leaf MD-name-string {
        type leafref{
          path "/domains/domain/MD-name-string";
        }
        mandatory true;
        description
          "Indicate which MD is seeing the defect";
      }

      leaf md-level {
        type leafref {
          path "/domains/domain/md-level";
        }
        description
          "The maintenance domain level.";
      }

      leaf MA-name-string{
        type leafref{
          path "/domains/domain/MAs/MA/MA-name-string";
        }
        mandatory true;
        description
          "Indicate which MA is seeing the defect";
      }
    }
    uses cos;
  }
}
```

```
    uses time-to-live;
    leaf command-sub-type {
        type identityref {
            base command-sub-type;
        }
        description
            "Defines different command types";
    }
    leaf source-mep {
        type leafref {
            path "/domains/domain/MAs/MA/MEP/mep-name";
        }
        description
            "Source MEP";
    }
    container destination-mep {
        uses mep-address;
        uses MEP-ID {
            description
                "Only applicable if the destination is a MEP";
        }
        description
            "Destination MEP";
    }
    leaf count {
        type uint32;
        default "1";
        description
            "Number of traceroute probes to send. In protocols where a
            separate message is sent at each TTL, this is the number
            of packets to send at each TTL.";
    }
    leaf interval {
        type Interval;
        description
            "Interval between echo requests";
    }
}
output {
    list response {
        key "response-index";

        leaf response-index {
            type uint8;
            description
                "Arbitrary index for the response. In protocols that
                guarantee there is only a single response at each TTL,
                the TTL can be used as the response index.";
        }
    }
}
```

```
    }
    uses time-to-live;
    container destination-mep {
        description "MEP from which the response has been received";
        uses mep-address;
        uses MEP-ID {
            description
                "Only applicable if the destination is a MEP";
        }
    }
    container mip {
        if-feature mip;
        leaf interface {
            type if:interface-ref;
            description
                "MIP interface";
        }
        uses mip-address;
        description
            "MIP responding with traceroute";
    }
    uses monitor-stats {
        description
            "Stats of traceroute.";
    }
    description
        "List of response.";
    }
}
```

<CODE ENDS>

6. Base Mode

The Base Mode ('default mode' described in section 4) defines default configuration that MUST be present in the devices that comply with this document. Base Mode allows users to have "zero-touch" experience. Several parameters require technology specific definition.

6.1. MEP Address

In the Base Mode of operation, the MEP Address is by default the IP address of the interface on which the MEP is located.

6.2. MEP ID for Base Mode

In the Base Mode of operation, each device creates a single MEP associated with a virtual OAM port with no physical layer (NULL PHY). The MEP-ID associated with this MEP is zero (0). The choice of MEP-ID zero is explained below.

MEP-ID is 2 octet field by default. It is never used on the wire except when using CCM. It is important to have method that can derive MEP-ID of base mode in an automatic manner with no user intervention. IP address cannot be directly used for this purpose as the MEP-ID is much smaller field. For Base Mode of operation we propose to use MEP-ID zero (0) as the default MEP-ID.

CCM packet use MEP-ID on the payload. CCM MUST NOT be used in the Base Mode. Hence CCM MUST be disabled on the Maintenance Association of the Base Mode.

If CCM is required, users MUST configure a separate Maintenance association and assign unique value for the corresponding MEP IDs.

CFM [IEEE802.1ag] defines MEP ID as an unsigned integer in the range 1 to 8191. In this document we propose extend the range to 0 to 65535. Value 0 is reserved for MEP-ID of Base Mode operation and MUST NOT be used for other purposes.

6.3. Maintenance Association

The ID of the Maintenance Association (MA-ID) [IEEE802.1ag] has a flexible format and includes two parts: Maintenance Domain Name and Short MA name. In the Based Mode of operation, the value of the Maintenance Domain Name must be the character string "GenericBaseMode" (excluding the quotes "). In Base Mode operation Short MA Name format is set to 2-octet integer format (value 3 in Short MA Format field [IEEE802.1ag]) and Short MA name set to 65532 (0xFFFC).

7. Connection-oriented OAM YANG model applicability

"ietf-conn-oam" model defined in this document provides technology-independent abstraction of key OAM constructs for connection oriented protocols. This model can be further extended to include technology specific details, e.g., adding new data nodes with technology specific functions and parameters into proper anchor points of the base model, so as to develop a technology-specific connection-oriented OAM model.

This section demonstrates the usability of the connection-oriented YANG OAM data model to various connection-oriented OAM technologies, e.g., TRILL and MPLS-TP. Note that, in this section, we only present several snippets of technology-specific model extensions for illustrative purposes. The complete model extensions should be worked on in respective protocol working groups.

7.1. Generic YANG Model extension for TRILL OAM

The TRILL YANG module is augmenting connection oriented OAM module for both configuration and RPC commands.

The TRILL YANG module requires the base TRILL module ([I-D.ietf-trill-yang]) to be supported as there is a strong relationship between those modules.

The configuration extensions for connection oriented OAM include MD configuration extension, Technology type extension, MA configuration extension, Connectivity-Context Extension, MEP Configuration Extension, ECMP extension. In the RPC extension, the continuity-check and path-discovery RPC are extended with TRILL specific.

7.1.1. MD Configuration Extension

MD level configuration parameters are management information which can be inherited in the TRILL OAM model and set by connection oriented base model as default values. For example domain name can be set to area-ID in the TRILL OAM case. In addition, at the Maintenance Domain level, domain data node at root level can be augmented with technology type.

Note that MD level configuration parameters provides context information for management system to correlate faults, defects, network failures with location information, which helps quickly identify root causes of network failures.

7.1.1.1. Technology Type Extension

No TRILL technology type has been defined in the connection oriented base model. Therefore a technology type extension is required in the TRILL OAM model. The technology type "trill" is defined as an identity that augments the base "technology-types" defined in the connection oriented base model:

```

identity trill{
  base goam:technology-types;
  description
    "trill type";
}

```

7.1.2. MA Configuration Extension

MA level configuration parameters are management information which can be inherited in the TRILL OAM model and set by connection oriented base model as default values. In addition, at the Maintenance Association(MA) level, MA data node at the second level can be augmented with connectivity-context extension.

Note that MA level configuration parameters provides context information for management system to correlate faults, defects, network failures with location information, which helps quickly identify root causes of network failures.

7.1.2.1. Connectivity-Context Extension

In TRILL OAM, one example of connectivity-context is either a 12 bit VLAN ID or a 24 bit Fine Grain Label. The connection oriented base model defines a placeholder for context-id. This allows other technologies to easily augment that to include technology specific extensions. The snippet below depicts an example of augmenting connectivity-context to include either VLAN ID or Fine Grain Label.

```

augment /goam:domains/goam:domain/goam:MAS
/goam:MA /goam:connectivity-context:
  +--:(connectivity-context-vlan)
  |   +--rw connectivity-context-vlan?   vlan
  +--:(connectivity-context-fgl)
  |   +--rw connectivity-context-fgl?    fgl

```

7.1.3. MEP Configuration Extension

The MEP configuration definition in the connection oriented base model already supports configuring the interface of MEP with either MAC address or IP address. In addition, the MEP address can be represented using a 2 octet RBridge Nickname in TRILL OAM . Hence, the TRILL OAM model augments the MEP configuration in base model to add a nickname case into the MEP address choice node as follows:

```

augment /goam:domains/goam:domain/goam:MAS
/goam:MA/ goam:MEP/goam:mep-address:
  +--:( mep-address-trill)
  |   +--rw mep-address-trill?  trill-rb-nickname

```

In addition, at the Maintenance Association Endpoint(MEP) level, MEP data node at the third level can be augmented with ECMP extension.

7.1.3.1. ECMP Extension

Since TRILL supports ECMP path selection, flow-entropy in TRILL is defined as a 96 octet field in the LIME model extension for TRILL OAM. The snippet below illustrates its extension.

```
augment /goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP:
  +--rw flow-entropy-trill?   flow-entropy-trill
augment /goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP
/goam:session:
  +--rw flow-entropy-trill?   flow-entropy-trill
```

7.1.4. RPC extension

In the TRILL OAM YANG model, the continuity-check and path-discovery RPC commands are extended with TRILL specific requirements. The snippet below depicts an example of illustrates the TRILL OAM RPC extension.

```

augment /goam:continuity-check/goam:input:
  +--ro (out-of-band)?
  |   +--:(ipv4-address)
  |   |   +--ro ipv4-address?      inet:ipv4-address
  |   +--:(ipv6-address)
  |   |   +--ro ipv6-address?      inet:ipv6-address
  |   +--:(trill-nickname)
  |       +--ro trill-nickname?    trill-rb-nickname
  +--ro diagnostic-vlan?    boolean
augment /goam:continuity-check/goam:input:
  +--ro flow-entropy-trill?  flow-entropy-trill
augment /goam:continuity-check/goam:output:
  +--ro upstream-rbridge?    trill-rb-nickname
  +--ro next-hop-rbridge*    trill-rb-nickname
augment /goam:path-discovery/goam:input:
  +--ro (out-of-band)?
  |   +--:(ipv4-address)
  |   |   +--ro ipv4-address?      inet:ipv4-address
  |   +--:(ipv6-address)
  |   |   +--ro ipv6-address?      inet:ipv6-address
  |   +--:(trill-nickname)
  |       +--ro trill-nickname?    trill-rb-nickname
  +--ro diagnostic-vlan?    boolean
augment /goam:path-discovery/goam:input:
  +--ro flow-entropy-trill?  flow-entropy-trill
augment /goam:path-discovery/goam:output/goam:response:
  +--ro upstream-rbridge?    trill-rb-nickname
  +--ro next-hop-rbridge*    trill-rb-nickname

```

7.2. Generic YANG Model extension for MPLS-TP OAM

The MPLS-TP OAM YANG module can augment connection oriented OAM Module with some technology-specific details. And the [mpls-tp-oam-yang] presents the YANG Data model for MPLS-TP OAM.

The configuration extensions for connection oriented OAM include MD configuration extension, Technology type extension, Sub Technology Type Extension ,MA configuration extension, MEP Configuration Extension.

7.2.1. MD Configuration Extension

MD level configuration parameters are management information which can be inherited in the MPLS-TP OAM model and set by LIME base model as default values. For example domain name can be set to area-ID or the provider's Autonomous System Number (ASN) [RFC6370] in the MPLS-TP OAM case. In addition, at the Maintenance Domain level, domain data

node at root level can be augmented with technology type and sub-technology type.

Note that MD level configuration parameters provides context information for management system to correlate faults, defects, network failures with location information, which helps quickly identify root causes of network failures

7.2.1.1. Technology Type Extension

No MPLS-TP technology type has been defined in the connection oriented base model, hence it is required in the MPLS OAM model. The technology type "mpls-tp" is defined as an identity that augments the base "technology-types" defined in the connection oriented base model:

```
identity mpls-tp{
    base goam:technology-types;
    description
        "mpls-tp type";
}
```

7.2.1.2. Sub Technology Type Extension

In MPLS-TP, since different encapsulation types such as IP/UDP Encapsulation, PW-ACH encapsulation can be employed, the "technology-sub-type" data node is defined and added into the MPLS OAM model to further identify the encapsulation types within the MPLS-TP OAM model. Based on it, we also define a technology sub-type for IP/UDP encapsulation and PW-ACH encapsulation. Other Encapsulation types can be defined in the same way. The snippet below depicts an example of several encapsulation types.

```
identity technology-sub-type {
  description
    "certain implementations can have different
    encapsulation types such as ip/udp, pw-ach and so on.
    Instead of defining separate models for each
    encapsulation, we define a technology sub-type to
    further identify different encapsulations.
    Technology sub-type is associated at the MA level"; }

  identity technology-sub-type-udp {
    base technology-sub-type;
    description
      "technology sub-type is IP/UDP encapsulation";
  }

  identity technology-sub-type-ach {
    base technology-sub-type;
    description
      "technology sub-type is PW-ACH encapsulation";
  }

  augment "/goam:domains/goam:domain/goam:MAS/goam:MA" {
    leaf technology-sub-type {
      type identityref {
        base technology-sub-type;
      }
    }
  }
}
```

7.2.2. MA Configuration Extension

MA level configuration parameters are management information which can be inherited in the MPLS-TP OAM model and set by Connection Oriented base model as default values. One example of MA Name could be MEG LSP ID or MEG Section ID or MEG PW ID[RFC6370].

Note that MA level configuration parameters provides context information for management system to correlate faults, defects, network failures with location information, which helps quickly identify root causes of network failures.

7.2.3. MEP Configuration Extension

In MPLS-TP, MEP-ID is either a variable length label value in case of G-ACH encapsulation or a 2 octet unsigned integer value in case of IP/UDP encapsulation. One example of MEP-ID is MPLS-TP LSP_MEP_ID [RFC6370]. In the connection-oriented base model, MEP-ID is defined

as a choice/case node which can supports an int32 value, and the same definition can be used for MPLS-TP with no further modification. In addition, at the Maintenance Association Endpoint(MEP) level, MEP data node at the third level can be augmented with Session extension and interface extension.

8. Security Considerations

The YANG module defined in this memo is designed to be accessed via the NETCONF protocol [RFC6241] [RFC6241]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [RFC6242] [RFC6242]. The NETCONF access control model [RFC6536] [RFC6536] provides the means to restrict access for particular NETCONF users to a pre-configured subset of all available NETCONF protocol operations and content.

There are a number of data nodes defined in the YANG module which are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., <edit-config>) to these data nodes without proper protection can have a negative effect on network operations.

The vulnerable "config true" subtrees and data nodes are the following:

/goam:domains/goam:domain/

/goam:domains/goam:domain/goam:MAS/goam:MA/

/goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP

/goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP/goam:session/

Unauthorized access to any of these lists can adversely affect OAM management system handling of end-to-end OAM and coordination of OAM within underlying network layers This may lead to inconsistent configuration, reporting, and presentation for the OAM mechanisms used to manage the network.

9. IANA Considerations

This document registers a URI in the IETF XML registry [RFC3688] [RFC3688]. Following the format in RFC 3688, the following registration is requested to be made:

URI: urn:ietf:params:xml:ns:yang:ietf-gen-oam

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

This document registers a YANG module in the YANG Module Names registry [RFC6020].

name: ietf-gen-oam namespace: urn:ietf:params:xml:ns:yang:ietf-gen-oam
prefix: goam reference: RFC XXXX

10. Acknowledgments

Giles Heron came up with the idea of developing a YANG model as a way of creating a unified OAM API set (interface), work in this document is largely an inspiration of that. Alexander Clemm provided many valuable tips, comments and remarks that helped to refine the YANG model presented in this document.

Carlos Pignataro, David Ball, Mahesh Jethanandani, Benoit Claise, Ladislav Lhotka, GUBALLA JENS, Yuji Tochio, Gregory Mirsky, Huub van Helvoort, Tom Taylor, Dapeng Liu, Mishaël Wexler, Adi Molkho participated and contributed to this document.

11. References

11.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, DOI 10.17487/RFC3688, January 2004, <<http://www.rfc-editor.org/info/rfc3688>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<http://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<http://www.rfc-editor.org/info/rfc6241>>.

- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", RFC 6242, DOI 10.17487/RFC6242, June 2011, <<http://www.rfc-editor.org/info/rfc6242>>.
- [RFC6370] Bocci, M., Swallow, G., and E. Gray, "MPLS Transport Profile (MPLS-TP) Identifiers", RFC 6370, DOI 10.17487/RFC6370, September 2011, <<http://www.rfc-editor.org/info/rfc6370>>.
- [RFC6536] Bierman, A. and M. Bjorklund, "Network Configuration Protocol (NETCONF) Access Control Model", RFC 6536, DOI 10.17487/RFC6536, March 2012, <<http://www.rfc-editor.org/info/rfc6536>>.

11.2. Informative References

- [G.8013] "OAM functions and mechanisms for Ethernet based networks", ITU-T Recommendation G.8013/Y.1731, 2013.
- [IEEE802.1ag] "Connectivity Fault Management", IEEE Std 802.1ag-2011, August 2011.
- [mpls-tp-oam-yang] Zhang, L., Zheng, L., Aldrin, S., and G. Mirsky, "YANG Data Model for MPLS-TP Operations, Administration, and Maintenance", draft-zhang-mpls-tp-yang-oam (work in progress), 2016.
- [RFC6136] Sajassi, A., Ed. and D. Mohan, Ed., "Layer 2 Virtual Private Network (L2VPN) Operations, Administration, and Maintenance (OAM) Requirements and Framework", RFC 6136, DOI 10.17487/RFC6136, March 2011, <<http://www.rfc-editor.org/info/rfc6136>>.
- [RFC6291] Andersson, L., van Helvoort, H., Bonica, R., Romascanu, D., and S. Mansfield, "Guidelines for the Use of the "OAM" Acronym in the IETF", BCP 161, RFC 6291, DOI 10.17487/RFC6291, June 2011, <<http://www.rfc-editor.org/info/rfc6291>>.
- [RFC6325] Perlman, R., Eastlake 3rd, D., Dutt, D., Gai, S., and A. Ghanwani, "Routing Bridges (RBridges): Base Protocol Specification", RFC 6325, DOI 10.17487/RFC6325, July 2011, <<http://www.rfc-editor.org/info/rfc6325>>.

- [RFC6371] Busi, I., Ed. and D. Allan, Ed., "Operations, Administration, and Maintenance Framework for MPLS-Based Transport Networks", RFC 6371, DOI 10.17487/RFC6371, September 2011, <<http://www.rfc-editor.org/info/rfc6371>>.
- [RFC7174] Salam, S., Senevirathne, T., Aldrin, S., and D. Eastlake 3rd, "Transparent Interconnection of Lots of Links (TRILL) Operations, Administration, and Maintenance (OAM) Framework", RFC 7174, DOI 10.17487/RFC7174, May 2014, <<http://www.rfc-editor.org/info/rfc7174>>.
- [RFC7276] Mizrahi, T., Sprecher, N., Bellagamba, E., and Y. Weingarten, "An Overview of Operations, Administration, and Maintenance (OAM) Tools", RFC 7276, DOI 10.17487/RFC7276, June 2014, <<http://www.rfc-editor.org/info/rfc7276>>.
- [RFC7455] Senevirathne, T., Finn, N., Salam, S., Kumar, D., Eastlake 3rd, D., Aldrin, S., and Y. Li, "Transparent Interconnection of Lots of Links (TRILL): Fault Management", RFC 7455, DOI 10.17487/RFC7455, March 2015, <<http://www.rfc-editor.org/info/rfc7455>>.

Appendix A. Contributors' Addresses

Tissa Senevirathne
Consultant

Email: tsenevir@gmail.com

Norman Finn
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035
USA

Email: nfinn@cisco.com

Samer Salam
CISCO Systems
595 Burrard St. Suite 2123
Vancouver, BC V7X 1J1
Canada

Email: ssalam@cisco.com

Authors' Addresses

Deepak Kumar
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035
USA

Email: dekumar@cisco.com

Qin Wu
Huawei
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: bill.wu@huawei.com

Michael Wang
Huawei Technologies, Co., Ltd
101 Software Avenue, Yuhua District
Nanjing 210012
China

Email: wangzitao@huawei.com

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: September 21, 2016

D. Kumar
Cisco
M. Wang
Q. Wu
Huawei
R. Rahman
Cisco
March 20, 2016

Generic YANG Data Model for Connection Less Operations, Administration,
and Maintenance(OAM) protocols
draft-kumar-lime-yang-connectionless-oam-01

Abstract

This document presents a base YANG Data model for connectionless OAM protocols. It provides a technology-independent abstraction of key OAM constructs for connectionless protocols. Based model presented here can be extended to include technology specific details. This is leading to uniformity between OAM protocols and support nested OAM workflows (i.e., performing OAM functions at different or same levels through a unified interface).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 21, 2016.

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
2. Conventions used in this document	3
2.1. Terminology	3
2.2. Tree Diagrams	4
3. Overview of the Connectionless OAM Model	4
3.1. TP address	5
3.2. tools	5
3.3. OAM-layers	5
3.4. rpc definitions	6
3.5. Relation with other OAM YANG Model	10
3.6. OAM data hierarchy	10
4. OAM YANG Module	38
5. Security Considerations	59
6. IANA Considerations	59
7. Normative References	59
Authors' Addresses	60

1. Introduction

Operations, Administration, and Maintenance (OAM) are important networking functions that allow operators to:

1. Monitor networks connections (Reachability Verification, Continuity Check).
2. Troubleshoot failures (Fault verification and localization).
3. Monitor Performance

An overview of OAM tools is presented at [RFC7276].

Ping and Traceroute [RFC792], [RFC4443] are well-known fault verification and isolation tools, respectively, for IP networks. Over the years, different technologies have developed similar tools for similar purposes.

In this document, we presents a base YANG Data model for connectionless OAM protocols which supports generic continuity or

reachability check, and path discovery. The generic YANG model for connectionless OAM is designed such that it can be extended to cover various connectionless technologies. Technology dependent nodes and RPC (remote process call) commands are defined in technology specific YANG models, which use and extend the base model defined here.

2. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

The following terms are defined in [RFC6241] and are not redefined here:

- o client
- o configuration data
- o server
- o state data

The following terms are defined in [RFC6020] and are not redefined here:

- o augment
- o data model
- o data node

The terminology for describing YANG data models is found in [RFC6020].

2.1. Terminology

TP - Test Point

MAC - Media Access Control

BFD - Bidirectional Forwarding Detection

TLV - Type Length Value

RPC - A Remote Procedure Call, as used within the NETCONF protocol

2.2. Tree Diagrams

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams is as follows:

Each node is printed as:

`<status> <flags> <name> <opts> <type>`

`<status>` is one of:

- + for current
- x for deprecated
- o for obsolete

`<flags>` is one of:

- rw for configuration data
- ro for non-configuration data
- x for rpcs
- n for notifications

`<name>` is the name of the node

If the node is augmented into the tree from another module, its name is printed as `<prefix>:<name>`.

`<opts>` is one of:

- ? for an optional leaf or choice
- ! for a presence container
- * for a leaf-list or list
- [<keys>] for a list's keys

`<type>` is the name of the type for leafs and leaf-lists

3. Overview of the Connectionless OAM Model

At the top of the Model there is Multiple test-point-location-list keyed using test point location type. Under test-point-location-list, there is one or more test-point-locations. Each test-point-location is associated with vrf, oam-layers, tools, and technology. The vrf is used to describe the corresponding network instance. The technology indicate oam technology details. The tools is used to describe oam tools supported. The oam-layers is used to indicate relation of test point with other test points. The level in oam-

layers indicate whether related oam test point is client layer, server layer or same or stitched layer. The Model is augmented to /nd:networks/nd:network/nd:node. oper is also defined at top of the Model to provide continuity-check common statistics. grouping is also defined for common per session continuity-check statistics.

Under test-point-locations, there are tp-addresses, technology type, OAM tool which describe the attributes associated with test-point.

3.1. TP address

In connectionless OAM, the tp address is defined with the following type:

- o MAC address
- o IPv4 or IPv6 address
- o a pair of source, destination addresses, and interface (Useful for BFD)
- o FEC
- o TLV address (RFC6428 (Figure 4,5, and 6))

3.2. tools

In connectionless OAM, the tools attribute is used to describe a toolset for fault detection and isolation, and for performance measurement. And it can serve as a constraint condition when the base model be extended to specific OAM technology. For example, to fulfill the icmp ping configuration, the "../coam:tools-ip/coam:rfc792" should be set to "true", and then the lime base model should be augmented with icmp ping specific details.

3.3. OAM-layers

OAM-layers is referred to a list of OAM layers above and below that are related to current test point. This allow users to easily navigate up and down to efficiently troubleshoot a connectivity issue. In this model, we have kept level default as 0, as none connectionless network OAM uses layer or level in its mode. Level is provided for scenarios where it might be possible to define layering relationship as it can be used to tie up interworking of fault at related oam layers. For example, there is a defect in the upstream path of the testpoint, the upstream path belongs to server layer LSP and the level is set to "-1", the downstream path of the test point belongs to client layer LSP and the level is set to "1", then we can

stitch server layer LSP and client layer LSP at different level and track defect along this path. In another case, if the upstream path and downstream path of the test point is in the same level, the level is set to "0". The snippet below depicts an example of OAM layers.

```
list oam-layers {
  key "index";
  leaf index {
    type uint16 {
      range "0..65535";
    }
  }
  leaf level {
    type int32 {
      range "-1..1";
    }
    description
      "Level";
  }
  ordered-by user;
  description
    "list of related oam layers.";
}
```

3.4. rpc definitions

The rpc model facilitates issuing commands to a NETCONF server (in this case to the device that need to execute the OAM command) and obtaining a response.

In this document, we summarize the common OAM functions and define the generic rpc commands: continuity-check and path-discovery. In practice, these commands are supported by corresponding technology-specific OAM tools [RFC7276]. For example, for the IP OAM model, the continuity-check rpc corresponds to the IP Ping, while the path-discovery rpc command corresponds to IP Traceroute.

Note that the rpc command presented in this document is the base building block, which is used to derive a model for a technology-specific OAM(i.e., icmp ping, lsp ping), the base building block should be extended with corresponding technology specific parameters.

```
continuity-check:
rpc continuity-check {
  if-feature continuity-check;
  description
    "Generates continuity-check as per RFC7276.";
  input {
```

```
    container destination-tp {
      uses tp-address;
    }
    uses session-type;
    leaf source-interface {
      type if:interface-ref;
      mandatory false;
    }
    leaf outbound-interface {
      type if:interface-ref;
      mandatory false;
    }
    leaf count {
      type uint32;
      default "5";
      mandatory false;
    }
    leaf vrf {
      type rt:routing-instance-ref;
      mandatory false;
    }
    leaf ttl {
      type uint8;
      default "255";
      mandatory false;
    }
    leaf packet-size {
      type uint32 {
        range "64..10000";
      }
      default "64";
      mandatory false;
      description
        "Size of ping echo request packets, in octets";
    }
  }
  output {
    list error-code-list {
      key "response-index";
      leaf response-index {
        type uint32;
      }
      leaf status-code {
        type int32;
        description
          "error code is ";
      }
      leaf status-sub-code {
```

```
        type uint8;
        mandatory false;
    }
}
leaf tx-packet-count {
    type oam-counter32;
    mandatory false;
    description
        "Transmitted Packet count";
}
leaf rx-packet-count {
    type oam-counter32;
    mandatory false;
    description
        "Received packet count";
}
leaf min-delay {
    type oam-counter32;
    mandatory false;
    units milliseconds;
    description
        "Delay is specified in milliseconds";
}
leaf average-delay {
    type oam-counter32;
    mandatory false;
    units millisecond;
    description
        "average delay in milliseconds";
}
leaf max-delay {
    type oam-counter32;
    mandatory false;
    units millisecond;
    description
        "Maximum delay in milliseconds";
}
}
}
```

Path discovery:

```
rpc path-discovery {
    description
        "";
    input {
        container destination-tp {
            uses tp-address;
        }
    }
}
```

```
    uses session-type;
    leaf source-interface {
        type if:interface-ref;
        mandatory false;
    }
    leaf outbound-interface {
        type if:interface-ref;
        mandatory false;
    }
    leaf vrf {
        type rt:routing-instance-ref;
        mandatory false;
    }
    leaf max-ttl {
        type uint8;
        default "255";
        mandatory false;
    }
}
output {
    list response-list {
        key "response-index";
        leaf response-index {
            type uint32;
        }
        leaf status-code {
            type int32;
            description
                "error code is ";
        }
        leaf status-sub-code {
            type uint8;
            mandatory false;
        }
        leaf hop-cnt {
            type uint8;
            description
                "";
        }
        container destination-tp {
            uses tp-address;
        }
        leaf min-delay {
            type oam-counter32;
            mandatory false;
            units milliseconds;
            description
                "Delay is specified in milliseconds";
        }
    }
}
```

```

    }
    leaf average-delay {
      type oam-counter32;
      mandatory false;
      units millisecond;
      description
        "average delay in milliseconds";
    }
    leaf max-delay {
      type oam-counter32;
      mandatory false;
      units millisecond;
      description
        "Maximum delay in milliseconds";
    }
  }
}

```

Snippet of data hierarchy related to rpc calls

3.5. Relation with other OAM YANG Model

In this document we define a generic YANG model for connectionless OAM protocols. The YANG model defined here is generic such that other technologies can extend it for technology specific needs. The Generic YANG model acts as the root for other OAM YANG models. This allows users to traverse between different OAM protocols at ease through a uniform API set. The Generic YANG model for OAM provides a framework where technology- specific YANG models can choose to inherit constructs from the base YANG models without needing to redefine them within the sub-technology.

3.6. OAM data hierarchy

The complete data hierarchy related to the OAM YANG model is presented below.

```

module: ietf-connectionless-oam
  +--ro oper {continuity-check}?
    +--ro cc-ipv4-sessions-statistics
      | +--ro cc-session-statistics
      |   | +--ro session-count?          uint32
      |   | +--ro session-up-count?       uint32
      |   | +--ro session-down-count?     uint32
      |   | +--ro session-admin-down-count? uint32
      +--ro cc-ipv6-sessions-statistics
        +--ro cc-session-statistics

```

```

        +--ro session-count?                uint32
        +--ro session-up-count?             uint32
        +--ro session-down-count?           uint32
        +--ro session-admin-down-count?     uint32
augment /nd:networks/nd:network/nd:node:
  +--rw test-point-ipv4-location-list {connection-less}?
  +--rw test-point-locations* [ipv4-location]
    +--rw ipv4-location                     inet:ipv4-address
    +--rw vrf?                             rt:routing-instance-ref
    +--rw (tp-address)?
      +--:(mac-address)
        | +--rw mac-address?                yang:mac-address
      +--:(ipv4-address)
        | +--rw ipv4-address?               inet:ipv4-address
      +--:(ipv6-address)
        | +--rw ipv6-address?               inet:ipv6-address
      +--:(src-dst-address)
        | +--rw src-ip-address?             inet:ip-address
        | +--rw dst-ip-address?             inet:ip-address
        | +--rw Interface?                  if:interface-ref
      +--:(fec)
        | +--rw fec-type?                   fec-type
        | +--rw (fec-value)?
          +--:(ip-prefix)
            | +--rw ip-prefix?               inet:ip-prefix
          +--:(bgp)
            | +--rw bgp?                     inet:ip-prefix
          +--:(tunnel)
            | +--rw tunnel-interface?        uint32
          +--:(l3vpn)
            | +--rw l3vpn-id?                uint32
          +--:(pw)
            | +--rw remote-pe-address?       inet:ip-address
            | +--rw pw-id?                   uint32
          +--:(vpls)
            | +--rw route-distinguisher?     uint32
            | +--rw sender-ve-id?            uint32
            | +--rw receiver-ve-id?          uint32
          +--:(mpls-mldp)
            | +--rw (root-address)?
              +--:(ip-address)
                | +--rw source-address?      inet:ip-address
                | +--rw group-ip-address?    IP-Multicast-Group-Addre
      +--:(vpn)
        | +--rw as-number?                   inet:as-number
      +--:(global-id)
        | +--rw lsp-id?                      string
      +--:(tlv-address)

```

ss

```

|         +---rw tlv-type?                int16
|         +---rw tlv-len?                 int16
|         +---rw tlv-value?              binary
+---rw (technology)?
|   +---:(technology-null)
|   |   +---rw tech-null?                 empty
|   +---:(technology-string)
|   |   +---rw ipv4-icmp?                 string
+---rw (tools)?
|   +---:(tools-empty)
|   |   +---rw tools-null?                 empty
|   +---:(tools-ip)
|   |   +---rw rfc792?                     boolean
|   |   +---rw rfc4443?                     boolean
|   |   +---rw rfc4884?                     boolean
|   |   +---rw rfc5837?                     boolean
|   +---:(tools-bfd)
|   |   +---rw rfc5881?                     boolean
|   |   +---rw rfc5883?                     boolean
|   |   +---rw rfc5884?                     boolean
|   |   +---rw rfc5885?                     boolean
|   +---:(tools-mpls)
|   |   +---rw rfc4379?                     boolean
|   |   +---rw rfc4687?                     boolean
|   |   +---rw rfc4950?                     boolean
|   |   +---rw mpls-rfc5884?                 boolean
|   +---:(tools-mpls-tp)
|   |   +---rw rfc6426?                     boolean
|   |   +---rw rfc6435?                     boolean
|   |   +---rw rfc6374?                     boolean
|   +---:(tools-pw)
|   |   +---rw rfc5085?                     boolean
|   |   +---rw pw_rfc5885?                 boolean
|   |   +---rw rfc6423?                     boolean
|   |   +---rw rfc6310?                     boolean
|   |   +---rw rfc7023?                     boolean
+---rw oam-layers* [index]
|   +---rw index                          uint16
|   +---rw level?                         int32
|   +---rw (tp-address)?
|   |   +---:(mac-address)
|   |   |   +---rw mac-address?            yang:mac-address
|   |   +---:(ipv4-address)
|   |   |   +---rw ipv4-address?            inet:ipv4-address
|   |   +---:(ipv6-address)
|   |   |   +---rw ipv6-address?            inet:ipv6-address
|   |   +---:(src-dst-address)
|   |   |   +---rw src-ip-address?          inet:ip-address

```

```

|   +-rw dst-ip-address?          inet:ip-address
|   +-rw Interface?              if:interface-ref
+---:(fec)
|   +-rw fec-type?               fec-type
|   +-rw (fec-value)?
|       +---:(ip-prefix)
|           | +-rw ip-prefix?          inet:ip-prefix
|       +---:(bgp)
|           | +-rw bgp?                inet:ip-prefix
|       +---:(tunnel)
|           | +-rw tunnel-interface?   uint32
|       +---:(l3vpn)
|           | +-rw l3vpn-id?           uint32
|       +---:(pw)
|           | +-rw remote-pe-address?  inet:ip-address
|           | +-rw pw-id?              uint32
|       +---:(vpls)
|           | +-rw route-distinguisher? uint32
|           | +-rw sender-ve-id?       uint32
|           | +-rw receiver-ve-id?     uint32
|       +---:(mpls-mldp)
|           +-rw (root-address)?
|               +---:(ip-address)
|                   | +-rw source-address?    inet:ip-address
|                   | +-rw group-ip-address?  IP-Multicast-Group-Ad
dress
|               +---:(vpn)
|                   | +-rw as-number?        inet:as-number
|               +---:(global-id)
|                   +-rw lsp-id?            string
+---:(tlv-address)
|   +-rw tlv-type?               int16
|   +-rw tlv-len?               int16
|   +-rw tlv-value?             binary
augment /nd:networks/nd:node:
  +-rw test-point-ipv6-location-list {connection-less}?
  +-rw test-point-locations* [ipv6-location]
  +-rw ipv6-location            inet:ipv6-address
  +-rw vrf?                    rt:routing-instance-ref
  +-rw (tp-address)?
  |   +---:(mac-address)
  |       | +-rw mac-address?          yang:mac-address
  |   +---:(ipv4-address)
  |       | +-rw ipv4-address?         inet:ipv4-address
  |   +---:(ipv6-address)
  |       | +-rw ipv6-address?         inet:ipv6-address
  |   +---:(src-dst-address)
  |       | +-rw src-ip-address?       inet:ip-address
  |       | +-rw dst-ip-address?       inet:ip-address

```



```

| | +--rw Interface? if:interface-ref
| | +---:(fec)
| | | +--rw fec-type? fec-type
| | | +--rw (fec-value)?
| | | | +---:(ip-prefix)
| | | | | +--rw ip-prefix? inet:ip-prefix
| | | | +---:(bgp)
| | | | | +--rw bgp? inet:ip-prefix
| | | | +---:(tunnel)
| | | | | +--rw tunnel-interface? uint32
| | | | +---:(l3vpn)
| | | | | +--rw l3vpn-id? uint32
| | | | +---:(pw)
| | | | | +--rw remote-pe-address? inet:ip-address
| | | | | +--rw pw-id? uint32
| | | | +---:(vpls)
| | | | | +--rw route-distinguisher? uint32
| | | | | +--rw sender-ve-id? uint32
| | | | | +--rw receiver-ve-id? uint32
| | | | +---:(mpls-mldp)
| | | | | +--rw (root-address)?
| | | | | | +---:(ip-address)
| | | | | | | +--rw source-address? inet:ip-address
| | | | | | | +--rw group-ip-address? IP-Multicast-Group-Addre
| | | | | +---:(vpn)
| | | | | | +--rw as-number? inet:as-number
| | | | | +---:(global-id)
| | | | | | +--rw lsp-id? string
| | | +---:(tlv-address)
| | | | +--rw tlv-type? int16
| | | | +--rw tlv-len? int16
| | | | +--rw tlv-value? binary
+--rw (technology)?
| | +---:(technology-null)
| | | +--rw tech-null? empty
| | +---:(technology-string)
| | | +--rw ipv4-icmp? string
+--rw (tools)?
| | +---:(tools-empty)
| | | +--rw tools-null? empty
| | +---:(tools-ip)
| | | +--rw rfc792? boolean
| | | +--rw rfc4443? boolean
| | | +--rw rfc4884? boolean
| | | +--rw rfc5837? boolean
| | +---:(tools-bfd)
| | | +--rw rfc5881? boolean
| | | +--rw rfc5883? boolean

```

```

| | +--rw rfc5884?                boolean
| | +--rw rfc5885?                boolean
+--:(tools-mpls)
| | +--rw rfc4379?                boolean
| | +--rw rfc4687?                boolean
| | +--rw rfc4950?                boolean
| | +--rw mpls-rfc5884?           boolean
+--:(tools-mpls-tp)
| | +--rw rfc6426?                boolean
| | +--rw rfc6435?                boolean
| | +--rw rfc6374?                boolean
+--:(tools-pw)
| | +--rw rfc5085?                boolean
| | +--rw pw_rfc5885?             boolean
| | +--rw rfc6423?                boolean
| | +--rw rfc6310?                boolean
| | +--rw rfc7023?                boolean
+--rw oam-layers* [index]
+--rw index                      uint16
+--rw level?                     int32
+--rw (tp-address)?
+--:(mac-address)
| | +--rw mac-address?            yang:mac-address
+--:(ipv4-address)
| | +--rw ipv4-address?           inet:ipv4-address
+--:(ipv6-address)
| | +--rw ipv6-address?           inet:ipv6-address
+--:(src-dst-address)
| | +--rw src-ip-address?         inet:ip-address
| | +--rw dst-ip-address?         inet:ip-address
| | +--rw Interface?             if:interface-ref
+--:(fec)
| | +--rw fec-type?               fec-type
+--rw (fec-value)?
+--:(ip-prefix)
| | +--rw ip-prefix?              inet:ip-prefix
+--:(bgp)
| | +--rw bgp?                    inet:ip-prefix
+--:(tunnel)
| | +--rw tunnel-interface?       uint32
+--:(l3vpn)
| | +--rw l3vpn-id?               uint32
+--:(pw)
| | +--rw remote-pe-address?      inet:ip-address
| | +--rw pw-id?                  uint32
+--:(vpls)
| | +--rw route-distinguisher?    uint32
| | +--rw sender-ve-id?           uint32

```

```

dress
|
|   |--rw receiver-ve-id?          uint32
|   +---:(mpls-mldp)
|       |--rw (root-address)?
|           +---:(ip-address)
|               |--rw source-address?      inet:ip-address
|               |--rw group-ip-address?    IP-Multicast-Group-Ad
|
|   +---:(vpn)
|       |--rw as-number?                inet:as-number
|       +---:(global-id)
|           |--rw lsp-id?                string
+---:(tlv-address)
    |--rw tlv-type?                      int16
    |--rw tlv-len?                       int16
    |--rw tlv-value?                     binary
augment /nd:networks/nd:network/nd:node:
  |--rw test-point-tunnel-address-location-list {connection-less}?
  |--rw test-point-locations* [tunnel-location]
  |--rw tunnel-location                  uint32
  |--rw vrf?                             rt:routing-instance-ref
  |--rw (tp-address)?
  |   +---:(mac-address)
  |       |--rw mac-address?              yang:mac-address
  |   +---:(ipv4-address)
  |       |--rw ipv4-address?              inet:ipv4-address
  |   +---:(ipv6-address)
  |       |--rw ipv6-address?              inet:ipv6-address
  |   +---:(src-dst-address)
  |       |--rw src-ip-address?            inet:ip-address
  |       |--rw dst-ip-address?            inet:ip-address
  |       |--rw Interface?                 if:interface-ref
  |   +---:(fec)
  |       |--rw fec-type?                  fec-type
  |       |--rw (fec-value)?
  |           +---:(ip-prefix)
  |               |--rw ip-prefix?          inet:ip-prefix
  |           +---:(bgp)
  |               |--rw bgp?                 inet:ip-prefix
  |           +---:(tunnel)
  |               |--rw tunnel-interface?    uint32
  |           +---:(l3vpn)
  |               |--rw l3vpn-id?            uint32
  |           +---:(pw)
  |               |--rw remote-pe-address?    inet:ip-address
  |               |--rw pw-id?                uint32
  |           +---:(vpls)
  |               |--rw route-distinguisher? uint32
  |               |--rw sender-ve-id?        uint32
  |               |--rw receiver-ve-id?      uint32

```

```

+---:(mpls-mldp)
+---rw (root-address)?
+---:(ip-address)
|   +---rw source-address?      inet:ip-address
|   +---rw group-ip-address?    IP-Multicast-Group-Addre
+---:(vpn)
|   +---rw as-number?           inet:as-number
+---:(global-id)
|   +---rw lsp-id?              string
+---:(tlv-address)
|   +---rw tlv-type?             int16
|   +---rw tlv-len?              int16
|   +---rw tlv-value?            binary
+---rw (technology)?
+---:(technology-null)
|   +---rw tech-null?           empty
+---:(technology-string)
|   +---rw ipv4-icmp?           string
+---rw (tools)?
+---:(tools-empty)
|   +---rw tools-null?          empty
+---:(tools-ip)
|   +---rw rfc792?              boolean
|   +---rw rfc4443?             boolean
|   +---rw rfc4884?             boolean
|   +---rw rfc5837?             boolean
+---:(tools-bfd)
|   +---rw rfc5881?             boolean
|   +---rw rfc5883?             boolean
|   +---rw rfc5884?             boolean
|   +---rw rfc5885?             boolean
+---:(tools-mpls)
|   +---rw rfc4379?             boolean
|   +---rw rfc4687?             boolean
|   +---rw rfc4950?             boolean
|   +---rw mpls-rfc5884?        boolean
+---:(tools-mpls-tp)
|   +---rw rfc6426?             boolean
|   +---rw rfc6435?             boolean
|   +---rw rfc6374?             boolean
+---:(tools-pw)
|   +---rw rfc5085?             boolean
|   +---rw pw_rfc5885?          boolean
|   +---rw rfc6423?             boolean
|   +---rw rfc6310?             boolean
|   +---rw rfc7023?             boolean
+---rw oam-layers* [index]
+---rw index                    uint16

```

```

    +--rw level?                               int32
    +--rw (tp-address)?
      +--:(mac-address)
        | +--rw mac-address?                   yang:mac-address
      +--:(ipv4-address)
        | +--rw ipv4-address?                  inet:ipv4-address
      +--:(ipv6-address)
        | +--rw ipv6-address?                  inet:ipv6-address
      +--:(src-dst-address)
        | +--rw src-ip-address?                inet:ip-address
        | +--rw dst-ip-address?                inet:ip-address
        | +--rw Interface?                     if:interface-ref
      +--:(fec)
        | +--rw fec-type?                       fec-type
        | +--rw (fec-value)?
          +--:(ip-prefix)
            | +--rw ip-prefix?                  inet:ip-prefix
          +--:(bgp)
            | +--rw bgp?                        inet:ip-prefix
          +--:(tunnel)
            | +--rw tunnel-interface?           uint32
          +--:(l3vpn)
            | +--rw l3vpn-id?                   uint32
          +--:(pw)
            | +--rw remote-pe-address?          inet:ip-address
            | +--rw pw-id?                      uint32
          +--:(vpls)
            | +--rw route-distinguisher?       uint32
            | +--rw sender-ve-id?               uint32
            | +--rw receiver-ve-id?            uint32
          +--:(mpls-mldp)
            +--rw (root-address)?
              +--:(ip-address)
                | +--rw source-address?         inet:ip-address
                | +--rw group-ip-address?       IP-Multicast-Group-Ad
              +--:(vn)
                | +--rw as-number?              inet:as-number
              +--:(global-id)
                | +--rw lsp-id?                 string
              +--:(tlv-address)
                +--rw tlv-type?                  int16
                +--rw tlv-len?                   int16
                +--rw tlv-value?                 binary
dress
    +--rw test-point-mac-address-location-list {connection-less}?
      +--rw test-point-locations* [mac-address-location]
        +--rw mac-address-location             yang:mac-address
      +--rw vrf?                               rt:routing-instance-ref

```

augment /nd:networks/nd:network/nd:node:

```

+--rw (tp-address)?
|   +--:(mac-address)
|   |   +--rw mac-address?          yang:mac-address
+--:(ipv4-address)
|   +--rw ipv4-address?             inet:ipv4-address
+--:(ipv6-address)
|   +--rw ipv6-address?             inet:ipv6-address
+--:(src-dst-address)
|   +--rw src-ip-address?           inet:ip-address
|   +--rw dst-ip-address?           inet:ip-address
|   +--rw Interface?                if:interface-ref
+--:(fec)
|   +--rw fec-type?                 fec-type
|   +--rw (fec-value)?
|   |   +--:(ip-prefix)
|   |   |   +--rw ip-prefix?         inet:ip-prefix
|   |   +--:(bgp)
|   |   |   +--rw bgp?                inet:ip-prefix
|   |   +--:(tunnel)
|   |   |   +--rw tunnel-interface?   uint32
|   |   +--:(l3vpn)
|   |   |   +--rw l3vpn-id?           uint32
|   |   +--:(pw)
|   |   |   +--rw remote-pe-address?   inet:ip-address
|   |   |   +--rw pw-id?              uint32
|   |   +--:(vpls)
|   |   |   +--rw route-distinguisher? uint32
|   |   |   +--rw sender-ve-id?        uint32
|   |   |   +--rw receiver-ve-id?      uint32
|   |   +--:(mpls-mldp)
|   |   |   +--rw (root-address)?
|   |   |   |   +--:(ip-address)
|   |   |   |   |   +--rw source-address?   inet:ip-address
|   |   |   |   |   +--rw group-ip-address? IP-Multicast-Group-Addr
|   |   |   +--:(vpn)
|   |   |   |   +--rw as-number?          inet:as-number
|   |   |   +--:(global-id)
|   |   |   |   +--rw lsp-id?              string
+--:(tlv-address)
|   +--rw tlv-type?                  int16
|   +--rw tlv-len?                   int16
|   +--rw tlv-value?                 binary
+--rw (technology)?
|   +--:(technology-null)
|   |   +--rw tech-null?              empty
+--:(technology-string)
|   +--rw ipv4-icmp?                 string
+--rw (tools)?

```

```

+---:(tools-empty)
|   +---rw tools-null?                empty
+---:(tools-ip)
|   +---rw rfc792?                    boolean
|   +---rw rfc4443?                   boolean
|   +---rw rfc4884?                   boolean
|   +---rw rfc5837?                   boolean
+---:(tools-bfd)
|   +---rw rfc5881?                   boolean
|   +---rw rfc5883?                   boolean
|   +---rw rfc5884?                   boolean
|   +---rw rfc5885?                   boolean
+---:(tools-mpls)
|   +---rw rfc4379?                   boolean
|   +---rw rfc4687?                   boolean
|   +---rw rfc4950?                   boolean
|   +---rw mpls-rfc5884?              boolean
+---:(tools-mpls-tp)
|   +---rw rfc6426?                   boolean
|   +---rw rfc6435?                   boolean
|   +---rw rfc6374?                   boolean
+---:(tools-pw)
|   +---rw rfc5085?                   boolean
|   +---rw pw_rfc5885?                boolean
|   +---rw rfc6423?                   boolean
|   +---rw rfc6310?                   boolean
|   +---rw rfc7023?                   boolean
+---rw oam-layers* [index]
|   +---rw index                      uint16
|   +---rw level?                     int32
|   +---rw (tp-address)?
|   |   +---:(mac-address)
|   |   |   +---rw mac-address?       yang:mac-address
|   |   +---:(ipv4-address)
|   |   |   +---rw ipv4-address?       inet:ipv4-address
|   |   +---:(ipv6-address)
|   |   |   +---rw ipv6-address?       inet:ipv6-address
|   |   +---:(src-dst-address)
|   |   |   +---rw src-ip-address?     inet:ip-address
|   |   |   +---rw dst-ip-address?     inet:ip-address
|   |   +---rw Interface?             if:interface-ref
|   +---:(fec)
|   |   +---rw fec-type?               fec-type
|   |   +---rw (fec-value)?
|   |   |   +---:(ip-prefix)
|   |   |   |   +---rw ip-prefix?      inet:ip-prefix
|   |   |   +---:(bgp)
|   |   |   |   +---rw bgp?            inet:ip-prefix

```

```

dress
|
|   +---:(tunnel)
|   |   +---rw tunnel-interface?      uint32
|   +---:(l3vpn)
|   |   +---rw l3vpn-id?              uint32
|   +---:(pw)
|   |   +---rw remote-pe-address?     inet:ip-address
|   |   +---rw pw-id?                 uint32
|   +---:(vpls)
|   |   +---rw route-distinguisher?   uint32
|   |   +---rw sender-ve-id?          uint32
|   |   +---rw receiver-ve-id?        uint32
|   +---:(mpls-mldp)
|   |   +---rw (root-address)?
|   |   |   +---:(ip-address)
|   |   |   |   +---rw source-address?   inet:ip-address
|   |   |   |   +---rw group-ip-address? IP-Multicast-Group-Ad
|   +---:(vpn)
|   |   +---rw as-number?              inet:as-number
|   +---:(global-id)
|   |   +---rw lsp-id?                 string
+---:(tlv-address)
|   +---rw tlv-type?                    int16
|   +---rw tlv-len?                     int16
|   +---rw tlv-value?                   binary
augment /nd:networks/nd:network/nd:node:
+---rw test-point-ip-prefix-location-list {connection-less}?
+---rw test-point-locations* [ip-prefix-location]
+---rw ip-prefix-location              inet:ip-prefix
+---rw vrf?                            rt:routing-instance-ref
+---rw (tp-address)?
|   +---:(mac-address)
|   |   +---rw mac-address?             yang:mac-address
|   +---:(ipv4-address)
|   |   +---rw ipv4-address?            inet:ipv4-address
|   +---:(ipv6-address)
|   |   +---rw ipv6-address?            inet:ipv6-address
|   +---:(src-dst-address)
|   |   +---rw src-ip-address?           inet:ip-address
|   |   +---rw dst-ip-address?           inet:ip-address
|   |   +---rw Interface?               if:interface-ref
|   +---:(fec)
|   |   +---rw fec-type?                 fec-type
|   |   +---rw (fec-value)?
|   |   |   +---:(ip-prefix)
|   |   |   |   +---rw ip-prefix?       inet:ip-prefix
|   |   |   +---:(bgp)
|   |   |   |   +---rw bgp?              inet:ip-prefix
|   |   +---:(tunnel)

```



```

| | | +--rw tunnel-interface?      uint32
| | | +---:(l3vpn)
| | | | +--rw l3vpn-id?            uint32
| | | +---:(pw)
| | | | +--rw remote-pe-address?   inet:ip-address
| | | | +--rw pw-id?              uint32
| | | +---:(vpls)
| | | | +--rw route-distinguisher? uint32
| | | | +--rw sender-ve-id?        uint32
| | | | +--rw receiver-ve-id?      uint32
| | | +---:(mpls-mldp)
| | | | +--rw (root-address)?
| | | | | +---:(ip-address)
| | | | | | +--rw source-address?   inet:ip-address
| | | | | | +--rw group-ip-address? IP-Multicast-Group-Addre
ss | | |
| | | | +---:(vpn)
| | | | | +--rw as-number?          inet:as-number
| | | | +---:(global-id)
| | | | | +--rw lsp-id?             string
| | | +---:(tlv-address)
| | | | +--rw tlv-type?             int16
| | | | +--rw tlv-len?             int16
| | | | +--rw tlv-value?           binary
+--rw (technology)?
| +---:(technology-null)
| | +--rw tech-null?              empty
+---:(technology-string)
| +--rw ipv4-icmp?               string
+--rw (tools)?
| +---:(tools-empty)
| | +--rw tools-null?            empty
+---:(tools-ip)
| | +--rw rfc792?                boolean
| | +--rw rfc4443?              boolean
| | +--rw rfc4884?              boolean
| | +--rw rfc5837?              boolean
+---:(tools-bfd)
| | +--rw rfc5881?              boolean
| | +--rw rfc5883?              boolean
| | +--rw rfc5884?              boolean
| | +--rw rfc5885?              boolean
+---:(tools-mpls)
| | +--rw rfc4379?              boolean
| | +--rw rfc4687?              boolean
| | +--rw rfc4950?              boolean
| | +--rw mpls-rfc5884?         boolean
+---:(tools-mpls-tp)
| | +--rw rfc6426?              boolean

```

```

| | +--rw rfc6435?                boolean
| | +--rw rfc6374?                boolean
| +--:(tools-pw)
| | +--rw rfc5085?                boolean
| | +--rw pw_rfc5885?            boolean
| | +--rw rfc6423?                boolean
| | +--rw rfc6310?                boolean
| | +--rw rfc7023?                boolean
+--rw oam-layers* [index]
  +--rw index                    uint16
  +--rw level?                   int32
  +--rw (tp-address)?
    +--:(mac-address)
    | +--rw mac-address?          yang:mac-address
    +--:(ipv4-address)
    | +--rw ipv4-address?         inet:ipv4-address
    +--:(ipv6-address)
    | +--rw ipv6-address?         inet:ipv6-address
    +--:(src-dst-address)
    | +--rw src-ip-address?       inet:ip-address
    | +--rw dst-ip-address?       inet:ip-address
    | +--rw Interface?            if:interface-ref
    +--:(fec)
    +--rw fec-type?              fec-type
    +--rw (fec-value)?
      +--:(ip-prefix)
      | +--rw ip-prefix?          inet:ip-prefix
      +--:(bgp)
      | +--rw bgp?                inet:ip-prefix
      +--:(tunnel)
      | +--rw tunnel-interface?   uint32
      +--:(l3vpn)
      | +--rw l3vpn-id?           uint32
      +--:(pw)
      | +--rw remote-pe-address?  inet:ip-address
      | +--rw pw-id?              uint32
      +--:(vpls)
      | +--rw route-distinguisher? uint32
      | +--rw sender-ve-id?       uint32
      | +--rw receiver-ve-id?     uint32
      +--:(mpls-mldp)
      +--rw (root-address)?
        +--:(ip-address)
        | +--rw source-address?   inet:ip-address
        | +--rw group-ip-address? IP-Multicast-Group-Ad
dress
        +--:(vpn)
        | +--rw as-number?        inet:as-number
        +--:(global-id)

```

```

|                                     +-rw lsp-id?                string
+---:(tlv-address)
|   +-rw tlv-type?                int16
|   +-rw tlv-len?                 int16
|   +-rw tlv-value?               binary
augment /nd:networks/nd:network/nd:node:
  +-rw test-point-route-dist-location-list {connection-less}?
  +-rw test-point-locations* [route-dist-location]
  +-rw route-dist-location        uint32
  +-rw vrf?                       rt:routing-instance-ref
  +-rw (tp-address)?
  |   +---:(mac-address)
  |   |   +-rw mac-address?        yang:mac-address
  |   +---:(ipv4-address)
  |   |   +-rw ipv4-address?       inet:ipv4-address
  |   +---:(ipv6-address)
  |   |   +-rw ipv6-address?       inet:ipv6-address
  |   +---:(src-dst-address)
  |   |   +-rw src-ip-address?     inet:ip-address
  |   |   +-rw dst-ip-address?     inet:ip-address
  |   |   +-rw Interface?          if:interface-ref
  |   +---:(fec)
  |   |   +-rw fec-type?            fec-type
  |   |   +-rw (fec-value)?
  |   |   |   +---:(ip-prefix)
  |   |   |   |   +-rw ip-prefix?   inet:ip-prefix
  |   |   |   +---:(bgp)
  |   |   |   |   +-rw bgp?          inet:ip-prefix
  |   |   |   +---:(tunnel)
  |   |   |   |   +-rw tunnel-interface? uint32
  |   |   |   +---:(l3vpn)
  |   |   |   |   +-rw l3vpn-id?     uint32
  |   |   |   +---:(pw)
  |   |   |   |   +-rw remote-pe-address? inet:ip-address
  |   |   |   |   +-rw pw-id?        uint32
  |   |   |   +---:(vpls)
  |   |   |   |   +-rw route-distinguisher? uint32
  |   |   |   |   +-rw sender-ve-id?   uint32
  |   |   |   |   +-rw receiver-ve-id? uint32
  |   |   +---:(mpls-mldp)
  |   |   |   +-rw (root-address)?
  |   |   |   |   +---:(ip-address)
  |   |   |   |   |   +-rw source-address? inet:ip-address
  |   |   |   |   |   +-rw group-ip-address? IP-Multicast-Group-Addre
  |   |   +---:(vpn)
  |   |   |   +-rw as-number?       inet:as-number
  |   |   +---:(global-id)
  |   |   |   +-rw lsp-id?          string

```

ss

```

    +---:(tlv-address)
      +---rw tlv-type?                int16
      +---rw tlv-len?                int16
      +---rw tlv-value?              binary
+---rw (technology)?
  +---:(technology-null)
  | +---rw tech-null?                empty
  +---:(technology-string)
  | +---rw ipv4-icmp?                string
+---rw (tools)?
  +---:(tools-empty)
  | +---rw tools-null?                empty
  +---:(tools-ip)
  | +---rw rfc792?                    boolean
  | +---rw rfc4443?                  boolean
  | +---rw rfc4884?                  boolean
  | +---rw rfc5837?                  boolean
  +---:(tools-bfd)
  | +---rw rfc5881?                  boolean
  | +---rw rfc5883?                  boolean
  | +---rw rfc5884?                  boolean
  | +---rw rfc5885?                  boolean
  +---:(tools-mpls)
  | +---rw rfc4379?                  boolean
  | +---rw rfc4687?                  boolean
  | +---rw rfc4950?                  boolean
  | +---rw mpls-rfc5884?              boolean
  +---:(tools-mpls-tp)
  | +---rw rfc6426?                  boolean
  | +---rw rfc6435?                  boolean
  | +---rw rfc6374?                  boolean
  +---:(tools-pw)
  | +---rw rfc5085?                  boolean
  | +---rw pw_rfc5885?                boolean
  | +---rw rfc6423?                  boolean
  | +---rw rfc6310?                  boolean
  | +---rw rfc7023?                  boolean
+---rw oam-layers* [index]
  +---rw index                      uint16
  +---rw level?                      int32
  +---rw (tp-address)?
    +---:(mac-address)
    | +---rw mac-address?              yang:mac-address
    +---:(ipv4-address)
    | +---rw ipv4-address?              inet:ipv4-address
    +---:(ipv6-address)
    | +---rw ipv6-address?              inet:ipv6-address
    +---:(src-dst-address)

```

```

|   +-rw src-ip-address?          inet:ip-address
|   +-rw dst-ip-address?         inet:ip-address
|   +-rw Interface?              if:interface-ref
+--:(fec)
|   +-rw fec-type?                fec-type
|   +-rw (fec-value)?
|       +--:(ip-prefix)
|       |   +-rw ip-prefix?      inet:ip-prefix
|       +--:(bgp)
|       |   +-rw bgp?            inet:ip-prefix
|       +--:(tunnel)
|       |   +-rw tunnel-interface? uint32
|       +--:(l3vpn)
|       |   +-rw l3vpn-id?       uint32
|       +--:(pw)
|       |   +-rw remote-pe-address? inet:ip-address
|       |   +-rw pw-id?         uint32
|       +--:(vpls)
|       |   +-rw route-distinguisher? uint32
|       |   +-rw sender-ve-id?    uint32
|       |   +-rw receiver-ve-id?  uint32
|       +--:(mpls-mlbp)
|       |   +-rw (root-address)?
|       |       +--:(ip-address)
|       |       |   +-rw source-address?    inet:ip-address
|       |       |   +-rw group-ip-address?  IP-Multicast-Group-Ad
dress
|       +--:(vpn)
|       |   +-rw as-number?        inet:as-number
|       +--:(global-id)
|       |   +-rw lsp-id?           string
+--:(tlv-address)
|   +-rw tlv-type?                int16
|   +-rw tlv-len?                int16
|   +-rw tlv-value?              binary
augment /nd:networks/nd:network/nd:node:
  +-rw test-point-group-ip-address-location-list {connection-less}?
  +-rw test-point-locations* [group-ip-address-location]
  +-rw group-ip-address-location    IP-Multicast-Group-Address
  +-rw vrf?                        rt:routing-instance-ref
  +-rw (tp-address)?
  |   +--:(mac-address)
  |   |   +-rw mac-address?        yang:mac-address
  |   +--:(ipv4-address)
  |   |   +-rw ipv4-address?      inet:ipv4-address
  |   +--:(ipv6-address)
  |   |   +-rw ipv6-address?      inet:ipv6-address
  |   +--:(src-dst-address)
  |   |   +-rw src-ip-address?    inet:ip-address

```

			---rw dst-ip-address?	inet:ip-address
			---rw Interface?	if:interface-ref
			---:(fec)	
			---rw fec-type?	fec-type
			---rw (fec-value)?	
			---:(ip-prefix)	
			---rw ip-prefix?	inet:ip-prefix
			---:(bgp)	
			---rw bgp?	inet:ip-prefix
			---:(tunnel)	
			---rw tunnel-interface?	uint32
			---:(l3vpn)	
			---rw l3vpn-id?	uint32
			---:(pw)	
			---rw remote-pe-address?	inet:ip-address
			---rw pw-id?	uint32
			---:(vpls)	
			---rw route-distinguisher?	uint32
			---rw sender-ve-id?	uint32
			---rw receiver-ve-id?	uint32
			---:(mpls-mldp)	
			---rw (root-address)?	
			---:(ip-address)	
			---rw source-address?	inet:ip-address
			---rw group-ip-address?	IP-Multicast-Group
-Address				
			---:(vpn)	
			---rw as-number?	inet:as-number
			---:(global-id)	
			---rw lsp-id?	string
			---:(tlv-address)	
			---rw tlv-type?	int16
			---rw tlv-len?	int16
			---rw tlv-value?	binary
			---rw (technology)?	
			---:(technology-null)	
			---rw tech-null?	empty
			---:(technology-string)	
			---rw ipv4-icmp?	string
			---rw (tools)?	
			---:(tools-empty)	
			---rw tools-null?	empty
			---:(tools-ip)	
			---rw rfc792?	boolean
			---rw rfc4443?	boolean
			---rw rfc4884?	boolean
			---rw rfc5837?	boolean
			---:(tools-bfd)	
			---rw rfc5881?	boolean

```

| | +--rw rfc5883?                boolean
| | +--rw rfc5884?                boolean
| | +--rw rfc5885?                boolean
+--:(tools-mpls)
| | +--rw rfc4379?                boolean
| | +--rw rfc4687?                boolean
| | +--rw rfc4950?                boolean
| | +--rw mpls-rfc5884?           boolean
+--:(tools-mpls-tp)
| | +--rw rfc6426?                boolean
| | +--rw rfc6435?                boolean
| | +--rw rfc6374?                boolean
+--:(tools-pw)
| | +--rw rfc5085?                boolean
| | +--rw pw_rfc5885?             boolean
| | +--rw rfc6423?                boolean
| | +--rw rfc6310?                boolean
| | +--rw rfc7023?                boolean
+--rw oam-layers* [index]
| +--rw index                    uint16
| +--rw level?                   int32
| +--rw (tp-address)?
| | +--:(mac-address)
| | | +--rw mac-address?          yang:mac-address
| | +--:(ipv4-address)
| | | +--rw ipv4-address?         inet:ipv4-address
| | +--:(ipv6-address)
| | | +--rw ipv6-address?         inet:ipv6-address
| | +--:(src-dst-address)
| | | +--rw src-ip-address?       inet:ip-address
| | | +--rw dst-ip-address?       inet:ip-address
| | | +--rw Interface?            if:interface-ref
| | +--:(fec)
| | | +--rw fec-type?             fec-type
| | | +--rw (fec-value)?
| | | | +--:(ip-prefix)
| | | | | +--rw ip-prefix?        inet:ip-prefix
| | | | +--:(bgp)
| | | | | +--rw bgp?              inet:ip-prefix
| | | | +--:(tunnel)
| | | | | +--rw tunnel-interface? uint32
| | | | +--:(l3vpn)
| | | | | +--rw l3vpn-id?         uint32
| | | | +--:(pw)
| | | | | +--rw remote-pe-address? inet:ip-address
| | | | | +--rw pw-id?            uint32
| | | | +--:(vpls)
| | | | | +--rw route-distinguisher? uint32

```

```

dress
|
|   +--rw sender-ve-id?          uint32
|   +--rw receiver-ve-id?       uint32
+--:(mpls-mldp)
|   +--rw (root-address)?
|       +--:(ip-address)
|           |   +--rw source-address?    inet:ip-address
|           |   +--rw group-ip-address?  IP-Multicast-Group-Ad
|
|       +--:(vpn)
|           |   +--rw as-number?         inet:as-number
|       +--:(global-id)
|           |   +--rw lsp-id?            string
+--:(tlv-address)
|   +--rw tlv-type?              int16
|   +--rw tlv-len?               int16
|   +--rw tlv-value?             binary
augment /nd:networks/nd:network/nd:node:
+--rw test-point-as-number-location-list {connection-less}?
+--rw test-point-locations* [as-number-location]
|   +--rw as-number-location      inet:as-number
|   +--rw vrf?                   rt:routing-instance-ref
+--rw (tp-address)?
|   +--:(mac-address)
|       |   +--rw mac-address?         yang:mac-address
+--:(ipv4-address)
|       |   +--rw ipv4-address?        inet:ipv4-address
+--:(ipv6-address)
|       |   +--rw ipv6-address?        inet:ipv6-address
+--:(src-dst-address)
|       |   +--rw src-ip-address?      inet:ip-address
|       |   +--rw dst-ip-address?     inet:ip-address
|       |   +--rw Interface?          if:interface-ref
+--:(fec)
|       |   +--rw fec-type?             fec-type
+--rw (fec-value)?
|       |   +--:(ip-prefix)
|       |       |   +--rw ip-prefix?    inet:ip-prefix
+--:(bgp)
|       |       |   +--rw bgp?          inet:ip-prefix
+--:(tunnel)
|       |       |   +--rw tunnel-interface? uint32
+--:(l3vpn)
|       |       |   +--rw l3vpn-id?     uint32
+--:(pw)
|       |       |   +--rw remote-pe-address? inet:ip-address
|       |       |   +--rw pw-id?        uint32
+--:(vpls)
|       |       |   +--rw route-distinguisher? uint32
|       |       |   +--rw sender-ve-id?  uint32

```



```

|         |         |   +--rw receiver-ve-id?           uint32
|         |         |   +---:(mpls-mldp)
|         |         |   +--rw (root-address)?
|         |         |   +---:(ip-address)
|         |         |   |   +--rw source-address?       inet:ip-address
|         |         |   |   +--rw group-ip-address?     IP-Multicast-Group-Addre
ss         |         |
|         |         |   +---:(vpn)
|         |         |   |   +--rw as-number?           inet:as-number
|         |         |   +---:(global-id)
|         |         |   |   +--rw lsp-id?              string
|         |         |   +---:(tlv-address)
|         |         |   |   +--rw tlv-type?             int16
|         |         |   |   +--rw tlv-len?             int16
|         |         |   |   +--rw tlv-value?          binary
|         |         |   +--rw (technology)?
|         |         |   |   +---:(technology-null)
|         |         |   |   |   +--rw tech-null?       empty
|         |         |   |   +---:(technology-string)
|         |         |   |   |   +--rw ipv4-icmp?      string
|         |         |   +--rw (tools)?
|         |         |   |   +---:(tools-empty)
|         |         |   |   |   +--rw tools-null?      empty
|         |         |   |   +---:(tools-ip)
|         |         |   |   |   +--rw rfc792?          boolean
|         |         |   |   |   +--rw rfc4443?         boolean
|         |         |   |   |   +--rw rfc4884?         boolean
|         |         |   |   |   +--rw rfc5837?         boolean
|         |         |   |   +---:(tools-bfd)
|         |         |   |   |   +--rw rfc5881?         boolean
|         |         |   |   |   +--rw rfc5883?         boolean
|         |         |   |   |   +--rw rfc5884?         boolean
|         |         |   |   |   +--rw rfc5885?         boolean
|         |         |   |   +---:(tools-mpls)
|         |         |   |   |   +--rw rfc4379?         boolean
|         |         |   |   |   +--rw rfc4687?         boolean
|         |         |   |   |   +--rw rfc4950?         boolean
|         |         |   |   |   +--rw mpls-rfc5884?     boolean
|         |         |   |   +---:(tools-mpls-tp)
|         |         |   |   |   +--rw rfc6426?         boolean
|         |         |   |   |   +--rw rfc6435?         boolean
|         |         |   |   |   +--rw rfc6374?         boolean
|         |         |   |   +---:(tools-pw)
|         |         |   |   |   +--rw rfc5085?         boolean
|         |         |   |   |   +--rw pw_rfc5885?      boolean
|         |         |   |   |   +--rw rfc6423?         boolean
|         |         |   |   |   +--rw rfc6310?         boolean
|         |         |   |   |   +--rw rfc7023?         boolean
|         |         |   +--rw oam-layers* [index]

```

```

+--rw index                               uint16
+--rw level?                             int32
+--rw (tp-address)?
  +--:(mac-address)
  |   +--rw mac-address?                  yang:mac-address
  +--:(ipv4-address)
  |   +--rw ipv4-address?                 inet:ipv4-address
  +--:(ipv6-address)
  |   +--rw ipv6-address?                 inet:ipv6-address
  +--:(src-dst-address)
  |   +--rw src-ip-address?               inet:ip-address
  |   +--rw dst-ip-address?               inet:ip-address
  |   +--rw Interface?                    if:interface-ref
  +--:(fec)
  |   +--rw fec-type?                     fec-type
  |   +--rw (fec-value)?
  |   |   +--:(ip-prefix)
  |   |   |   +--rw ip-prefix?            inet:ip-prefix
  |   |   +--:(bgp)
  |   |   |   +--rw bgp?                  inet:ip-prefix
  |   |   +--:(tunnel)
  |   |   |   +--rw tunnel-interface?     uint32
  |   |   +--:(l3vpn)
  |   |   |   +--rw l3vpn-id?             uint32
  |   |   +--:(pw)
  |   |   |   +--rw remote-pe-address?    inet:ip-address
  |   |   |   +--rw pw-id?                uint32
  |   |   +--:(vpls)
  |   |   |   +--rw route-distinguisher? uint32
  |   |   |   +--rw sender-ve-id?         uint32
  |   |   |   +--rw receiver-ve-id?       uint32
  |   |   +--:(mpls-mldp)
  |   |   |   +--rw (root-address)?
  |   |   |   |   +--:(ip-address)
  |   |   |   |   |   +--rw source-address? inet:ip-address
  |   |   |   |   |   +--rw group-ip-address? IP-Multicast-Group-Ad
  |   |   +--:(vpn)
  |   |   |   +--rw as-number?            inet:as-number
  |   |   +--:(global-id)
  |   |   |   +--rw lsp-id?               string
  +--:(tlv-address)
  |   +--rw tlv-type?                     int16
  |   +--rw tlv-len?                      int16
  |   +--rw tlv-value?                    binary
augment /nd:networks/nd:network/nd:node:
  +--rw test-point-lsp-id-location-list {connection-less}?
  |   +--rw test-point-locations* [lsp-id-location]
  |   |   +--rw lsp-id-location            string

```

```

+--rw vrf?                               rt:routing-instance-ref
+--rw (tp-address)?
|   +--:(mac-address)
|   |   +--rw mac-address?               yang:mac-address
|   +--:(ipv4-address)
|   |   +--rw ipv4-address?               inet:ipv4-address
|   +--:(ipv6-address)
|   |   +--rw ipv6-address?               inet:ipv6-address
|   +--:(src-dst-address)
|   |   +--rw src-ip-address?              inet:ip-address
|   |   +--rw dst-ip-address?              inet:ip-address
|   |   +--rw Interface?                  if:interface-ref
|   +--:(fec)
|   |   +--rw fec-type?                    fec-type
|   |   +--rw (fec-value)?
|   |   |   +--:(ip-prefix)
|   |   |   |   +--rw ip-prefix?            inet:ip-prefix
|   |   |   +--:(bgp)
|   |   |   |   +--rw bgp?                  inet:ip-prefix
|   |   |   +--:(tunnel)
|   |   |   |   +--rw tunnel-interface?      uint32
|   |   |   +--:(l3vpn)
|   |   |   |   +--rw l3vpn-id?              uint32
|   |   |   +--:(pw)
|   |   |   |   +--rw remote-pe-address?      inet:ip-address
|   |   |   |   +--rw pw-id?                  uint32
|   |   |   +--:(vpls)
|   |   |   |   +--rw route-distinguisher?    uint32
|   |   |   |   +--rw sender-ve-id?            uint32
|   |   |   |   +--rw receiver-ve-id?          uint32
|   |   |   +--:(mpls-mldp)
|   |   |   |   +--rw (root-address)?
|   |   |   |   |   +--:(ip-address)
|   |   |   |   |   |   +--rw source-address?    inet:ip-address
|   |   |   |   |   |   +--rw group-ip-address?  IP-Multicast-Group-Addre
|   |   |   +--:(vpn)
|   |   |   |   +--rw as-number?              inet:as-number
|   |   |   +--:(global-id)
|   |   |   |   +--rw lsp-id?                  string
|   +--:(tlv-address)
|   |   +--rw tlv-type?                      int16
|   |   +--rw tlv-len?                      int16
|   |   +--rw tlv-value?                    binary
+--rw (technology)?
|   +--:(technology-null)
|   |   +--rw tech-null?                    empty
|   +--:(technology-string)
|   |   +--rw ipv4-icmp?                    string

```

```

+--rw (tools)?
|   +--:(tools-empty)
|   |   +--rw tools-null?                empty
|   +--:(tools-ip)
|   |   +--rw rfc792?                    boolean
|   |   +--rw rfc4443?                  boolean
|   |   +--rw rfc4884?                  boolean
|   |   +--rw rfc5837?                  boolean
|   +--:(tools-bfd)
|   |   +--rw rfc5881?                  boolean
|   |   +--rw rfc5883?                  boolean
|   |   +--rw rfc5884?                  boolean
|   |   +--rw rfc5885?                  boolean
|   +--:(tools-mpls)
|   |   +--rw rfc4379?                  boolean
|   |   +--rw rfc4687?                  boolean
|   |   +--rw rfc4950?                  boolean
|   |   +--rw mpls-rfc5884?            boolean
|   +--:(tools-mpls-tp)
|   |   +--rw rfc6426?                  boolean
|   |   +--rw rfc6435?                  boolean
|   |   +--rw rfc6374?                  boolean
|   +--:(tools-pw)
|   |   +--rw rfc5085?                  boolean
|   |   +--rw pw_rfc5885?              boolean
|   |   +--rw rfc6423?                  boolean
|   |   +--rw rfc6310?                  boolean
|   |   +--rw rfc7023?                  boolean
+--rw oam-layers* [index]
|   +--rw index                        uint16
|   +--rw level?                      int32
|   +--rw (tp-address)?
|   |   +--:(mac-address)
|   |   |   +--rw mac-address?        yang:mac-address
|   |   +--:(ipv4-address)
|   |   |   +--rw ipv4-address?       inet:ipv4-address
|   |   +--:(ipv6-address)
|   |   |   +--rw ipv6-address?       inet:ipv6-address
|   |   +--:(src-dst-address)
|   |   |   +--rw src-ip-address?     inet:ip-address
|   |   |   +--rw dst-ip-address?     inet:ip-address
|   |   |   +--rw Interface?          if:interface-ref
|   |   +--:(fec)
|   |   |   +--rw fec-type?            fec-type
|   |   |   +--rw (fec-value)?
|   |   |   |   +--:(ip-prefix)
|   |   |   |   |   +--rw ip-prefix?  inet:ip-prefix
|   |   |   |   +--:(bgp)

```

```

| | +--rw bgp? inet:ip-prefix
| | +---:(tunnel)
| | | +--rw tunnel-interface? uint32
| | +---:(l3vpn)
| | | +--rw l3vpn-id? uint32
| | +---:(pw)
| | | +--rw remote-pe-address? inet:ip-address
| | | +--rw pw-id? uint32
| | +---:(vpls)
| | | +--rw route-distinguisher? uint32
| | | +--rw sender-ve-id? uint32
| | | +--rw receiver-ve-id? uint32
| | +---:(mpls-mldp)
| | | +--rw (root-address)?
| | | | +---:(ip-address)
| | | | | +--rw source-address? inet:ip-address
| | | | | +--rw group-ip-address? IP-Multicast-Group-Ad
dress
| | | +---:(vpn)
| | | | +--rw as-number? inet:as-number
| | | +---:(global-id)
| | | | +--rw lsp-id? string
+---:(tlv-address)
    +--rw tlv-type? int16
    +--rw tlv-len? int16
    +--rw tlv-value? binary

rpcs:
+---x continuity-check {continuity-check}?
|   +---w input
|   |   +---w destination-tp
|   |   |   +---w (tp-address)?
|   |   |   |   +---:(mac-address)
|   |   |   |   |   +---w mac-address? yang:mac-address
|   |   |   |   +---:(ipv4-address)
|   |   |   |   |   +---w ipv4-address? inet:ipv4-address
|   |   |   |   +---:(ipv6-address)
|   |   |   |   |   +---w ipv6-address? inet:ipv6-address
|   |   |   +---:(src-dst-address)
|   |   |   |   +---w src-ip-address? inet:ip-address
|   |   |   |   +---w dst-ip-address? inet:ip-address
|   |   |   |   +---w Interface? if:interface-ref
|   |   +---:(fec)
|   |   |   +---w fec-type? fec-type
|   |   |   +---w (fec-value)?
|   |   |   |   +---:(ip-prefix)
|   |   |   |   |   +---w ip-prefix? inet:ip-prefix
|   |   |   |   +---:(bgp)
|   |   |   |   |   +---w bgp? inet:ip-prefix
|   |   +---:(tunnel)
```

```

| | | | | +---w tunnel-interface?      uint32
| | | | | +---:(l3vpn)
| | | | | | +---w l3vpn-id?          uint32
| | | | | +---:(pw)
| | | | | | +---w remote-pe-address?  inet:ip-address
| | | | | | +---w pw-id?             uint32
| | | | | +---:(vpls)
| | | | | | +---w route-distinguisher? uint32
| | | | | | +---w sender-ve-id?       uint32
| | | | | | +---w receiver-ve-id?     uint32
| | | | | +---:(mpls-mldp)
| | | | | | +---w (root-address)?
| | | | | | | +---:(ip-address)
| | | | | | | | +---w source-address?  inet:ip-address
| | | | | | | | +---w group-ip-address? IP-Multicast-Group-Ad
dress | | | | |
| | | | | +---:(vpn)
| | | | | | +---w as-number?          inet:as-number
| | | | | +---:(global-id)
| | | | | | +---w lsp-id?             string
| | | | | +---:(tlv-address)
| | | | | | +---w tlv-type?            int16
| | | | | | +---w tlv-len?            int16
| | | | | | +---w tlv-value?          binary
| | | | | +---w session-type-enum?    enumeration
| | | | | +---w source-interface?     if:interface-ref
| | | | | +---w outbound-interface?   if:interface-ref
| | | | | +---w count?                uint32
| | | | | +---w vrf?                  rt:routing-instance-ref
| | | | | +---w ttl?                  uint8
| | | | | +---w packet-size?          uint32
| | | | | +---ro output
| | | | | | +---ro error-code-list* [response-index]
| | | | | | | +---ro response-index   uint32
| | | | | | | +---ro status-code?     int32
| | | | | | | +---ro status-sub-code?  uint8
| | | | | | +---ro tx-packet-count?    oam-counter32
| | | | | | +---ro rx-packet-count?    oam-counter32
| | | | | | +---ro min-delay?          oam-counter32
| | | | | | +---ro average-delay?      oam-counter32
| | | | | | +---ro max-delay?          oam-counter32
| | | | | +---x path-discovery
| | | | | | +---w input
| | | | | | | +---w destination-tp
| | | | | | | | +---w (tp-address)?
| | | | | | | | +---:(mac-address)
| | | | | | | | | +---w mac-address?  yang:mac-address
| | | | | | | | +---:(ipv4-address)
| | | | | | | | | +---w ipv4-address?  inet:ipv4-address

```

```

+---:(ipv6-address)
|   +---w ipv6-address?          inet:ipv6-address
+---:(src-dst-address)
|   +---w src-ip-address?        inet:ip-address
|   +---w dst-ip-address?        inet:ip-address
|   +---w Interface?             if:interface-ref
+---:(fec)
|   +---w fec-type?              fec-type
|   +---w (fec-value)?
|       +---:(ip-prefix)
|       |   +---w ip-prefix?      inet:ip-prefix
|       +---:(bgp)
|       |   +---w bgp?            inet:ip-prefix
|       +---:(tunnel)
|       |   +---w tunnel-interface? uint32
|       +---:(l3vpn)
|       |   +---w l3vpn-id?        uint32
|       +---:(pw)
|       |   +---w remote-pe-address? inet:ip-address
|       |   +---w pw-id?           uint32
|       +---:(vpls)
|       |   +---w route-distinguisher? uint32
|       |   +---w sender-ve-id?      uint32
|       |   +---w receiver-ve-id?    uint32
|       +---:(mpls-mlbp)
|       |   +---w (root-address)?
|       |       +---:(ip-address)
|       |       |   +---w source-address?      inet:ip-address
|       |       |   +---w group-ip-address?    IP-Multicast-Group-Ad
dress
|       +---:(vpn)
|       |   +---w as-number?          inet:as-number
|       +---:(global-id)
|       |   +---w lsp-id?              string
+---:(tlv-address)
|   +---w tlv-type?                    int16
|   +---w tlv-len?                     int16
|   +---w tlv-value?                   binary
+---w session-type-enum?                enumeration
+---w source-interface?                 if:interface-ref
+---w outbound-interface?               if:interface-ref
+---w vrf?                             rt:routing-instance-ref
+---w max-ttl?                          uint8
+--ro output
+--ro response-list* [response-index]
|   +--ro response-index                uint32
|   +--ro status-code?                  int32
|   +--ro status-sub-code?              uint8
|   +--ro hop-cnt?                      uint8

```

```

+--ro destination-tp
|   +--ro (tp-address)?
|   |   +--:(mac-address)
|   |   |   +--ro mac-address?           yang:mac-address
|   |   +--:(ipv4-address)
|   |   |   +--ro ipv4-address?         inet:ipv4-address
|   |   +--:(ipv6-address)
|   |   |   +--ro ipv6-address?         inet:ipv6-address
|   |   +--:(src-dst-address)
|   |   |   +--ro src-ip-address?       inet:ip-address
|   |   |   +--ro dst-ip-address?       inet:ip-address
|   |   |   +--ro Interface?           if:interface-ref
|   |   +--:(fec)
|   |   |   +--ro fec-type?             fec-type
|   |   |   +--ro (fec-value)?
|   |   |   |   +--:(ip-prefix)
|   |   |   |   |   +--ro ip-prefix?       inet:ip-prefix
|   |   |   |   +--:(bgp)
|   |   |   |   |   +--ro bgp?             inet:ip-prefix
|   |   |   |   +--:(tunnel)
|   |   |   |   |   +--ro tunnel-interface? uint32
|   |   |   |   +--:(l3vpn)
|   |   |   |   |   +--ro l3vpn-id?         uint32
|   |   |   |   +--:(pw)
|   |   |   |   |   +--ro remote-pe-address? inet:ip-address
|   |   |   |   |   +--ro pw-id?           uint32
|   |   |   |   +--:(vpls)
|   |   |   |   |   +--ro route-distinguisher? uint32
|   |   |   |   |   +--ro sender-ve-id?     uint32
|   |   |   |   |   +--ro receiver-ve-id?   uint32
|   |   |   |   +--:(mpls-mldp)
|   |   |   |   |   +--ro (root-address)?
|   |   |   |   |   |   +--:(ip-address)
|   |   |   |   |   |   |   +--ro source-address?   inet:ip-address
|   |   |   |   |   |   |   +--ro group-ip-address? IP-Multicast-Group
|   |   |   |   |   |   +--:(vpn)
|   |   |   |   |   |   |   +--ro as-number?       inet:as-number
|   |   |   |   |   |   +--:(global-id)
|   |   |   |   |   |   |   +--ro lsp-id?           string
|   |   |   +--:(tlv-address)
|   |   |   |   +--ro tlv-type?             int16
|   |   |   |   +--ro tlv-len?             int16
|   |   |   |   +--ro tlv-value?           binary
+--ro min-delay?       oam-counter32
+--ro average-delay?   oam-counter32
+--ro max-delay?       oam-counter32

```

data hierarchy of OAM

4. OAM YANG Module

```
<CODE BEGINS> file "ietf-connectionless-oam.yang"

module ietf-connectionless-oam {
  namespace "urn:ietf:params:xml:ns:yang:ietf-connectionless-oam";
  prefix coam;

  import ietf-network {
    prefix nd;
  }
  import ietf-yang-types {
    prefix yang;
  }
  import ietf-interfaces {
    prefix if;
  }
  import ietf-inet-types {
    prefix inet;
  }
  import ietf-routing {
    prefix rt;
  }
  organization "IETF LIME Working Group";
  contact
    "Deepak Kumar dekkumar@cisco.com
     Qin Wu      bill.wu@huawei.com";
  description
    "This YANG module defines the generic configuration,
     statistics and rpc for connectionless OAM to be
     used within IETF in a protocol independent manner.
     Functional level abstraction is independent with
     YANG modeling. It is assumed that each protocol maps
     corresponding abstracts to its native format.
     Each protocol may extend the YANG model defined
     here to include protocol specific extensions";
  revision 2015-12-22 {
    description
      "Initial revision. - 01 version";
    reference "";
  }
  /* features */
  feature connection-less {
    description
      "this feature indicates that OAM solution is connection less.";
  }
  feature continuity-check {
    description
```

```

    "This feature indicates that the server supports
    executing continuity check OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    continuity check command or rpc model for
    continuity check command.";
}
feature path-discovery {
  description
    "This feature indicates that the server supports
    executing path discovery OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    path discovery command or rpc model for
    path discovery command.";
}
/* Identities */
/* typedefs */
typedef IPv4-Multicast-Group-Address {
  type string {
    pattern '(2((2[4-9])|(3[0-9]))\.)'
      +'((([0-9]|([1-9][0-9]|1[0-9][0-9]|'
      +'2[0-4][0-9]|25[0-5]))\.){2}'
      +'([0-9]|([1-9][0-9]|1[0-9][0-9]'
      +'|2[0-4][0-9]|25[0-5]))';
  }
  description
    "The IPv4-Multicast-Group-Address type
    represents an IPv4 multicast address
    in dotted-quad notation.";
  reference "RFC4607";
} // typedef IPv4-Multicast-Group-Address
typedef IPv6-Multicast-Group-Address {
  type string {
    pattern
      '(((FF|ff)[0-9a-fA-F]{2}):)([0-9a-fA-F]'
      +'{0,4}):{0,5}((([0-9a-fA-F]{0,4}):)?'
      +'(:|[0-9a-fA-F]{0,4}))|(((25[0-5]|2[0-4]'
      +'[0-9]|([01]?[0-9]?[0-9])\.){3}(25[0-5]|'
      +'2[0-4][0-9]|([01]?[0-9]?[0-9])))';
    pattern
      '([[:^:]]+){6}([[:^:]]+:[[:^:]]+)|'
      +'(.*\.\.*)"|([[:^:]]+:[[:^:]]+)*[[:^:]]+'
      +'?::([[:^:]]+:[[:^:]]+)?[[:^:]]+';
  }
  description
    "The IPv6-Multicast-Group-Address
    type represents an IPv6 address in full,

```

```

        mixed, shortened, and shortened-mixed
        notation.";
    reference "RFC4291 2.7.
    ietf-inet-types:ipv6-address";
}
typedef IP-Multicast-Group-Address {
    type union {
        type IPv4-Multicast-Group-Address;
        type IPv6-Multicast-Group-Address;
    }
    description
        "The IP-Multicast-Group-Address type
        represents an IP multicast address and
        is IP version neutral. The format of the
        textual representations implies the IP version.";
} // typedef IP-Multicast-Group-Address

identity fec-types {
    description
        "This is base identity of fec types which are ip-prefix,
        bgp, tunnel, l3vpn, pwe3, vpls, etc.";
}

typedef fec-type {
    type identityref {
        base fec-types;
    }
    description "Target FEC type.";
}

typedef oam-counter32 {
    type yang:zero-based-counter32;
    description
        "defines 32 bit counter for OAM";
}
/* groupings */

grouping cc-session-statistics {
    description "Grouping for session statistics";
    container cc-session-statistics {
        description "cc session counters";
        leaf session-count {
            type uint32;
            description "Number of cc sessions.";
        }
        leaf session-up-count {
            type uint32;
            description "Number of sessions which are up.";
        }
    }
}
```

```
    }
    leaf session-down-count {
        type uint32;
        description "Number of sessions which are down.";
    }
    leaf session-admin-down-count {
        type uint32;
        description "Number of sessions which are admin-down.";
    }
}
}

grouping cc-per-session-statistics {
    description "Grouping for per session statistics";
    container cc-per-session-statistics {
        description "per session statistics.";
        leaf create-time {
            type yang:date-and-time;
            description "Time and date when session is created.";
        }
        leaf last-down-time {
            type yang:date-and-time;
            description "Time and date last time session is down.";
        }
        leaf last-up-time {
            type yang:date-and-time;
            description "Time and date last time session is up.";
        }
        leaf down-count {
            type uint32;
            description "Total down count.";
        }
        leaf admin-down-count {
            type uint32;
            description "Total down count.";
        }
        leaf rx-packet-count {
            type uint32;
            description "Total receive packet count.";
        }
        leaf tx-packet-count {
            type uint32;
            description "Total transmit packet count.";
        }
        leaf rx-bad-packet {
            type uint32;
            description "Total receive bad packet.";
        }
    }
}
```

```
    leaf tx-packet-failed {
      type uint32;
      description "Total send packet failed.";
    }
  }
}

grouping session-type {
  description
    "This object indicates the current session
    definition.";
  leaf session-type-enum {
    type enumeration {
      enum proactive {
        description
          "The current session is proactive";
      }
      enum on-demand {
        description
          "The current session is on-demand.";
      }
    }
    default "on-demand";
    description
      "session type enum";
  }
}

grouping tp-address {
  choice tp-address {
    case mac-address {
      leaf mac-address {
        type yang:mac-address;
        description
          "MAC Address";
      }
    }
    description
      "MAC Address based MP Addressing.";
  }
  case ipv4-address {
    leaf ipv4-address {
      type inet:ipv4-address;
      description
        "Ipv4 Address";
    }
    description
      "Ip Address based MP Addressing.";
  }
  case ipv6-address {
```

```
    leaf ipv6-address {
      type inet:ipv6-address;
      description
        "Ipv6 Address";
    }
    description
      "ipv6 Address based MP Addressing.";
  }
  case src-dst-address {
    leaf src-ip-address {
      type inet:ip-address;
      description
        "source ip address.";
    }
    leaf dst-ip-address {
      type inet:ip-address;
      description
        "destination ip address.";
    }
  }
  leaf Interface {
    type if:interface-ref;
    description
      "interface.";
  }
}
case fec {
  leaf fec-type {
    type fec-type;
    description
      "fec type.";
  }
  choice fec-value {
    description
      "fec value.";
    case ip-prefix {
      leaf ip-prefix {
        type inet:ip-prefix;
        description
          "ip prefix.";
      }
    }
    case bgp {
      leaf bgp {
        type inet:ip-prefix;
        description
          "BGP Labeled Prefix ";
      }
    }
  }
}
```

```
case tunnel {
  leaf tunnel-interface {
    type uint32;
    description
      "VPN Prefix ";
  }
}
case l3vpn {
  leaf l3vpn-id {
    type uint32;
    description
      "FEC layer 3 vpn.";
  }
}
case pw {
  leaf remote-pe-address{
    type inet:ip-address;
    description
      "remote pe address.";
  }
  leaf pw-id {
    type uint32;
    description
      "Pseudowire id.";
  }
}
case vpls {
  leaf route-distinguisher {
    type uint32;
    description
      "Route Distinguisher(8 octets).";
  }
  leaf sender-ve-id{
    type uint32;
    description
      "Sender's VE ID.";
  }
  leaf receiver-ve-id{
    type uint32;
    description
      "Receiver's VE ID.";
  }
}
case mpls-mldp{
  choice root-address{
    description
      "root address choice.";
    case ip-address{
```

```

    leaf source-address{
      type inet:ip-address;
      description
        "ip address.";
    }
    leaf group-ip-address{
      type IP-Multicast-Group-Address;
      description
        "group ip address.";
    }
  }
}
case vpn{
  leaf as-number{
    type inet:as-number;
    description
      "AS number.";
  }
}
case global-id{
  leaf lsp-id{
    type string;
    description
      "lsp id.";
  }
}
}
}
}
}
}
}
case tlv-address {
  leaf tlv-type {
    type int16;
    description
      "Type of MEP-ID";
  }
  leaf tlv-len {
    type int16;
    description
      "Length of MEP-ID value";
  }
  leaf tlv-value {
    type binary {
      length "12..255";
    }
    description
      "Value please refer RFC6428 (Figure 4,5,6).";
  }
description
  "Value please refer RFC6428 (Figure 4,5,6).";
}
description

```



```
        "MEP-ID";
    }
    description
        "TP Addressing.";
    }
    description
        "TP Address";
    }
    grouping connectionless-oam-layers {
        list oam-layers {
            key "index";
            leaf index {
                type uint16 {
                    range "0..65535";
                }
                description
                    "Index";
            }
            leaf level {
                type int32 {
                    range "-1..1";
                }
                default 0;
                description
                    "Level 0 indicates default level, -1 means server
                     and +1 means client layer.
                     In relationship 0 means same layer.";
            }
        }
        uses tp-address;
        ordered-by user;
        description
            "list of related oam layers.
             0 means they are in same level, especially
             interworking scenarios of stitching multiple
             technology at same layer.
             -1 means server layer, for eg:- in case of
             Overlay and Underlay, Underlay is server layer for
             Overlay Test Point.
             +1 means client layer, for eg:- in case of
             Service OAM and Transport OAM, Service OAM is client
             layer to Transport OAM.";
    }
    description
        "connectionless related OAM layer";
    }
    grouping tp-technology {
        choice technology {
            default technology-null;
        }
    }
```

```
    case technology-null {
      description
        "this is a placeholder when no technology is needed.";
      leaf tech-null {
        type empty;
        description
          "there is no technology define";
      }
    }
    description
      "technology choice null";
    case technology-string {
      description
        "oam technology string";
      leaf ipv4-icmp {
        type string;
        description
          "name to identify oam technology";
      }
    }
  }
  description
    "OAM Technology";
}
grouping tp-tools {
  description
    "Test Point OAM Toolset.";
  choice tools {
    default tools-empty;
    description
      "choice of test point tools.
      Empty tools means based on Test Point it's implicit
      all OAM tools are present and no further configuration
      is supported.";
    case tools-empty {
      description
        "this is a placeholder when oam toolset is not needed.";
      leaf tools-null {
        type empty;
        description
          "there is no oam toolset defined.";
      }
    }
  }
  case tools-ip{
    description
      "Oam Toolset for Ip";
    leaf rfc792 {
      type boolean;
    }
  }
}
```

```
        description
            "rfc792 (icmpv4) supported.";
    }
    leaf rfc4443 {
        type boolean;
        description
            "rfc4443 supported.";
    }
    leaf rfc4884 {
        type boolean;
        description
            "rfc4884 supported.";
    }
    leaf rfc5837 {
        type boolean;
        description
            "rfc5837 supported.";
    }
}
case tools-bfd {
    leaf rfc5881 {
        type boolean;
        description
            "rfc5881 supported.";
    }
    leaf rfc5883 {
        type boolean;
        description
            "rfc5883 supported.";
    }
    leaf rfc5884 {
        type boolean;
        description
            "rfc5884 supported.";
    }
    leaf rfc5885 {
        type boolean;
        description
            "rfc5885 supported.";
    }
}
case tools-mpls {
    description
        "Oam Toolset for mpls";
    leaf rfc4379 {
        type boolean;
        description
            "rfc4379 supported.";
    }
}
```

```
    }
    leaf rfc4687 {
        type boolean;
        description
            "rfc4687 supported.";
    }
    leaf rfc4950 {
        type boolean;
        description
            "rfc4950 supported.";
    }
    leaf mpls-rfc5884 {
        type boolean;
        description
            "rfc5884 supported.";
    }
}
case tools-mpls-tp {
    description
        "Oam Toolset for mpls TP.";
    leaf rfc6426 {
        type boolean;
        description
            "rfc6426 supported.";
    }
    leaf rfc6435 {
        type boolean;
        description
            "rfc6435 supported.";
    }
    leaf rfc6374 {
        type boolean;
        description
            "rfc6374 supported.";
    }
}
case tools-pw {
    description
        "Oam Toolset for pw oam.";
    leaf rfc5085 {
        type boolean;
        description
            "rfc5085 supported.";
    }
    leaf pw_rfc5885 {
        type boolean;
        description
            "rfc5885 supported.";
    }
}
```

```
    }
    leaf rfc6423 {
        type boolean;
        description
            "rfc6423 supported.";
    }
    leaf rfc6310 {
        type boolean;
        description
            "rfc6310 supported.";
    }
    leaf rfc7023 {
        type boolean;
        description
            "rfc7023 supported.";
    }
}
}
}
grouping test-point-location {
    leaf vrf {
        type rt:routing-instance-ref;
        description
            "The vrf is used to describe the
            corresponding network instance";
    }
    uses tp-address;
    uses tp-technology;
    uses tp-tools;
    uses connectionless-oam-layers;
    description
        "Test point Address";
}

augment "/nd:networks/nd:network/nd:node"{
    description
        "Augment test points of connectionless oam.";
    container test-point-ipv4-location-list {
        if-feature connection-less;
        list test-point-locations {
            key "ipv4-location";
            leaf ipv4-location {
                type inet:ipv4-address;
                description
                    "Ipv4 Address.";
            }
        }
        uses test-point-location;
        ordered-by user;
    }
}
```

```
        description
            "list of test point locations.";
    }
    description
        "Serves as top-level container for test point location list.";
}
}
augment "/nd:networks/nd:network/nd:node"{
    description
        "Augment test points of connectionless oam.";
    container test-point-ipv6-location-list {
        if-feature connection-less;
        list test-point-locations {
            key "ipv6-location";
            leaf ipv6-location {
                type inet:ipv6-address;
                description
                    "Ipv6 Address.";
            }
            uses test-point-location;
            ordered-by user;
            description
                "list of test point locations.";
        }
        description
            "Serves as top-level container for test point location list.";
    }
}
augment "/nd:networks/nd:network/nd:node"{
    description
        "Augment test points of connectionless oam.";
    container test-point-tunnel-address-location-list {
        if-feature connection-less;
        list test-point-locations {
            key "tunnel-location";
            leaf tunnel-location {
                type uint32;
                description
                    "VPN Prefix ";
            }
            uses test-point-location;
            ordered-by user;
            description
                "list of test point locations.";
        }
        description
            "Serves as top-level container for test point location list.";
    }
}
```

```
}

augment "/nd:networks/nd:network/nd:node"{
  description
    "Augment test points of connectionless oam.";
  container test-point-mac-address-location-list {
    if-feature connection-less;
    list test-point-locations {
      key "mac-address-location";
      leaf mac-address-location {
        type yang:mac-address;
        description
          "MAC Address";
      }
    }
    uses test-point-location;
    ordered-by user;
    description
      "list of test point locations.";
  }
  description
    "Serves as top-level container for test point location list.";
}

augment "/nd:networks/nd:network/nd:node"{
  description
    "Augment test points of connectionless oam.";
  container test-point-ip-prefix-location-list {
    if-feature connection-less;
    list test-point-locations {
      key "ip-prefix-location";
      leaf ip-prefix-location {
        type inet:ip-prefix;
        description
          "ip prefix.";
      }
    }
    uses test-point-location;
    ordered-by user;
    description
      "list of test point locations.";
  }
  description
    "Serves as top-level container for test point location list.";
}

augment "/nd:networks/nd:network/nd:node"{
  description
```

```
    "Augment test points of connectionless oam.";
  container test-point-route-dist-location-list {
    if-feature connection-less;
    list test-point-locations {
      key "route-dist-location";
      leaf route-dist-location {
        type uint32;
        description
          "Route Distinguisher(8 octets).";
      }
    }
    uses test-point-location;
    ordered-by user;
    description
      "list of test point locations.";
  }
  description
    "Serves as top-level container for test point location list.";
}

augment "/nd:networks/nd:network/nd:node"{
  description
    "Augment test points of connectionless oam.";
  container test-point-group-ip-address-location-list {
    if-feature connection-less;
    list test-point-locations {
      key "group-ip-address-location";
      leaf group-ip-address-location {
        type IP-Multicast-Group-Address;
        description
          "group ip address.";
      }
    }
    uses test-point-location;
    ordered-by user;
    description
      "list of test point locations.";
  }
  description
    "Serves as top-level container for test point location list.";
}

augment "/nd:networks/nd:network/nd:node"{
  description
    "Augment test points of connectionless oam.";
  container test-point-as-number-location-list {
    if-feature connection-less;
    list test-point-locations {
      key "as-number-location";
```



```
    leaf as-number-location {
      type inet:as-number;
      description
        "AS number.";
    }
    uses test-point-location;
    ordered-by user;
    description
      "list of test point locations.";
  }
  description
    "Serves as top-level container for test point location list.";
}

augment "/nd:networks/nd:network/nd:node"{
  description
    "Augment test points of connectionless oam.";
  container test-point-lsp-id-location-list {
    if-feature connection-less;
    list test-point-locations {
      key "lsp-id-location";
      leaf lsp-id-location{
        type string;
        description
          "lsp id.";
      }
    }

    uses test-point-location;
    ordered-by user;
    description
      "list of test point locations.";
  }
  description
    "Serves as top-level container for test point location list.";
}

container oper {
  if-feature continuity-check;
  config "false";
  description "cc operational information.";
  container cc-ipv4-sessions-statistics {
    description "cc ipv4 sessions";
    uses cc-session-statsitics;
  }
  container cc-ipv6-sessions-statistics {
    description "cc ipv6 sessions";
  }
}
```

```
    uses cc-session-statsitics;
  }
}

rpc continuity-check {
  if-feature continuity-check;
  description
    "Generates continuity-check as per RFC7276.";
  input {
    container destination-tp {
      uses tp-address;
      description
        "destination test point.";
    }
    uses session-type;
    leaf source-interface {
      type if:interface-ref;
      description
        "source interface.";
    }
    leaf outbound-interface {
      type if:interface-ref;

      description
        "outbound interface.";
    }
    leaf count {
      type uint32;
      default "5";

      description
        "Specifies the number of packets that will be sent.";
    }
    leaf vrf {
      type rt:routing-instance-ref;

      description
        "vrf instance.";
    }
    leaf ttl {
      type uint8;
      default "255";

      description
        "Time to live (TTL).";
    }
    leaf packet-size {
      type uint32 {
```

```
        range "64..10000";
    }
    default "64";

    description
        "Size of ping echo request packets, in octets";
}
}
output {
    list error-code-list {
        key "response-index";
        leaf response-index {
            type uint32;
            description
                "response index.";
        }
        leaf status-code {
            type int32;
            description
                "error code is ";
        }
        leaf status-sub-code {
            type uint8;
            description
                "sub code.";
        }
    }
    description
        "error code list.";
}
leaf tx-packet-count {
    type oam-counter32;

    description
        "Transmitted Packet count";
}
leaf rx-packet-count {
    type oam-counter32;

    description
        "Received packet count";
}
leaf min-delay {
    type oam-counter32;
    units milliseconds;

    description
        "Delay is specified in milliseconds";
}
```

```
    leaf average-delay {
      type oam-counter32;
      units milliseconds;

      description
        "average delay in milliseconds";
    }
    leaf max-delay {
      type oam-counter32;
      units milliseconds;

      description
        "Maximum delay in milliseconds";
    }
  }
}
rpc path-discovery {
  description
    "Generates path discovery as per RFC7276.";
  input {
    container destination-tp {
      uses tp-address;
      description
        "destination test point.";
    }
    uses session-type;
    leaf source-interface {
      type if:interface-ref;

      description
        "source interface.";
    }
    leaf outbound-interface {
      type if:interface-ref;

      description
        "outbound interface.";
    }
    leaf vrf {
      type rt:routing-instance-ref;

      description
        "vrf";
    }
    leaf max-ttl {
      type uint8;
      default "255";
    }
  }
}
```

```
        description
          "max ttl.";
      }
    }
  output {
    list response-list {
      key "response-index";
      description
        "path discovery response list.";
      leaf response-index {
        type uint32;
        description
          "response index.";
      }
      leaf status-code {
        type int32;
        description
          "error code is ";
      }
      leaf status-sub-code {
        type uint8;

        description
          "sub code is ";
      }
      leaf hop-cnt {
        type uint8;
        description
          "hop count.";
      }
      container destination-tp {
        uses tp-address;
        description
          "destination test point.";
      }
      leaf min-delay {
        type oam-counter32;
        units milliseconds;

        description
          "Delay is specified in milliseconds";
      }
      leaf average-delay {
        type oam-counter32;
        units millisecond;

        description
          "average delay in milliseconds";
      }
    }
  }
}
```

```
    }  
    leaf max-delay {  
      type oam-counter32;  
      units millisecond;  
  
      description  
        "Maximum delay in milliseconds";  
    }  
  }  
}  
}
```

YANG module of OAM

<CODE ENDS>

5. Security Considerations

TBD.

6. IANA Considerations

This document registers a URI in the IETF XML registry [RFC3688] [RFC3688]. Following the format in RFC 3688, the following registration is requested to be made:

URI: urn:ietf:params:xml:ns:yang:ietf-connectionless-oam

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

This document registers a YANG module in the YANG Module Names registry [RFC6020].

name: ietf-connectionless-oam namespace: urn:ietf:params:xml:ns:yang:ietf-connectionless-oam
prefix: goam reference: RFC XXXX

7. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<http://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<http://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", RFC 6242, DOI 10.17487/RFC6242, June 2011, <<http://www.rfc-editor.org/info/rfc6242>>.
- [RFC792] Postel, J., "Internet Control Message Protocol", RFC 792, September 1981.

Authors' Addresses

Deepak Kumar
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035
USA

Email: dekumar@cisco.com

Michael Wang
Huawei Technologies, Co., Ltd
101 Software Avenue, Yuhua District
Nanjing 210012
China

Email: wangzitao@huawei.com

Qin Wu
Huawei
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: bill.wu@huawei.com

Reshad Rahman
CISCO Systems
2000 Innovation Drive
KANATA, ONTARIO K2K 3E8
CANADA

Email: rrahman@cisco.com

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: January 20, 2017

D. Kumar
Cisco
M. Wang
Q. Wu
Huawei
R. Rahman
S. Raghavan
Cisco
July 19, 2016

Generic YANG Data Model for Connection Less Operations, Administration,
and Maintenance(OAM) protocols
draft-kumar-lime-yang-connectionless-oam-05

Abstract

This document presents a base YANG Data model for connectionless OAM protocols. It provides a technology-independent abstraction of key OAM constructs for connectionless protocols. The Base model presented here can be extended to include technology specific details. This is leading to uniformity between OAM protocols and support nested OAM workflows (i.e., performing OAM functions at different or same levels through a unified interface).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 20, 2017.

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
2. Conventions used in this document	3
2.1. Terminology	4
2.2. Tree Diagrams	4
3. Overview of the Connectionless OAM Model	5
3.1. TP Address	5
3.2. Tools	6
3.3. OAM-layers	6
3.4. Test Point Locations Information	7
3.5. Test Point Locations	7
3.6. Path discovery data	7
3.7. Continuity check data	8
3.8. RPC definitions	8
3.9. Relation with other OAM YANG Model	11
3.10. OAM data hierarchy	11
4. OAM YANG Module	29
5. Security Considerations	60
6. IANA Considerations	60
7. Normative References	60
Authors' Addresses	61

1. Introduction

Operations, Administration, and Maintenance (OAM) are important networking functions that allow operators to:

1. Monitor networks connections (Reachability Verification, Continuity Check).
2. Troubleshoot failures (Fault verification and localization).
3. Monitor Performance

An overview of OAM tools is presented at [RFC7276].

Ping and Traceroute [RFC792], [RFC4443] are well-known fault verification and isolation tools, respectively, for IP networks. Over the years, different technologies have developed similar tools for similar purposes.

In this document, we present two modules, one to represent the base independent and stand-alone YANG data model for connectionless OAM protocols and the other one focuses on data retrieval procedures like RPCs. The split module approach avoids mixing the models for the retrieved-data from the retrieval procedures. It is expected that retrieval procedures would evolve faster than the data model and will allow new procedures to be defined for retrieval of the same data defined by the base data model. This also allows the data model to change at its own pace.

2. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

The following terms are defined in [RFC6241] and are not redefined here:

- o client
- o configuration data
- o server
- o state data

The following terms are defined in [RFC6020] and are not redefined here:

- o augment
- o data model
- o data node

The terminology for describing YANG data models is found in [RFC6020].

2.1. Terminology

TP - Test Point

MAC - Media Access Control

BFD - Bidirectional Forwarding Detection

TLV - Type Length Value

RPC - A Remote Procedure Call, as used within the NETCONF protocol

2.2. Tree Diagrams

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams is as follows:

Each node is printed as:

<status> <flags> <name> <opts> <type>

<status> is one of:

- + for current
- x for deprecated
- o for obsolete

<flags> is one of:

- rw for configuration data
- ro for non-configuration data
- x for rpcs
- n for notifications

<name> is the name of the node

If the node is augmented into the tree from another module, its name is printed as <prefix>:<name>.

<opts> is one of:

- ? for an optional leaf or choice
- ! for a presence container
- * for a leaf-list or list
- [<keys>] for a list's keys

<type> is the name of the type for leafs and leaf-lists

3. Overview of the Connectionless OAM Model

At the top of the Model, there is an oper container for session statistics. Grouping is also defined for common session statistics and these are applicable for proactive OAM sessions. Multiple test-point-locations keyed using technology specific keys (eg., IPv4 address for IPv4 locations) are possible by augmented network topology nodes. Each test-point-location is chosen based on location-type which when chosen, leads to a container that includes a list of test-point-locations keyed by technology specific keys. Each test point location includes a test-point-location-info. The test-point-location-info includes tp-technology, tp-tools, and connectionless-oam-layers. The groupings of tp-address and tp-address-vrf are kept out of test-point-location-info to make it addressing agnostic and allow varied composition. Depending upon the choice of the location-type (determined by the tp-address-vrf), the containers differ in its composition of test-point-locations while the test-point-location-info, is a common aspect of every test-point-location. The vrf is used to describe the corresponding network instance. The tp-technology indicate oam technology details. The tp-tools describe the oam tools supported. The connectionless-oam-layers is used to describe the relationship of one test point with other test points. The level in oam-layers indicate whether related oam test point is client layer, server layer or same or stiched layer. The Model is augmented to /nd:networks/nd:network/nd:node using Test Point Locations defined below.

3.1. TP Address

In connectionless OAM, the tp address is defined with the following type:

- o MAC address
- o IPv4 or IPv6 address
- o a pair of source, destination addresses, and interface (Useful for BFD)

- o FEC
- o TLV address (RFC6428 (Figure 4,5, and 6))
- o System-id to represent the device or node.

3.2. Tools

In connectionless OAM, the tools attribute is used to describe a toolset for fault detection and isolation, and for performance measurement. And it can serve as a constraint condition when the base model be extended to specific OAM technology. For example, to fulfill the icmp ping configuration, the "../coam:tools-ip/coam:rfc792" should be set to "true", and then the lime base model should be augmented with icmp ping specific details.

3.3. OAM-layers

As typical networks have a multi-layer architecture, the set of OAM protocols similarly take a multi-layer structure; each layer has its own OAM protocols [RFC7276] and is corresponding to specific network portion or path and has associated test points. OAM-layers is referred to a list of upper layer, lower layer that are related to current test point. This allows users to easily navigate up and down to efficiently troubleshoot a connectivity issue at different layer. In this model, we have kept level default as 0, when all test points are located at the same layer. Level is provided for scenarios where it might be possible to define layering relationship as it can be used to stitching fault at related OAM layers. For example, there is a network in which data traffic between two customer edges is transported over three consecutive network portions, the current test point is located in the second network portion. If there is a defect in the first network portion located at the upstream of the second network portion, the level of the first network portion is set to "-1". If the third network portion is located at the downstream of the second network portion and the level is set to "1". In another case, if the first network portion and the third network portion are in the same level of the second network portion, the level is set to "0". The snippet below depicts an example of OAM layers.

```
list oam-layers {
  key "index";
  leaf index {
    type uint16 {
      range "0..65535";
    }
  }
  leaf level {
    type int32 {
      range "-1..1";
    }
    description
      "Level";
  }
  ordered-by user;
  description
    "list of related oam layers.";
}
```

3.4. Test Point Locations Information

This is a generic grouping for Test Point Locations Information. It Provide details of Test Point Location using Tools, OAM-Layers grouping defined above.

3.5. Test Point Locations

This is a generic grouping for Test Point Locations. Choice statement is used to define locations types, for example ipv4-location-type, ipv6-location-type, etc. Container is defined under each location type containing list keyed to test point address, Test Point Location Information defined in section above, and routing instance vrf name if required.

3.6. Path discovery data

This is a generic grouping for path discovery data model that can be retrieved by any data retrieval methods including RPCs. Path discovery data output from methods, includes src-test-point, dst-test-point, sequence-number, hop-cnt, session statistics of various kinds, path verification and path trace related information. Path discovery includes data to be retrieved on a per-hop basis via a list of path-trace-info-list which includes information like timestamps, ingress-interface, egress-interface and app-meta-data. The path discovery data model is made generic enough to allow active, passive and hybrid OAMs to do the retrieval. None of the fields are made mandatory for that reason.

3.7. Continuity check data

This is a generic grouping for continuity check data model that can be retrieved by any data retrieval methods including RPCs. Continuity check data output from methods, includes src-test-point, dst-test-point, sequence-number, hop-cnt and session statistics of various kinds. The continuity check data model is made generic enough to allow active, passive and hybrid OAMs to do the retrieval. None of the fields are made mandatory for that reason.

3.8. RPC definitions

The rpc model described here as a separate model outside of the data model, facilitates issuing commands to a NETCONF server (in this case to the device that need to execute the OAM command) and obtaining a response.

Under connectionless-oam-methods module, we summarize the common OAM functions and define the generic rpc commands: continuity-check and path-discovery. In practice, these commands are supported by corresponding technology-specific OAM tools [RFC7276]. For example, for the IP OAM model, the continuity-check rpc corresponds to the IP Ping, while the path-discovery rpc command corresponds to IP Traceroute.

Note that the rpc command presented in this document is the base building block, which is used to derive a model for a technology-specific OAM (i.e., icmp ping, lsp ping), the base building block should be extended with corresponding technology specific parameters. To facilitate this and for future enhancements to data retrieval methods, the RPCs are captured under a separate module.

The generic path-discovery-data and continuity-check-data are used as data outputs from the different RPCs described in the document. Similar methods including other RPCs can retrieve the data using the same data model.

```
rpc continuity-check {
  if-feature coam:continuity-check;
  description
    "Generates continuity-check as per RFC7276.";
  input {
    container destination-tp {
      uses coam:tp-address;
      description
        "destination test point.";
    }
    uses coam:session-type;
  }
}
```



```
leaf source-interface {
    type if:interface-ref;
    description
        "source interface.";
}
leaf outbound-interface {
    type if:interface-ref;

    description
        "outbound interface.";
}
leaf count {
    type uint32;
    default "5";
    description
        "Specifies the number of packets that will be sent.";
}
leaf vrf {
    type coam:routing-instance-ref;
    description
        "vrf instance.";
}
leaf ttl {
    type uint8;
    default "255";
    description
        "Time to live (TTL).";
}
leaf packet-size {
    type uint32 {
        range "64..10000";
    }
    default "64";
    description
        "Size of ping echo request packets, in octets";
}
}
output {
    list error-code-list {
        key "response-index";
        leaf response-index {
            type uint32;
            description
                "response index.";
        }
        leaf status-code {
            type int32;
            description
```

```
        "error code is ";
    }
    leaf status-sub-code {
        type uint8;
        description
            "sub code.";
    }
    description
        "error code list.";
}

uses coam:continuity-check-data;
}
}

rpc path-discovery {
    description
        "Generates path discovery as per RFC7276.";
    input {
        container destination-tp {
            uses coam:tp-address;
            description
                "destination test point.";
        }
        uses coam:session-type;
        leaf source-interface {
            type if:interface-ref;
            description
                "source interface.";
        }
        leaf outbound-interface {
            type if:interface-ref;
            description
                "outbound interface.";
        }
        leaf vrf {
            type coam:routing-instance-ref;
            description
                "vrf";
        }
        leaf max-ttl {
            type uint8;
            default "255";
            description
                "max ttl.";
        }
    }
    output {
```

```
list response-list {
  key "response-index";
  description
    "path discovery response list.";
  leaf response-index {
    type uint32;
    description
      "response index.";
  }
  leaf status-code {
    type int32;
    description
      "error code is ";
  }
  leaf status-sub-code {
    type uint8;

    description
      "sub code is ";
  }
}

uses coam:path-discovery-data;
}
```

Snippet of data hierarchy related to rpc calls

3.9. Relation with other OAM YANG Model

In this document we define a generic YANG data model for connectionless OAM protocols. The other model defined adds generic data-retrieval methods. The YANG data model defined here is generic such that other technologies can extend it for technology specific needs. The Generic YANG model acts as the root for other OAM YANG models. This allows users to traverse between different OAM protocols at ease through a uniform API set. The Generic YANG model for OAM provides a framework where technology- specific YANG models can choose to inherit constructs from the base YANG models without needing to redefine them within the sub-technology.

3.10. OAM data hierarchy

The complete data hierarchy related to the OAM YANG model is presented below.

```
module: ietf-connectionless-oam
  +---ro oper {continuity-check}?
```

```

+--ro cc-ipv4-sessions-statistics
|   +--ro cc-session-statistics
|   |   +--ro session-count?          uint32
|   |   +--ro session-up-count?       uint32
|   |   +--ro session-down-count?     uint32
|   |   +--ro session-admin-down-count? uint32
+--ro cc-ipv6-sessions-statistics
|   +--ro cc-session-statistics
|   |   +--ro session-count?          uint32
|   |   +--ro session-up-count?       uint32
|   |   +--ro session-down-count?     uint32
|   |   +--ro session-admin-down-count? uint32
augment /nd:networks/nd:network/nd:node:
+--rw tp-address-type-value?          identityref
+--rw (location-type)?
+--:(ipv4-location-type)
|   +--rw test-point-ipv4-location-list
|   |   +--rw test-point-locations* [ipv4-location]
|   |   |   +--rw ipv4-location      inet:ipv4-address
|   |   |   +--rw vrf?                routing-instance-ref
|   |   +--rw (technology)?
|   |   |   +--:(technology-null)
|   |   |   |   +--rw tech-null?      empty
|   |   |   +--:(technology-string)
|   |   |   |   +--rw ipv4-icmp?      string
|   |   +--rw (tools)?
|   |   |   +--:(tools-empty)
|   |   |   |   +--rw tools-null?     empty
|   |   |   +--:(tools-ip)
|   |   |   |   +--rw rfc792?         boolean
|   |   |   |   +--rw rfc4443?       boolean
|   |   |   |   +--rw rfc4884?       boolean
|   |   |   |   +--rw rfc5837?       boolean
|   |   |   +--:(tools-bfd)
|   |   |   |   +--rw rfc5881?       boolean
|   |   |   |   +--rw rfc5883?       boolean
|   |   |   |   +--rw rfc5884?       boolean
|   |   |   |   +--rw rfc5885?       boolean
|   |   |   +--:(tools-mpls)
|   |   |   |   +--rw rfc4379?       boolean
|   |   |   |   +--rw rfc4687?       boolean
|   |   |   |   +--rw rfc4950?       boolean
|   |   |   |   +--rw mpls-rfc5884?   boolean
|   |   |   +--:(tools-mpls-tp)
|   |   |   |   +--rw rfc6426?       boolean
|   |   |   |   +--rw rfc6435?       boolean
|   |   |   |   +--rw rfc6374?       boolean
|   |   |   +--:(tools-pw)

```

```

+---rw rfc5085?                boolean
+---rw pw_rfc5885?             boolean
+---rw rfc6423?                boolean
+---rw rfc6310?                boolean
+---rw rfc7023?                boolean
+---rw oam-layers* [index]
+---rw index                    uint16
+---rw level?                  int32
+---:(ipv6-location-type)
+---rw test-point-ipv6-location-list
+---rw test-point-locations* [ipv6-location]
+---rw ipv6-location            inet:ipv6-address
+---rw vrf?                     routing-instance-ref
+---rw (technology)?
+---:(technology-null)
+---rw tech-null?              empty
+---:(technology-string)
+---rw ipv4-icmp?              string
+---rw (tools)?
+---:(tools-empty)
+---rw tools-null?             empty
+---:(tools-ip)
+---rw rfc792?                  boolean
+---rw rfc4443?                 boolean
+---rw rfc4884?                 boolean
+---rw rfc5837?                 boolean
+---:(tools-bfd)
+---rw rfc5881?                 boolean
+---rw rfc5883?                 boolean
+---rw rfc5884?                 boolean
+---rw rfc5885?                 boolean
+---:(tools-mppls)
+---rw rfc4379?                 boolean
+---rw rfc4687?                 boolean
+---rw rfc4950?                 boolean
+---rw mppls-rfc5884?           boolean
+---:(tools-mppls-tp)
+---rw rfc6426?                 boolean
+---rw rfc6435?                 boolean
+---rw rfc6374?                 boolean
+---:(tools-pw)
+---rw rfc5085?                 boolean
+---rw pw_rfc5885?             boolean
+---rw rfc6423?                 boolean
+---rw rfc6310?                 boolean
+---rw rfc7023?                 boolean
+---rw oam-layers* [index]
+---rw index                    uint16

```

```

|         +--rw level?    int32
+---:(mac-location-type)
|   +--rw test-point-mac-address-location-list
|   |   +--rw test-point-locations* [mac-address-location]
|   |   |   +--rw mac-address-location    yang:mac-address
|   |   |   +--rw (technology)?
|   |   |   |   +---:(technology-null)
|   |   |   |   |   +--rw tech-null?          empty
|   |   |   |   +---:(technology-string)
|   |   |   |   |   +--rw ipv4-icmp?          string
|   |   +--rw (tools)?
|   |   |   +---:(tools-empty)
|   |   |   |   +--rw tools-null?          empty
|   |   |   +---:(tools-ip)
|   |   |   |   +--rw rfc792?              boolean
|   |   |   |   +--rw rfc4443?             boolean
|   |   |   |   +--rw rfc4884?             boolean
|   |   |   |   +--rw rfc5837?             boolean
|   |   |   +---:(tools-bfd)
|   |   |   |   +--rw rfc5881?              boolean
|   |   |   |   +--rw rfc5883?              boolean
|   |   |   |   +--rw rfc5884?              boolean
|   |   |   |   +--rw rfc5885?              boolean
|   |   |   +---:(tools-mpls)
|   |   |   |   +--rw rfc4379?              boolean
|   |   |   |   +--rw rfc4687?              boolean
|   |   |   |   +--rw rfc4950?              boolean
|   |   |   |   +--rw mpls-rfc5884?         boolean
|   |   |   +---:(tools-mpls-tp)
|   |   |   |   +--rw rfc6426?              boolean
|   |   |   |   +--rw rfc6435?              boolean
|   |   |   |   +--rw rfc6374?              boolean
|   |   |   +---:(tools-pw)
|   |   |   |   +--rw rfc5085?              boolean
|   |   |   |   +--rw pw_rfc5885?           boolean
|   |   |   |   +--rw rfc6423?              boolean
|   |   |   |   +--rw rfc6310?              boolean
|   |   |   |   +--rw rfc7023?              boolean
|   |   +--rw oam-layers* [index]
|   |   |   +--rw index    uint16
|   |   |   +--rw level?   int32
+---:(tunnel-location-type)
|   +--rw test-point-tunnel-address-location-list
|   |   +--rw test-point-locations* [tunnel-location]
|   |   |   +--rw tunnel-location    uint32
|   |   |   +--rw vrf?                routing-instance-ref
|   |   +--rw (technology)?
|   |   |   +---:(technology-null)

```

```

| | +--rw tech-null?          empty
| | +---:(technology-string)
| |   +--rw ipv4-icmp?        string
+--rw (tools)?
| +---:(tools-empty)
| | +--rw tools-null?         empty
+---:(tools-ip)
| | +--rw rfc792?             boolean
| | +--rw rfc4443?            boolean
| | +--rw rfc4884?            boolean
| | +--rw rfc5837?            boolean
+---:(tools-bfd)
| | +--rw rfc5881?            boolean
| | +--rw rfc5883?            boolean
| | +--rw rfc5884?            boolean
| | +--rw rfc5885?            boolean
+---:(tools-mpls)
| | +--rw rfc4379?            boolean
| | +--rw rfc4687?            boolean
| | +--rw rfc4950?            boolean
| | +--rw mpls-rfc5884?        boolean
+---:(tools-mpls-tp)
| | +--rw rfc6426?            boolean
| | +--rw rfc6435?            boolean
| | +--rw rfc6374?            boolean
+---:(tools-pw)
| | +--rw rfc5085?            boolean
| | +--rw pw_rfc5885?          boolean
| | +--rw rfc6423?            boolean
| | +--rw rfc6310?            boolean
| | +--rw rfc7023?            boolean
+--rw oam-layers* [index]
| +--rw index      uint16
| +--rw level?     int32
+---:(ip-prefix-location-type)
+--rw test-point-ip-prefix-location-list
| +--rw test-point-locations* [ip-prefix-location]
| | +--rw ip-prefix-location    inet:ip-prefix
| | +--rw vrf?                  routing-instance-ref
+--rw (technology)?
| +---:(technology-null)
| | +--rw tech-null?            empty
| +---:(technology-string)
| | +--rw ipv4-icmp?            string
+--rw (tools)?
| +---:(tools-empty)
| | +--rw tools-null?            empty
+---:(tools-ip)

```

```

| | | +--rw rfc792? boolean
| | | +--rw rfc4443? boolean
| | | +--rw rfc4884? boolean
| | | +--rw rfc5837? boolean
| | +--:(tools-bfd)
| | | +--rw rfc5881? boolean
| | | +--rw rfc5883? boolean
| | | +--rw rfc5884? boolean
| | | +--rw rfc5885? boolean
| | +--:(tools-mpls)
| | | +--rw rfc4379? boolean
| | | +--rw rfc4687? boolean
| | | +--rw rfc4950? boolean
| | | +--rw mpls-rfc5884? boolean
| | +--:(tools-mpls-tp)
| | | +--rw rfc6426? boolean
| | | +--rw rfc6435? boolean
| | | +--rw rfc6374? boolean
| | +--:(tools-pw)
| | | +--rw rfc5085? boolean
| | | +--rw pw_rfc5885? boolean
| | | +--rw rfc6423? boolean
| | | +--rw rfc6310? boolean
| | | +--rw rfc7023? boolean
| +--rw oam-layers* [index]
| | +--rw index uint16
| | +--rw level? int32
+--:(route-distinguisher-location-type)
+--rw test-point-route-dist-location-list
+--rw test-point-locations* [route-dist-location]
+--rw route-dist-location uint32
+--rw vrf? routing-instance-ref
+--rw (technology)?
| +--:(technology-null)
| | +--rw tech-null? empty
| +--:(technology-string)
| | +--rw ipv4-icmp? string
+--rw (tools)?
+--:(tools-empty)
| +--rw tools-null? empty
+--:(tools-ip)
| +--rw rfc792? boolean
| +--rw rfc4443? boolean
| +--rw rfc4884? boolean
| +--rw rfc5837? boolean
+--:(tools-bfd)
| +--rw rfc5881? boolean
| +--rw rfc5883? boolean

```



```

| | | +--rw rfc5884?                boolean
| | | +--rw rfc5885?                boolean
| | | +---:(tools-mpls)
| | | | +--rw rfc4379?              boolean
| | | | +--rw rfc4687?              boolean
| | | | +--rw rfc4950?              boolean
| | | | +--rw mpls-rfc5884?         boolean
| | | +---:(tools-mpls-tp)
| | | | +--rw rfc6426?              boolean
| | | | +--rw rfc6435?              boolean
| | | | +--rw rfc6374?              boolean
| | | +---:(tools-pw)
| | | | +--rw rfc5085?              boolean
| | | | +--rw pw_rfc5885?           boolean
| | | | +--rw rfc6423?              boolean
| | | | +--rw rfc6310?              boolean
| | | | +--rw rfc7023?              boolean
| | | +--rw oam-layers* [index]
| | | | +--rw index      uint16
| | | | +--rw level?    int32
+---:(group-ip-address-location-type)
+--rw test-point-group-ip-address-location-list
+--rw test-point-locations* [group-ip-address-location]
+--rw group-ip-address-location    IP-Multicast-Group-Address
+--rw vrf?                          routing-instance-ref
+--rw (technology)?
| +---:(technology-null)
| | +--rw tech-null?                empty
| +---:(technology-string)
| | +--rw ipv4-icmp?                string
+--rw (tools)?
+---:(tools-empty)
| +--rw tools-null?                empty
+---:(tools-ip)
| +--rw rfc792?                    boolean
| +--rw rfc4443?                    boolean
| +--rw rfc4884?                    boolean
| +--rw rfc5837?                    boolean
+---:(tools-bfd)
| +--rw rfc5881?                    boolean
| +--rw rfc5883?                    boolean
| +--rw rfc5884?                    boolean
| +--rw rfc5885?                    boolean
+---:(tools-mpls)
| +--rw rfc4379?                    boolean
| +--rw rfc4687?                    boolean
| +--rw rfc4950?                    boolean
| +--rw mpls-rfc5884?              boolean

```

```

+---:(tools-mpls-tp)
|   +---rw rfc6426?                boolean
|   +---rw rfc6435?                boolean
|   +---rw rfc6374?                boolean
+---:(tools-pw)
|   +---rw rfc5085?                boolean
|   +---rw pw_rfc5885?            boolean
|   +---rw rfc6423?                boolean
|   +---rw rfc6310?                boolean
|   +---rw rfc7023?                boolean
+---rw oam-layers* [index]
|   +---rw index      uint16
|   +---rw level?    int32
+---:(group-as-number-location-type)
+---rw test-point-as-number-location-list
+---rw test-point-locations* [as-number-location]
|   +---rw as-number-location    inet:as-number
|   +---rw vrf?                  routing-instance-ref
|   +---rw (technology)?
|   |   +---:(technology-null)
|   |   |   +---rw tech-null?    empty
|   |   +---:(technology-string)
|   |   |   +---rw ipv4-icmp?    string
+---rw (tools)?
|   +---:(tools-empty)
|   |   +---rw tools-null?        empty
+---:(tools-ip)
|   +---rw rfc792?                boolean
|   +---rw rfc4443?                boolean
|   +---rw rfc4884?                boolean
|   +---rw rfc5837?                boolean
+---:(tools-bfd)
|   +---rw rfc5881?                boolean
|   +---rw rfc5883?                boolean
|   +---rw rfc5884?                boolean
|   +---rw rfc5885?                boolean
+---:(tools-mpls)
|   +---rw rfc4379?                boolean
|   +---rw rfc4687?                boolean
|   +---rw rfc4950?                boolean
|   +---rw mpls-rfc5884?            boolean
+---:(tools-mpls-tp)
|   +---rw rfc6426?                boolean
|   +---rw rfc6435?                boolean
|   +---rw rfc6374?                boolean
+---:(tools-pw)
|   +---rw rfc5085?                boolean
|   +---rw pw_rfc5885?            boolean

```



```

+--rw test-point-system-info-location-list
  +--rw test-point-locations* [system-id-location]
    +--rw system-id-location      inet:uri
    +--rw vrf?                    routing-instance-ref
    +--rw (technology)?
      +--:(technology-null)
      |   +--rw tech-null?        empty
      +--:(technology-string)
      |   +--rw ipv4-icmp?        string
    +--rw (tools)?
      +--:(tools-empty)
      |   +--rw tools-null?        empty
      +--:(tools-ip)
      |   +--rw rfc792?            boolean
      |   +--rw rfc4443?          boolean
      |   +--rw rfc4884?          boolean
      |   +--rw rfc5837?          boolean
      +--:(tools-bfd)
      |   +--rw rfc5881?          boolean
      |   +--rw rfc5883?          boolean
      |   +--rw rfc5884?          boolean
      |   +--rw rfc5885?          boolean
      +--:(tools-mpls)
      |   +--rw rfc4379?          boolean
      |   +--rw rfc4687?          boolean
      |   +--rw rfc4950?          boolean
      |   +--rw mpls-rfc5884?     boolean
      +--:(tools-mpls-tp)
      |   +--rw rfc6426?          boolean
      |   +--rw rfc6435?          boolean
      |   +--rw rfc6374?          boolean
      +--:(tools-pw)
      |   +--rw rfc5085?          boolean
      |   +--rw pw_rfc5885?       boolean
      |   +--rw rfc6423?          boolean
      |   +--rw rfc6310?          boolean
      |   +--rw rfc7023?          boolean
    +--rw oam-layers* [index]
      +--rw index      uint16
      +--rw level?     int32

```

```

module: ietf-connectionless-oam-methods

```

```

rpcs:

```

```

  +---x continuity-check {coam:continuity-check}?
  |   +---w input
  |   |   +---w destination-tp
  |   |   |   +---w (tp-address)?

```

```

| | | +---:(mac-address)
| | | | +---w mac-address?          yang:mac-address
+---:(ipv4-address)
| | | | +---w ipv4-address?        inet:ipv4-address
+---:(ipv6-address)
| | | | +---w ipv6-address?        inet:ipv6-address
+---:(src-dst-address)
| | | | +---w src-ip-address?       inet:ip-address
| | | | +---w dst-ip-address?       inet:ip-address
| | | | +---w Interface?            if:interface-ref
+---:(fec)
| | | | +---w fec-type?              fec-type
| | | | +---w (fec-value)?
| | | | | +---:(ip-prefix)
| | | | | | +---w ip-prefix?        inet:ip-prefix
+---:(bgp)
| | | | | +---w bgp?                inet:ip-prefix
+---:(tunnel)
| | | | | +---w tunnel-interface?   uint32
+---:(l3vpn)
| | | | | +---w l3vpn-id?            uint32
+---:(pw)
| | | | | +---w remote-pe-address?   inet:ip-address
| | | | | +---w pw-id?               uint32
+---:(vpls)
| | | | | +---w route-distinguisher? uint32
| | | | | +---w sender-ve-id?        uint32
| | | | | +---w receiver-ve-id?      uint32
+---:(mpls-mldp)
| | | | | +---w (root-address)?
| | | | | | +---:(ip-address)
| | | | | | | +---w source-address?   inet:ip-address
| | | | | | | +---w group-ip-address? IP-Multicast-Group-Ad
dress
| | | | +---:(vpn)
| | | | | +---w as-number?            inet:as-number
| | | | +---:(global-id)
| | | | | +---w lsp-id?                string
+---:(tlv-address)
| | | | +---w tlv-type?                int16
| | | | +---w tlv-len?                 int16
| | | | +---w tlv-value?               binary
+---:(system-info)
| | | | +---w system-id?                inet:uri
+---w session-type-enum?                enumeration
+---w source-interface?                 if:interface-ref
+---w outbound-interface?               if:interface-ref
+---w count?                            uint32
+---w vrf?                              coam:routing-instance-ref

```

```

| | +---w ttl?                               uint8
| | +---w packet-size?                       uint32
+--ro output
+--ro error-code-list* [response-index]
| +--ro response-index                       uint32
| +--ro status-code?                         int32
| +--ro status-sub-code?                     uint8
+--ro src-test-point
| +--ro vrf?                                routing-instance-ref
| +--ro (tp-address)?
| | +--:(mac-address)
| | | +--ro mac-address?                     yang:mac-address
| | +--:(ipv4-address)
| | | +--ro ipv4-address?                     inet:ipv4-address
| | +--:(ipv6-address)
| | | +--ro ipv6-address?                     inet:ipv6-address
| | +--:(src-dst-address)
| | | +--ro src-ip-address?                   inet:ip-address
| | | +--ro dst-ip-address?                   inet:ip-address
| | | +--ro Interface?                       if:interface-ref
| | +--:(fec)
| | | +--ro fec-type?                         fec-type
| | | +--ro (fec-value)?
| | | | +--:(ip-prefix)
| | | | | +--ro ip-prefix?                     inet:ip-prefix
| | | | +--:(bgp)
| | | | | +--ro bgp?                           inet:ip-prefix
| | | | +--:(tunnel)
| | | | | +--ro tunnel-interface?             uint32
| | | | +--:(l3vpn)
| | | | | +--ro l3vpn-id?                       uint32
| | | | +--:(pw)
| | | | | +--ro remote-pe-address?             inet:ip-address
| | | | | +--ro pw-id?                         uint32
| | | | +--:(vpls)
| | | | | +--ro route-distinguisher?          uint32
| | | | | +--ro sender-ve-id?                 uint32
| | | | | +--ro receiver-ve-id?               uint32
| | | +--:(mpls-mldp)
| | | | +--ro (root-address)?
| | | | | +--:(ip-address)
| | | | | | +--ro source-address?              inet:ip-address
| | | | | | +--ro group-ip-address?           IP-Multicast-Group-Ad
dress | | | | +--:(vpn)
| | | | | +--ro as-number?                     inet:as-number
| | | | +--:(global-id)
| | | | | +--ro lsp-id?                         string
| | | +--:(tlv-address)

```

				+++ro tlv-type?	int16
				+++ro tlv-len?	int16
				+++ro tlv-value?	binary
			+++:(system-info)		
			+++ro system-id?	inet:uri	
			+++ro egress-intf-name?	if:interface-ref	
		+++ro dest-test-point			
		+++ro vrf?		routing-instance-ref	
		+++ro (tp-address)?			
		+++:(mac-address)			
		+++ro mac-address?		yang:mac-address	
		+++:(ipv4-address)			
		+++ro ipv4-address?		inet:ipv4-address	
		+++:(ipv6-address)			
		+++ro ipv6-address?		inet:ipv6-address	
		+++:(src-dst-address)			
		+++ro src-ip-address?		inet:ip-address	
		+++ro dst-ip-address?		inet:ip-address	
		+++ro Interface?		if:interface-ref	
		+++:(fec)			
		+++ro fec-type?		fec-type	
		+++ro (fec-value)?			
		+++:(ip-prefix)			
		+++ro ip-prefix?		inet:ip-prefix	
		+++:(bgp)			
		+++ro bgp?		inet:ip-prefix	
		+++:(tunnel)			
		+++ro tunnel-interface?		uint32	
		+++:(l3vpn)			
		+++ro l3vpn-id?		uint32	
		+++:(pw)			
		+++ro remote-pe-address?		inet:ip-address	
		+++ro pw-id?		uint32	
		+++:(vpls)			
		+++ro route-distinguisher?		uint32	
		+++ro sender-ve-id?		uint32	
		+++ro receiver-ve-id?		uint32	
		+++:(mpls-mldp)			
		+++ro (root-address)?			
		+++:(ip-address)			
		+++ro source-address?		inet:ip-address	
		+++ro group-ip-address?		IP-Multicast-Group-Ad	
dress					
			+++:(vpn)		
		+++ro as-number?		inet:as-number	
		+++:(global-id)			
		+++ro lsp-id?		string	
		+++:(tlv-address)			
		+++ro tlv-type?		int16	

```

| | | +--ro tlv-len? int16
| | | +--ro tlv-value? binary
| | | +--:(system-info)
| | | +--ro system-id? inet:uri
| | +--ro ingress-intf-name? if:interface-ref
+--ro sequence-number? uint64
+--ro hop-cnt? uint8
+--ro session-packet-statistics
| +--ro rx-packet-count? uint32
| +--ro tx-packet-count? uint32
| +--ro rx-bad-packet? uint32
| +--ro tx-packet-failed? uint32
+--ro session-error-statistics
| +--ro packet-drops-count? uint32
| +--ro packet-reorder-count? uint32
| +--ro packets-out-of-seq-count? uint32
| +--ro packets-dup-count? uint32
+--ro session-delay-statistics
| +--ro time-resolution-value? identityref
| +--ro min-delay-value? uint32
| +--ro max-delay-value? uint32
| +--ro average-delay-value? uint32
+--ro session-jitter-statistics
| +--ro time-resolution-value? identityref
| +--ro min-jitter-value? uint32
| +--ro max-jitter-value? uint32
| +--ro average-jitter-value? uint32
+---x path-discovery
+---w input
| +---w destination-tp
| | +---w (tp-address)?
| | | +--:(mac-address)
| | | | +---w mac-address? yang:mac-address
| | | +--:(ipv4-address)
| | | | +---w ipv4-address? inet:ipv4-address
| | | +--:(ipv6-address)
| | | | +---w ipv6-address? inet:ipv6-address
| | | +--:(src-dst-address)
| | | | +---w src-ip-address? inet:ip-address
| | | | +---w dst-ip-address? inet:ip-address
| | | | +---w Interface? if:interface-ref
| | | +--:(fec)
| | | | +---w fec-type? fec-type
| | | | +---w (fec-value)?
| | | | | +--:(ip-prefix)
| | | | | | +---w ip-prefix? inet:ip-prefix
| | | | | +--:(bgp)
| | | | | | +---w bgp? inet:ip-prefix

```



```

dress
    +---:(tunnel)
    |   +---w tunnel-interface?      uint32
    +---:(l3vpn)
    |   +---w l3vpn-id?              uint32
    +---:(pw)
    |   +---w remote-pe-address?     inet:ip-address
    |   +---w pw-id?                 uint32
    +---:(vpls)
    |   +---w route-distinguisher?   uint32
    |   +---w sender-ve-id?          uint32
    |   +---w receiver-ve-id?        uint32
    +---:(mpls-mldp)
    |   +---w (root-address)?
    |   |   +---:(ip-address)
    |   |   |   +---w source-address?      inet:ip-address
    |   |   |   +---w group-ip-address?    IP-Multicast-Group-Ad
    |   +---:(vpn)
    |   |   +---w as-number?              inet:as-number
    |   +---:(global-id)
    |   |   +---w lsp-id?                  string
    +---:(tlv-address)
    |   +---w tlv-type?                  int16
    |   +---w tlv-len?                  int16
    |   +---w tlv-value?                 binary
    +---:(system-info)
    |   +---w system-id?                  inet:uri
    +---w session-type-enum?              enumeration
    +---w source-interface?               if:interface-ref
    +---w outbound-interface?             if:interface-ref
    +---w vrf?                            coam:routing-instance-ref
    +---w max-ttl?                        uint8
+--ro output
+--ro response-list* [response-index]
|   +--ro response-index      uint32
|   +--ro status-code?        int32
|   +--ro status-sub-code?    uint8
+--ro src-test-point
|   +--ro vrf?                  routing-instance-ref
|   +--ro (tp-address)?
|   |   +---:(mac-address)
|   |   |   +--ro mac-address?      yang:mac-address
|   |   +---:(ipv4-address)
|   |   |   +--ro ipv4-address?      inet:ipv4-address
|   |   +---:(ipv6-address)
|   |   |   +--ro ipv6-address?      inet:ipv6-address
|   +---:(src-dst-address)
|   |   +--ro src-ip-address?        inet:ip-address
|   |   +--ro dst-ip-address?        inet:ip-address

```

```

|   +--ro Interface?                               if:interface-ref
|   +--:(fec)
|   |   +--ro fec-type?                             fec-type
|   |   +--ro (fec-value)?
|   |   |   +--:(ip-prefix)
|   |   |   |   +--ro ip-prefix?                     inet:ip-prefix
|   |   |   +--:(bgp)
|   |   |   |   +--ro bgp?                             inet:ip-prefix
|   |   |   +--:(tunnel)
|   |   |   |   +--ro tunnel-interface?               uint32
|   |   |   +--:(l3vpn)
|   |   |   |   +--ro l3vpn-id?                       uint32
|   |   |   +--:(pw)
|   |   |   |   +--ro remote-pe-address?              inet:ip-address
|   |   |   |   +--ro pw-id?                          uint32
|   |   |   +--:(vpls)
|   |   |   |   +--ro route-distinguisher?            uint32
|   |   |   |   +--ro sender-ve-id?                   uint32
|   |   |   |   +--ro receiver-ve-id?                 uint32
|   |   +--:(mpls-mldp)
|   |   |   +--ro (root-address)?
|   |   |   |   +--:(ip-address)
|   |   |   |   |   +--ro source-address?              inet:ip-address
|   |   |   |   |   +--ro group-ip-address?            IP-Multicast-Group-Ad
dress
|   |   |   |   +--:(vpn)
|   |   |   |   |   +--ro as-number?                   inet:as-number
|   |   |   |   +--:(global-id)
|   |   |   |   |   +--ro lsp-id?                       string
|   |   +--:(tlv-address)
|   |   |   +--ro tlv-type?                             int16
|   |   |   +--ro tlv-len?                             int16
|   |   |   +--ro tlv-value?                           binary
|   |   +--:(system-info)
|   |   |   +--ro system-id?                             inet:uri
+--ro dest-test-point
|   +--ro vrf?                                         routing-instance-ref
|   +--ro (tp-address)?
|   |   +--:(mac-address)
|   |   |   +--ro mac-address?                         yang:mac-address
|   |   +--:(ipv4-address)
|   |   |   +--ro ipv4-address?                         inet:ipv4-address
|   |   +--:(ipv6-address)
|   |   |   +--ro ipv6-address?                         inet:ipv6-address
|   |   +--:(src-dst-address)
|   |   |   +--ro src-ip-address?                       inet:ip-address
|   |   |   +--ro dst-ip-address?                       inet:ip-address
|   |   +--ro Interface?                             if:interface-ref
|   +--:(fec)

```

```

+--ro fec-type? fec-type
+--ro (fec-value)?
+--:(ip-prefix)
| +--ro ip-prefix? inet:ip-prefix
+--:(bgp)
| +--ro bgp? inet:ip-prefix
+--:(tunnel)
| +--ro tunnel-interface? uint32
+--:(l3vpn)
| +--ro l3vpn-id? uint32
+--:(pw)
| +--ro remote-pe-address? inet:ip-address
| +--ro pw-id? uint32
+--:(vpls)
| +--ro route-distinguisher? uint32
| +--ro sender-ve-id? uint32
| +--ro receiver-ve-id? uint32
+--:(mpls-mldp)
+--ro (root-address)?
+--:(ip-address)
| +--ro source-address? inet:ip-address
| +--ro group-ip-address? IP-Multicast-Group-Ad
dress
+--:(vpn)
| +--ro as-number? inet:as-number
+--:(global-id)
+--ro lsp-id? string
+--:(tlv-address)
| +--ro tlv-type? int16
| +--ro tlv-len? int16
| +--ro tlv-value? binary
+--:(system-info)
+--ro system-id? inet:uri
+--ro sequence-number? uint64
+--ro hop-cnt? uint8
+--ro session-packet-statistics
| +--ro rx-packet-count? uint32
| +--ro tx-packet-count? uint32
| +--ro rx-bad-packet? uint32
| +--ro tx-packet-failed? uint32
+--ro session-error-statistics
| +--ro packet-drops-count? uint32
| +--ro packet-reorder-count? uint32
| +--ro packets-out-of-seq-count? uint32
| +--ro packets-dup-count? uint32
+--ro session-delay-statistics
| +--ro time-resolution-value? identityref
| +--ro min-delay-value? uint32
| +--ro max-delay-value? uint32

```

```

|   +--ro average-delay-value?      uint32
+--ro session-jitter-statistics
|   +--ro time-resolution-value?    identityref
|   +--ro min-jitter-value?         uint32
|   +--ro max-jitter-value?         uint32
|   +--ro average-jitter-value?     uint32
+--ro path-verification
|   +--ro flow-info?                string
|   +--ro session-path-verification-statistics
|       +--ro verified-count?      uint32
|       +--ro failed-count?       uint32
+--ro path-trace-info
|   +--ro path-trace-info-list* [index]
|       +--ro index                uint32
|       +--ro vrf?                 routing-instance-ref
|       +--ro (tp-address)?
|           +--:(mac-address)
|           |   +--ro mac-address?      yang:mac-address
|           +--:(ipv4-address)
|           |   +--ro ipv4-address?     inet:ipv4-address
|           +--:(ipv6-address)
|           |   +--ro ipv6-address?     inet:ipv6-address
|           +--:(src-dst-address)
|           |   +--ro src-ip-address?   inet:ip-address
|           |   +--ro dst-ip-address?   inet:ip-address
|           |   +--ro Interface?       if:interface-ref
|           +--:(fec)
|           |   +--ro fec-type?         fec-type
|           |   +--ro (fec-value)?
|           |       +--:(ip-prefix)
|           |       |   +--ro ip-prefix?      inet:ip-prefix
|           |       +--:(bgp)
|           |       |   +--ro bgp?           inet:ip-prefix
|           |       +--:(tunnel)
|           |       |   +--ro tunnel-interface? uint32
|           |       +--:(l3vpn)
|           |       |   +--ro l3vpn-id?      uint32
|           |       +--:(pw)
|           |       |   +--ro remote-pe-address? inet:ip-address
|           |       |   +--ro pw-id?        uint32
|           |       +--:(vpls)
|           |       |   +--ro route-distinguisher? uint32
|           |       |   +--ro sender-ve-id?   uint32
|           |       |   +--ro receiver-ve-id? uint32
|           |       +--:(mpls-mldp)
|           |       |   +--ro (root-address)?
|           |       |       +--:(ip-address)
|           |       |       |   +--ro source-address?      inet:ip-address

```

-Address				+-ro group-ip-address?	IP-Multicast-Group
				+-:(vpn)	
				+-ro as-number?	inet:as-number
				+-:(global-id)	
				+-ro lsp-id?	string
				+-:(tlv-address)	
				+-ro tlv-type?	int16
				+-ro tlv-len?	int16
				+-ro tlv-value?	binary
				+-:(system-info)	
				+-ro system-id?	inet:uri
				+-ro timestamp-val?	yang:date-and-time
				+-ro ingress-intf-name?	if:interface-ref
				+-ro egress-intf-name?	if:interface-ref
				+-ro app-meta-data?	uint32

data hierarchy of OAM

4. OAM YANG Module

<CODE BEGINS> file "ietf-connectionless-oam.yang"

```

module ietf-connectionless-oam {
  namespace "urn:ietf:params:xml:ns:yang:ietf-connectionless-oam";
  prefix coam;

  import ietf-network {
    prefix nd;
  }
  import ietf-yang-types {
    prefix yang;
  }
  import ietf-interfaces {
    prefix if;
  }
  import ietf-inet-types {
    prefix inet;
  }
  import ietf-network-instance {
    prefix "ni";
  }

  organization "IETF LIME Working Group";
  contact
    "Deepak Kumar dekkumar@cisco.com
     Qin Wu bill.wu@huawei.com
     S Raghavan srihari@cisco.com";
  description

```

```
"This YANG module defines the generic configuration,
data model, statistics for connectionless OAM to be
used within IETF in a protocol independent manner.
Functional level abstraction is indendent with
YANG modeling. It is assumed that each protocol maps
corresponding abstracts to its native format.
Each protocol may extend the YANG model defined
here to include protocol specific extensions";
revision 2015-12-22 {
  description
    "Initial revision. - 01 version";
  reference "";
}
/* features */
feature connection-less {
  description
    "this feature indicates that OAM solution is connection less.";
}
feature continuity-check {
  description
    "This feature indicates that the server supports
    executing continuity check OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    continuity check command or rpc model for
    continuity check command.";
}
feature path-discovery {
  description
    "This feature indicates that the server supports
    executing path discovery OAM command and
    returning a response. Servers that do not advertise
    this feature will not support executing
    path discovery command or rpc model for
    path discovery command.";
}

/* Identities */
/* typedefs */
typedef routing-instance-ref {
  type leafref {
    path "/ni:network-instances/ni:network-instance/ni:name";
  }
  description
    "This type is used for leafs that reference a routing instance
    configuration.";
}
```

```

typedef IPv4-Multicast-Group-Address {
  type string {
    pattern '(2((2[4-9])|(3[0-9]))\.)'
      +'((([0-9]|[1-9][0-9]|1[0-9][0-9]|'
      +'2[0-4][0-9]|25[0-5])\.){2}'
      +'([0-9]|[1-9][0-9]|1[0-9][0-9]'
      +'|2[0-4][0-9]|25[0-5]))';
  }
  description
    "The IPv4-Multicast-Group-Address type
    represents an IPv4 multicast address
    in dotted-quad notation.";
  reference "RFC4607";
} // typedef IPv4-Multicast-Group-Address
typedef IPv6-Multicast-Group-Address {
  type string {
    pattern
      '(((FF|ff)[0-9a-fA-F]{2}):)([0-9a-fA-F]'
      +'{0,4}):){0,5}((([0-9a-fA-F]{0,4}):)?'
      +'(:|[0-9a-fA-F]{0,4}))|(((25[0-5]|2[0-4]'
      +'[0-9]|[01]?[0-9]?[0-9])\.){3}(25[0-5]|'
      +'2[0-4][0-9]|[01]?[0-9]?[0-9])));';
  pattern
    '([[:^:]]+){6}([[:^:]]+:[[:^:]]+)|'
    +'(.*\..*)|([[:^:]]+:[[:^:]]+)*[[:^:]]+'
    +'?::([[:^:]]+:[[:^:]]+)?';
  }
  description
    "The IPv6-Multicast-Group-Address
    type represents an IPv6 address in full,
    mixed, shortened, and shortened-mixed
    notation.";
  reference "RFC4291 2.7.
  ietf-inet-types:ipv6-address";
}
typedef IP-Multicast-Group-Address {
  type union {
    type IPv4-Multicast-Group-Address;
    type IPv6-Multicast-Group-Address;
  }
  description
    "The IP-Multicast-Group-Address type
    represents an IP multicast address and
    is IP version neutral. The format of the
    textual representations implies the IP version.";
} // typedef IP-Multicast-Group-Address

identity fec-types {

```

```
    description
      "This is base identity of fec types which are ip-prefix,
      bgp, tunnel, l3vpn, pwe3, vpls, etc.";
  }

  typedef fec-type {
    type identityref {
      base fec-types;
    }
    description "Target FEC type.";
  }

  typedef oam-counter32 {
    type yang:zero-based-counter32;
    description
      "defines 32 bit counter for OAM";
  }

  identity time-resolution{
    description
      "Time interval resolution";
  } //base identity

  identity hours {
    base time-resolution;
    description
      "Hours";
  }

  identity minutes {
    base time-resolution;
    description
      "Minutes";
  }

  identity seconds {
    base time-resolution;
    description
      "Seconds";
  }

  identity milliseconds {
    base time-resolution;
    description
      "Milliseconds";
  }

  identity microseconds {
```



```
    base time-resolution;
    description
        "Microseconds";
}

identity nanoseconds {
    base time-resolution;
    description
        "Nanoseconds";
}

/* groupings */
grouping cc-session-statistics {
    description "Grouping for session statistics.";
    container cc-session-statistics {
        description "cc session counters";
        leaf session-count {
            type uint32;
            description "Number of cc sessions.";
        }
        leaf session-up-count {
            type uint32;
            description "Number of sessions which are up.";
        }
        leaf session-down-count {
            type uint32;
            description "Number of sessions which are down.";
        }
        leaf session-admin-down-count {
            type uint32;
            description "Number of sessions which are admin-down.";
        }
    }
}

grouping session-packet-statistics {
    description "Grouping for per session packet statistics";
    container session-packet-statistics {
        description "Per session packet statistics.";
        leaf rx-packet-count {
            type uint32;
            description "Total received packet count.";
        }
        leaf tx-packet-count {
            type uint32;
            description "Total transmitted packet count.";
        }
        leaf rx-bad-packet {
```

```
        type uint32;
        description "Total received bad packet.";
    }
    leaf tx-packet-failed {
        type uint32;
        description "Total send packet failed.";
    }
}

grouping cc-per-session-statistics {
    description "Grouping for per session statistics";
    container cc-per-session-statistics {
        description "per session statistics.";
        leaf create-time {
            type yang:date-and-time;
            description "Time and date when session is created.";
        }
        leaf last-down-time {
            type yang:date-and-time;
            description "Time and date last time session is down.";
        }
        leaf last-up-time {
            type yang:date-and-time;
            description "Time and date last time session is up.";
        }
        leaf down-count {
            type uint32;
            description "Total down count.";
        }
        leaf admin-down-count {
            type uint32;
            description "Total down count.";
        }
    }

    uses session-packet-statistics;
}

grouping session-error-statistics {
    description "Grouping for per session error statistics";
    container session-error-statistics {
        description "Per session error statistics.";
        leaf packet-drops-count {
            type uint32;
            description "Total received packet drops count.";
        }
        leaf packet-reorder-count {
```

```
        type uint32;
        description "Total received packet reordered count.";
    }
    leaf packets-out-of-seq-count {
        type uint32;
        description "Total received out of sequence count.";
    }
    leaf packets-dup-count {
        type uint32;
        description "Total received packet duplicates count.";
    }
}

grouping session-delay-statistics {
    description "Grouping for per session delay statistics";
    container session-delay-statistics {
        description "Session delay summarised information.";
        leaf time-resolution-value {
            type identityref {
                base time-resolution;
            }
            description "Time units among choice of s,ms,ns etc.";
        }
        leaf min-delay-value {
            type uint32;
            description "Minimum delay value observed.";
        }
        leaf max-delay-value {
            type uint32;
            description "Maximum delay value observed.";
        }
        leaf average-delay-value {
            type uint32;
            description "Average delay value observed.";
        }
    }
}

grouping session-jitter-statistics {
    description "Grouping for per session jitter statistics";
    container session-jitter-statistics {
        description "Session jitter summarised information.";
        leaf time-resolution-value {
            type identityref {
                base time-resolution;
            }
            description "Time units among choice of s,ms,ns etc.";
        }
    }
}
```

```

    }
    leaf min-jitter-value {
        type uint32;
        description "Minimum jitter value observed.";
    }
    leaf max-jitter-value {
        type uint32;
        description "Maximum jitter value observed.";
    }
    leaf average-jitter-value {
        type uint32;
        description "Average jitter value observed.";
    }
}

grouping session-path-verification-statistics {
    description "Grouping for per session path verification statistics";
    container session-path-verification-statistics {
        description "OAM per session path verification statistics.";
        leaf verified-count {
            type uint32;
            description "Total number of packets that went through a path as inten
ded.";
        }
        leaf failed-count {
            type uint32;
            description "Total number of packets that went through an unintended p
ath.";
        }
    }
}

grouping session-type {
    description
        "This object indicates the current session
        definition.";
    leaf session-type-enum {
        type enumeration {
            enum proactive {
                description
                    "The current session is proactive";
            }
            enum on-demand {
                description
                    "The current session is on-demand.";
            }
        }
        default "on-demand";
        description

```

```
        "session type enum";
    }
}

identity tp-address-type {
    description
        "Test point address type";
} //base identity

identity mac-address-type {
    base tp-address-type;
    description
        "MAC address type";
}

identity ipv4-address-type {
    base tp-address-type;
    description
        "IPv4 address type";
}

identity ipv6-address-type {
    base tp-address-type;
    description
        "IPv6 address type";
}

identity src-dst-address-type {
    base tp-address-type;
    description
        "Source/Dest address type";
}

identity fec-address-type {
    base tp-address-type;
    description
        "FEC address type";
}

identity tlv-address-type {
    base tp-address-type;
    description
        "TLV address type";
}

identity system-id-address-type {
    base tp-address-type;
    description
```

```
    "System id address type";
}

identity lsp-id-address-type {
    base tp-address-type;
    description
        "LSP ID address type";
}

identity as-number-address-type {
    base tp-address-type;
    description
        "AS number address type";
}

identity group-ip-address-type {
    base tp-address-type;
    description
        "Group IP address type";
}

identity route-distinguisher-address-type {
    base tp-address-type;
    description
        "Route Distinguisher address type";
}

identity ip-prefix-address-type {
    base tp-address-type;
    description
        "IP prefix address type";
}

identity tunnel-address-type {
    base tp-address-type;
    description
        "Tunnel address type";
}

grouping tp-address {
    leaf tp-address-type-value {
        type identityref {
            base tp-address-type;
        }
        description "Test point address type.";
    }

    choice tp-address {
```

```
case mac-address {
  when "tp-address-type-value = mac-address-type" {
    description "MAC address type";
  }
  leaf mac-address {
    type yang:mac-address;
    description
      "MAC Address";
  }
  description
    "MAC Address based MP Addressing.";
}
case ipv4-address {
  when "tp-address-type-value = ipv4-address-type" {
    description "IPv4 address type";
  }
  leaf ipv4-address {
    type inet:ipv4-address;
    description
      "Ipv4 Address";
  }
  description
    "Ip Address based MP Addressing.";
}
case ipv6-address {
  when "tp-address-type-value = ipv6-address-type" {
    description "IPv6 address type";
  }
  leaf ipv6-address {
    type inet:ipv6-address;
    description
      "Ipv6 Address";
  }
  description
    "ipv6 Address based MP Addressing.";
}
case src-dst-address {
  when "tp-address-type-value = src-dst-address-type" {
    description "Src dest address type for BFD";
  }
  leaf src-ip-address {
    type inet:ip-address;
    description
      "source ip address.";
  }
  leaf dst-ip-address {
    type inet:ip-address;
    description

```

```
        "destination ip address.";
    }
    leaf Interface {
        type if:interface-ref;
        description
            "interface.";
    }
}
case fec {
    when "tp-address-type-value = fec-address-type" {
        description "FEC address type";
    }
    leaf fec-type {
        type fec-type;
        description
            "fec type.";
    }
    choice fec-value {
        description
            "fec value.";
        case ip-prefix {
            leaf ip-prefix {
                type inet:ip-prefix;
                description
                    "ip prefix.";
            }
        }
        case bgp {
            leaf bgp {
                type inet:ip-prefix;
                description
                    "BGP Labeled Prefix ";
            }
        }
        case tunnel {
            leaf tunnel-interface {
                type uint32;
                description
                    "VPN Prefix ";
            }
        }
        case l3vpn {
            leaf l3vpn-id {
                type uint32;
                description
                    "FEC layer 3 vpn.";
            }
        }
    }
}
```



```
case pw {
  leaf remote-pe-address{
    type inet:ip-address;
    description
      "remote pe address.";
  }
  leaf pw-id {
    type uint32;
    description
      "Pseudowire id.";
  }
}
case vpls {
  leaf route-distinguisher {
    type uint32;
    description
      "Route Distinguisher(8 octets).";
  }
  leaf sender-ve-id{
    type uint32;
    description
      "Sender's VE ID.";
  }
  leaf receiver-ve-id{
    type uint32;
    description
      "Receiver's VE ID.";
  }
}
case mpls-mldp{
  choice root-address{
    description
      "root address choice.";
    case ip-address{
      leaf source-address{
        type inet:ip-address;
        description
          "ip address.";
      }
    }
    leaf group-ip-address{
      type IP-Multicast-Group-Address;
      description
        "group ip address.";
    }
  }
}
case vpn{
  leaf as-number{
    type inet:as-number;
```

```

        description
            "AS number.";
    }
}
case global-id{
    leaf lsp-id{
        type string;
        description
            "lsp id.";
    }
}
}
}
}
}
}
}
}
case tlv-address {
    when "tp-address-type-value = tlv-address-type" {
        description "TLV address type";
    }
    leaf tlv-type {
        type int16;
        description
            "Type of MEP-ID";
    }
    leaf tlv-len {
        type int16;
        description
            "Length of MEP-ID value";
    }
    leaf tlv-value {
        type binary {
            length "12..255";
        }
        description
            "Value please refer RFC6428 (Figure 4,5,6).";
    }
}
description
    "MEP-ID";
}
case system-info {
    when "tp-address-type-value = system-id-address-type" {
        description "System id address type";
    }
    leaf system-id {
        type inet:uri;
        description
            "System ID assigned to this node.";
    }
}

```

```
    }
    description
      "TP Addressing.";
  }
  description
    "TP Address";
}

grouping tp-address-vrf {
  description
    "Test point address with VRF.";
  leaf vrf {
    type routing-instance-ref;
    description
      "The vrf is used to describe the
        corresponding network instance";
  }

  uses tp-address;
}

grouping connectionless-oam-layers {
  list oam-layers {
    key "index";
    leaf index {
      type uint16 {
        range "0..65535";
      }
      description
        "Index";
    }
    leaf level {
      type int32 {
        range "-1..1";
      }
      default 0;
      description
        "Level 0 indicates default level, -1 means server
          and +1 means client layer.
          In relationship 0 means same layer.";
    }
  }
  ordered-by user;
  description
    "list of related oam layers.
    0 means they are in same level, especially
    interworking scenarios of stitching multiple
    technology at same layer.
    -1 means server layer, for eg:- in case of
```

```
        Overlay and Underlay, Underlay is server layer for
        Overlay Test Point.
        +1 means client layer, for eg:- in case of
        Service OAM and Transport OAM, Service OAM is client
        layer to Transport OAM.";
    }
    description
        "connectionless related OAM layer";
}

grouping tp-technology {
    choice technology {
        default technology-null;
        case technology-null {
            description
                "this is a placeholder when no technology is needed.";
            leaf tech-null {
                type empty;
                description
                    "there is no technology define";
            }
        }
    }
    description
        "technology choice null";
    case technology-string {
        description
            "oam technology string";
        leaf ipv4-icmp {
            type string;
            description
                "name to identify oam technology";
        }
    }
}
description
    "OAM Technology";
}

grouping tp-tools {
    description
        "Test Point OAM Toolset.";
    choice tools {
        default tools-empty;
        description
            "choice of test point tools.
            Empty tools means based on Test Point it's implicit
            all OAM tools are present and no further configuration
```

```
        is supported.";
    case tools-empty {
        description
            "this is a placeholder when oam toolset is not needed.";
        leaf tools-null {
            type empty;
            description
                "there is no oam toolset defined.";
        }
    }
}
case tools-ip{
    description
        "Oam Toolset for Ip";
    leaf rfc792 {
        type boolean;
        description
            "rfc792 (icmpv4) supported.";
    }
    leaf rfc4443 {
        type boolean;
        description
            "rfc4443 supported.";
    }
    leaf rfc4884 {
        type boolean;
        description
            "rfc4884 supported.";
    }
    leaf rfc5837 {
        type boolean;
        description
            "rfc5837 supported.";
    }
}
case tools-bfd {
    leaf rfc5881 {
        type boolean;
        description
            "rfc5881 supported.";
    }
    leaf rfc5883 {
        type boolean;
        description
            "rfc5883 supported.";
    }
    leaf rfc5884 {
        type boolean;
        description
```

```
        "rfc5884 supported.";
    }
    leaf rfc5885 {
        type boolean;
        description
            "rfc5885 supported.";
    }
}
case tools-mpls {
    description
        "Oam Toolset for mpls";
    leaf rfc4379 {
        type boolean;
        description
            "rfc4379 supported.";
    }
    leaf rfc4687 {
        type boolean;
        description
            "rfc4687 supported.";
    }
    leaf rfc4950 {
        type boolean;
        description
            "rfc4950 supported.";
    }
    leaf mpls-rfc5884 {
        type boolean;
        description
            "rfc5884 supported.";
    }
}
case tools-mpls-tp {
    description
        "Oam Toolset for mpls TP.";
    leaf rfc6426 {
        type boolean;
        description
            "rfc6426 supported.";
    }
    leaf rfc6435 {
        type boolean;
        description
            "rfc6435 supported.";
    }
    leaf rfc6374 {
        type boolean;
        description
```

```
        "rfc6374 supported.";
    }
}
case tools-pw {
  description
    "Oam Toolset for pw oam.";
  leaf rfc5085 {
    type boolean;
    description
      "rfc5085 supported.";
  }
  leaf pw_rfc5885 {
    type boolean;
    description
      "rfc5885 supported.";
  }
  leaf rfc6423 {
    type boolean;
    description
      "rfc6423 supported.";
  }
  leaf rfc6310 {
    type boolean;
    description
      "rfc6310 supported.";
  }
  leaf rfc7023 {
    type boolean;
    description
      "rfc7023 supported.";
  }
}
}
```

```
grouping test-point-location-info {
  uses tp-technology;
  uses tp-tools;
  uses connectionless-oam-layers;
  description
    "Test point Location";
}
```

```
grouping test-point-locations {
  description "Group of test point locations.";
  leaf tp-address-type-value {
```

```
    type identityref {
      base tp-address-type;
    }
    description "Test point address type.";
  }
  choice location-type {
    case ipv4-location-type {
      when "tp-address-type-value = ipv4-address-type" {
        description
          "when test point address is equal to ipv4 address.";
      }
      container test-point-ipv4-location-list {
        list test-point-locations {
          key "ipv4-location";
          leaf ipv4-location {
            type inet:ipv4-address;
            description
              "Ipv4 Address.";
          }
          leaf vrf {
            type routing-instance-ref;
            description
              "The vrf is used to describe the
              corresponding network instance";
          }
          uses test-point-location-info;
          ordered-by user;
          description
            "list of test point locations.";
        }
        description
          "Serves as top-level container for test point location list.";
      }
    }
    case ipv6-location-type {
      when "tp-address-type-value = ipv6-address-type" {
        description
          "when test point address is equal to ipv6 address";
      }
      container test-point-ipv6-location-list {
        list test-point-locations {
          key "ipv6-location";
          leaf ipv6-location {
            type inet:ipv6-address;
            description
              "Ipv6 Address.";
          }
          leaf vrf {
```



```
        type routing-instance-ref;
        description
            "The vrf is used to describe the
             corresponding network instance";
    }
    uses test-point-location-info;
    ordered-by user;
    description
        "list of test point locations.";
    }
    description
        "Serves as top-level container for test point location list.";
    }
}
case mac-location-type {
    when "tp-address-type-value = mac-address-type" {
        description
            "when test point address is equal to mac address.";
    }
    container test-point-mac-address-location-list {
        list test-point-locations {
            key "mac-address-location";
            leaf mac-address-location {
                type yang:mac-address;
                description
                    "MAC Address";
            }
        }
        uses test-point-location-info;
        ordered-by user;
        description
            "list of test point locations.";
    }
    description
        "Serves as top-level container for test point location list.";
    }
}
case tunnel-location-type {
    when "tp-address-type-value = tunnel-address-type" {
        description
            "when test point address is equal to tunnel type.";
    }
    container test-point-tunnel-address-location-list {
        list test-point-locations {
            key "tunnel-location";
            leaf tunnel-location {
                type uint32;
                description
                    "VPN Prefix";
            }
        }
    }
}
```

```
    }
    leaf vrf {
        type routing-instance-ref;
        description
            "The vrf is used to describe the
            corresponding network instance";
    }
    uses test-point-location-info;
    ordered-by user;
    description
        "list of test point locations.";
    }
    description
        "Serves as top-level container for test point location list.";
    }
}
case ip-prefix-location-type {
    when "tp-address-type-value = ip-prefix-address-type" {
        description
            "when test point address is equal to ip prefix.";
    }
    container test-point-ip-prefix-location-list {
        list test-point-locations {
            key "ip-prefix-location";
            leaf ip-prefix-location {
                type inet:ip-prefix;
                description
                    "IP Prefix";
            }
        }
        leaf vrf {
            type routing-instance-ref;
            description
                "The vrf is used to describe the
                corresponding network instance";
        }
        uses test-point-location-info;
        ordered-by user;
        description
            "list of test point locations.";
    }
    description
        "Serves as top-level container for test point location list.";
    }
}
case route-distinguisher-location-type {
    when "tp-address-type-value = route-distinguisher-address-type" {
        description "when test point address is equal to
        route distinguisher.";
```

```
    }
    container test-point-route-dist-location-list {
      list test-point-locations {
        key "route-dist-location";
        leaf route-dist-location {
          type uint32;
          description
            "Route Distinguisher(8 octets).";
        }
        leaf vrf {
          type routing-instance-ref;
          description
            "The vrf is used to describe the
              corresponding network instance";
        }
        uses test-point-location-info;
        ordered-by user;
        description
          "list of test point locations.";
      }
      description
        "Serves as top-level container for test point location list.";
    }
  }
  case group-ip-address-location-type {
    when "tp-address-type-value = group-ip-address-type" {
      description "when test point address is equal to
        group ip address.";
    }
    container test-point-group-ip-address-location-list {
      list test-point-locations {
        key "group-ip-address-location";
        leaf group-ip-address-location {
          type IP-Multicast-Group-Address;
          description
            "Group IP address.";
        }
        leaf vrf {
          type routing-instance-ref;
          description
            "The vrf is used to describe the
              corresponding network instance";
        }
        uses test-point-location-info;
        ordered-by user;
        description
          "list of test point locations.";
      }
    }
  }
}
```

```
        description
            "Serves as top-level container for test point location list.";
    }
}
case group-as-number-location-type {
    when "tp-address-type-value = as-number-address-type" {
        description "when test point address is equal to
            as-number.";
    }
    container test-point-as-number-location-list {
        list test-point-locations {
            key "as-number-location";
            leaf as-number-location {
                type inet:as-number;
                description
                    "AS number.";
            }
            leaf vrf {
                type routing-instance-ref;
                description
                    "The vrf is used to describe the
                    corresponding network instance";
            }
            uses test-point-location-info;
            ordered-by user;
            description
                "list of test point locations.";
        }
        description
            "Serves as top-level container for test point location list.";
    }
}
case group-lsp-id-location-type {
    when "tp-address-type-value = lsp-id-address-type" {
        description "when test point address is equal to lspid.";
    }
    container test-point-lsp-id-location-list {
        list test-point-locations {
            key "lsp-id-location";
            leaf lsp-id-location {
                type string;
                description
                    "LSP Id.";
            }
            leaf vrf {
                type routing-instance-ref;
                description
                    "The vrf is used to describe the
```

```

        corresponding network instance";
    }
    uses test-point-location-info;
    ordered-by user;
    description
        "list of test point locations.";
    }
    description
        "Serves as top-level container for test point location list.";
}
}
case group-system-id-location-type {
    when "tp-address-type-value = system-id-address-type" {
        description "when test point address is equal to
            system info.";
    }
    container test-point-system-info-location-list {
        list test-point-locations {
            key "system-id-location";
            leaf system-id-location {
                type inet:uri;
                description
                    "System Id.";
            }
            leaf vrf {
                type routing-instance-ref;
                description
                    "The vrf is used to describe the
                    corresponding network instance";
            }
            uses test-point-location-info;
            ordered-by user;
            description
                "list of test point locations.";
        }
        description
            "Serves as top-level container for test point location list.";
    }
}
description
    "Choice of address types.";
}
}

augment "/nd:networks/nd:network/nd:node"{
    description
        "Augment test points of connectionless oam.";
    uses test-point-locations;
}

```

```
}

grouping path-discovery-data {
  description "Path discovery related data output from nodes.";
  container src-test-point {
    description "Source test point.";
    uses tp-address-vrf;
  }
  container dest-test-point {
    description "Destination test point.";
    uses tp-address-vrf;
  }
  leaf sequence-number {
    type uint64;
    description "Sequence number in data packets.";
  }
  leaf hop-cnt {
    type uint8;
    description "hop count.";
  }
}

uses session-packet-statistics;
uses session-error-statistics;
uses session-delay-statistics;
uses session-jitter-statistics;

container path-verification {
  description "Optional path verification related information.";
  leaf flow-info {
    type string;
    description
      "ACL name that refers to the flow, if any.";
  }
  uses session-path-verification-statistics;
}

container path-trace-info {
  description "Optional path trace per-hop test point information.
    The list has typically a single element for per-hop
    cases like path-discovery RPC but allows a list of
    hop related information for other types of
    data retrieval methods.";
  list path-trace-info-list {
    key "index";
    description
      "Path trace information list.";
    leaf index {
      type uint32;
    }
  }
}
```

```
        description "Trace information index.";
    }

    uses tp-address-vrf;

    leaf timestamp-val {
        type yang:date-and-time;
        description "Timestamp value";
    }
    leaf ingress-intf-name {
        type if:interface-ref;
        description
            "Ingress interface name";
    }
    leaf egress-intf-name {
        type if:interface-ref;
        description
            "Egress interface name";
    }
    leaf app-meta-data {
        type uint32;
        description
            "Application specific data added by node.";
    }
}

}

}

grouping continuity-check-data {
    description "Continuity check data output from nodes.";
    container src-test-point {
        description "Source test point.";
        uses tp-address-vrf;

        leaf egress-intf-name {
            type if:interface-ref;
            description
                "Egress interface name";
        }
    }
    container dest-test-point {
        description "Destination test point.";
        uses tp-address-vrf;

        leaf ingress-intf-name {
            type if:interface-ref;
            description
                "Ingress interface name";
        }
    }
}
```

```
    }
  }
  leaf sequence-number {
    type uint64;
    description "Sequence number.";
  }
  leaf hop-cnt {
    type uint8;
    description "hop count.";
  }

  uses session-packet-statistics;
  uses session-error-statistics;
  uses session-delay-statistics;
  uses session-jitter-statistics;
}

container oper {
  if-feature continuity-check;
  config "false";
  description "cc operational information.";
  container cc-ipv4-sessions-statistics {
    description "cc ipv4 sessions";
    uses cc-session-statsitics;
  }
  container cc-ipv6-sessions-statistics {
    description "cc ipv6 sessions";
    uses cc-session-statsitics;
  }
}
}

module ietf-connectionless-oam-methods {
  namespace "urn:ietf:params:xml:ns:yang:ietf-connectionless-oam-methods";
  prefix coam-methods;

  import ietf-interfaces {
    prefix if;
  }
  import ietf-connectionless-oam {
    prefix coam;
  }

  organization "IETF LIME Working Group";
  contact
    "Deepak Kumar dekkumar@cisco.com
     Qin Wu          bill.wu@huawei.com
     S Raghavan      srihari@cisco.com";
```



```
description
  "This YANG module defines the RPCs for ,
  connectionless OAM to be used within IETF
  in a protocol Independent manner.
  Functional level abstraction is indendent with
  YANG modeling. It is assumed that each protocol maps
  corresponding abstracts to its native format.
  Each protocol may extend the YANG model defined
  here to include protocol specific extensions";
revision 2015-12-22 {
  description
    "Initial revision. - 01 version";
  reference "";
}

rpc continuity-check {
  if-feature coam:continuity-check;
  description
    "Generates continuity-check as per RFC7276.";
  input {
    container destination-tp {
      uses coam:tp-address;
      description
        "destination test point.";
    }
    uses coam:session-type;
    leaf source-interface {
      type if:interface-ref;
      description
        "source interface.";
    }
    leaf outbound-interface {
      type if:interface-ref;

      description
        "outbound interface.";
    }
    leaf count {
      type uint32;
      default "5";
      description
        "Specifies the number of packets that will be sent.";
    }
    leaf vrf {
      type coam:routing-instance-ref;
      description
        "vrf instance.";
    }
  }
}
```

```
    leaf ttl {
      type uint8;
      default "255";
      description
        "Time to live (TTL).";
    }
    leaf packet-size {
      type uint32 {
        range "64..10000";
      }
      default "64";
      description
        "Size of ping echo request packets, in octets";
    }
  }
  output {
    list error-code-list {
      key "response-index";
      leaf response-index {
        type uint32;
        description
          "response index.";
      }
      leaf status-code {
        type int32;
        description
          "error code is ";
      }
      leaf status-sub-code {
        type uint8;
        description
          "sub code.";
      }
    }
    description
      "error code list.";
  }
  uses coam:continuity-check-data;
}
rpc path-discovery {
  description
    "Generates path discovery as per RFC7276.";
  input {
    container destination-tp {
      uses coam:tp-address;
      description
        "destination test point.";
    }
  }
}
```

```
    }
    uses coam:session-type;
    leaf source-interface {
        type if:interface-ref;
        description
            "source interface.";
    }
    leaf outbound-interface {
        type if:interface-ref;
        description
            "outbound interface.";
    }
    leaf vrf {
        type coam:routing-instance-ref;
        description
            "vrf";
    }
    leaf max-ttl {
        type uint8;
        default "255";
        description
            "max ttl.";
    }
}
output {
    list response-list {
        key "response-index";
        description
            "path discovery response list.";
        leaf response-index {
            type uint32;
            description
                "response index.";
        }
        leaf status-code {
            type int32;
            description
                "error code is ";
        }
        leaf status-sub-code {
            type uint8;

            description
                "sub code is ";
        }
    }
}

uses coam:path-discovery-data;
```

```
}  
}  
}
```

YANG module of OAM

<CODE ENDS>

5. Security Considerations

TBD.

6. IANA Considerations

This document registers a URI in the IETF XML registry [RFC3688] [RFC3688]. Following the format in RFC 3688, the following registration is requested to be made:

URI: urn:ietf:params:xml:ns:yang:ietf-connectionless-oam

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

This document registers a YANG module in the YANG Module Names registry [RFC6020].

name: ietf-connectionless-oam namespace: urn:ietf:params:xml:ns:yang:ietf-connectionless-oam
prefix: goam reference: RFC XXXX

7. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<http://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<http://www.rfc-editor.org/info/rfc6241>>.

- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", RFC 6242, DOI 10.17487/RFC6242, June 2011, <<http://www.rfc-editor.org/info/rfc6242>>.
- [RFC792] Postel, J., "Internet Control Message Protocol", RFC 792, September 1981.

Authors' Addresses

Deepak Kumar
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035
USA

Email: dekumar@cisco.com

Michael Wang
Huawei Technologies, Co., Ltd
101 Software Avenue, Yuhua District
Nanjing 210012
China

Email: wangzitao@huawei.com

Qin Wu
Huawei
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: bill.wu@huawei.com

Reshad Rahman
CISCO Systems
2000 Innovation Drive
KANATA, ONTARIO K2K 3E8
CANADA

Email: rrahman@cisco.com

Srihari Raghavan
CISCO Systems
TRIL INFOPARK SEZ, Ramanujan IT City
NEVILLE BLOCK, 2nd floor, Old Mahabalipuram Road
CHENNAI, TAMIL NADU 600113
INDIA

Email: srihari@cisco.com