

CCAMP Working Group
Internet Draft
Intended status: Standards Track
Expires: September 7, 2017

J.E. Lopez de Vergara
Daniel Perdices
Universidad Autonoma de Madrid
V. Lopez
O. Gonzalez de Dios
Telefonica I+D/GCTO
D. King
Lancaster University
Y. Lee
Huawei
G. Galimberti
Cisco Photonics Srl
March 6, 2017

YANG data model for Flexi-Grid Optical Networks
draft-vergara-ccamp-flexigrid-yang-04.txt

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79. This document may not be modified, and derivative works of it may not be created, except to publish it as an RFC and to translate it into languages other than English.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/lid-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>

This Internet-Draft will expire on September 7, 2017.

Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

Abstract

This document defines a YANG model for managing flexi-grid optical Networks. The model described in this document is composed of two submodels: one to define a flexi-grid traffic engineering database, and other one to describe the flexi-grid paths or media channels. It is grounded on other defined YANG abstract models.

Table of Contents

1. Introduction	2
2. Conventions used in this document	3
3. Flexi-grid network topology model overview	3
4. Main building blocks.....	4
4.1. flexi-grid TED	4
4.2. Media-channel/network-media-channel	8
5. Example of use	11
6. Formal Syntax	12
7. Security Considerations	12
8. IANA Considerations	12
9. References	12
9.1. Normative References	12
9.2. Informative References	13
10. Contributors	13
11. Acknowledgments	14
Appendix A. YANG models.....	14
A.1. Flexi-grid TED YANG Model	14
A.1.1. YANG Model - Tree	14
A.1.2. YANG Model - Code	16
A.2. Media Channel YANG Model	26
A.2.1. YANG Model - Tree	26
A.2.2. YANG Model - Code	27
A.3. License	31
Authors' Addresses	32

1. Introduction

Internet-based traffic is dramatically increasing every year. Moreover, such traffic is also becoming more dynamic. Thus, transport networks need to evolve from current DWDM systems towards elastic optical networks, based on flexi-grid transmission and switching technologies. This technology aims at increasing both transport network scalability and flexibility, allowing the optimization of bandwidth usage.

This document presents a YANG model for flexi-grid objects in the dynamic optical network, including the nodes, transponders and links between them, as well as how such links interconnect nodes and transponders.

The YANG model for flexi-grid [RFC7698] networks allows the representation of the flexi-grid optical layer of a network, combined with the underlying physical layer. The model is defined in two YANG modules:

- o Flexi-grid-TED (Traffic Engineering Database): This module defines all the information needed to represent the flexi-grid optical node, transponder and link.
- o Media-channel: This module defines the whole path from a source transponder to the destination through a number of intermediate nodes in the flexi-grid optical network.

This document identifies the flexi-grid components, parameters and their values, characterizes the features and the performances of the flexi-grid elements. An application example is provided towards the end of the document to better understand their utility.

2. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

In this document, these words will appear with that interpretation only when in ALL CAPS. Lower case uses of these words are not to be interpreted as carrying RFC-2119 significance.

In this document, the characters ">>" preceding an indented line(s) indicates a compliance requirement statement using the key words listed above. This convention aids reviewers in quickly identifying or finding the explicit compliance requirements of this RFC.

3. Flexi-grid network topology model overview

YANG is a data modeling language used to model configuration data manipulated by the NETCONF protocol. Several YANG models have already been specified for network configurations. For instance, the work in [I-D.draft-ietf-iet2rs-yang-network-topo] has proposed a generic YANG model for network/service topologies and inventories. The work in [I-D.draft-ietf-teas-yang-te-topo] presents a data model to represent, retrieve and manipulate Traffic Engineering (TE) Topologies. These models serve as base models that other technology specific models can augment. A YANG model has also been proposed in [I-D.draft-dharini-ccamp-dwdm-if-yang] to manage single channel optical interface parameters of DWDM applications, and in

Internet-Draft A YANG data model for Flexi-Grid March 2017
[I-D.draft-ietf-ccamp-wson-yang] another model has been specified for the routing and wavelength assignment TE topology in wavelength switched optical networks (WSONs). None of them are specific for flexi-grid technology.

Then, as stated before, we propose a model to describe a flexi-grid topology that is split in two YANG sub-modules:

- o Flexi-grid-TED: In order to be compatible with existing proposals, we augment the definitions contained in [I-D.draft-ietf-i2rs-yang-network-topo] and [I-D.draft-ietf-teas-yang-te-topo], by defining the different elements we can find in a flexi-grid network: a node, a transponder and a link. For that, each of those elements is defined as a container that includes a group of attributes. References to the elements are provided to be later used in the definition of a media channel. It also includes the data types for the type of modulation, the flexi-grid technology, the FEC, etc.
- o Media-channel: This module defines the whole path from a source transponder to the destination through a number of intermediate nodes and links. For this, it takes the information defined before in the flexi-grid TED.

The following section provides a detailed view of each module.

4. Main building blocks

Subsections below detail each of the defined YANG modules. They are listed in Appendix A.

4.1. Flexi-grid TED

The description of the three main components, flexi-grid-node, flexi-grid-transponder and flexi-grid-link is provided below. flexi-grid-sliceable-transponders are also defined.

```
<flexi-grid-node> ::= <config> <state>
```

<flexi-grid-node>: This element designates a node in the network.

```
<config> ::= <flexi-grid-node-attributes-config>
```

```
<config>: Contains the configuration of a node.  
<flexi-grid-node-attributes-config> ::= <list-interface>  
<connectivity_matrix>
```

<flexi-grid-node-attributes-config>: Contains all the attributes related to the node configuration, such as its interfaces or its management addresses.

```
<list-interface> ::= <name> <port-number>  
<input-port> <output-port> <description>  
<interface-type>  
[<numbered-interface> / <unnumbered-interface>]
```

<list-interface>: The list containing all the information of the interfaces.

<name>: Determines the interface name.

<port-number>: Port number of the interface.

<input-port>: Boolean value that defines whether the interface is input or not.

<output-port>: Boolean value that defines whether the interface is output or not.

<description>: Description of the usage of the interface.

<interface-type>: Determines if the interface is numbered or unnumbered.

```
<numbered-interface> ::= <n-i-ip-address>  
    <numbered-interface>: An interface with  
    its own IP address.
```

<n-i-ip-address>: Only available if
<interface-type> is "numbered-interface".
Determines the IP address of the interface.

```
<unnumbered-interface> ::= <u-i-ip-address>  
<label>
```

<unnumbered-interface>: A interface that needs a label to be unique.

<u-i-ip-address>: Only available if
<interface-type> is "numbered-interface".
Determines the node IP address, which with the label defines the interface.

<label>: Label that determines the interface, joint with the node IP address.

```
<connectivity-matrix> ::= <connections>
```

<connectivity-matrix>: Determines whether a connection port in/port out exists.

```
<connections> ::= <input-port-id>  
<output-port-id>
```

<flexi-grid-transponder>: This item designates a transponder of a node.

<transponder-type>: Contains the type of the transponder.

<config> ::= <flexi-grid-transponder-attributes-config>

<config>: Contains the configuration of a transponder.

<flexi-grid-transponder-attributes-config> ::=
<available-modulation> <modulation-type>
<available-FEC> <FEC-enabled> [<FEC-type>]

<flexi-grid-transponder-attributes>: Contains all the attributes related to the transponder, such as whether it has FEC enabled or not, or its modulation type.

<available-modulation>: It provides a list of the modulations available at this transponder.

<modulation-type>: Determines the type of modulation in use: QPSK, QAM16, QAM64...

<available-FEC>: It provides a list of the FEC algorithms available at this transponder.

<FEC-enabled>: Boolean value that determines whether is the FEC enabled or not.

<FEC-type>: Determines the type of FEC in use: reed-solomon, hamming-code, enum golay, BCH...

<state> ::= <flexi-grid-transponder-attributes-config>
<flexi-grid-transponder-attributes-state>

<state>: Contains the state of a transponder.

<flexi-grid-transponder-attributes-config>: See above.

<flexi-grid-transponder-attributes-state>: Contains the state of a transponder.

Internet-Draft A YANG data model for Flexi-Grid March 2017
<flexi-grid-sliceable-transponder> ::= <transponder-type> <config>
<state>

<flexi-grid-sliceable-transponder>: A list of transponders.

<transponder-type>: Contains the type of the transponder.

<config> ::= <flexi-grid-transponder-attributes-config>
<flexi-grid-sliceable-transponder-attributes-config>

<flexi-grid-transponder-attributes-config>: See above.

<flexi-grid-sliceable-transponder-attributes-config> ::=
<transponder-list>

<flexi-grid-sliceable-transponder-attributes-config>:
Contains the configuration of a sliceable transponder

<transponder-list> ::= <carrier-id>
<transponder-list>: A list of transponders.

<carrier-id>: An identifier for each one of the
transponders in the list.

<state> ::= <flexi-grid-transponder-attributes-state>
<flexi-grid-sliceable-transponder-attributes-state>
<flexi-grid-transponder-attributes-config>
<flexi-grid-sliceable-transponder-attributes-config>

<state>: Contains the state of a sliceable transponder.

<flexi-grid-transponder-attributes-state>: See above.

<flexi-grid-sliceable-transponder-attributes-state>:
Contains the state attributes of a sliceable transponders.

<flexi-grid-transponder-attributes-config>: See above.

<flexi-grid-sliceable-transponder-attributes-config>: See
above.

<link> ::= <config> <state>

<link>: This element describes all the information of a link.

<config> ::= <flexi-grid-link-attributes-config>

<config>: Contains the configuration of a link.

Internet-Draft A YANG data model for Flexi-Grid March 2017
 <flexi-grid-link-attributes-config> ::= <technology-type>
 <available-label-flexi-grid> <N-max> <base-frequency>
 <nominal-central-frequency-granularity>
 <slot-width-granularity>

 <flexi-grid-link-attributes>: Contains all the attributes related to the link, such as its unique id, its N value, its latency, etc.

 <link-id>: Unique id of the link.

 <available-label-flexi-grid>: Array of bits that determines, with each bit, the availability of each interface for flexi-grid technology.

 <N-max>: The max value of N in this link, being N the number of slots.

 <base-frequency>: The default central frequency used in the link.

 <nominal-central-frequency-granularity>: It is the spacing between allowed nominal central frequencies and it is set to 6.25 GHz (note: sometimes referred to as 0.00625 THz).

 <slot-width-granularity>: 12.5 GHz, as defined in G.694.1.

 <state> ::= <flexi-grid-link-attributes-config>
 <flexi-grid-link-attributes-state>

 <state>: Contains the state of a link.

 <flexi-grid-link-attributes-config>: See above.

 <flexi-grid-link-attributes-state>: Contains all the the information related to the state of a link.

4.2. Media-channel/network-media-channel

The model defines two types of media channels, following the terminology summarized in [RFC7698]:

- o media-channel, which represents a (effective) frequency slot supported by a concatenation of media elements (fibers, amplifiers, filters, switching matrices...);
- o network-media-channel: It is a media channel that transports an Optical Tributary Signal. In the model, the network media channel has as end-points transponders, which are the source and destination of the optical signal.

The description of these components is provided below:

Internet-Draft A YANG data model for Flexi-Grid March 2017

```

<media-channel> ::= <source> <destination> <link-channel> <effective-
freq-slot>
  <media-channel>: Determines a media-channel and its components.

  <source > ::= <source-node> <source-port>

    <source>: In a media-channel, the source is a node and a port.

    <source-node>: Reference to the source node of the media
channel.

    <source-port>: Reference to the source port in the source
<node>.

  <destination> ::= <destination-node> <destination-port>

    <destination>: In a media-channel, the destination is a node
and a port.

    <destination-node>: Reference to the destination node of the
media channel.

    <destination-port>: Reference to the destination port in the
destination node.

  <link-channel> ::= <link-id> <N> <M> <source-node> <source-port>
  <destination-node> <destination-port> <link> <bidirectional>
    <link-channel>: Defines a list with each of the links between
elements in the media channel.

    <link-id>: Unique identifier for the link channel

    <N>: N used for this link channel.

    <M>: M used for this link channel.

    <source-node>: Reference to the source node of this link
channel.

    <source-port>: Reference to the source port of this link
channel.

    <destination-node>: Reference to the destination node of this
link channel.

    <destination-port>: Reference to the destination port of this
link channel.

    <link>: Reference to the link of this link channel.

    <bidirectional>: Indicates if this link is bidirectional or
not.

```

<effective-freq-slot> ::= <N> <M>

<effective-freq-slot>: Defines the effective frequency slot of the media channel, which could be different from the one defined in the link channels.

<N>: Defines the effective N for this media channel.

<M>: Defines the effective M for this media channel.

<network-media-channel> ::= <source> <destination> <link-channel>
<effective-freq-slot>

<network-media-channel>: Determines a network media-channel and its components.

<source > ::= <source-node> <source-transponder>

<source>: In a network media channel, the source is defined by a node and a transponder.

<source-node>: Reference to the source node of the media channel.

<source-transponder>: Reference to the source transponder in the source node.

<destination> ::= <destination-node> <destination-transponder>

<destination>: In a network media channel, the destination is defined by a node and a transponder

<destination-node>: Reference to the destination node of the media channel.

<destination-port>: Reference to the destination port in the destination node.

<link-channel>: See above, the information is reused for both types of media channels.

<effective-freq-slot>: See above, this information is reused for both types of media channels.

5. Example of use

In order to explain how this model is used, we provide the following example. An optical network usually has multiple transponders, switches (nodes) and links between them. Figure 1 shows a simple topology, where two physical paths interconnect two optical transponders.

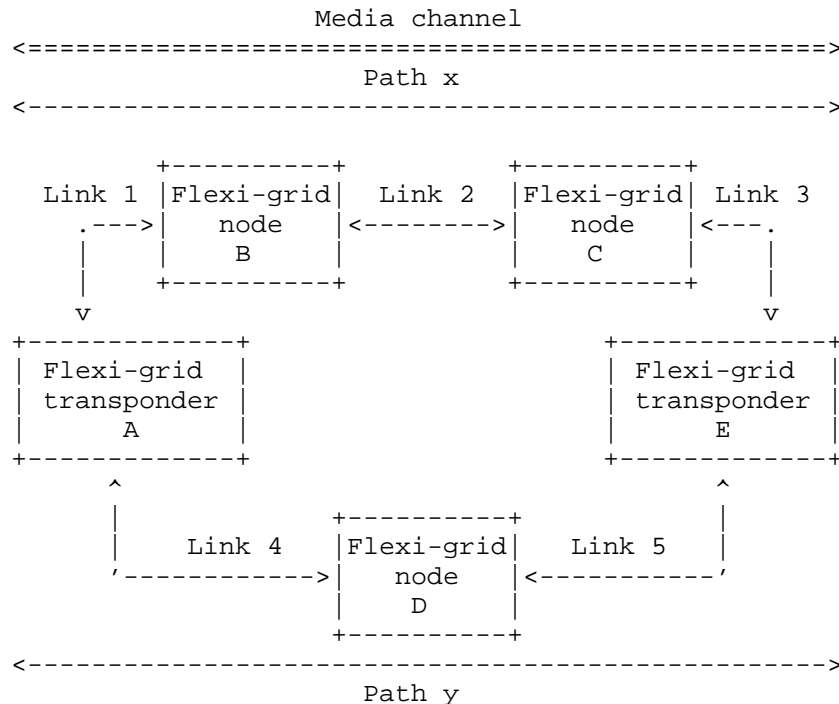


Figure 1. Topology example.

In order to configure a media channel to interconnect transponders A and E, first of all we have to populate the flexi-grid TED YANG model with all elements in the network:

1. We define the transponders A and E, including their FEC type, if enabled, and modulation type. We also provide node identifiers and addresses for the transponders, as well as interfaces included in the transponders. Sliceable transponders can also be defined if needed.
2. We do the same for the nodes B, C and D, providing their identifiers, addresses and interfaces, as well as the internal connectivity matrix between interfaces.
3. Then, we also define the links 1 to 5 that interconnect nodes and transponders, indicating which flexi-grid labels are available. Other information, such as the slot frequency and granularity are also provided.

Next, we can configure the media channel from the information we have stored in the flexi-grid TED, by querying which elements are available, and planning the resources that have to be provided on each situation. Note that every element in the flexi-grid TED has a reference, and this is the way in which they are called in the media channel.

4. Depending on the case, it is possible to define either the source and destination node ports, or the source and destination node and transponder. In our case, we would define a network media channel, with source transponder A and source node B, and destination transponder E and destination node C. Thus, we are going to follow path x.
5. Then, for each link in the path x, we indicate which channel we are going to use, providing information about the slots, and what nodes are connected.

Finally, the flexi-grid TED has to be updated with each element usage status each time a media channel is created or torn down.

6. Formal Syntax

The following syntax specification uses the augmented Backus-Naur Form (BNF) as described in [RFC5234].

7. Security Considerations

The transport protocol used for sending the managed information MUST support authentication and SHOULD support encryption.

The defined data-model by itself does not create any security implications.

8. IANA Considerations

The namespace used in the defined models is currently based on the IDEALIST project URI. Future versions of this document could register a URI in the IETF XML registry [RFC3688], as well as in the YANG Module Names registry [RFC6020].

9. References

9.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.
- [RFC5234] Crocker, D. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, January 2008, <<http://www.rfc-editor.org/info/rfc5234>>.

Internet-Draft A YANG data model for Flexi-Grid March 2017
[RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for
the Network Configuration Protocol (NETCONF)", RFC 6020,
October 2010.

[RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688,
January 2004.

9.2. Informative References

- [RFC7698] Gonzalez de Dios, O., Casellas, R., Eds. "Framework and
Requirements for GMPLS-Based Control of Flexi-Grid Dense
Wavelength Division Multiplexing (DWDM) Networks",
RFC7698, November 2015.
- [I-D.draft-ietf-i2rs-yang-network-topo] Clemm, A., Medved, J.,
Varga, R., Bahadur, N., Ananthakrishnan, H., Liu, X.,
"A Data Model for Network Topologies", Internet Draft
draft-ietf-i2rs-yang-network-topo-12.txt, 2017.
- [I-D.draft-ietf-teas-yang-te-topo] Liu, X., Bryskin, I., Pavan
Beeram, V., Saad, T., Shah, H., Gonzalez De Dios, O., "YANG
Data Model for TE Topologies", Internet Draft
draft-ietf-teas-yang-te-topo-06.txt, 2016
- [I-D.draft-dharini-ccamp-dwdm-if-yang] Galimberti, G., Kunze, R.,
Lam, K., Hiremagalur, D., Grammel, G., Fang, L., Ratterree, G.,
Eds., "A YANG model to manage the optical interface parameters
for an external transponder in a WDM network", Internet Draft,
draft-dharini-ccamp-dwdm-if-param-yang-00.txt, 2016.
- [I-D.draft-ietf-ccamp-wson-yang] Lee, Y. Dhody, D., Zhang, X., Guo,
A., Lopez, V., King, D., Yoon, B., "A Yang Data Model for WSON
Optical Networks", Internet Draft,
draft-ietf-ccamp-wson-yang-05.txt, 2017.

10. Contributors

The model presented in this paper was contributed to by more people
than can be listed on the author list. Additional contributors
include:

- o Zafar Ali, Cisco Systems
- o Daniel Michaud Vallinoto, Universidad Autonoma de Madrid

The work presented in this Internet-Draft has been partially funded by the European Commission under the project Industry-Driven Elastic and Adaptive Lambda Infrastructure for Service and Transport Networks (IDEALIST) of the Seventh Framework Program, with Grant Agreement Number: 317999, and by the Spanish Ministry of Economy and Competitiveness under the project TRAFICA (MINECO/FEDER TEC2015-69417-C2-1-R).

Appendix A. YANG models

A.1. Flexi-grid TED YANG Model

A.1.1. Yang Model - Tree Structure

```
module: ietf-flexi-grid-topology
flexi-grid-network-type
  augment /nd:networks/nd:network/nd:network-types:
    +--rw flexi-grid-network!
flexi-grid-link-attributes-config
  augment /nd:networks/nd:network/lnk:link/tet:te/tet:config:
    +--rw available-label-flexi-grid*      bits
    +--rw N-max?                          int32
    +--rw base-frequency?                  decimal64
    +--rw nominal-central-frequency-granularity? decimal64
    +--rw slot-width-granularity?         decimal64
flexi-grid-link-attributes-state
  augment /nd:networks/nd:network/lnk:link/tet:te/tet:state:
    +--ro available-label-flexi-grid*      bits
    +--ro N-max?                          int32
    +--ro base-frequency?                  decimal64
    +--ro nominal-central-frequency-granularity? decimal64
    +--ro slot-width-granularity?         decimal64
flexi-grid-node-attributes-config
  augment /nd:networks/nd:network/nd:node/tet:te/tet:config:
    +--rw interfaces* [name]
      +--rw name                          string
      +--rw port-number?                  uint32
      +--rw input-port?                   boolean
      +--rw output-port?                   boolean
      +--rw description?                   string
      +--rw type?                         interface-type
      +--rw numbered-interface
      | +--rw n-i-ip-address?             inet:ip-address
      +--rw unnumbered-interface
      | +--rw u-i-ip-address?             inet:ip-address
      +--rw label?                        uint32
```

```

flexi-grid-node-attributes-state
  augment /nd:networks/nd:network/nd:node/tet:te/tet:state:
    +--ro interfaces* [name]
      +--ro name                               string
      +--ro port-number?                       uint32
      +--ro input-port?                        boolean
      +--ro output-port?                       boolean
      +--ro description?                       string
      +--ro type?                              interface-type
      +--ro numbered-interface
      |   +--ro n-i-ip-address?                inet:ip-address
      +--ro unnumbered-interface
          +--ro u-i-ip-address?                inet:ip-address
          +--ro label?                         uint32
flexi-grid-connectivity-matrix-attributes
  augment /nd:networks/nd:network/nd:node/tet:te/tet:config/
    tet:te-node-attributes/tet:connectivity-matrix:
      +--rw connections* [input-port-id]
        +--rw input-port-id                    flexi-grid-node-port-ref
        +--rw output-port-id?                  flexi-grid-node-port-ref
flexi-grid-connectivity-matrix-attributes
  augment /nd:networks/nd:network/nd:node/tet:te/tet:state/
    tet:te-node-attributes/tet:connectivity-matrix:
      +--ro connections* [input-port-id]
        +--ro input-port-id                    flexi-grid-node-port-ref
        +--ro output-port-id?                  flexi-grid-node-port-ref
flexi-grid-transponder
  augment /nd:networks/nd:network/nd:node/tet:te/
    tet:tunnel-termination-point:
      +--rw transponder-type                    flexi-grid-transponder-type
      +--rw config
      |   +--rw available-modulation*           modulation
      |   +--rw modulation-type?                modulation
      |   +--rw available-FEC*                  FEC
      |   +--rw FEC-enabled?                    boolean
      |   +--rw FEC-type?                       FEC
      +--ro state
          +--ro available-modulation*           modulation
          +--ro modulation-type?                modulation
          +--ro available-FEC*                  FEC
          +--ro FEC-enabled?                    boolean
          +--ro FEC-type?                       FEC

```

```
augment /nd:networks/nd:network/nd:node/tet:te/
tet:tunnel-termination-point:
  +--rw transponder-type          flexi-grid-transponder-type
  +--rw config
  |   +--rw available-modulation*  modulation
  |   +--rw modulation-type?      modulation
  |   +--rw available-FEC*         FEC
  |   +--rw FEC-enabled?          boolean
  |   +--rw FEC-type?             FEC
  |   +--rw transponder-list* [carrier-id]
  |       +--rw carrier-id        uint32
  +--ro state
  |   +--ro available-modulation*  modulation
  |   +--ro modulation-type?      modulation
  |   +--ro available-FEC*         FEC
  |   +--ro FEC-enabled?          boolean
  |   +--ro FEC-type?             FEC
  |   +--ro transponder-list* [carrier-id]
  |       +--ro carrier-id        uint32
```

A.1.2. YANG Model - Code

```
<CODE BEGINS> file "ietf-flexi-grid-ted.yang"
module ietf-flexi-grid-ted {
  yang-version 1.1;

  namespace "urn:ietf:params:xml:ns:yang:ietf-flexi-grid-ted";
  prefix "fg-ted";

  import ietf-network {
    prefix "nd";
  }

  import ietf-network-topology {
    prefix "lnk";
  }

  import ietf-te-topology {
    prefix "tet";
  }

  import ietf-inet-types {
    prefix "inet";
  }

  organization
    "IETF CCAMP Working Group";

  contact
    "Editor: Jorge E. Lopez de Vergara
    <jorge.lopez_vergara@uam.es>";
```


description

"This module contains a collection of YANG definitions for a Flexi-Grid Traffic Engineering Database (TED)."

Copyright (c) 2017 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Simplified BSD License set forth in Section 4.c of the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>).";

revision 2017-03-01 {

description

"version 4.";

reference

"RFC XXX: A Yang Data Model for Flexi-Grid Optical Networks ";

}

typedef flexi-grid-trasponder-type {

type enumeration {

enum "flexi-grid-transponder" {

description

"Flexi-grid transponder";

}

enum "flexi-grid-sliceable-transponder" {

description

"Flexi-grid sliceable transponder";

}

}

description "Determines the trasponder type:

flexi-grid-transponder or

flexi-grid-sliceable-transponder";

}

typedef modulation {

type enumeration {

enum QPSK {

description

"QPSK (Quadrature Phase Shift Keying) modulation";

}

enum DP_QPSK {

description "DP-QPSK (Dual Polarization Quadrature Phase Shift Keying) modulation";

}

enum QAM16 {

description "QAM16 (Quadrature Amplitude Modulation - 4 bits per symbol) modulation";

}

```

    enum DP_QAM16 {
        description "DP-QAM16 (Dual Polarization
            Quadrature Amplitude Modulation - 4 bits per
            symbol) modulation";
    }
    enum DC_DP_QAM16 {
        description "DC DP-QAM16 (Dual Polarization
            Quadrature Amplitude Modulation - 4 bits per
            symbol) modulation";
    }
}
description
    "Enumeration that defines the type of wave modulation";
}

typedef FEC {
    type enumeration {
        enum reed-solomon {
            description "Reed-Solomon error correction";
        }
        enum hamming-code{
            description "Hamming Code error correction";
        }
        enum golay{
            description "Golay error correction";
        }
    }
    description "Enumeration that defines the type of
        Forward Error Correction";
}

typedef interface-type {
    type enumeration {
        enum numbered-interface {
            description "The interface is numbered";
        }
        enum unnumbered-interface {
            description "The interface is unnumbered";
        }
    }
    description
        "Enumeration that defines if an interface is numbered or
        unnumbered";
}

```

```
/*
 * Typedef related to references
 */
typedef flexi-grid-link-ref {
  type leafref {
    path
      "/nd:networks/nd:network/lnk:link/lnk:link-id";
  }

  description
    "This type is used by data models that need to reference
    a flexi-grid optical link.";
}

typedef flexi-grid-node-port-ref {
  type leafref {
    path "/nd:networks/nd:network/nd:node/tet:te/tet:config/"
      +"fg-ted:interfaces/fg-ted:port-number";
  }
  description
    "This type is used by data models that need to reference
    a flexi-grid port.";
}

typedef flexi-grid-transponder-ref {
  type leafref {
    path "/nd:networks/nd:network/nd:node/tet:te/"
      +"tet:tunnel-termination-point/tet:tunnel-tp-id";
  }
  description
    "This type is used by data models that need to reference
    a trasponder.";
}

grouping flexi-grid-network-type {
  container flexi-grid-network {
    presence "indicates a flexi-grid optical network";
    description "flexi-grid optical network";
  }
  description "If present, it indicates a flexi-grid
  optical TED network";
}

grouping flexi-grid-node-attributes-config {
  description "Set of attributes of an optical node.";

  list interfaces {
    key "name";
    unique "port-number";
    description "List of interfaces contained in the node";
    leaf name {
      type string;
      description "Interface name";
    }
  }
}
```

```

    leaf port-number {
        type uint32;
        description "Number of the port used by the interface";
    }
    leaf input-port {
        type boolean;
        description "Determines if the port is an input port";
    }
    leaf output-port {
        type boolean;
        description
            "Determines if the port is an output port";
    }
    leaf description {
        type string;
        description "Description of the interface";
    }
    leaf type {
        type interface-type;
        description "Determines the type of the interface";
    }
    container numbered-interface {
        when "../fg-ted:type =
        'numbered-interface'" {
            description
                "If the interface is a numbered interface";
        }
        description "Container that defines an numbered
        interface with an ip-address";
        leaf n-i-ip-address{
            type inet:ip-address;
            description "IP address of the numbered interface";
        }
    }
    container unnumbered-interface {
        when "../fg-ted:type =
        'unnumbered-interface'" {
            description
                "If the interface is an unnumbered interface";
        }
        description "Container that defines an unnumbered
        interface with an ip-address and a label";
        leaf u-i-ip-address{
            type inet:ip-address;
            description "IP address of the interface";
        }
        leaf label {
            type uint32;
            description "Number as label for the interface";
        }
    }
}

```

```

Internet-Draft    A YANG data model for Flexi-Grid    March 2017
  grouping flexi-grid-node-attributes-state {
    description "Flexigrid node attributes (state).";
  }
  grouping flexi-grid-link-attributes-config {
    description "Set of attributes of an optical link";
    leaf-list available-label-flexi-grid {
      type bits {
        bit is-available{
          description "Set to 1 when it is available";
        }
      }
    }
    description
      "Array of bits that determines whether a spectral
      slot is available or not.";
  }

  leaf N-max {
    type int32;
    description "Maximum number of channels available.";
  }

  leaf base-frequency {
    type decimal64 {
      fraction-digits 5;
    }
    units THz;
    default 193.1;
    description "Default central frequency";
    reference "rfc7698";
  }
  leaf nominal-central-frequency-granularity {
    type decimal64 {
      fraction-digits 5;
    }
    units GHz;
    default 6.25;
    description
      "It is the spacing between allowed nominal central
      frequencies and it is set to 6.25 GHz";
    reference "rfc7698";
  }

  leaf slot-width-granularity {
    type decimal64 {
      fraction-digits 5;
    }
    units GHz;
    description "Minimum space between slot widths";
    reference "rfc7698";
  }
}

```

```

    grouping flexi-grid-link-attributes-state {
        description "Flexigrid link attributes (state)";
    }
    grouping flexi-grid-transponder-attributes-config {
        description "Configuration of an optical transponder";
        leaf-list available-modulation {
            type modulation;
            description
                "List determining all the available modulations";
        }
        leaf modulation-type {
            type modulation;
            description "Modulation type of the wave";
        }
        leaf-list available-FEC {
            type FEC;
            description "List determining all the available FEC";
        }
        leaf FEC-enabled {
            type boolean;
            description
                "Determines whether the FEC is enabled or not";
        }
        leaf FEC-type {
            type FEC;
            description "FEC type of the transponder";
        }
    }

    grouping flexi-grid-transponder-attributes-state {
        description "State of an optical transponder";
    }

    grouping flexi-grid-sliceable-transponder-attributes-config {
        description
            "Configuration of a sliceable transponder.";
        list transponder-list {
            key "carrier-id";
            description "List of carriers";
            leaf carrier-id {
                type uint32;
                description "Identifier of the carrier";
            }
        }
    }

    grouping flexi-grid-sliceable-transponder-attributes-state {
        description "State of a sliceable transponder.";
        uses flexi-grid-transponder-attributes-state;
    }

```

```

    grouping flexi-grid-connectivity-matrix-attributes {
      description "Connectivity matrix between the input and
        output ports";
      list connections {
        key "input-port-id";
        leaf input-port-id {
          type flexi-grid-node-port-ref;
          description "Identifier of the input port";
        }
        leaf output-port-id {
          type flexi-grid-node-port-ref;
          description "Identifier of the output port";
        }
      }
      description "List of connections between input and
        output ports";
    }
  }

  augment "/nd:networks/nd:network/nd:network-types" {
    uses flexi-grid-network-type;
    description "Augment network-types including flexi-grid
      topology";
  }

  augment "/nd:networks/nd:network/lnk:link/tet:te/tet:config" {
    when "/nd:networks/nd:network/nd:network-types/
      fg-ted:flexi-grid-network" {
      description "Augment only for Flexigrid network.";
    }
    description "Augment link configuration";
    uses flexi-grid-link-attributes-config;
  }

  augment "/nd:networks/nd:network/lnk:link/tet:te/tet:state" {
    when "/nd:networks/nd:network/nd:network-types/
      fg-ted:flexi-grid-network" {
      description "Augment only for Flexigrid network.";
    }
    description "Augment link state";
    uses flexi-grid-link-attributes-config;
    uses flexi-grid-link-attributes-state;
  }

  augment "/nd:networks/nd:network/nd:node/tet:te/tet:config" {
    when "/nd:networks/nd:network/nd:network-types/
      fg-ted:flexi-grid-network" {
      description "Augment only for Flexigrid network.";
    }
    uses flexi-grid-node-attributes-config;
    description "Augment node config with flexi-grid attributes";
  }
}

```

```

Internet-Draft    A YANG data model for Flexi-Grid    March 2017
augment "/nd:networks/nd:network/nd:node/tet:te/tet:state" {
  when "/nd:networks/nd:network/nd:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }
  uses flexi-grid-node-attributes-config;
  uses flexi-grid-node-attributes-state;
  description "Augment node config with flexi-grid attributes";
}

augment "/nd:networks/nd:network/nd:node/tet:te/tet:config"+
"/tet:te-node-attributes/tet:connectivity-matrix" {
  when "/nd:networks/nd:network/nd:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }

  uses flexi-grid-connectivity-matrix-attributes;
  description "Augment node connectivity-matrix for node config";
}

augment "/nd:networks/nd:network/nd:node/tet:te/tet:state"+
"/tet:te-node-attributes/tet:connectivity-matrix" {
  when "/nd:networks/nd:network/nd:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }

  uses flexi-grid-connectivity-matrix-attributes;
  description "Augment node connectivity-matrix for node config";
}

augment "/nd:networks/nd:network/nd:node/tet:te"+
"/tet:tunnel-termination-point" {
  when "/nd:networks/nd:network/nd:network-types/
fg-ted:flexi-grid-network" {
    description "Augment only for Flexigrid network.";
  }

  leaf transponder-type {
    type flexi-grid-transponder-type;
    description "Type of flexi-grid transponder";
  }
  container state {
    description "State of the transponder";
  }
  container config {
    description "Configuration of the transponder";
  }
  description "Augment node with configuration and state
for transponder";
}

```



```

    augment "/nd:networks/nd:network/nd:node/tet:te"+
      "/tet:tunnel-termination-point/fg-ted:config" {
        when "../fg-ted:transponder-type" {
          description "When it is either a flexi-grid transponder
            or a sliceable transponder";
        }
        uses flexi-grid-transponder-attributes-config;
        description "Augment node state with transponder attributes";
      }

    augment "/nd:networks/nd:network/nd:node/tet:te"+
      "/tet:tunnel-termination-point/fg-ted:state" {
        when "../fg-ted:transponder-type"{
          description "When it is either a flexi-grid transponder
            or a sliceable transponder";
        }
        uses flexi-grid-transponder-attributes-state;
        uses flexi-grid-transponder-attributes-config;
        description "Augment node state with transponder attributes";
      }

    augment "/nd:networks/nd:network/nd:node/tet:te"+
      "/tet:tunnel-termination-point/fg-ted:config" {
        when "../fg-ted:transponder-type =
          'flexi-grid-sliceable-transponder'"{
          description
            "When it is a flexi-grid sliceable transponder";
        }
        uses flexi-grid-sliceable-transponder-attributes-config;
        description "Augment node with sliceable transponder
          attributes";
      }

    augment "/nd:networks/nd:network/nd:node/tet:te"+
      "/tet:tunnel-termination-point/fg-ted:state" {
        when "../fg-ted:transponder-type =
          'flexi-grid-sliceable-transponder'"{
          description
            "When it is a flexi-grid sliceable transponder";
        }
        uses flexi-grid-sliceable-transponder-attributes-state;
        uses flexi-grid-sliceable-transponder-attributes-config;
        description "Augment node with sliceable transponder
          attributes";
      }
  }

  <CODE ENDS>

```

A.2.1. YANG Model - Tree

```
module: ietf-flexi-grid-media-channel
  +--rw media-channel
  |   +--rw source
  |   |   +--rw source-node?    te-types:te-node-id
  |   |   +--rw source-port?    fg-ted:flexi-grid-node-port-ref
  |   +--rw destination
  |   |   +--rw destination-node?  te-types:te-node-id
  |   |   +--rw destination-port?  fg-ted:flexi-grid-node-port-ref
  |   +--rw effective-freq-slot
  |   |   +--rw N?    int32
  |   |   +--rw M?    int32
  |   +--rw link-channel* [link-id]
  |   |   +--rw link-id          int32
  |   |   +--rw N?              int32
  |   |   +--rw M?              int32
  |   |   +--rw source-node?    te-types:te-node-id
  |   |   +--rw source-port?    fg-ted:flexi-grid-node-port-ref
  |   |   +--rw destination-node?  te-types:te-node-id
  |   |   +--rw destination-port?  fg-ted:flexi-grid-node-port-ref
  |   |   +--rw link?          fg-ted:flexi-grid-link-ref
  |   |   +--rw bidireccional?  boolean
  |   +--rw network-media-channel
  |   |   +--rw source
  |   |   |   +--rw source-node?    te-types:te-node-id
  |   |   |   +--rw source-transponder?  fg-ted:flexi-grid-transponder-ref
  |   |   +--rw destination
  |   |   |   +--rw destination-node?    te-types:te-node-id
  |   |   |   +--rw destination-transponder?
  |   |   |   |   fg-ted:flexi-grid-transponder-ref
  |   |   +--rw effective-freq-slot
  |   |   |   +--rw N?    int32
  |   |   |   +--rw M?    int32
  |   |   +--rw link-channel* [link-id]
  |   |   |   +--rw link-id          int32
  |   |   |   +--rw N?              int32
  |   |   |   +--rw M?              int32
  |   |   |   +--rw source-node?    te-types:te-node-id
  |   |   |   +--rw source-port?    fg-ted:flexi-grid-node-port-ref
  |   |   |   +--rw destination-node?  te-types:te-node-id
  |   |   |   +--rw destination-port?  fg-ted:flexi-grid-node-port-ref
  |   |   |   +--rw link?          fg-ted:flexi-grid-link-ref
  |   |   |   +--rw bidireccional?  boolean
```

```
<CODE BEGINS> file "ietf-flexi-grid-media-channel.yang"
module ietf-flexi-grid-media-channel {
  yang-version 1.1;

  namespace
    "urn:ietf:params:xml:ns:yang:ietf-flexi-grid-media-channel";
  prefix "fg-mc";

  import ietf-flexi-grid-ted {
    prefix "fg-ted";
  }

  import ietf-te-types {
    prefix "te-types";
  }

  organization
    "IETF CCAMP Working Group";

  contact
    "Editor: Jorge E. Lopez de Vergara
      <jorge.lopez_vergara@uam.es>";

  description
    "This module contains a collection of YANG definitions for
    a Flexi-Grid media channel.

    Copyright (c) 2017 IETF Trust and the persons identified as
    authors of the code. All rights reserved.

    Redistribution and use in source and binary forms, with or
    without modification, is permitted pursuant to, and subject
    to the license terms contained in, the Simplified BSD
    License set forth in Section 4.c of the IETF Trust's Legal
    Provisions Relating to IETF Documents
    (http://trustee.ietf.org/license-info).";

  revision 2017-03-01 {
    description
      "version 4.";

    reference
      "RFC XXX: A Yang Data Model for Flexi-Grid Optical
      Networks ";
  }
}
```

```
container media-channel {
  description
    "Media association that represents both the topology
    (i.e., path through the media) and the resource
    (frequency slot) that it occupies. As a topological
    construct, it represents a (effective) frequency slot
    supported by a concatenation of media elements (fibers,
    amplifiers, filters, switching matrices...). This term
    is used to identify the end-to-end physical layer entity
    with its corresponding (one or more) frequency slots
    local at each link filters.";
  reference "rfc7698";
  container source {
    description "Source of the media channel";
    leaf source-node {
      type te-types:te-node-id;
      description "Source node";
    }
    leaf source-port {
      type fg-ted:flexi-grid-node-port-ref;
      description "Source port";
    }
  }
  container destination {
    description "Destination of the media channel";
    leaf destination-node {
      type te-types:te-node-id;
      description "Destination node";
    }
    leaf destination-port {
      type fg-ted:flexi-grid-node-port-ref;
      description "Destination port";
    }
  }
  uses media-channel-attributes;
}

container network-media-channel {
  description
    "It is a media channel that transports an Optical
    Tributary Signal ";
  reference "rfc7698";
  container source {
    description "Source of the network media channel";
    leaf source-node {
      type te-types:te-node-id;
      description "Source node";
    }
    leaf source-transponder {
      type fg-ted:flexi-grid-transponder-ref;
      description "Source transponder";
    }
  }
}
```

```

    container destination {
      description "Destination of the network media channel";
      leaf destination-node {
        type te-types:te-node-id;
        description "Destination node";
      }
      leaf destination-transponder {
        type fg-ted:flexi-grid-transponder-ref;
        description "Destination transponder";
      }
    }
  }
  uses media-channel-attributes;
}

grouping media-channel-attributes {
  description "Set of attributes of a media channel";
  container effective-freq-slot {
    description "The effective frequency slot is an attribute
      of a media channel and, being a frequency slot, it is
      described by its nominal central frequency and slot
      width";
    reference "rfc7698";
    leaf N {
      type int32;
      description
        "Is used to determine the Nominal Central
        Frequency. The set of nominal central frequencies
        can be built using the following expression:
          f = 193.1 THz + n x 0.00625 THz,
        where 193.1 THz is ITU-T ''anchor frequency'' for
        transmission over the C band, n is a positive or
        negative integer including 0.";
      reference "rfc7698";
    }
    leaf M {
      type int32;
      description
        "Is used to determine the slot width. A slot width
        is constrained to be M x SWG (that is, M x 12.5 GHz),
        where M is an integer greater than or equal to 1.";
      reference "rfc7698";
    }
  }
}
list link-channel {
  key "link-id";
  description
    "A list of the concatenated elements of the media
    channel.";
  leaf link-id {
    type int32;
    description "Identifier of the link";
  }
}

```

```
    uses link-channel-attributes;
  }
}

grouping link-channel-attributes {
  description
    "A link channel is one of the concatenated elements of
    the media channel.";
  leaf N {
    type int32;
    description
      "Is used to determine the Nominal Central Frequency.
      The set of nominal central frequencies can be built
      using the following expression:
         $f = 193.1 \text{ THz} + n \times 0.00625 \text{ THz}$ ,
      where 193.1 THz is ITU-T ''anchor frequency'' for
      transmission over the C band, n is a positive or
      negative integer including 0.";
    reference "rfc7698";
  }
  leaf M {
    type int32;
    description
      "Is used to determine the slot width. A slot
      width is constrained to be M x SWG (that is,
      M x 12.5 GHz), where M is an integer greater than
      or equal to 1.";
    reference "rfc7698";
  }
  leaf source-node {
    type te-types:te-node-id;
    description "Source node of the link channel";
  }
  leaf source-port {
    type fg-ted:flexi-grid-node-port-ref;
    description "Source port of the link channel";
  }
  leaf destination-node {
    type te-types:te-node-id;
    description "Destination node of the link channel";
  }
  leaf destination-port {
    type fg-ted:flexi-grid-node-port-ref;
    description "Destination port of the link channel";
  }
  leaf link {
    type fg-ted:flexi-grid-link-ref;
    description "Link of the link channel";
  }
}
```

```
    leaf bidireccional {
      type boolean;
      description
        "Determines whether the link is bidireccional or
         not";
    }
  }
}
```

<CODE ENDS>

A.3. License

Copyright (c) 2017 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- o Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- o Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- o Neither the name of Internet Society, IETF or IETF Trust, nor the names of specific contributors, may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Jorge E. Lopez de Vergara
Universidad Autonoma de Madrid
Escuela Politecnica Superior
C/Francisco Tomas y Valiente, 11
E-28049 Madrid, Spain

Email: jorge.lopez_vergara@uam.es

Daniel Perdices Burrero
Universidad Autonoma de Madrid
Escuela Politecnica Superior
C/Francisco Tomas y Valiente, 11
E-28049 Madrid, Spain

Email: daniel.perdices@estudiante.uam.es

Victor Lopez
Telefonica I+D/GCTO
Distrito Telefonica
E-28050 Madrid, Spain

Email: victor.lopezalvarez@telefonica.com

Oscar Gonzalez de Dios
Telefonica I+D/GCTO
Distrito Telefonica
E-28050 Madrid, Spain

Email: oscar.gonzalezdedios@telefonica.com

Daniel King
Lancaster University

Email: d.king@lancaster.ac.uk

Young Lee
Huawei Technologies

Email: leeyoung@huawei.com

Gabriele Galimberti
Cisco Photonics Srl

Email: ggalimbe@cisco.com