Keyword-Based Mobile Application Sharing through Information-Centric Connectivity

Best Paper Award
ACM MobiArch 2016

Dr Ioannis Psaras
EPSRC Fellow / Lecturer
University College London
Email: i.psaras@ucl.ac.uk
Web: http://www.ee.ucl.ac.uk/~ipsaras/

ICNRG Interim Meeting
16th July 2017
Prague

I. Psaras, S. Rene, K.V. Katsaros, V. Sourlas, N. Bezirgiannidis, S. Diamantopoulos, I. Komnios, V. Tsaoussidis, G. Pavlou

The Cloud is not enough

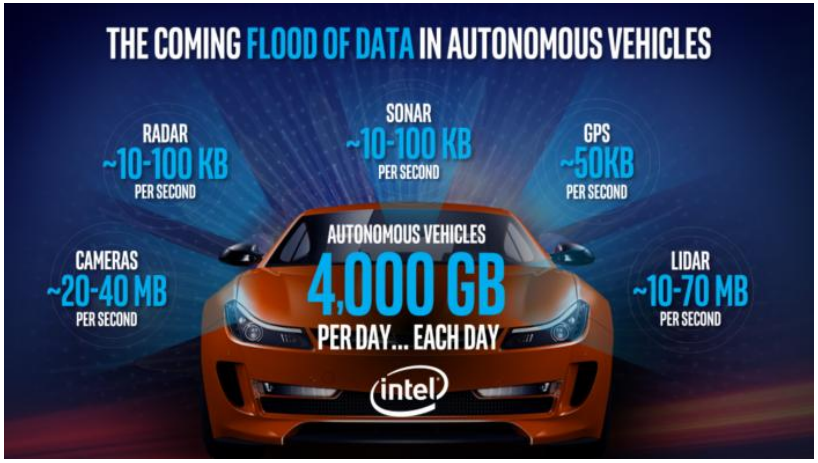

<rant>

- Always trying to reach the cloud does not work
  - E.g. trains, airplances, crowded areas
- 5G needs to integrate some edge-computing functionality
- The cloud is neither the only nor the best way
- There are enormous amounts of computation and storage available around us
  - 5G has to exploit the computation, storage and software resources of edge devices (smartphones, tablets, Raspberry PIs, WiFi APs)
- Connecting randomly to the nearest device does not work
  - **Information-Centric Connectivity** becomes necessity when we need to specify to which of the 100s of smartphone devices to connect to.
  - This need does not exist when we always connect to the main cell tower

</rant>

What is KEBAPP – Contribution

An *application sharing and information-processing* framework for smartphone apps

Route Finder App

Game or Video-Streaming Server

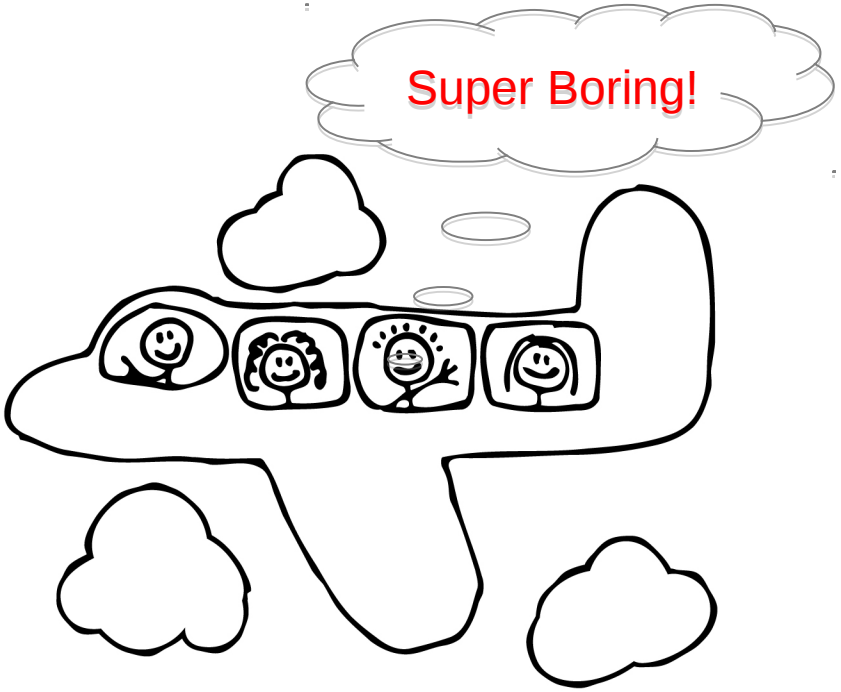

What applications does KEBAPP deal with – Design Space

- By and large, smartphone apps target:
  - **Static content**, *e.g.,* news updates
  - **Personalised content**, *e.g.,* Facebook/Twitter updates
  - **Processed information**, *e.g.,* route finder, gaming
    - *Keep demand for local services, locally!*

We envision a pool of *application resources* to provide D2D access to *processed and non-personalised information*

Where/When do we need KEBAPP (Target environments)

- Overcrowded areas
  - Airports, festivals, stadiums, IETF :)
- Fragmented networks
  - Natural disasters (floods, earthquakes)
- Not (or poorly) connected environments
  - Airplanes, trains, ferries, developing regions

In most of those cases, Internet connectivity is not even necessary!

How does KEBAPP work?

Applications act both as clients and as servers

Three Main Components

1) Application-centric naming

- Applications share common name-spaces and support the use of keywords

2) Application-centric connectivity

- Applications manage connectivity by defining and/or joining WiFi broadcast domains

3) Information-centric forwarding

- Extending Named Data Networking primitives

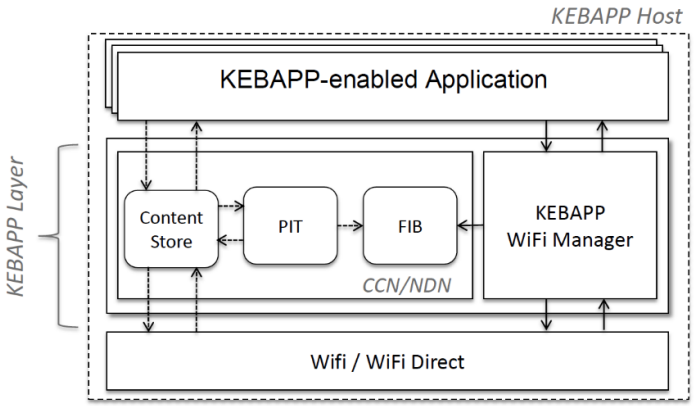

Content Store

Data Chunck	Name
2a3b69e43f9bd48937	/d/e/f#t3#t4

PIT

In	Name	Out
Internal face #1	/a/b/c#t1#t2	BSSID1
BSSID2	/d/e/f#t3#t4	Internal face #2

FIB

Prefix	BSSID	Face
/a/b/c#t1#t2	BSSID1	Internal face #1
/d/e/f#t3#t4	BSSID2	Internal face #2

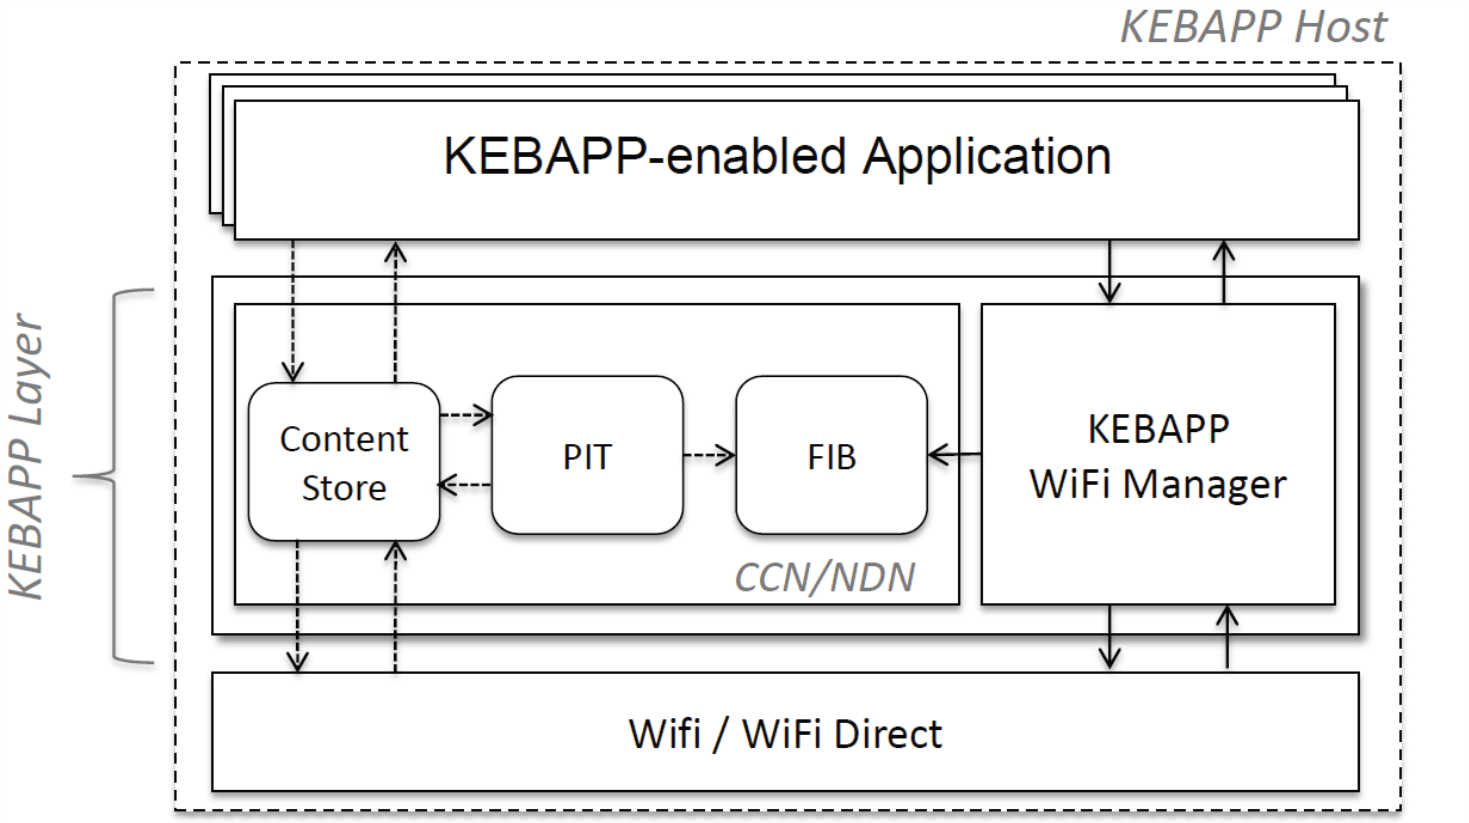

Content Store

Data Chunck	Name
2a3b69e43f9bd48937	/d/e/f#t3#t4

PIT

In	Name	Out
Internal face #1	/a/b/c#t1#t2	BSSID1
BSSID2	/d/e/f#t3#t4	Internal face #2

FIB

Prefix	BSSID	Face
/a/b/c	BSSID1	Internal face #1
/d/e/f	BSSID2	Internal face #2

Information-Centric Mobility

- Content is the addressable entity
  - Not the host!
- Content is the routing target
  - Not the host!
- Interface to the content is used
  - Not to a socket!
- Content is secured individually
  - Not the communication channel!

No need to keep references of moving nodes

Information Exposure through Names

- ICN can enable features not possible with IP
  - Exposure of information through names.

A network-layer naming scheme that enables fine-grained description of the desired processed information

Application-Centric Naming (App IDs)

- Needs to support fine-grained description of the desired processed information

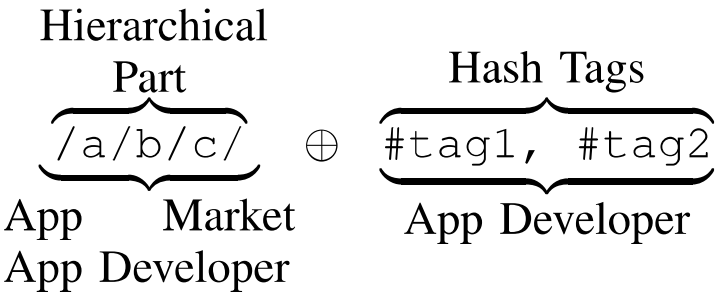

- **Fixed part:** *NDN hierarchical naming, longest prefix match*
  - Needs to guarantee compatibility between applications
  - Can define static content: /NewsApp/politics/
  - Or invoke computation: /myTravelAdvisor/Top10Restos
  - App GUI indicates naming, users do not have to be aware of naming
- **Hashtags:** *free keywords to assist application processing*
  - Enables *partial matching* of responses to requests
  - /myTravelAdvisor/Top10Restos #userRating; #London; #indian
  - /routeFinder/tube #euston; #waterloo

Application-Centric Connectivity

- Application-specific 802.11 broadcast domains, through Basic Service Set(s), BSSs
  - Need a “hook” between BSS and the corresponding application
  - Every KEBAPP application advertises its own SSID, through *WiFi Direct Groups*
  - *WiFi Neighbour-Awareness Networking (NAN)* can find applications behind BSSs – also optimised for energy efficiency

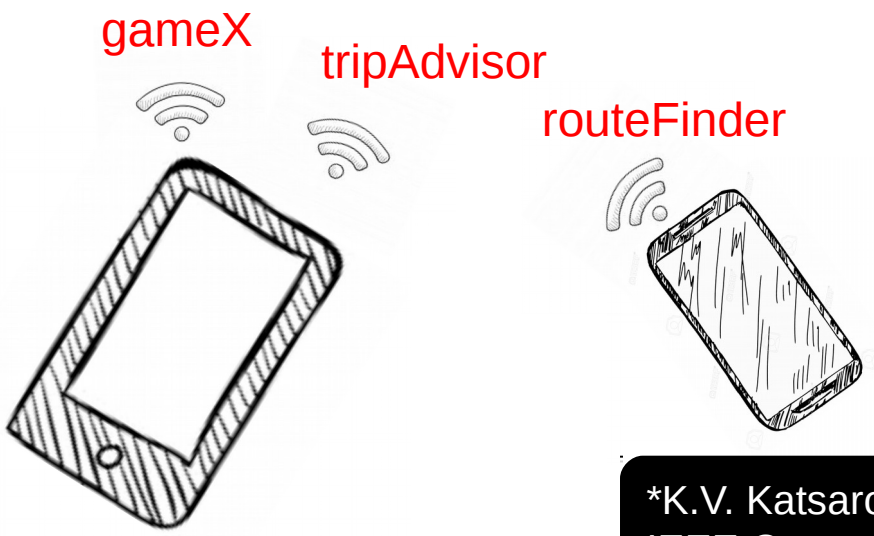

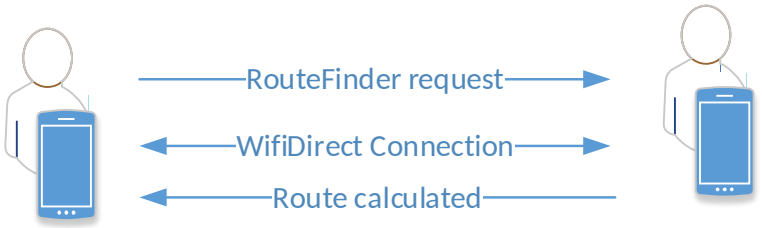

*K.V. Katsaros et. al. “Information-Centric Connectivity” IEEE Communications Magazine, August 2016.

Information-Centric Forwarding

- We build on a modified version of NDN
- Forward messages to single-hop broadcasting (BSS) domains
- Single-hop operation

- ❑ *Broadcast domains are considered as node interfaces*
- ❑ FIB is populated with neighbouring BSSIDs

gameX

tripAdvisor

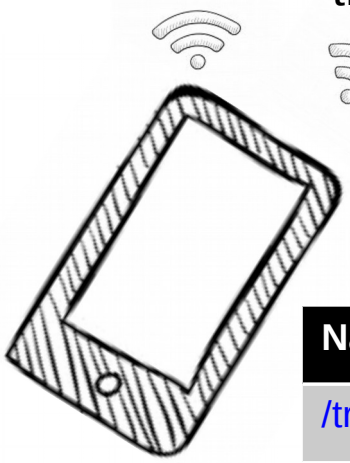

Name Prefix	BSSID	*if*
/travel/routeFinder #x	routeFinder	#1

Name Prefix	BSSID	*if*
/travel/tripAdvisor #x #y	tripAdvisor	#1
/gaming/gameX #z	gameX	#2

routeFinder

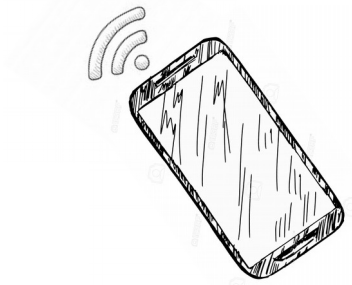

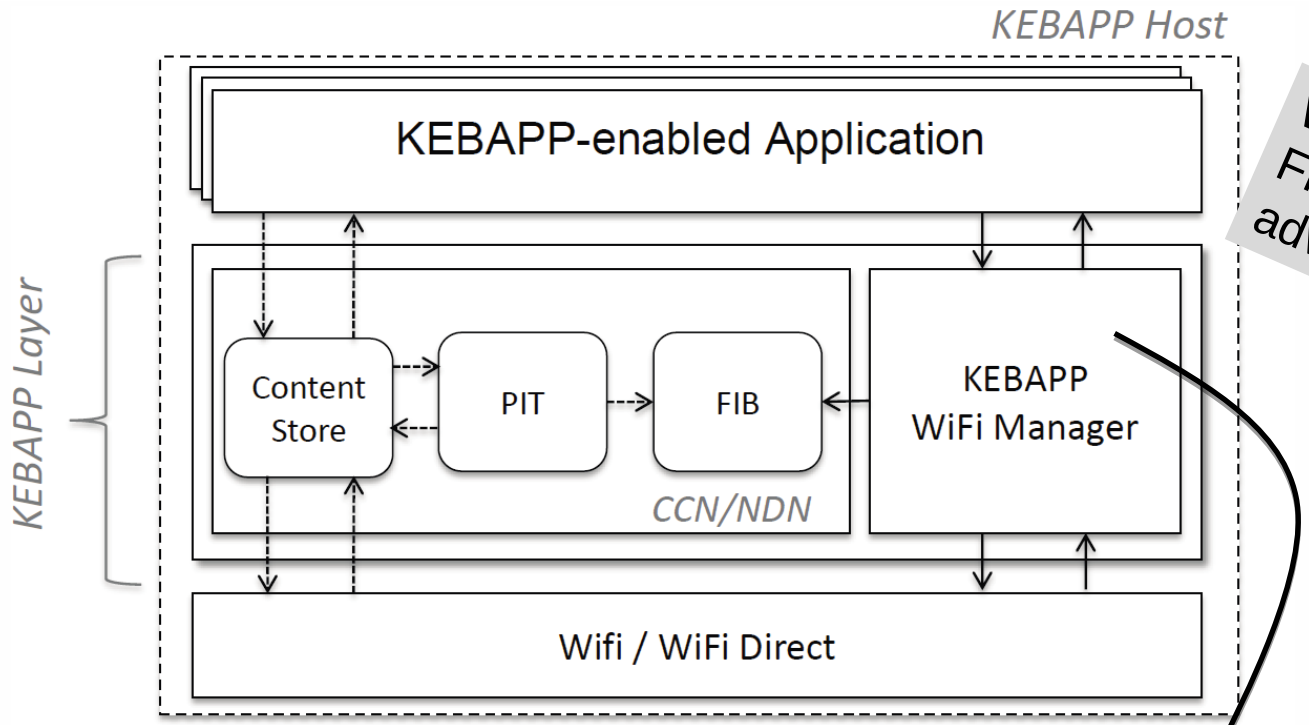

WiFi Manager populates FIB with hierarchical name advertised by SSID

BSSIDs are the new interfaces

Content Store

Data Chunck	Name
2a3b69e43f9bd48937	/d/e/f#t3#t4

PIT

In	Name	Out
Internal face #1	/a/b/c#t1#t2	BSSID1
BSSID2	/d/e/f#t3#t4	Internal face #2

FIB

Prefix	BSSID	Face
/a/b/c	BSSID1	Internal face #1
/d/e/f	BSSID2	Internal face #2

One PIT entry per request

Server part of app internalFace entry links BSSID to specific app that listens to this SSID.

Feasibility – RouteFinder App

Setup
Mobility trace from 3300 users in a Stockholm subway station throughout one hour

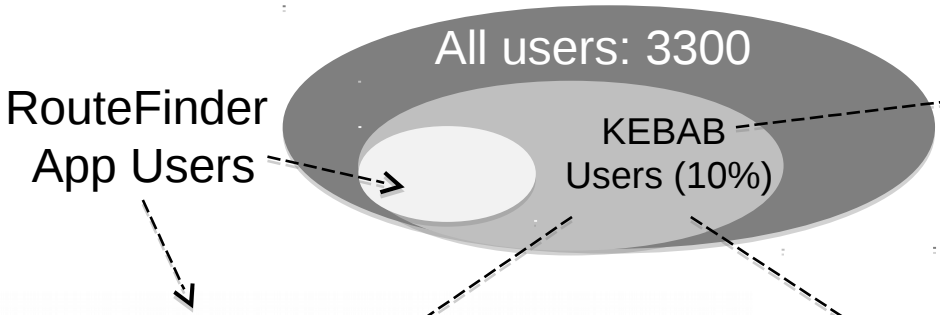

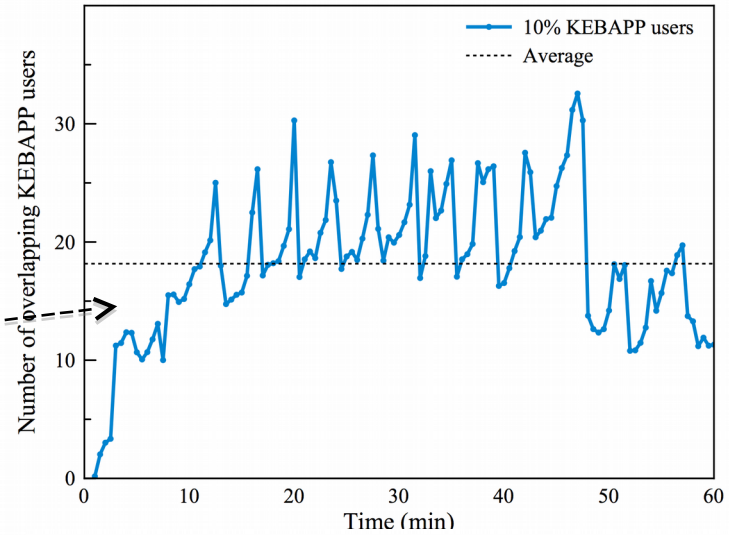

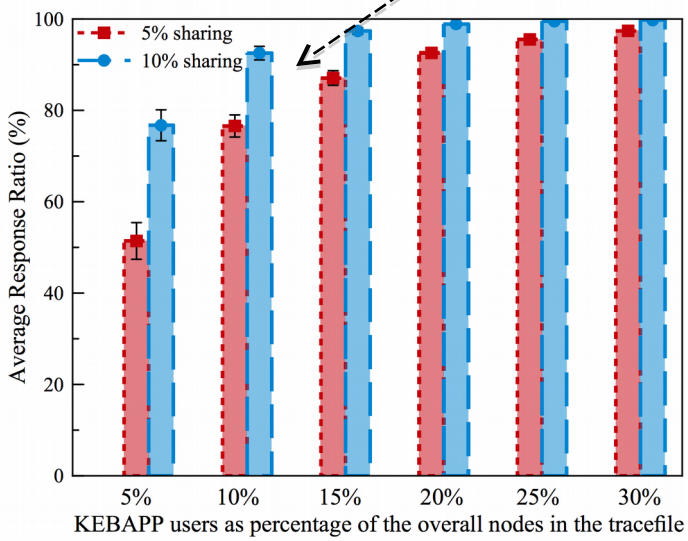

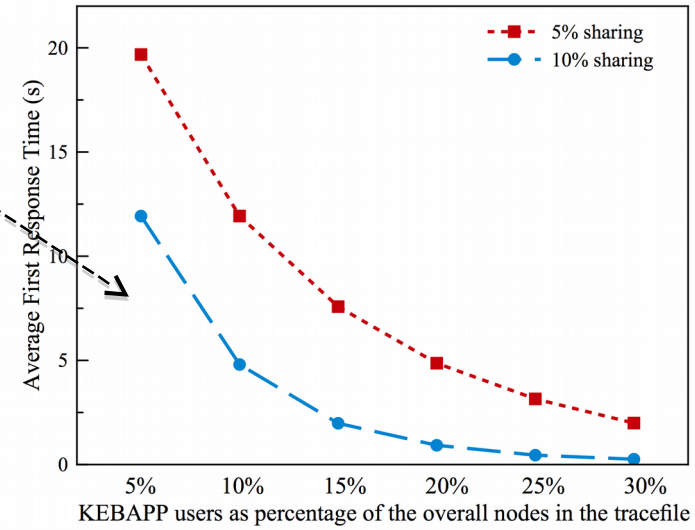

Route Finder App

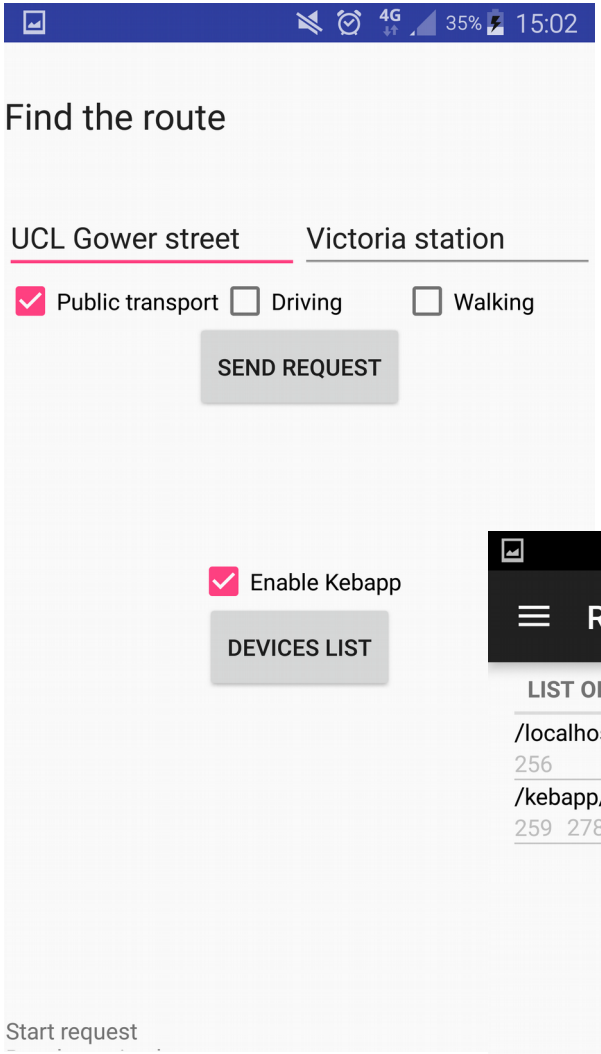

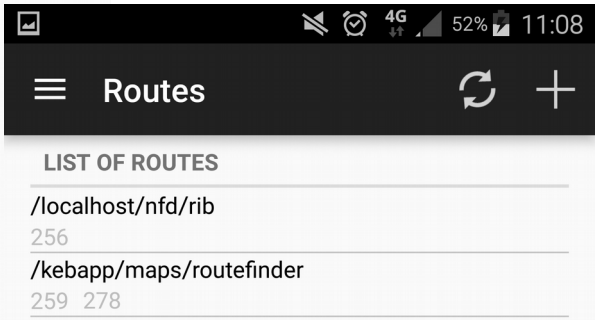

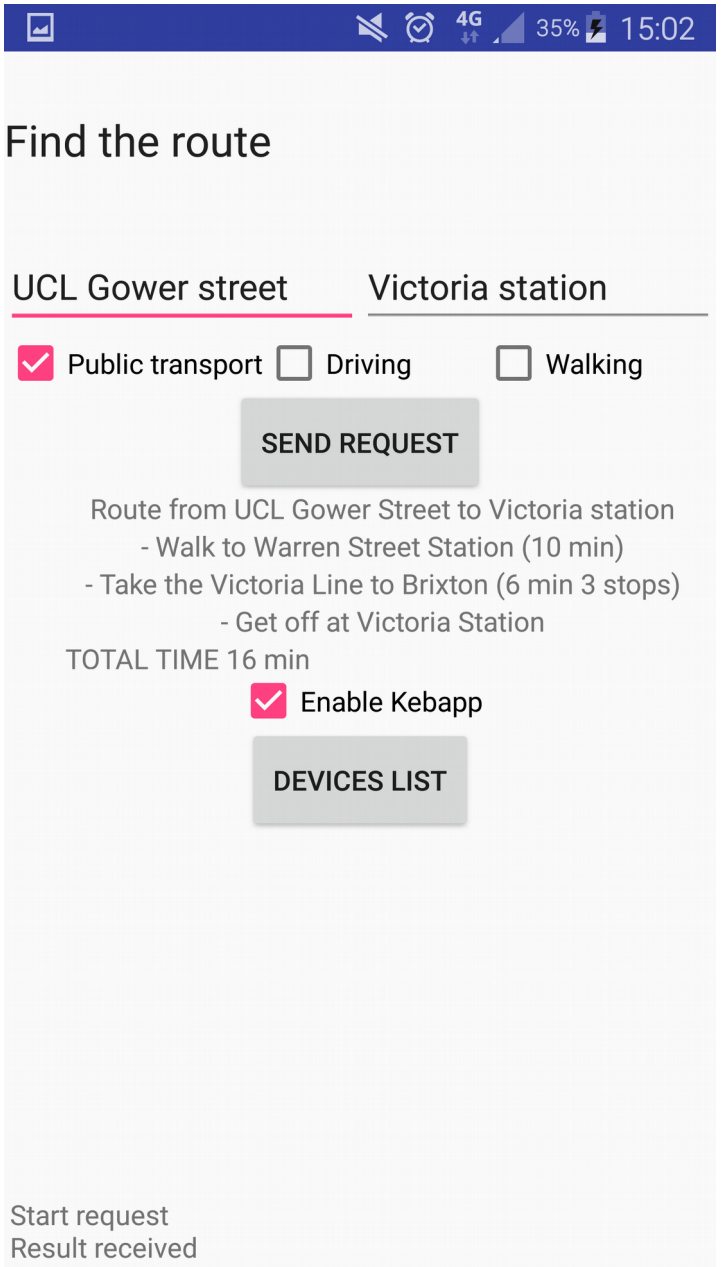

Vision: An Edge ICN IoT Platform based on Information-Centric Connectivity

- The long-term plan is to develop a platform for IoT applications
  - users can build applications or applets
  - API should be lightweight and easy to use, e.g., IFTTT-like
- Some applications already implemented in Raspberry PIs – plan to extend to WiFi APs through OpenWRT

How to implement KEBAPP?

Android implementation components

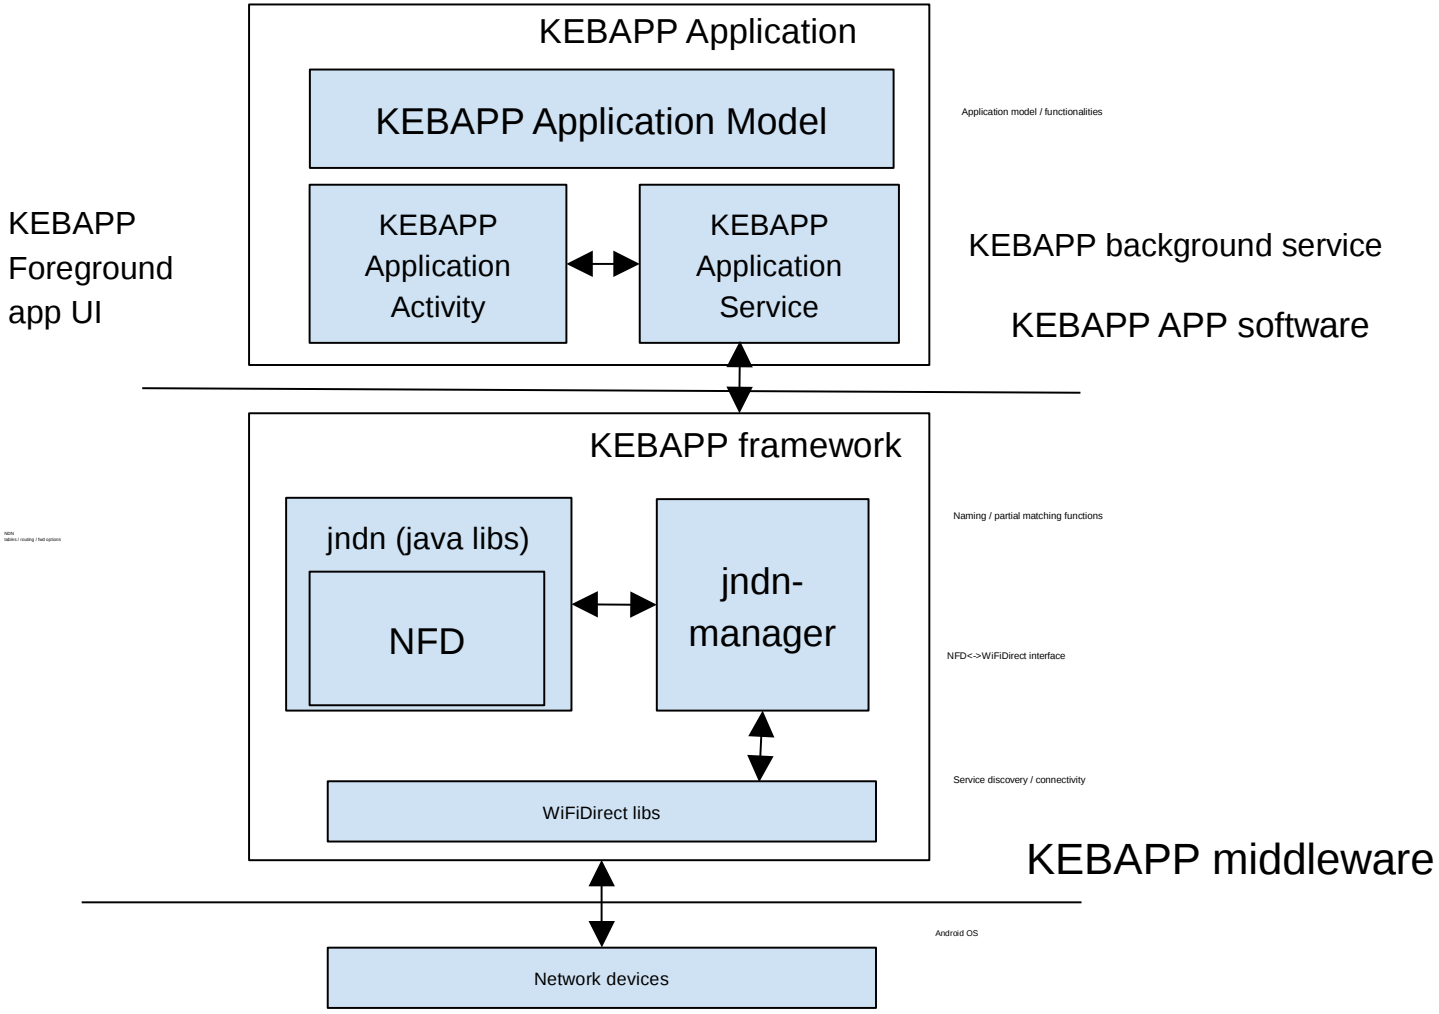

Thanks!

Dr Ioannis Psaras
University College London
http://www.ee.ucl.ac.uk/~ipsaras/
i.psaras@ucl.ac.uk

BACKUP SLIDES

Taxi Share App / Carpooling

- Group commuters into taxis/vehicles locally
  - User 1 wants to travel from A – C
  - User 2 wants to travel from A – B, where B is along the route A – C
  - User 3 travels from A – D and so on
- Can’t think of many good reasons

not to do this locally...

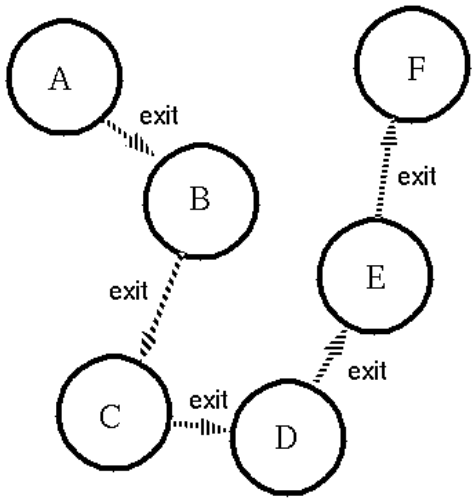

Online vs Offline Micropayment

Online Mode

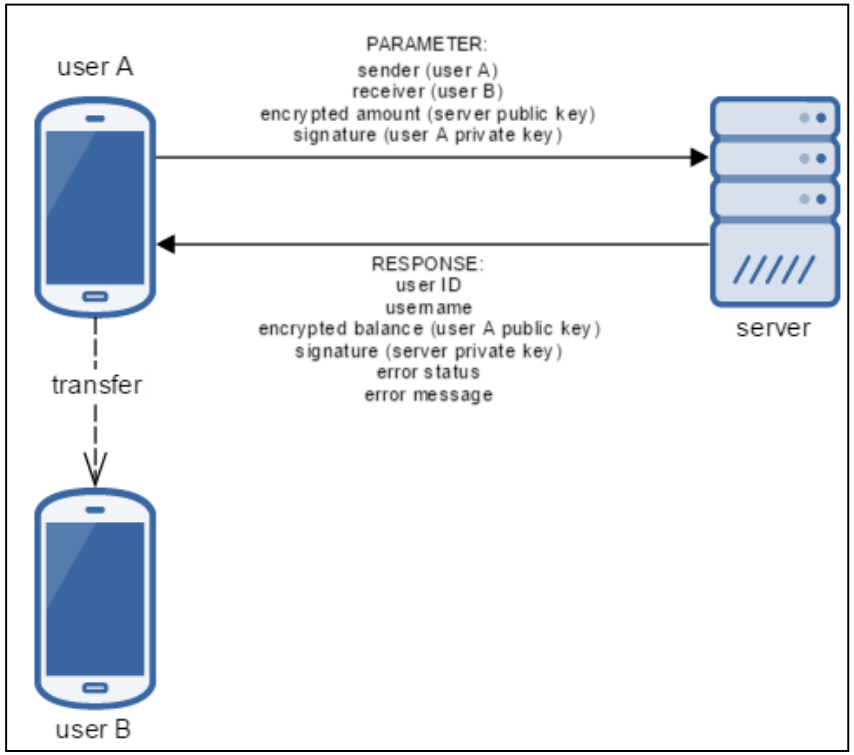

Offline Micropayment

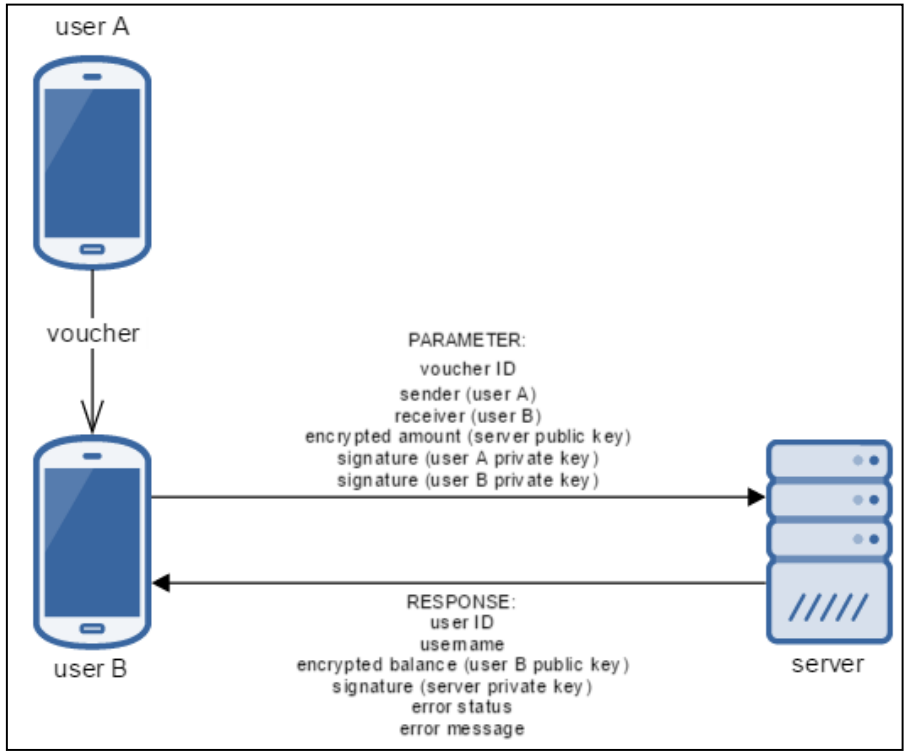

- *Central trusted authority issues certificates*
- *Certificates trusted by nodes who pay with vouchers*
- *Vouchers later validated when users get back online*