



MAP-Me

Managing Anchor-less Producer Mobility in Content-Centric Networks

Jordan Augé, Software Engineer, Cisco Systems (France)

joint work with G. Carofiglio, G.Grassi, L. Muscariello, M. Papalini, G.Pau, X. Zeng

ICNRG interim meeting, March 18, 2018

Mobility challenges

Mobility challenges beyond ICN

- Core overloaded with signaling and user traffic
- Opportunity to remove anchors, tunnels... simplify & unify
- Much interest in IETF (DMM/ILA/...) and 3GPP

Interesting ICN features from a mobility standpoint

Much progress in producer mobility...

... and some original solutions wrt IP

Consumer vs. Producer mobility

- Consumer mobility natively supported in virtue of the pull-based model
- Producer Mobility = still an open challenge



We are only looking at L3 here, transport need to support / leverage ICN specifics, and help with seamless handovers




esocket library + forwarder mechanisms as IP In-network Control for Loss Detection and Recovery in Wireless Mobile networks", In. Proc. ICN'16, Sep. 26-28, 2016, Kyoto (JP)

Towards native mobility

- **Preserve features of ICN** (caching, multipath, content-based security) : no tunnelling, no name rewriting
- **L2-agnostic**
- **Decentralized** : remove the need for anchors
- **Feasible and scalable** : lightweight in terms of network / CPU usage


- High bandwidth / **low latency** requirements
- Preserve performance of user flows in progress

Illustration of related approaches in ICN

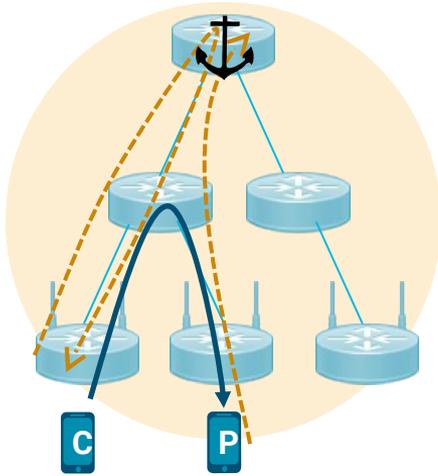


RDV-BASED

[DNS]
[SCOM, SNAMP, ...]

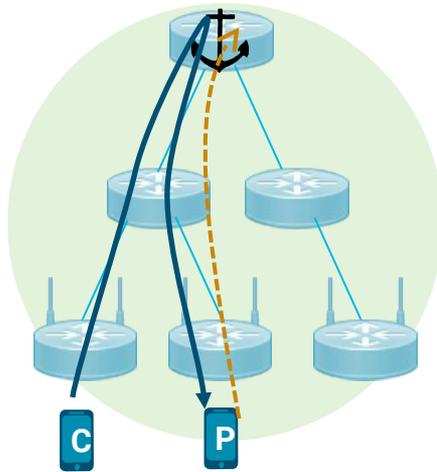


ANCHOR-BASED

[Mobile IP]
[MobiCCN, ...]

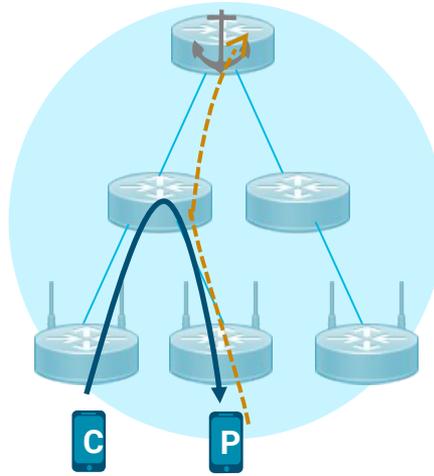

TRACE-BASED

[LBMA, KITE, ...]

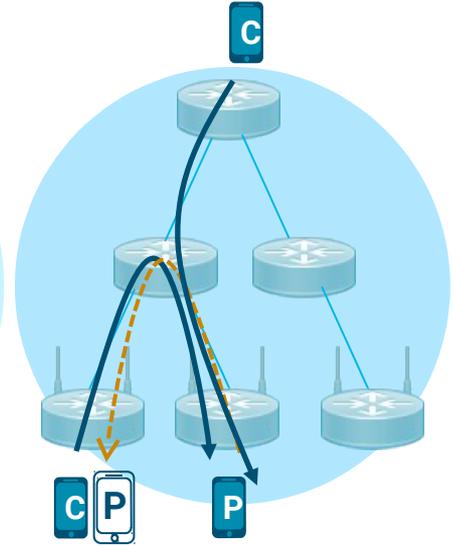


ANCHOR-LESS

[Interest Forwarding, ...]

MAP-Me in a nutshell

- Use of **data plane protocols** for sending forwarding updates to the network
- Producer **sends mobility updates to itself**
- Modifies the forwarding graph by patching a small set of routers' FIB entries (next hops)
- → **Update protocol** with good path stretch properties for fast global reconnectivity : routing can optimize paths later...
- **+ Notification protocol** : Optimizations for low-latency traffic

MAP-Me implementation overview

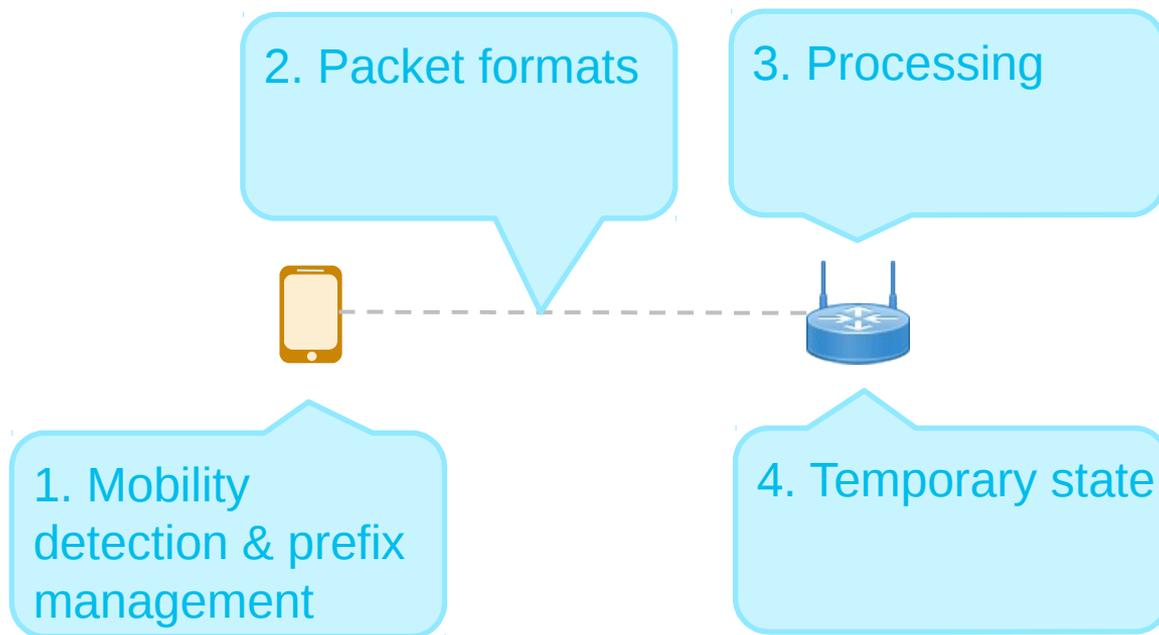


1. Mobility detection & prefix management

Mobility detection

A **FaceManager** module listens to **L2/L3 events** and dynamically create/delete faces.


Example on Linux:

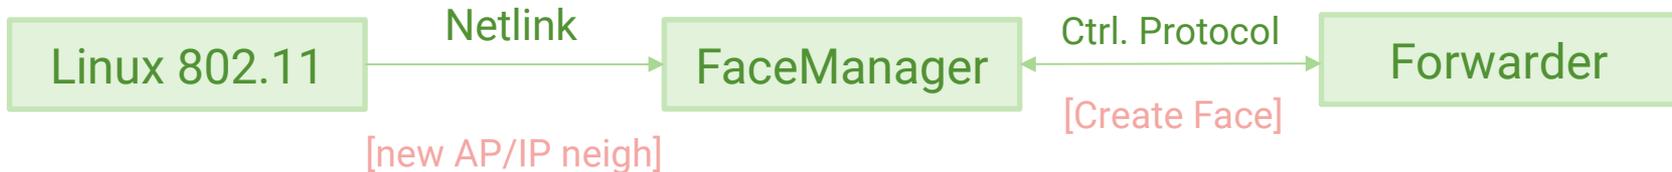

Prefix management

Hook the FIB to learn about **locally served prefixes**

2. Packet formats

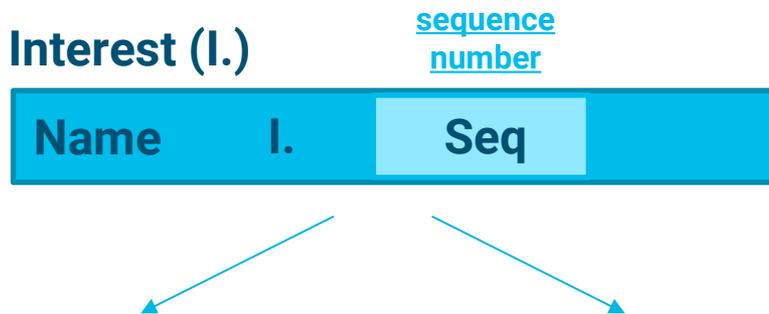

I. Update



I. Update Ack



I. Notification



I. Notification Ack



3. Processing: Update protocol

Modify FIB entries at forwarding timescale to min. disconnectivity


assumption

- existence of a routing protocol populating FIBs
- multipath support (not shown here for clarity)

key ideas


- interest-based signaling **triggered by producer** after movement
- reuse **stale FIB entries** to forward signalization
- **flip edges** in existing forwarding tree to forward to new location

Update propagation

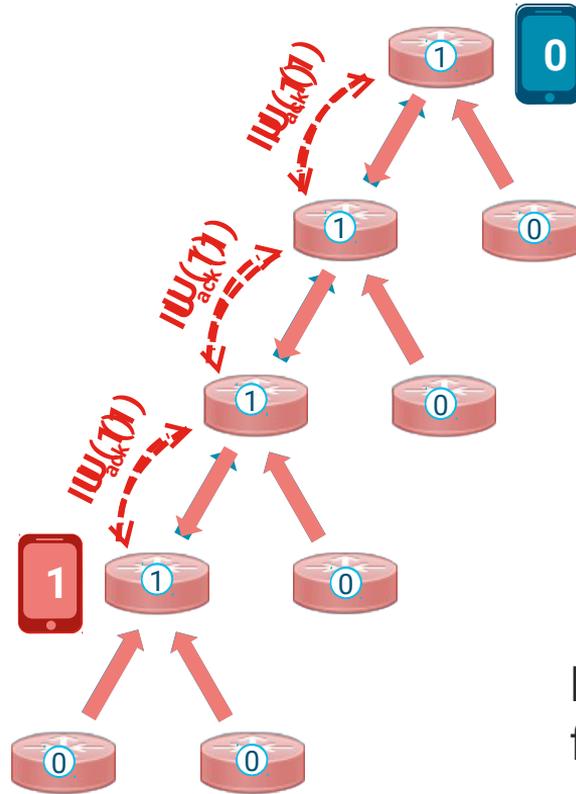


Hop-by-hop retransmissions
for reliability



Concurrent updates

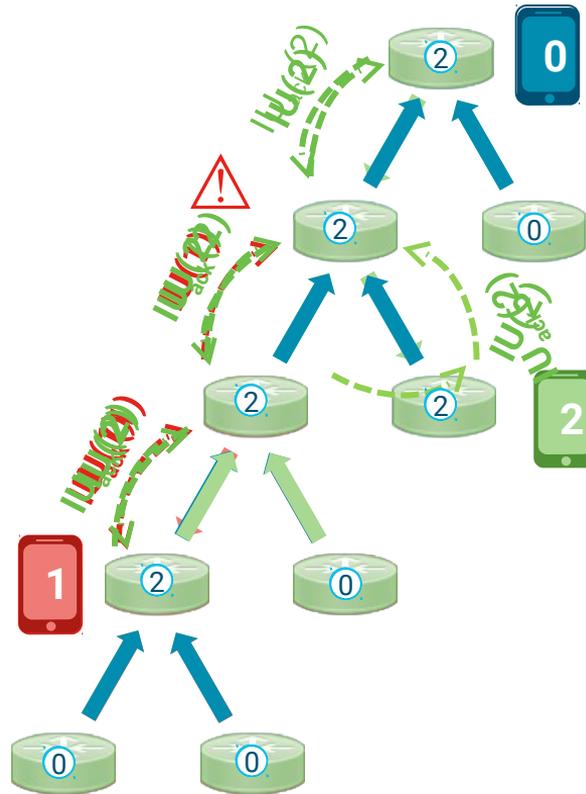


3. Processing : Notification protocol

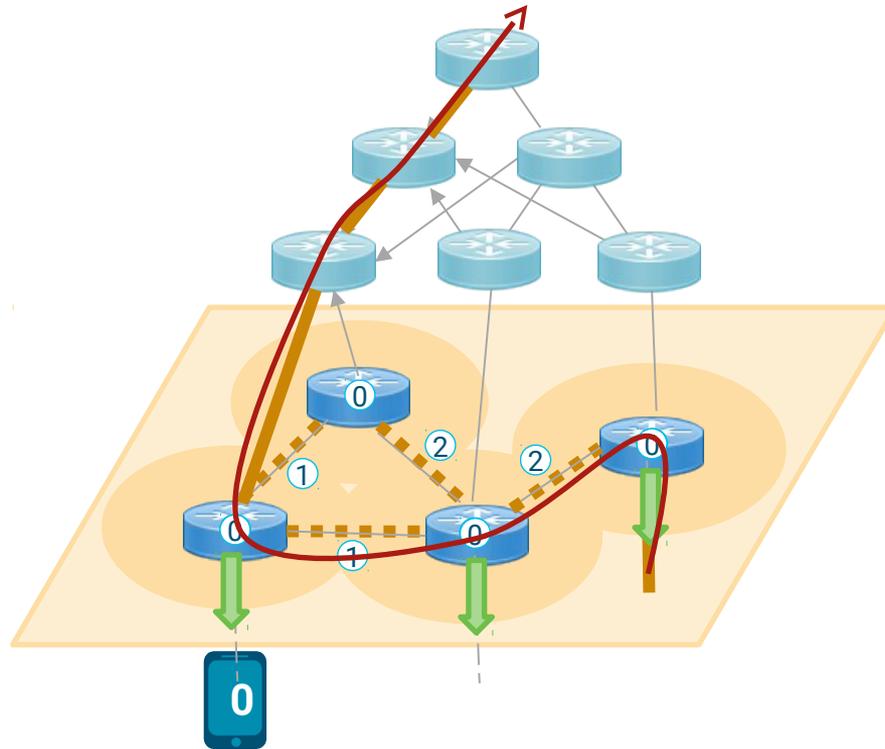

4. Transient FIB (TFIB)

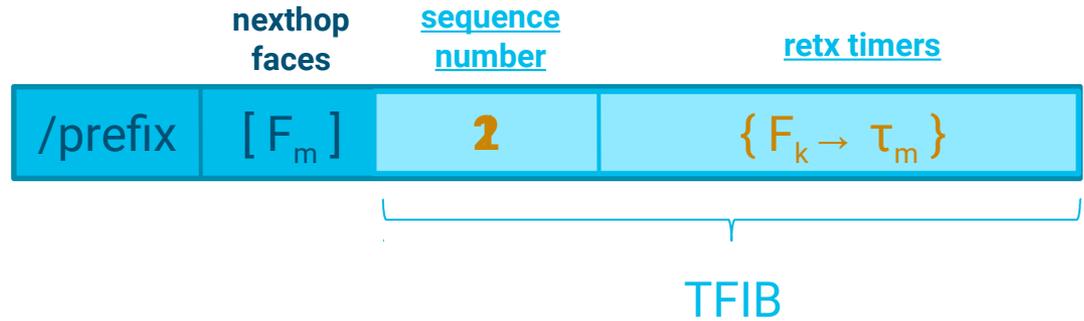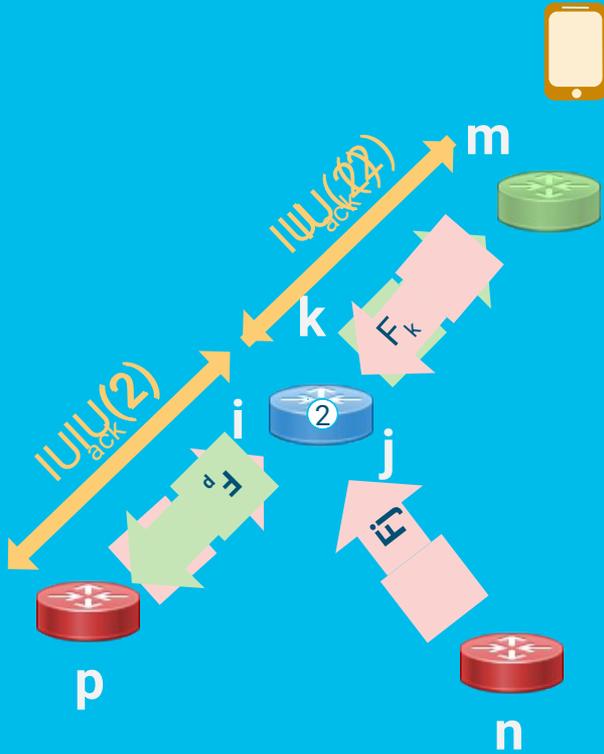


Implementation summary

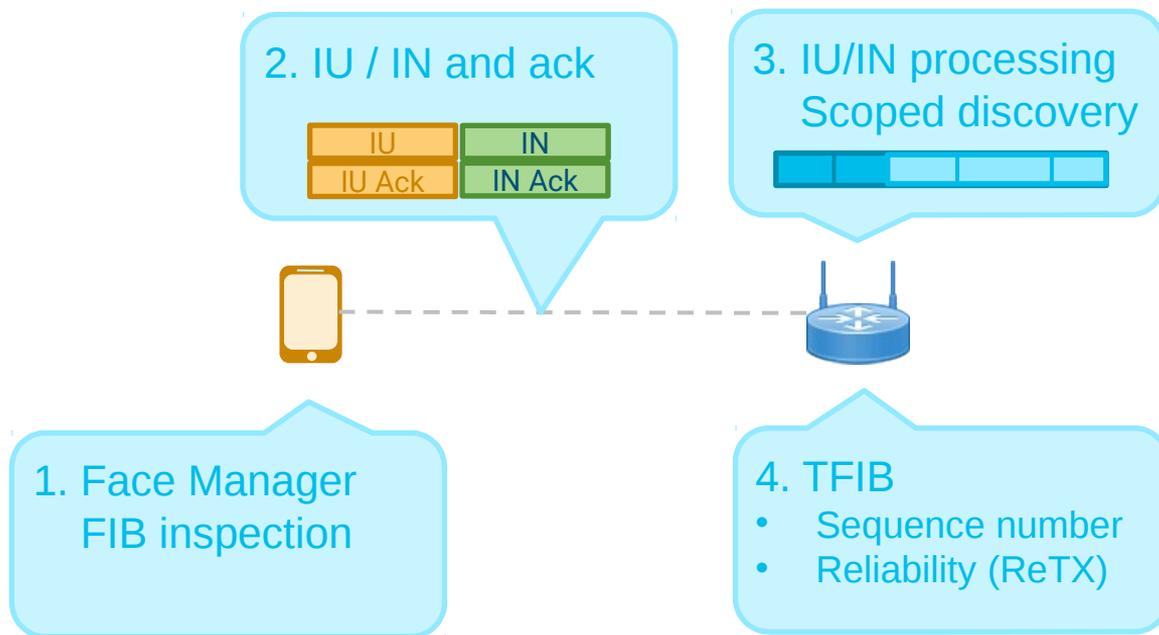

MAP-Me timescales



Interaction between MAP-Me and routing

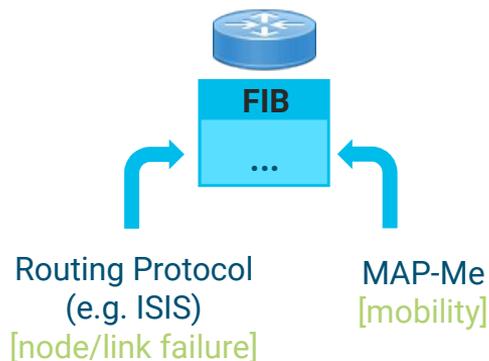

FIB update overwritten by routing protocol ?

Initial proposal : independent protocols

- a routing instance running on producer
- seq \rightarrow (Rseq, seq)
- delay MAP-Me IU/IN until local routing convergence
- reissue IU/IN after routing update has been received

Detailed example with link state in paper

Towards a joint protocol ?

MAP-Me properties [see paper]

FOR UPDATES

- Optimal reconnectivity algorithm; **bounded stretch properties**
- Update Algorithm **correctness and convergence** have been proved
- Preserves the **loop-freeness** of the forwarding tree
- Works in presence of multipath

FOR NOTIFICATIONS

- Near-zero disconnectivity
- Ability to use various heuristics for instance to bound stretch / load of neighbouring links, etc.

Security

- A lightweight **prefix attestation scheme** based on **hash-chains**
- Appropriate for Trace-based and Anchor-less mobility approaches
- Preserves MAP-Me benefits in terms of user / network performance
- Lightweight in term of CPU
- Additional security wrt typical HMAC based approaches in a



distributed context

A. Pignatelli, X. Zeng, G. Luscarriello, G. Carofiglio, J. Augé, “**Secure Producer Mobility in Information Centric Networking**”, in. *Proc. ICN’17, Sep. 26-28, 2017, Berlin (DE)*

Evaluation

Evaluation methodology

Analysis

Simple analytical model under RWP:
MapMe > AB wrt. *overhead* and *offloading*

Graph simulations

Synthetic / Rocketfuel topologies : *stretch*


Simulation

Synthetic & Trace-based - *user & network performance*

Emulation

Demo & testbed evaluations (Grid5k → Cisco)

ndnSIM simulation setup

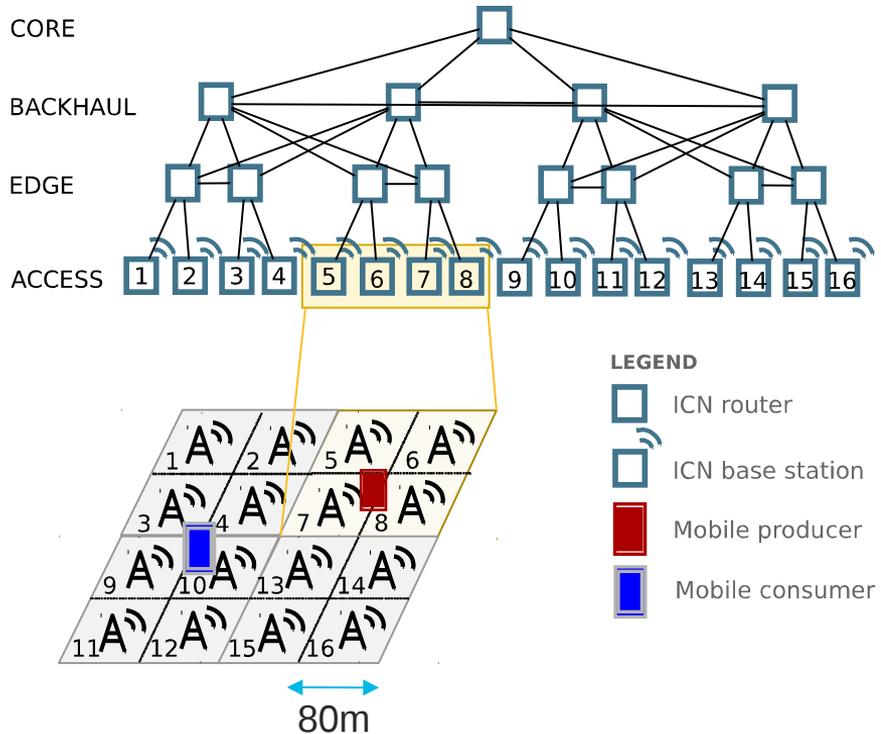

- Realistic 802.11n radio access (handover, rate adaptation, fading, etc.)
- **N** permanent CBR pairs
- Random waypoint mobility (uniformly dist. and varying const. **speed**) & vehicular trace
- Baseline scenario:
 - C = 10Mb/s – 5ms delay
 - N = 1..5..20
 - speed: up to **50km/h**

Simulations

User performance

Average packet loss and delay

(flow. performance)

Layer-3 handover delay

(e2e availability)

Average hop count

(path stretch)

Network performance

Average number of signaling packets per handover

(signaling overhead)

Average number of processed messages per router per handover

(distributedness)

Per-class average link utilization

(offloading)

Simulations

User performance

Average packet loss and delay

(flow performance)

Layer-3 handover delay

(e2e availability)

Average hop count

(path stretch)

Network performance

Average number of signaling packets per handover

(signaling overhead)



Average number of processed messages per router per handover

(distributedness)

Per-class average link utilization


(offloading)

Behaviour of mobility protocols

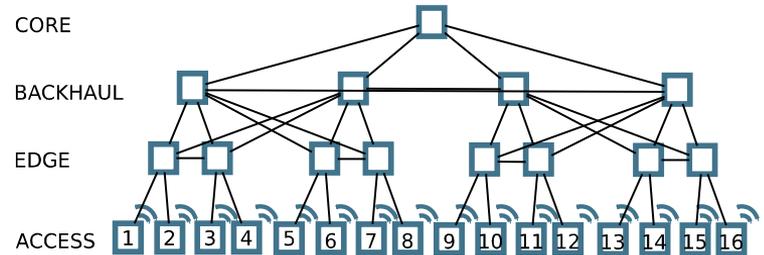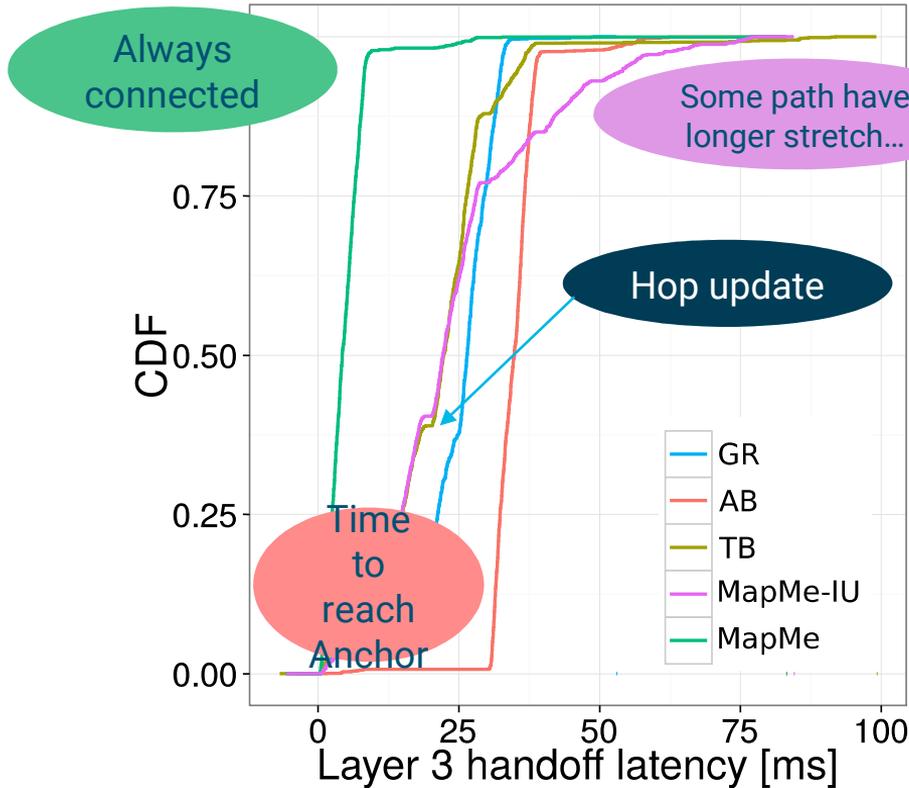

Impact of routing !

Avg. stretch and latency on synthetic topologies

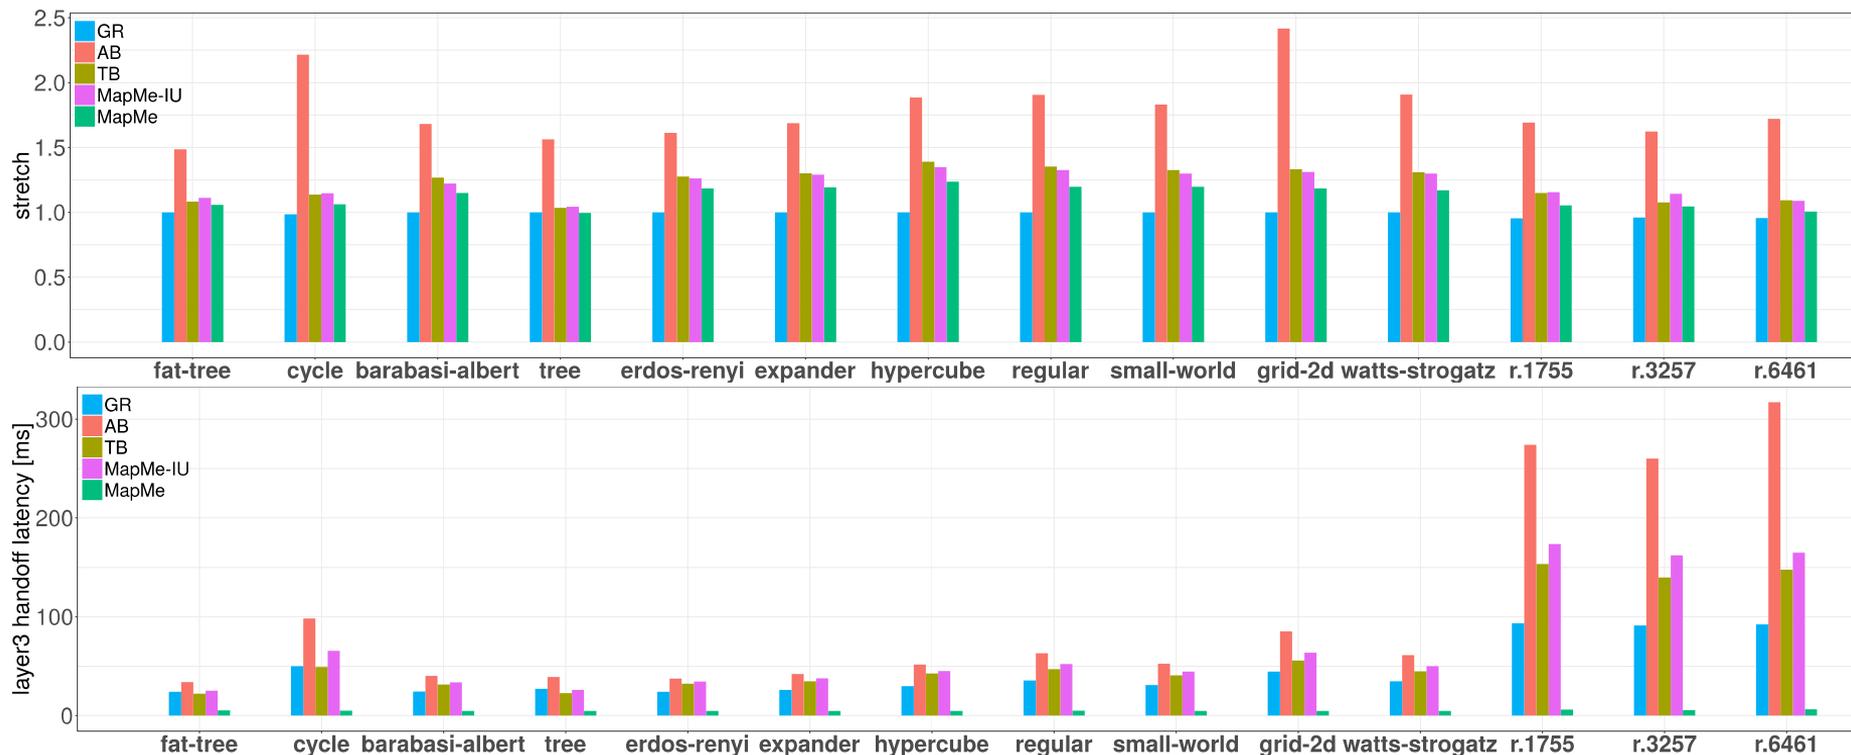

Conclusion

MapMe: effective anchorless producer mobility solution for ICN

- improvements over state-of-the-art solutions
- simple, easily deployable

Future work includes:

- WiFi / LTE handover - Interdomain
- Multi-source / Multihoming



• **More experimentation (see next presentation)**
• **MAP-Me: Managing Anchor-less Producer Mobility in Content-Centric Networks**, in IEEE TNSM, vol. PP, no. 99.





MAP-Me implementation & deployment

CICN, NDN, Hybrid ICN (hICN)


Jordan Augé, Software Engineer, Cisco Systems (France)
joint work with G. Carofiglio, L. Muscariello, M. Papalini, M. Sardara
ICNRG interim meeting, March 18, 2018

NDN prototype

- Original C++ / Boost implementation used in paper
 - Compatible both with NFD and NDNSIM
- Link to paper and NFD source code : <http://mapme-tnsm.github.io/>
- Not maintained

- Bonus : implementations of alternative solutions:
 - Anchor-based (generic)
 - Trace-based (inspired from KITE)

« Making WiFi mobile » demo @ MWC'17

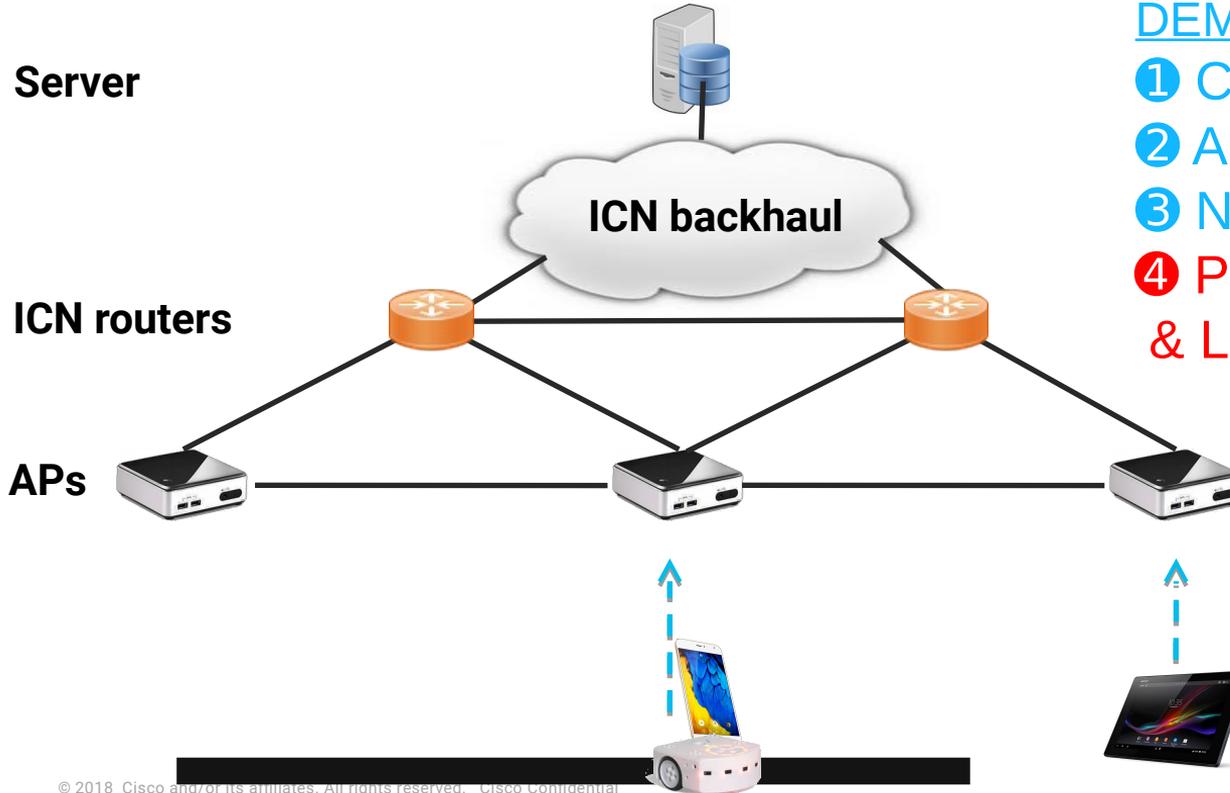


DEMONSTRATED SCENARI

- 1 CONSUMER MOBILITY
- 2 ASYNC. MULTICAST
- 3 NATIVE MULTIHOMING
- 4 PRODUCER MOBILITY & LIVE VIDEO STREAMING

CICN (hICN)

- Continuation of CCNx's Metis forwarder
 - C / libparc (data structures: hashmaps, etc.)
- Most codebase identical between CICN & hICN
 - Differences at lower layers (packet formats, etc)
- Very fresh, will be released in fd.io shortly
 - No notifications yet
 - No security

MAP-Me in Hybrid ICN

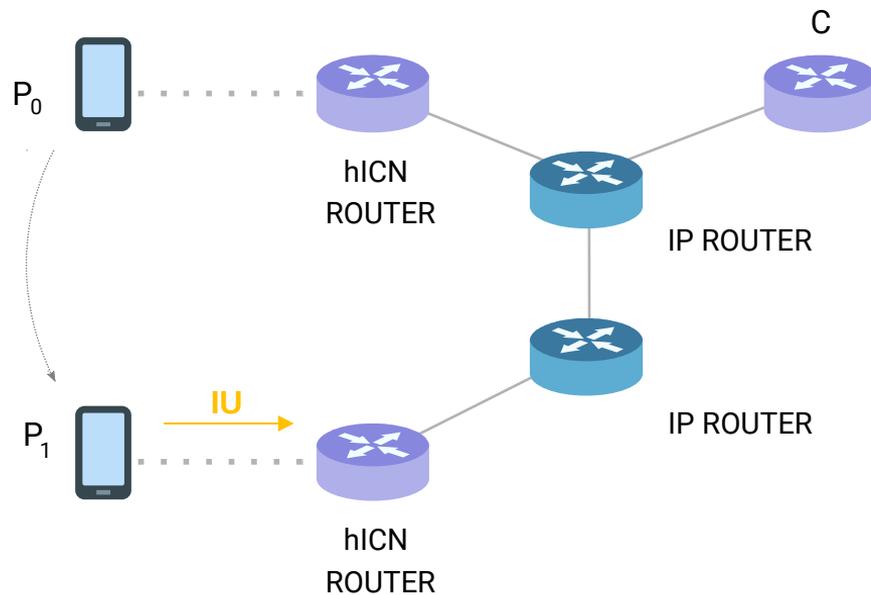

Upon attachment to P_1 , producer senses an IU that should update forwarding state in both hICN and IP routers on the way to P_0 .

hICN principles of reusing RFC compliant packets.

In hICN, we can use a non-reactive ICMP(v6) redirect packet to P_0 's address using the link local address as default gateway.

Sequence number can be encoded in payload, and security can be ensured as usual by AH header, SEND, etc.

ICMP redirect processing

In an hICN router


- ICMP-RD packets recognized and used to update FIB entries
- Seq. check, multipath possible

In an IP router

- IPv6 routers can be configured to use ND proxy that will update local route cache (with higher administrative distance), rewrite the gateway with own LL address, and forward it.
- no multipath
- no local check on seqno., deferred to closest hICN router

Experimentation with vICN

 Network view

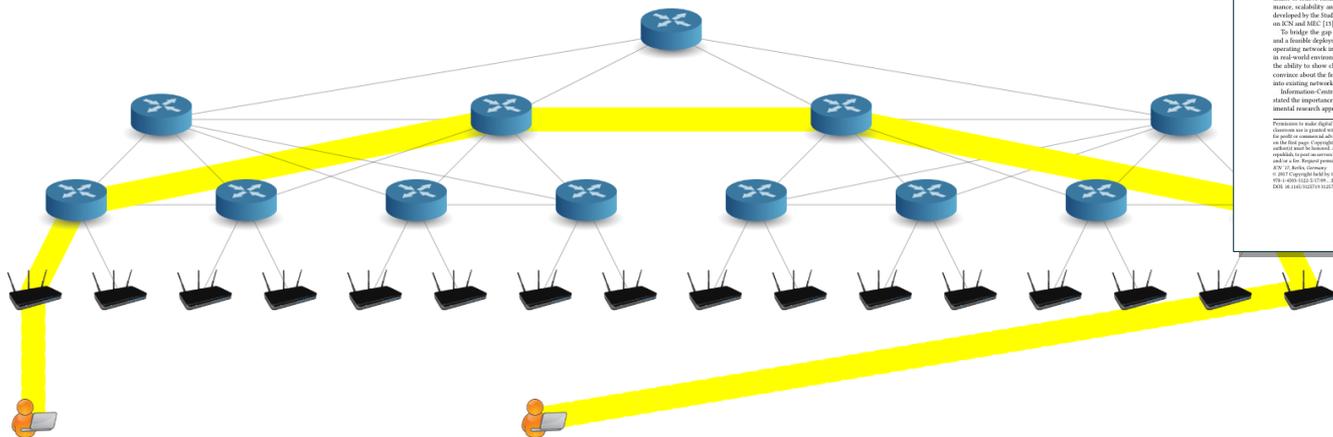

Virtualized ICN (vICN): Towards a Unified Network Virtualization Framework for ICN Experimentation

Mauro Sardara, Luca Muscariello, Jordan Augé, Marcel Enguehard, Alberta Compagna, Giovanna Carrofiglio
Cisco Systems, {firstname.lastname}@cisco.com

ABSTRACT

The capability to carry out large scale experimentation and tests in real operational networks is crucial to assess feasibility and potential for deployment of new networking paradigms such as ICN. Various platforms have been developed by the research community to support design and evaluation of specific aspects of ICN architecture. Most of them provide ICN-dedicated, small-scale or application-specific environments and ad-hoc testing tools, not reusable in other contexts such as real-world IP deployments.

The goal of this paper is to contribute vICN (virtualized ICN), a unified open-source framework for network configuration and management that leverages recent progress in resource isolation and virtualization techniques to offer a single, flexible and scalable platform to serve different purposes, ranging from reproducible large-scale research experimentation, to demonstrations with emulated and/or physical devices and network resources and to real deployment of ICN in existing IP networks.

In the paper, we describe vICN rationale and components, highlighting programmability, scalability and reliability as its core principles, illustrated by means of concrete examples.

1 INTRODUCTION

The encouraging results of ICN research efforts in the last years have triggered broader industrial interest in ICN as a serious candidate to solve future IP network challenges in terms of performance, scalability and cost (see e.g. latest ITU recommendation developed by the Study Group 13/TG-SCG Internet White Paper on ICN and MEC [1]).

To bridge the gap between a promising network architecture and a feasible deployment ready solution, to introduce in existing operating network infrastructures, experimentation at scale and in real-world environments is a critical step. From that, it depends the ability to show clear benefits over the state of the art, and to convince about the feasibility of the integration of the technology into existing network infrastructures.

Information-Centric Networking (ICN) community has largely stated the importance of a pragmatic application-driven and experimental research approach from the beginning (see e.g. [2],[1],[4]).

Researchers have digital-level copies of all or part of the work to be protected in domains such as parallel virtual machines (PVM) or application-specific virtual machines (ASVM) or containers and have proposed the use and the full reliance on the latter, especially for experiments that must be repeated many times in order to be statistically significant. However, such approaches are not suitable for real-time experiments, as they require specific permissions and/or the support of external hardware components.

ICN: V. Sardara, Genova
© 2018 Copyright held by the author(s). Publication rights licensed to ACM.
1545-8555/2018/0000-0000
DOI: 10.1145/3222782.3222782

Multiple tools and testbeds have been developed for simulation and emulation (ICN: NSM software and Testbed, ICN: Minic, Minic-ICN [3], MinicNS). Most of existing tools have been designed to serve the purpose of assisting research and specifically design and evaluation of aspects of ICN architecture (e.g. routing, forwarding, etc.). In this case, they operate in dedicated (often ICN network environments, trading off abstraction of network characteristics for scale and offering limited flexibility to modify core ICN features, network topology and settings, application APIs).

In this paper, we aim at complementing existing tools with vICN (Virtualized ICN), a flexible, unified framework for ICN network configuration, management and control able to satisfy a number of important deployment and experimentation use cases: (i) conducting large-scale and fine-grained experiments over generic testbeds; (ii) instantiate virtualized ICN network supporting real applications in proof-of-concept; (iii) the ability to deploy large networks within network for trial and test development.

Clearly, requirements are different research experimentation needs: fine-grained control and monitoring of the network and reproducibility of the experiments. Prototypes for demonstration require a high level of programmability and flexibility to combine emulated and real network components or traffic sources. More than in previous cases, reliability and resource isolation is a critical property for deployments in ISP networks.

The operations required for the deployment of an ICN network include to install/configure/reconfigure a new network stack in feasible elements and at the end points and the network API used by applications. If building a network stack from an application store into general purpose hardware is easy to realize, a network stack with different requirements compared to classical hardware-oriented ultra scalability, high-speed and predictability, is not a few. vICN shares the same high-level goals as SDN/SPN architectures, but with additional ICN-specific capabilities not typically required by IP networks. Overall, we identify three main challenges that vICN addresses and that differentiate it w.r.t. state of the art:

- (1) Programmability, i.e. the need to propose a simple and unified API, easy to facilitate bootstrap, expressive enough to accommodate both resource configuration and monitoring and flexible enough to allow the user to decide about level of control granularity. Existing solutions like OpenStack, which are not built as a collection of independent components, each one following different design purposes, do not offer a satisfactory level of programmability.
- (2) Scalability. vICN software infrastructure aims at combining high-speed packet processing, network slicing and virtualization, highly parallel latency insensitive task scheduling. Current systems are based on a layered architecture that does not prevent optimization, so limiting scalability on the long term.
- (3) Reliability: a fundamental property of vICN which consists in



J.Augé, G.Carrofiglio, G.Grassi, L.Muscariello, G.Pau and X.Zeng, **MAP-Me: Managing Anchor-less Producer Mobility in Content-Centric Networks**, in IEEE TNSM, vol. PP, no. 99, pp. 1-1.

Conclusion

- Two ICN implementations
 - ICN (opensource) and hICN
- We have just finished a draft for MAP-Me
 - working on hICN version
 - We welcome community discussion and feedback
- MAP-Me ~ a « *mobility control plane* » for (Hybrid) ICN
 - Interesting anchorless properties are generally applicable



• ICN project and C/CN source code <http://wiki.fd.io/view/Cicn>
Link to paper and NFD source code : <http://mapme-tnsm.github.io/>

ICNMG
Internet-Draft
Intended status: Informational
Expires: September 16, 2018

J. Auge, Ed.
G. Carofiglio, Ed.
L. Muscarello, Ed.
M. Papalini, Ed.
Cisco Systems, Inc.
mar 15, 2018

MAP-Me : Managing Anchorless Mobility in Content Centric Networking
draft-irtf-icnrg-mapme-00

Abstract

Mobility has become a basic premise of network communications, thereby requiring a native integration into 5G networks. Despite numerous efforts to propose and standardize effective mobility-management models for IP, the result is a complex, poorly flexible set of mechanisms. The natural support for mobility offered by ICN (Information Centric Networking) makes it a good candidate to define a radically new solution relieving limitations of the traditional approaches. If consumer mobility is supported in ICN by design, in virtue of its connectionless pull-based communication model, producer mobility is still an open challenge. In this document, we focus on two prominent ICN architectures, CCN (Content Centric Networking) and NDN (Named Data Networking) and describe MAP-Me, an anchor-less solution to manage micro-mobility of content producers via a name-based CCN/NDN data plane, with support for latency-sensitive applications.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 16, 2018.

Auge, et al. Expires September 16, 2018 [Page 1]