

6man Working Group
Internet-Draft
Updates: [3306](#),3956,4291 (if approved)
Intended status: Standards Track
Expires: April 21, 2014

M. Boucadair
France Telecom
S. Venaas
Cisco
October 18, 2013

Updates to the IPv6 Multicast Addressing Architecture
draft-ietf-6man-multicast-addr-arch-update-02

Abstract

This document updates the IPv6 multicast addressing architecture by defining the 17-20 reserved bits as generic flag bits. The document provides also some clarifications related to the use of these flag bits.

This document updates [RFC 3956](#), [RFC 3306](#) and [RFC 4291](#).

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on April 21, 2014.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

Internet-Draft

Multicast Flag bits

October 2013

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1.](#) Introduction [2](#)
- [2.](#) Addressing Architecture Update [2](#)
- [3.](#) Clarifications [3](#)
 - [3.1.](#) Flag Bits [3](#)
- [4.](#) RFC Updates [4](#)
 - [4.1.](#) [RFC 3306](#) [4](#)
 - [4.2.](#) [RFC 3956](#) [5](#)
- [5.](#) IANA Considerations [7](#)
- [6.](#) Security Considerations [8](#)
- [7.](#) Acknowledgements [8](#)
- [8.](#) Normative References [8](#)
- Authors' Addresses [8](#)


[1.](#) Introduction

This document updates the IPv6 multicast addressing architecture [[RFC4291](#)] by defining the 17-20 reserved bits as generic flag bits ([Section 2](#)). The document provides also some clarifications related to the use of these flag bits ([Section 3.1](#)).

This document updates [[RFC3956](#)], [[RFC3306](#)], and [[RFC4291](#)].

[2.](#) Addressing Architecture Update

Bits 17-20 of a multicast address are defined in [[RFC3956](#)] and [[RFC3306](#)] as reserved bits. This document defines these bits as generic flag bits so that they apply to any multicast address. Figure 1 and Figure 2 show the updated structure of the addressing architecture. The first diagram shows the update of the base IPv6 addressing architecture, and the second shows the update of so-called Embedded-RP.

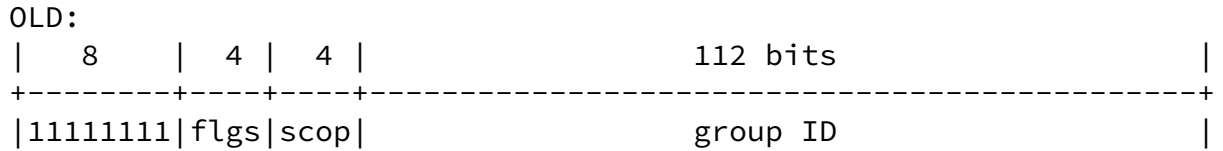

Internet-Draft Multicast Flag bits October 2013

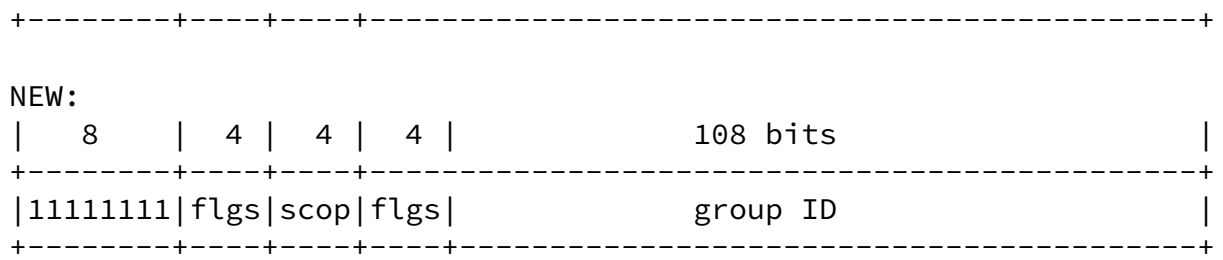


Figure 1: Updated IPv6 Multicast Addressing Architecture

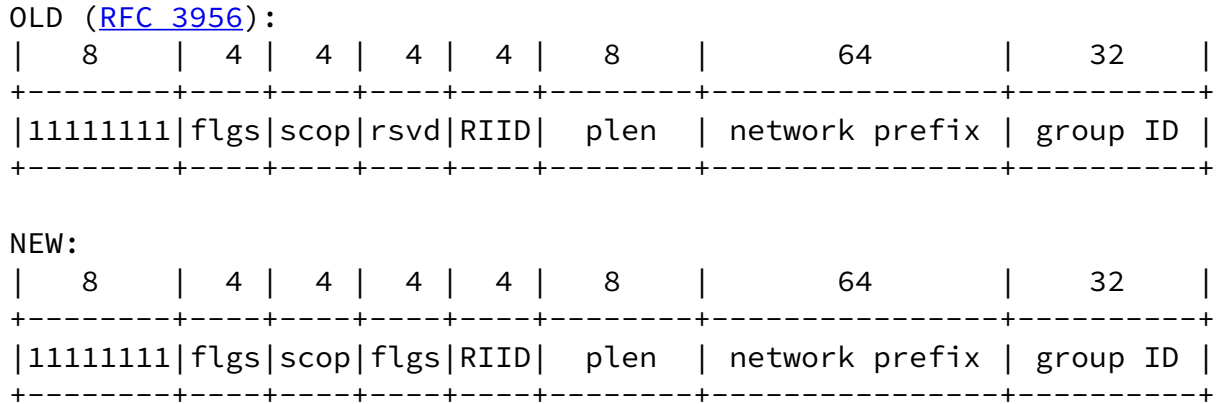


Figure 2: Embedded-RP with Updated IPv6 Multicast Address Arch.

Further specification documents may define a meaning for these flag bits. Defining the bits 17-20 as flags for all IPv6 multicast addresses allows addresses to be treated in a more uniform and generic way, and allows for these bits to be defined in the future for different purposes, irrespective of the specific type of multicast address.

3. Clarifications

3.1. Flag Bits

Some implementations and specification documents do not treat the

flag bits as separate bits but tend to use their combined value as a 4-bit integer. This practice is a hurdle for assigning a meaning to the remaining flag bits. Below are listed some examples for illustration purposes:

- o the reading of [\[RFC3306\]](#) may lead to conclude that ff3x::/32 is the only allowed SSM IPv6 prefix block.
- o [\[RFC3956\]](#) states only ff70::/12 applies to Embedded-RP. Particularly, implementations should not treat the fff0::/12 range as Embedded-RP.

To avoid such confusion and to unambiguously associate a meaning with the remaining flags, the following requirement is made



Implementations MUST treat flag bits as separate bits.

[4.](#) RFC Updates

[4.1.](#) [RFC 3306](#)

This document changes [Section 4 of \[RFC3306\]](#) as follows:

OLD:


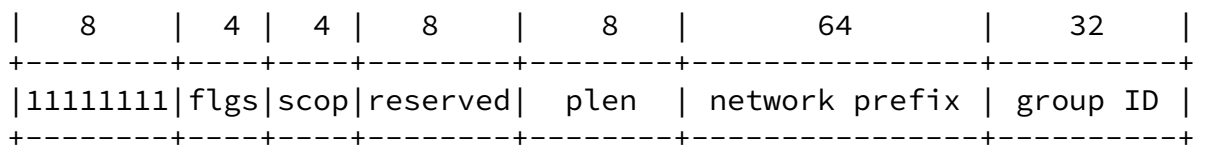


- o P = 0 indicates a multicast address that is not assigned based on the network prefix. This indicates a multicast address as defined in [ADDRARCH].
- o P = 1 indicates a multicast address that is assigned based on the network prefix.

- o If P = 1, T MUST be set to 1, otherwise the setting of the T bit is defined in [Section 2.7](#) of [ADDRARCH].

The reserved field MUST be zero.

NEW:

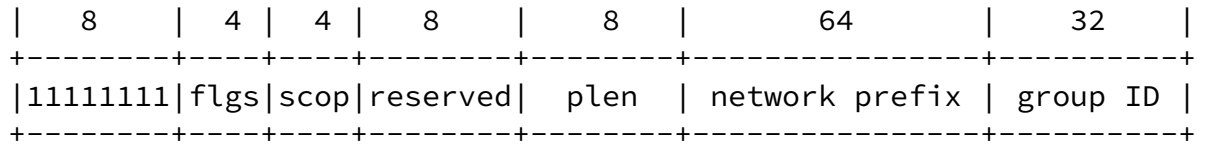

X and Y may each be set to 0 or 1.

- o P = 0 indicates a multicast address that is not assigned based on the network prefix. This indicates a multicast address as defined in [ADDRARCH].
- o P = 1 indicates a multicast address that is assigned based on the network prefix.
- o If P = 1, T MUST be set to 1, otherwise the setting of the T bit is defined in [Section 2.7](#) of [ADDRARCH].

This document changes [Section 6 of \[RFC3306\]](#) as follows:

OLD:

These settings create an SSM range of FF3x::/32 (where 'x' is any valid scope value). The source address field in the IPv6 header identifies the owner of the multicast address.

NEW:

If the flag bits are set to 0011, these settings create an SSM


range of ff3x::/32 (where 'x' is any valid scope value). The source address field in the IPv6 header identifies the owner of the multicast address. ff3x::/32 is not the only allowed SSM prefix range. For example if the most significant flag bit is set, then we would get the SSM range ffbx::/32.

4.2. [RFC 3956](#)

This document changes [Section 2 of \[RFC3956\]](#) as follows:

OLD:


As described in [\[RFC3306\]](#), the multicast address format is as follows:

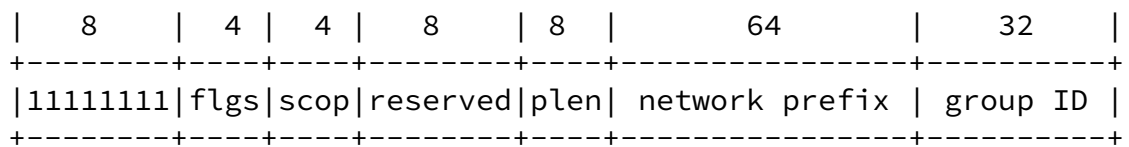

Where flgs are "0011". (The first two bits are as yet undefined, sent as zero and ignored on receipt.)

NEW:

The multicast address format is as follows:

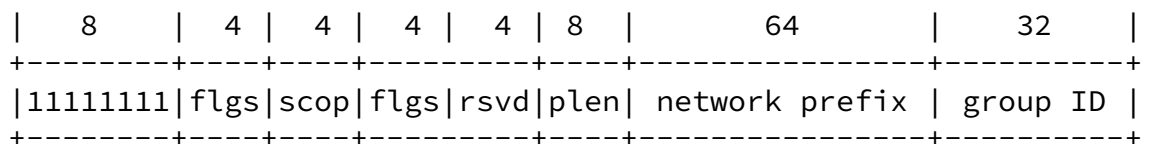


flgs is a set of four flags: +---+---+
 |X|R|P|T|
 +---+---+

X may be set to 0 or 1.

This document changes [Section 3 of \[RFC3956\]](#) as follows:



OLD:

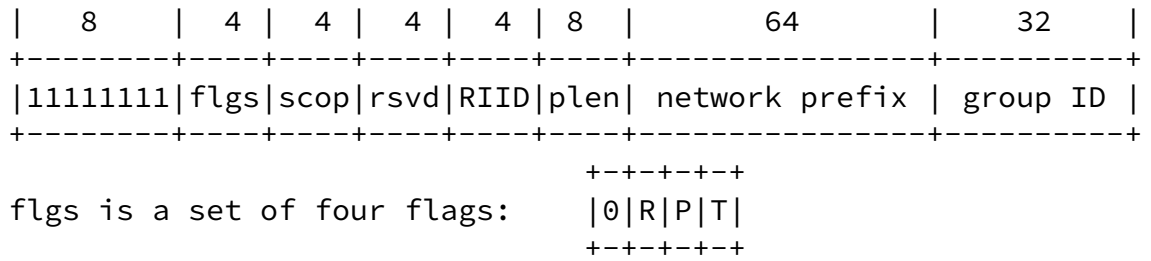

When the highest-order bit is 0, R = 1 indicates a multicast address that embeds the address on the RP. Then P MUST be set to 1, and consequently T MUST be set to 1, as specified in [\[RFC3306\]](#). In effect, this implies the prefix FF70::

The behavior is unspecified if P or T is not set to 1, as then the prefix would not be FF70::

NEW:

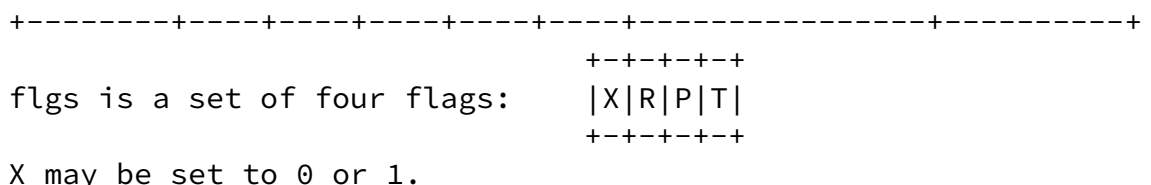

R = 1 indicates a multicast address that embeds the address of the RP. P MUST be set to 1, and consequently T MUST be set to 1, according

to [\[RFC3306\]](#), as this is a special case of unicast-prefix based addresses. This implies that for instance prefixes ff70::/12 and fff0::/12 are embedded RP prefixes, but all multicast addresses with the R-bit set to 1 MUST be treated as Embedded RP addresses. The behavior is unspecified if P or T is not set to 1. When the R-bit is set, the last 4 bits of the previously reserved field are interpreted as embedding the RP interface ID, as specified in this memo.

This document changes [Section 4 of \[RFC3956\]](#) as follows:

OLD:

It MUST be a multicast address with "flgs" set to 0111, that is, to be of the prefix FF70::/12,

NEW:

It MUST be a multicast address with R-bit set to 1.

It MUST have P-bit and T-bit both set to 1 when using the embedding in this document as it is a prefix-based address.

This document changes [Section 7.1 of \[RFC3956\]](#) as follows:

OLD:

To avoid loops and inconsistencies, for addresses in the range FF70::/12, the Embedded-RP mapping MUST be considered the longest possible match and higher priority than any other mechanism.

NEW:

To avoid loops and inconsistencies, for addresses with R-bit set to 1, the Embedded-RP mapping MUST be considered the longest possible match and higher priority than any other mechanism.

[5.](#) IANA Considerations

not clear exactly what these updates may be.

6. Security Considerations

Security considerations discussed in [[RFC3956](#)], [[RFC3306](#)] and [[RFC4291](#)] MUST be taken into account.

7. Acknowledgements

Many thanks to B. Haberman for the discussions prior to the publication of this document.

8. Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC3306] Haberman, B. and D. Thaler, "Unicast-Prefix-based IPv6 Multicast Addresses", [RFC 3306](#), August 2002.

[RFC3956] Savola, P. and B. Haberman, "Embedding the Rendezvous Point (RP) Address in an IPv6 Multicast Address", [RFC 3956](#), November 2004.

[RFC4291] Hinden, R. and S. Deering, "IP Version 6 Addressing Architecture", [RFC 4291](#), February 2006.

Authors' Addresses

Mohamed Boucadair
France Telecom
Rennes 35000
France

Email: mohamed.boucadair@orange.com

Stig Venaas
Cisco
USA

Email: stig@cisco.com