

Internet Engineering Task Force
INTERNET-DRAFT
Intended status: Experimental
Expires: 18 May 2008

Sally Floyd
ICIR
Eddie Kohler
UCLA
18 November 2007

**Profile for Datagram Congestion Control Protocol (DCCP)
Congestion ID 4: TCP-Friendly Rate Control for Small Packets (TFRC-SP)
draft-ietf-dccp-ccid4-01.txt**

Status of This Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on 18 May 2008.

Copyright Notice

Copyright (C) The IETF Trust (2007).

Abstract

This document specifies an experimental profile for Congestion Control Identifier 4, the Small-Packet variant of TCP-Friendly Rate

Control (TFRC), in the Datagram Congestion Control Protocol (DCCP). CCID 4 is for experimental use, and uses TFRC-SP [[RFC4828](#)], a variant of TFRC designed for applications that send small packets. CCID 4 is considered experimental because TFRC-SP is itself experimental, and is not proposed for widespread deployment in the global Internet at this time. The goal for TFRC-SP is to achieve roughly the same bandwidth in bits per second (bps) as a TCP flow using packets of up to 1500 bytes but experiencing the same level of congestion. CCID 4 is for experimental use for senders that send small packets and would like a TCP-friendly sending rate, possibly with Explicit Congestion Notification (ECN), while minimizing abrupt rate changes.

TO BE DELETED BY THE RFC EDITOR UPON PUBLICATION:

Changes from [draft-ietf-dccp-ccid4-00.txt](#):

- * Added that the [RFC 4342](#) errata applies to CCID 4 as well. From email from Leandro Sales.
- * Added the phrase "If the sender is calculating the loss event rate itself" to a non-normative description in [Section 5](#). Feedback from Gerrit Renker.
- * Deleted the Send Dropped Packets feature, since it is not used in CCID 4. In CCID 4, the Dropped Packets option is mandatory.

Changes from [draft-floyd-dccp-ccid4-01.txt](#):

- * Title changed to [draft-ietf-dccp-ccid4-00.txt](#).
- * Incorporated material from [draft-kohler-dccp-ccid3-drops-01.txt](#).
- * Added a reference to RFC3448bis.
- * Added a sentence saying that this is Experimental because TFRC-SP is Experimental.
- * General editing in response to feedback from Gorry.

Changes from [draft-floyd-dccp-ccid4-00.txt](#):

- * Added a subsection describing calculation of the average loss interval in TFRC-SP.
- * Changed the assumed DCCP-Data header size from 12 bytes to 16 bytes, for 48-bit sequence numbers. Feedback from Ian McDonald.
- * Added that the CCID4 sender can send two packets in a burst, if limited by OS granularity. From Ian McDonald.
- * Added that the implementor may track Faster Restart and implement it before an explicit update to the CCID4 RFC. From Ian McDonald.
- * Added an example to [Section 8.4](#) of when errors can occur in using the Window Counter to detect loss intervals of at most two round-trip times.

Changes from [draft-floyd-ccid4-00.txt](#):

- * Added the Dropped Packets option for reporting the number of

packets dropped in a loss interval.

* Added examples to [Section 8.4](#) of the receiver incorrectly inferring whether a loss interval was short or not.

END OF SECTION TO BE DELETED.

Table of Contents

1.	Introduction	6
2.	Conventions	6
3.	Usage	7
3.1.	Relationship with TFRC	7
3.2.	Example Half-Connection	7
4.	Connection Establishment	8
5.	Congestion Control on Data Packets	8
5.1.	Response to Idle and Application-limited Periods	10
5.2.	Response to Data Dropped and Slow Receiver	10
5.3.	Packet Sizes	10
6.	Acknowledgements	10
6.1.	Loss Interval Definition	10
6.2.	Congestion Control on Acknowledgements	11
6.3.	Acknowledgements of Acknowledgements	11
6.4.	Quiescence	11
7.	Explicit Congestion Notification	11
8.	Options and Features	11
8.1.	Window Counter Value	12
8.2.	Elapsed Time Options	12
8.3.	Receive Rate Option	13
8.4.	Send Loss Event Rate Feature	13
8.5.	Loss Event Rate Option	13
8.6.	Loss Intervals Option	13
8.7.	Dropped Packets Option	14
8.7.1.	Example	15
9.	Verifying Congestion Control Compliance With ECN	16
9.1.	Verifying the ECN Nonce Echo	16
9.2.	Verifying the Reported Loss Intervals and Loss Event Rate	17
10.	Implementation Issues	17
10.1.	Timestamp Usage	17
10.2.	Determining Loss Events at the Receiver	17
10.3.	Sending Feedback Packets	17
11.	Security Considerations	17
12.	IANA Considerations	17
12.1.	Reset Codes	17
12.2.	Option Types	18
12.3.	Feature Numbers	18
13.	Thanks	18

Normative References	18
Informative References	19
Authors' Addresses	20
Full Copyright Statement	20
Intellectual Property	20
Acknowledgement	21

List of Tables

Table 1: DCCP CCID 4 Options	11
Table 2: DCCP CCID 4 Feature Numbers	12

1. Introduction

This document contains the profile for Congestion Control Identifier 4, TCP-Friendly Rate Control for Small Packets (TFRC-SP), in the Datagram Congestion Control Protocol (DCCP) [[RFC4340](#)]. CCID 4 differs from CCID 3 in that CCID 4 uses TFRC-SP, the Small-Packet variant of TFRC, while CCID 3 [[RFC4342](#)] uses standard TFRC [[RFC3448](#)]. This document assumes that the reader is familiar with [[RFC4342](#)], instead of repeating from that document unnecessarily.

CCID 4 differs from CCID 3 only in the following respects:

- o Header size: For TFRC-SP, the allowed transmit rate in bytes per second is reduced by a factor that accounts for packet header size. This is specified for TFRC-SP in [Section 4.2 of \[RFC4828\]](#), and described for CCID 4 in [Section 5](#) below.
- o Minimum sending rate: TFRC-SP enforces a minimum interval of 10 milliseconds between data packets. This is specified for TFRC-SP in [Section 4.3 of \[RFC4828\]](#), and described for CCID 4 in [Section 5](#) below.
- o Loss rates for short loss intervals: For short loss intervals of at most two round-trip times, the loss rate is computed by counting the actual number of packets lost or marked. For such a short loss interval with N data packets, including K lost or marked data packets, the loss interval length is calculated as N/K, instead of as N. This is specified for TFRC-SP in [Section 4.4 of \[RFC4828\]](#). If the sender is computing the loss event rate, the Dropped Packets option specified in [Section 8.7](#) is required, in addition to the default CCID 3's Loss Intervals option. [Section 8.7](#) describes the use of the Dropped Packets option in calculating the loss event rate. The computation of the loss rate by the receiver for the Loss Event Rate option is described for CCID 4 in [Section 8.4](#) below.
- o The nominal segment size: In TFRC-SP, the nominal segment size used by the TCP throughput equation is set to 1460 bytes. This is specified for TFRC-SP in [Section 4.5 of \[RFC3448\]](#), and described for CCID 4 in [Section 5](#) below.

2. Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

Additional terminology is described in [Section 2 of \[RFC4342\]](#).

3. Usage

Like CCID 3, CCID 4's congestion control is appropriate for flows that would prefer to minimize abrupt changes in the sending rate, including streaming media applications with small or moderate receiver buffering before playback.

CCID 4 is designed to be used either by applications that use a small fixed segment size, or by applications that change their sending rate by varying the segment size. If CCID 4 is used by an application that varies its segment size in response to changes in the allowed sending rate in bps, we note that CCID 4 doesn't dictate the segment size to be used by the application; this is done by the application itself. The CCID 4 sender determines the allowed sending rate in bps, in response to on-going feedback from the CCID 4 receiver, and the application can use information about the current allowed sending rate to decide whether to change the current segment size.

We note that in some environments there will be a feedback loop, with changes in the packet size or in the sending rate in bps affecting congestion along the path, therefore affecting the allowed sending rate in the future.

3.1. Relationship with TFRC

The congestion control mechanisms described here follow the TFRC-SP mechanism specified in [\[RFC4828\]](#). As with CCID 3, conformant CCID 4 implementations MAY track updates to the TCP throughput equation directly, as updates are standardized in the IETF, rather than waiting for revisions of this document. This document is based on CCID 3 [\[RFC4342\]](#) as modified by the [RFC 4342 Errata \[RFC4342Errat\]](#), and on TFRC [\[RFC3448\]](#) as modified by the [RFC 3448 Errata \[RFC3448Errat\]](#). (We don't expect that errata would be added to CCID 3 that didn't apply to CCID 4, but if this should happen, we would say this explicitly in the errata.) If [\[RFC3448bis\]](#) is standardized in the IETF as a revision of [\[RFC3448\]](#), then [\[RFC3448bis\]](#) MAY be implemented with CCID4 without having to wait for an explicit update to this document.

3.2. Example Half-Connection

This example shows the typical progress of a half-connection using CCID 4's TFRC Congestion Control, not including connection initiation and termination. The example is informative, not normative. This example differs from that for CCID 3 in [\[RFC4342\]](#) only in that the allowed transmit rate is determined by [\[RFC4828\]](#) as well as by

[[RFC3448](#)].

1. The sender transmits DCCP-Data packets, where the sending rate is governed by the allowed transmit rate as specified in [[RFC4828](#)]. Each DCCP-Data packet has a sequence number, and the DCCP header's CCVal field contains the window counter value, used by the receiver in determining when multiple losses belong in a single loss event.

In the typical case of an ECN-capable half-connection, each DCCP-Data and DCCP-DataAck packet is sent as ECN-Capable, with either the ECT(0) or the ECT(1) codepoint set. The use of the ECN Nonce with TFRC is described in [Section 9](#).

2. The receiver sends DCCP-Ack packets acknowledging the data packets at least once per round-trip time, unless the sender is sending at a rate of less than one packet per round-trip time [[RFC3448](#)] ([Section 6](#)). Each DCCP-Ack packet uses a sequence number, identifies the most recent packet received from the sender, and includes feedback about the recent loss intervals experienced by the receiver.
3. The sender continues sending DCCP-Data packets as controlled by the allowed transmit rate. Upon receiving DCCP-Ack packets, the sender updates its allowed transmit rate as specified in [[RFC3448](#)] ([Section 4.3](#)) and [[RFC4828](#)]. This update is based upon a loss event rate calculated by the sender, based on the receiver's loss intervals feedback. If it prefers, the sender can also use a loss event rate calculated and reported by the receiver.
4. The sender estimates round-trip times and calculates a nofeedback time, as specified in [[RFC3448](#)] ([Section 4.4](#)). If no feedback is received from the receiver in that time (at least four round-trip times), the sender halves its sending rate.

4. Connection Establishment

The connection establishment is as specified in [Section 4 of \[RFC4342\]](#).

5. Congestion Control on Data Packets

CCID 4 uses the congestion control mechanisms of TFRC [[RFC3448](#)] and TFRC-SP [[RFC4828](#)]. [[RFC4828](#)] MUST be considered normative except where specifically indicated.

Loss Event Rate

As with CCID 3, the basic operation of CCID 4 centers around the calculation of a loss event rate: the number of loss events as a fraction of the number of packets transmitted, weighted over the last several loss intervals. For CCID 4, this loss event rate, a round-trip time estimate, and a nominal packet size of 1460 bytes are plugged into the TCP throughput equation, as specified in [RFC 3448](#) ([Section 3.1](#)) and [[RFC4828](#)].

Because CCID 4 is intended for applications that send small packets, the allowed transmit rate derived from the TCP throughput equation is reduced by a factor that accounts for packet header size, as specified in [Section 4.2 of \[RFC4828\]](#). The header size on data packets is estimated as 36 bytes (20 bytes for the IP header, and 16 bytes for the DCCP-Data header with 48-bit sequence numbers). If the DCCP sender is sending N-byte data packets, the allowed transmit rate is reduced by $N/(N+36)$. CCID 4 senders are limited to this fair rate. The header size would be 32 bytes instead of 36 bytes when 24-bit sequence numbers were used in the DCCP-Data header.

As explained in [Section 4.2 of \[RFC4828\]](#), the actual header could be larger or smaller than the assumed value, due to IP or DCCP options, IPv6, IP tunnels, header compression, and the like. Because we are only aiming at rough fairness, and at a rough incentive for applications, the default use of a 32-byte or 36-byte header in the calculations of the header bandwidth is sufficient for both IPv4 and IPv6.

If the sender is calculating the loss event rate itself, the loss event rate can be calculated using recent loss interval lengths reported by the receiver. Loss intervals are precisely defined in [Section 6.1 of \[RFC4342\]](#), with the modification in [[RFC4828](#)] ([Section 3](#)) for loss intervals of at most two round-trip times. In summary, a loss interval is up to 1 RTT of possibly lost or ECN-marked data packets, followed by an arbitrary number of non-dropped, non-marked data packets. The CCID 3 Loss Intervals option is used to report loss interval lengths; see [Section 8.6](#).

For loss intervals of at most two round-trip times, CCID 4 calculates the loss event rate for that interval by counting the number of packets lost or marked, as described in [Section 4.4 of \[RFC4828\]](#). Thus, for such a short loss interval with N data packets, including K lost or marked data packets, the loss interval length is calculated as N/K , instead as N. The Dropped Packets option is used to report K, the count of lost or marked data packets.

Unlike CCID 3, the CCID 4 sender enforces a minimum interval of 10 ms between data packets, regardless of the allowed transmit rate. If operating system scheduling granularity makes this impractical, up to

one additional packet MAY be sent per timeslice, providing that no more than three packets are sent in any 30 ms interval.

Other Congestion Control Mechanisms

The other congestion control mechanisms such as slow-start, feedback packets, and the like are exactly as in CCID 3, and are described in the subsection on "Other Congestion Control Mechanisms" of [Section 5 in \[RFC4342\]](#).

[5.1.](#) Response to Idle and Application-limited Periods

This is described in [Section 5.1 of \[RFC4342\]](#). If Faster Restart is standardized in the IETF for TFRC [[KFS07](#)], then Faster Restart MAY be implemented in CCID4 without having to wait for an explicit update to this document.

[5.2.](#) Response to Data Dropped and Slow Receiver

This is described in [Section 5.2 of \[RFC4342\]](#).

[5.3.](#) Packet Sizes

CCID 4 is intended for applications that use a fixed small segment size, or that vary their segment size in response to congestion.

The CCID 4 sender uses a segment size of 1460 bytes in the TCP throughput equation. This gives the CCID 4 sender roughly the same sending rate in bytes per second as a TFRC flow using 1460-byte segments but experiencing the same packet drop rate.

[6.](#) Acknowledgements

The acknowledgements are as specified in [Section 6 of \[RFC4342\]](#) with the exception of the Loss Interval lengths specified below.

[6.1.](#) Loss Interval Definition

The loss interval definition is as defined in [Section 6.1 of \[RFC4342\]](#), except as specified below. [Section 6.1.1 of RFC 4342](#) specifies that for all loss intervals except the first one, the data length equals the sequence length minus the number of non-data packets the sender transmitted during the loss interval, with a minimum data length of one packet. For TFRC-SP, for short loss intervals of at most two round-trip times, the loss interval length is computed not as the data length of the loss interval, but instead as the data length divided by the number of dropped or marked data packets.

[Section 5.4 of RFC 4342](#) described when to use the most recent loss interval in the calculation of the average loss interval. [\[RFC4828\]](#) adds to this procedure the restriction that the most recent loss interval is only used in the calculation of the average loss interval if the most recent loss interval is greater than two round-trip times. The pseudocode is given in [Section 3 of \[RFC4828\]](#).

[6.2.](#) Congestion Control on Acknowledgements

The congestion control on acknowledgements is as specified in [Section 6.2 of \[RFC4342\]](#).

[6.3.](#) Acknowledgements of Acknowledgements

Procedures for the acknowledgement of acknowledgements are as specified in [Section 6.3 of \[RFC4342\]](#).

[6.4.](#) Quiescence

The procedure for detecting that the sender has gone quiescent is as specified in [Section 6.4 of \[RFC4342\]](#).

[7.](#) Explicit Congestion Notification

Procedures for the use of Explicit Congestion Notification (ECN) are as specified in [Section 7 of \[RFC4342\]](#).

[8.](#) Options and Features

CCID 4 can make use of DCCP's Ack Vector, Timestamp, Timestamp Echo, and Elapsed Time options, and its Send Ack Vector and ECN Incapable features. CCID 4 also imports the currently defined CCID 3-specific options and features [\[RFC4342\]](#), augmented by the Dropped Packets option specified in this document. Each CCID 4-specific option and feature contains the same data as the corresponding CCID 3 option or feature, and is interpreted in the same way, except as specified elsewhere in this document.

Type	Option Length	Meaning	DCCP-Data?	Section Reference
-----	-----	-----	-----	-----
128-191		Reserved		
192	6	Loss Event Rate	N	8.5
193	variable	Loss Intervals	N	8.6
194	6	Receive Rate	N	8.3
195	variable	Dropped Packets	N	8.7
196-255		Reserved		

Table 1: DCCP CCID 4 Options

The "DCCP-Data?" column indicates that all currently defined CCID 4-specific options MUST be ignored when they occur on DCCP-Data packets.

As with CCID 3, the following CCID-specific features are also defined.

Number	Meaning	Rec'n Rule	Initial Value	Req'd	Section Reference
-----	-----	-----	-----	-----	-----
128-191	Reserved				
192	Send Loss Event Rate	SP	0	N	8.4
193-255	Reserved				

Table 2: DCCP CCID 4 Feature Numbers

More information is available in [Section 8 of \[RFC4342\]](#).

8.1. Window Counter Value

The use of the Window Counter Value in the DCCP generic header's CCVal field is as specified in [Section 8.1 of \[RFC4342\]](#). In addition to their use described in CCID 3, the CCVal counters are used by the receiver in CCID 4 to determine when the length of a loss interval is at most two round-trip times. None of these procedures require the receiver to maintain an explicit estimate of the round-trip time. However, [Section 8.1 of \[RFC4342\]](#) gives a procedure that implementors may use if they wish to keep such an RTT estimate using CCVal.

8.2. Elapsed Time Options

The use of the Elapsed Time option is defined in [Section 8.2 of \[RFC4342\]](#).

8.3. Receive Rate Option

The Receive Rate option is as specified in [Section 8.3 of \[RFC4342\]](#).

8.4. Send Loss Event Rate Feature

The Send Loss Event Rate feature is as defined in [Section 8.4 of \[RFC4342\]](#).

See [\[RFC3448\]](#), [Section 5](#) and [\[RFC4828\]](#), [Section 4.4](#) for a normative calculation of the loss event rate. [Section 4.4 of \[RFC4828\]](#) modifies the calculation of the loss interval size for loss intervals of at most two round-trip times.

If the CCID 4 receiver is using the Loss Event Rate option, the receiver needs to be able to determine if a loss interval is short, of at most two round-trip times. The receiver can heuristically detect a short loss interval by using the Window Counter in arriving data packets. The sender increases the Window Counter by 1 every quarter of a round-trip time, with the caveat that the Window Counter is never increased by more than five, modulo 16, from one data packet to the next. Using the Window Counter to detect loss intervals of at most two round-trip times could result in some false positives, with some longer loss intervals incorrectly identified as short ones. For example, if the loss interval contained data packets with only two Window Counter values, say, k and $k+5$, then the receiver could not tell if the loss interval was at most two round-trip times long or not. Similarly, if the sender sent data packets with Window Counter values of 4, 8, 12, 0, 5, but the packets with Window Counter values of 8, 12, and 0 were lost in the network, then the receiver would only receive data packets with Window Counter values of 4 and 5, and would incorrectly infer that the loss interval was at most two round-trip times.

8.5. Loss Event Rate Option

The Loss Event Rate option is as specified in [Section 8.5 of \[RFC4342\]](#).

See [\[RFC3448\]](#) ([Section 5](#)) and [\[RFC4828\]](#) for a normative calculation of the loss event rate.

8.6. Loss Intervals Option

The Loss Intervals option is as specified in [Section 8.6 of \[RFC4342\]](#).

8.7. Dropped Packets Option

This section describes the Dropped Packets option, a mechanism for reporting the number of lost and marked packets per loss interval. By reporting both the Loss Intervals and Dropped Packets options on the feedback packets, the receiver gives the sender sufficient information to calculate the loss event rate, or to verify the calculation of the reported loss event rate, if the sender so desires.

The core information reported by CCID 4 receivers is a list of recent loss intervals, where a loss interval begins with a lost or ECN-marked data packet; continues with at most one round-trip time's worth of packets that may or may not be lost or marked; and completes with an arbitrarily long series of non-dropped, non-marked data packets. Loss intervals model the congestion behavior of TCP NewReno senders, which reduce their sending rate at most once per window of data packets. Consequently, the number of packets lost in a loss interval is not important for either TCP's or TFRC's congestion response. CCID 3's Loss Intervals option reports the length of each loss interval's lossy part, not the number of packets that were actually lost or marked in that lossy part.

However, for computing the loss event rate for periods that include short loss intervals the TFRC-SP sender needs to know the number of packets lost or marked in a loss interval, over and above the length of the loss interval in packets. The Dropped Packets option, a CCID 4-specific option, reports this information. Together with the existing Loss Intervals option, the Dropped Packets option allows the CCID 4 sender to discover exactly how many packets were dropped from each loss interval. The receiver reports the number of lost or marked packets in its recently observed loss intervals using the Dropped Packets option.

The Dropped Packets Option is specified as follows:

```
+-----+-----+-----+-----+-----+-----+
|11000011| Length |   Drop Count   | More Drop Counts...
+-----+-----+-----+-----+-----+-----+
Type=195                               3 bytes
```

The Dropped Packets option contains information about one to 84 consecutive loss intervals, always including the most recent loss interval. As with the Loss Intervals option, intervals are listed in reverse chronological order. Should more than 84 loss intervals need to be reported, multiple Dropped Packets options can be sent; the second option begins where the first left off, and so forth.

One Drop Count is specified per loss interval. Drop Count is a 24-bit number that equals the number of packets lost or received ECN-marked during the corresponding loss interval. By definition, this number MUST NOT exceed the corresponding loss interval's Loss Length.

CCID 4 receivers MUST report Dropped Packets options with every feedback packet. Any packet containing a Loss Intervals option MUST also contain a Dropped Packets option covering the same loss intervals. If a feedback packet does not include a relevant Dropped Packets option, and the CCID 4 sender is computing the loss event rate itself, the sender MUST treat the relevant loss intervals' Drop Counts as equal to the corresponding Loss Lengths, as specified below. This conservative assumption leads to the minimum send rate for the corresponding loss intervals.

Consider a CCID 4 receiver. As specified in Section 8.6.1 of [RFC 4342](#), the receiver sends the Loss Intervals option for all intervals that have not been acknowledged by the sender. When this receiver sends a feedback packet containing information about the N most recent loss intervals (packaged in one or more Loss Intervals options), then the receiver includes on the same feedback packet one or more Dropped Packets options covering exactly those N loss intervals. CCID 4 senders MUST ignore Drop Counts information for loss intervals not covered by a Loss Intervals option on the same feedback packet. Conversely, a CCID 4 sender might want to interpolate Drop Counts information for a loss interval not covered by any Dropped Packets options; such a sender MUST use the corresponding loss interval's Loss Length as its Drop Count.

Each loss interval's Drop Count MUST by definition be less than or equal to its Loss Length. A Drop Count that exceeds the corresponding Loss Length MUST be treated as equal to the Loss Length.


[8.7.1](#). Example

Consider the following sequence of packets, where "-" represents a safely delivered packet and "*" represents a lost or marked packet. This sequence is repeated from [\[RFC4342\]](#).

Sequence

Numbers:	0	10	20	30	40	44
	-----*	-----***	-----*	-----*	-----*	-----*

Assuming that packet 43 was lost, not marked, this sequence might be divided into loss intervals as follows:

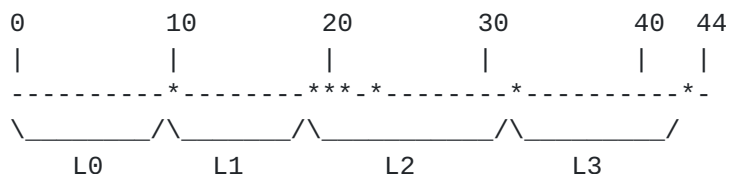

A Loss Intervals option sent on a packet with Acknowledgement Number 44 to acknowledge this set of loss intervals might contain the bytes 193,39,2, 0,0,10, 128,0,1, 0,0,10, 0,0,8, 0,0,5, 0,0,10, 0,0,8, 0,0,1, 0,0,8, 0,0,10, 128,0,0, 0,0,15; for interpretation of this option, see [[RFC4342](#)]. A Dropped Packets option sent in tandem on this packet would contain the bytes 195,14, 0,0,1, 0,0,4, 0,0,1, 0,0,0. This is interpreted as follows.

195 The Dropped Packets option number.

14 The length of the option, including option type and length bytes. This option contains information about $(14 - 2)/3 = 4$ loss intervals. Note that the two most recent sequence numbers are not yet part of any loss interval -- the Loss Intervals option includes them in its Skip Length -- and are thus not included in the Dropped Packets option.

0,0,1

These bytes define the Drop Count for L3, which is 1. As required, the Drop Count is less than or equal to L3's Loss Length, which is also 1.

0,0,4

The Drop Count for L2 is 4.

0,0,1

The Drop Count for L1 is 1.

0,0,0

Finally, the Drop Count for L0 is 0.

9. Verifying Congestion Control Compliance With ECN

Verifying congestion control compliance with ECN is as discussed in [Section 9 of \[RFC4342\]](#).

9.1. Verifying the ECN Nonce Echo

Procedures for verifying the ECN Nonce Echo are as specified in [Section 9.1 of \[RFC4342\]](#).

9.2. Verifying the Reported Loss Intervals and Loss Event Rate

[Section 9.2 of \[RFC4342\]](#) discusses the sender's possible verification of loss intervals and loss event rate information reported by the receiver.

10. Implementation Issues

10.1. Timestamp Usage

The use of the Timestamp option is as discussed in [Section 10.1 of \[RFC4342\]](#).

10.2. Determining Loss Events at the Receiver

The use of the window counter by the receiver to determine if multiple lost packets belong to the same loss event is as described in [Section 10.2 of \[RFC4342\]](#).

10.3. Sending Feedback Packets

The procedure for sending feedback packets is as described in [Section 10.3 of \[RFC4342\]](#).

11. Security Considerations

Security considerations include those discussed in [Section 11 of \[RFC4342\]](#). There are no new security considerations introduced by CCID 4.

12. IANA Considerations

This specification defines the value 4 in the DCCP CCID namespace managed by IANA.

CCID 4 also uses three sets of numbers whose values should be allocated by IANA, namely CCID 4-specific Reset Codes, option types, and feature numbers. This document makes no particular allocations from the Reset Code range, except for experimental and testing use [\[RFC3692\]](#). We refer to the Standards Action policy outlined in [\[RFC2434\]](#).

12.1. Reset Codes

Each entry in the DCCP CCID 4 Reset Code registry contains a CCID 4-specific Reset Code, which is a number in the range 128-255; a

short description of the Reset Code; and a reference to the RFC defining the Reset Code. Reset Codes 184-190 and 248-254 are permanently reserved for experimental and testing use. The remaining Reset Codes -- 128-183, 191-247, and 255 -- are currently reserved, and should be allocated with the Standards Action policy, which requires IESG review and approval and standards-track IETF RFC publication.

12.2. Option Types

Each entry in the DCCP CCID 4 option type registry contains a CCID 4-specific option type, which is a number in the range 128-255; the name of the option, such as "Loss Intervals"; and a reference to the RFC defining the option type. The registry is initially populated using the values in Table 1, in [Section 8](#). This includes the value 195 allocated for the Dropped Packets option. This document allocates option types 192-195, and option types 184-190 and 248-254 are permanently reserved for experimental and testing use. The remaining option types -- 128-183, 191, 196-247, and 255 -- are currently reserved, and should be allocated with the Standards Action policy, which requires IESG review and approval and standards-track IETF RFC publication.

12.3. Feature Numbers

Each entry in the DCCP CCID 4 feature number registry contains a CCID 4-specific feature number, which is a number in the range 128-255; the name of the feature, such as "Send Loss Event Rate"; and a reference to the RFC defining the feature number. The registry is initially populated using the values in Table 2, in [Section 8](#). This document allocates feature number 192, and feature numbers 184-190 and 248-254 are permanently reserved for experimental and testing use. The remaining feature numbers -- 128-183, 191, 193-247, and 255 -- are currently reserved, and should be allocated with the Standards Action policy, which requires IESG review and approval and standards-track IETF RFC publication.

13. Thanks

We thank Gorry Fairhurst, Ian McDonald, Gerrit Renker, and Leandro Sales for feedback on this document.

Normative References

- [RFC2119] S. Bradner. Key Words For Use in RFCs to Indicate Requirement Levels. [RFC 2119](#).

- [RFC2434] T. Narten and H. Alvestrand. Guidelines for Writing an IANA Considerations Section in RFCs. [RFC 2434](#).
- [RFC3448] M. Handley, S. Floyd, J. Padhye, and J. Widmer, TCP Friendly Rate Control (TFRC): Protocol Specification, [RFC 3448](#), Proposed Standard, January 2003.
- [RFC3448Errat] RFC Errata for [RFC 3448](#), URL "<http://www.rfc-editor.org/errata.php>".
- [RFC3692] T. Narten. Assigning Experimental and Testing Numbers Considered Useful. [RFC 3692](#).
- [RFC4340] Kohler, E., Handley, M., and S. Floyd. Datagram Congestion Control Protocol (DCCP), [RFC 4340](#), March 2006.
- [RFC4342] Floyd, S., Kohler, E., and J. Padhye. Profile for Datagram Congestion Control Protocol (DCCP) Congestion Control ID 3: TCP-Friendly Rate Control (TFRC), [RFC 4342](#), March 2006.
- [RFC4342Errat] RFC Errata for [RFC 4342](#), URL "<http://www.rfc-editor.org/errata.php>".
- [RFC4828] S. Floyd and E. Kohler. TCP Friendly Rate Control (TFRC): the Small-Packet (SP) Variant. [RFC 4828](#), April 2007.

Informative References

- [KFS07] Kohler, E., S. Floyd, and A. Sathiaselalan, Faster Restart for TCP Friendly Rate Control (TFRC), Internet-draft [draft-ietf-dccp-tfrc-faster-restart-04.txt](#), work-in-progress, September 2007.
- [RFC3448bis] M. Handley, S. Floyd, J. Padhye, and J. Widmer, TCP Friendly Rate Control (TFRC): Protocol Specification, internet-draft [draft-ietf-dccp-rfc3448bis-02.txt](#), work-in-progress, July 2007.

Authors' Addresses

Sally Floyd
ICSI Center for Internet Research
1947 Center Street, Suite 600
Berkeley, CA 94704
USA

Email: floyd@icir.org

Eddie Kohler
4531C Boelter Hall
UCLA Computer Science Department
Los Angeles, CA 90095
USA

Email: kohler@cs.ucla.edu

Full Copyright Statement

Copyright (C) The IETF Trust (2007).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of

such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Acknowledgement

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).

