

**Definitions of Managed Objects
for Monitoring and Controlling the
UNI/NNI Multilink Frame Relay Function**

October 6, 2000

[draft-ietf-frnetmib-mfrmib-04](#)

Prayson Pate
Overture Networks
prayson.pate@overturenetworks.com

Bob Lynch
Larscom Incorporated
blynch@larscom.com

Kenneth Rehbehn
Megisto Systems, Inc.
krehbehn@megisto.com

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC 2026](#). Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet- Drafts as reference material or to cite them other than as ``work in progress.''

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

Expires March 2001

[Page 1]

Abstract

This memo defines a Management Information Base (MIB) for monitoring and controlling a UNI/NNI Multilink Frame Relay Function as defined in Frame Relay Forum FRF.16. This MIB also include conformance and notification information.

Copyright Notice

Copyright (C) The Internet Society (2000). All Rights Reserved.

Table of Contents

1	The SNMP Management Framework	4
2	Overview	5
2.1	Multilink Frame Relay Background	5
2.1.1	Terminology	5
2.1.2	Reference Model	6
2.2	Structure of the MIB	7
2.2.1	mfrBundleMaxNumBundles	7
2.2.2	mfrBundleNextIndex	7
2.2.3	mfrBundleTable	7
2.2.4	Bundle-to-ifIndex Mapping Table	7
2.2.5	mfrBundleLinkTable	8
2.3	Relationship With Other MIBS and Tables	8
2.3.1	Relationship With Interface Table	8
2.3.1.1	Bundle Links	8
2.3.1.2	Bundles	8
2.3.1.3	Mapping Between ifIndex and mfrBundleIndex	9
2.3.1.4	ifTable Objects	9
2.3.2	Relationship With Interface Stack Table	10
2.3.3	Relationship With Frame Relay DTE MIB	10
2.3.4	Relationship With Frame Relay Service MIB	10
2.3.5	Example	11
2.4	Creation Of Bundles and Bundle Links	12
2.4.1	Creation Of Bundles	12
2.4.2	Creation Of Bundle Links	12
2.5	Notifications	13
2.5.1	Bundle	13
2.5.1.1	linkUp	13
2.5.1.2	linkDown	13
2.5.2	Bundle Link	13
2.5.2.1	linkUp	13
2.5.2.2	linkDown	13
2.5.2.3	mfrMibTrapBundleLinkMismatch	14
3	Object Definitions	15
4	Acknowledgments	34
5	References	35
6	Security Considerations	37
7	Authors' Addresses	38
8	Full Copyright Section	39

Expires March 2001

[Page 3]

1. The SNMP Management Framework

The SNMP Management Framework presently consists of five major components:

- o An overall architecture, described in [RFC 2571](#) [[RFC2571](#)].
- o Mechanisms for describing and naming objects and events for the purpose of management. The first version of this Structure of Management Information (SMI) is called SMIV1 and described in STD 16, [RFC 1155](#) [[RFC1155](#)], STD 16, [RFC 1212](#) [[RFC1212](#)] and [RFC 1215](#) [[RFC1215](#)]. The second version, called SMIV2, is described in STD 58, [RFC 2578](#) [[RFC2578](#)], [RFC 2579](#) [[RFC2579](#)] and [RFC 2580](#) [[RFC2580](#)].
- o Message protocols for transferring management information. The first version of the SNMP message protocol is called SNMPv1 and described in STD 15, [RFC 1157](#) [[RFC1157](#)]. A second version of the SNMP message protocol, which is not an Internet standards track protocol, is called SNMPv2c and described in [RFC 1901](#) [[RFC1901](#)] and [RFC 1906](#) [[RFC1906](#)]. The third version of the message protocol is called SNMPv3 and described in [RFC 1906](#) [[RFC1906](#)], [RFC 2572](#) [[RFC2572](#)] and [RFC 2574](#) [[RFC2574](#)].
- o Protocol operations for accessing management information. The first set of protocol operations and associated PDU formats is described in STD 15, [RFC 1157](#) [[RFC1157](#)]. A second set of protocol operations and associated PDU formats is described in [RFC 1905](#) [[RFC1905](#)].
- o A set of fundamental applications described in [RFC 2573](#) [[RFC2573](#)] and the view-based access control mechanism described in [RFC 2575](#) [[RFC2575](#)].

A more detailed introduction to the current SNMP Management Framework can be found in [RFC 2570](#) [[RFC2570](#)].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. Objects in the MIB are defined using the mechanisms defined in the SMI.

This memo specifies a MIB module that is compliant to the SMIV2. A MIB conforming to the SMIV1 can be produced through the appropriate translations. The resulting translated MIB must be semantically equivalent, except where objects or events are omitted because no translation is possible (use of Counter64). Some machine readable information in SMIV2 will be converted into textual descriptions in SMIV1 during the translation process. However, this loss of machine readable information is not considered to change the semantics of the

Expires March 2001

[Page 4]

MIB.

2. Overview

This document defines a Management Information Base (MIB) for monitoring and controlling the UNI/NNI Multilink Frame Relay function. The agreement on which this MIB is based was defined and documented by the Frame Relay Forum in the Frame Relay Forum Document FRF.16 [[FRF.16](#)].

2.1. Multilink Frame Relay Background

Multilink Frame Relay (MFR) for the User-to-Network Interface (UNI) and the Network-to-Network Interface (NNI) provides physical interface emulation for frame relay devices. The emulated physical interface consists of one or more physical links, called "bundle links", aggregated together into a single "bundle" of bandwidth. This service provides a frame-based inverse multiplexing function, sometimes referred to as an "IMUX".

The bundle provides the same order-preserving service as a physical layer for frames sent on a data link connection. In addition, the bundle provides support for all Frame Relay services based on UNI and NNI standards.

2.1.1. Terminology

Physical Link --	A single physical interface that interconnects two devices in a frame relay network (e.g. DS1, DS0, Bearer channel, refer to FRF.14).
Bundle --	A grouping of one or more physical links using the formats and procedures of multilink frame relay. The bundle operates as a logical interface function that emulates a single physical interface to the Q.922 data link layer.
Bundle Link --	A MFR sub-component that controls operation of one of the bundle's physical links.

Expires March 2001

[Page 5]

2.1.2. Reference Model

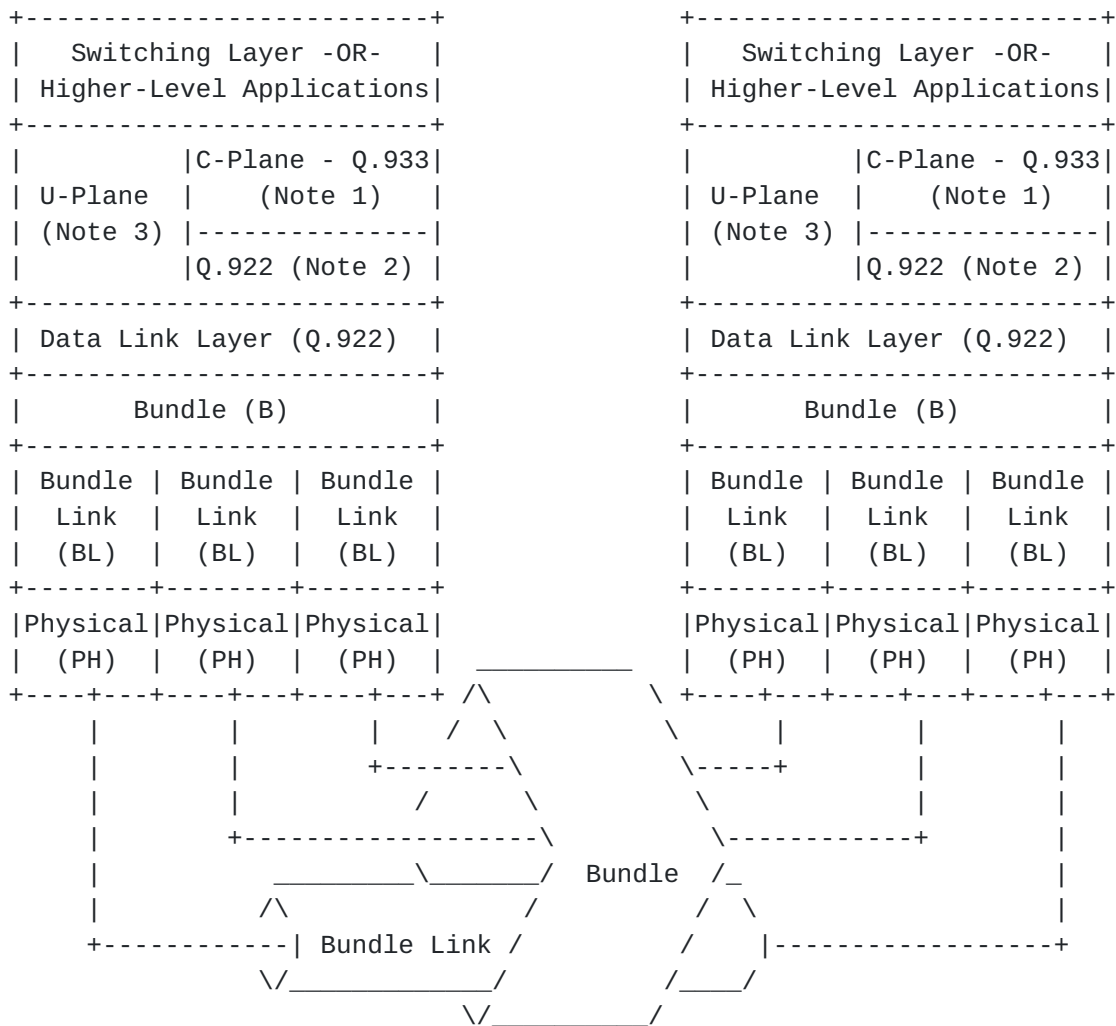


Figure 1: MFR Reference Diagram

Note 1: C-Plane operation as described in Q.933 [[Q.933](#)] and FRF.4 [[FRF.4](#)]

Note 2: Multiple frame acknowledged information transfer mode as described in Q.922 [[Q.922](#)]

Note 3: Core aspects for use with frame relay bearer service as described in Q.922, Annex A [[Q.922](#)]

Expires March 2001

[Page 6]

2.2. Structure of the MIB

The UNI/NNI MFR managed objects consist of two scalar objects and three tables.

2.2.1. mfrBundleMaxNumBundles

This scalar is used to inform the manager of the maximum number of bundles supported by this device.

2.2.2. mfrBundleNextIndex

This scalar is used to assist the manager in selecting a value for mfrBundleIndex during row creation. It can also be used to avoid race conditions with multiple managers trying to create rows in the table (see [RFC 2494](#) [[RFC2494](#)] for one such algorithm).

2.2.3. mfrBundleTable

This table provides a means to configure and monitor bundles. It is indexed by mfrBundleIndex and contains these columns:

- mfrBundleIndex	Integer32
- mfrBundleIfIndex	InterfaceIndex
- mfrBundleRowStatus	RowStatus
- mfrBundleNearEndName	SnmpAdminString
- mfrBundleFragmentation	INTEGER
- mfrBundleMaxFragSize	Integer32
- mfrBundleTimerHello	INTEGER
- mfrBundleTimerAck	INTEGER
- mfrBundleCountMaxRetry	INTEGER
- mfrBundleActivationClass	INTEGER
- mfrBundleThreshold	Integer32
- mfrBundleMaxDiffDelay	Integer32
- mfrBundleSeqNumSize	INTEGER
- mfrBundleLinksConfigured	Integer32
- mfrBundleLinksActive	Integer32
- mfrBundleBandwidth	Integer32
- mfrBundleFarEndName	SnmpAdminString
- mfrBundleResequencingErrors	Counter32

2.2.4. Bundle-to-ifIndex Mapping Table

This table provides a means to take an ifIndex and find the corresponding mfrBundleIndex. It is indexed by ifIndex and contains these columns:

- mfrBundleIfIndexMapping	Integer32
---------------------------	-----------

Expires March 2001

[Page 7]

2.2.5. mfrBundleLinkTable

This table provides a means to configure and monitor bundle links. It is indexed by ifIndex and contains these columns:

- mfrBundleLinkRowStatus	RowStatus
- mfrBundleLinkConfigBundleIndex	Integer32
- mfrBundleLinkNearEndName	SnmpAdminString
- mfrBundleLinkState	MfrBundleLinkState
- mfrBundleLinkFarEndName	SnmpAdminString
- mfrBundleLinkFarEndBundleName	SnmpAdminString
- mfrBundleLinkDelay	Integer32
- mfrBundleLinkFramesControlTx	Counter32
- mfrBundleLinkFramesControlRx	Counter32
- mfrBundleLinkFramesControlInvalid	Counter32
- mfrBundleLinkTimerExpiredCount	Counter32
- mfrBundleLinkLoopbackSuspected	Counter32
- mfrBundleLinkUnexpectedSequence	Counter32
- mfrBundleLinkMismatch	Counter32

2.3. Relationship With Other MIBS and Tables

2.3.1. Relationship With Interface Table

2.3.1.1. Bundle Links

Each bundle link will appear as an interface in the ifTable. The ifIndex that appears in the ifTable is used for indexing the bundle link tables in the UNI-NNI MFR MIB.

2.3.1.2. Bundles

Each bundle will appear as an interface in the ifTable. There will be corresponding mfrBundleIndex which may be different than the ifIndex of the bundle.

The reason is best summarized in [RFC 2494](#) [[RFC2494](#)], which describes frame relay bundle of DS0. It says:

This table is not indexed by ifIndex because the manager has to choose the index in a createable row and the agent must be allowed to select ifIndex values.

The rows in the ifEntry table are not creatable as they do not have row status. [RFC 2863](#) [[RFC2863](#)] suggests that the ifIndex should be chosen by the agent. Here is its statement regarding row creation and deletion:

Expires March 2001

[Page 8]

While some interfaces, for example, most physical interfaces, cannot be created via network management, other interfaces such as logical interfaces sometimes can be. The ifTable contains only generic information about an interface. Almost all 'create-able' interfaces have other, media-specific, information through which configuration parameters may be supplied prior to creating such an interface. Thus, the ifTable does not itself support the creation or deletion of an interface (specifically, it has no RowStatus column). Rather, if a particular interface type supports the dynamic creation and/or deletion of an interface of that type, then that media-specific MIB should include an appropriate RowStatus object (see the ATM LAN-Emulation Client MIB [[ATMLANE](#)] for an example of a MIB which does this). Typically, when such a RowStatus object is created/deleted, then the conceptual row in the ifTable appears/disappears as a by-product, and an ifIndex value (chosen by the agent) is stored in an appropriate object in the media-specific MIB.

The ATM LAN-Emulation Client MIB [[ATMLANE](#)] uses different indices and so does the IMA MIB [[ATMIMA](#)]. Looking at the examples we have, and the statements from RFC, it seems better to have two indices. This gives the SNMP agent implementor the freedom to manage their ifIndex in the way they like.

2.3.1.3. Mapping Between ifIndex and mfrBundleIndex

The mfrBundleIfIndexMappingTable is indexed by ifIndex and provides the means to map a given ifIndex into the corresponding mfrBundleIndex. The mfrBundleIfIndexMapping object in the mfrBundleTable (indexed by mfrBundleIndex) provides the reverse mapping of a mfrBundleIndex to the corresponding ifIndex in the ifTable.

2.3.1.4. ifTable Objects

The bundle configuration and status table. There is a one-to-one correspondence between a bundle and an interface represented in the ifTable.

The following objects of the ifTable have specific meaning for an MFR bundle:

- ifAdminStatus - the bundle admin status
- ifOperStatus - the bundle operational status
- ifSpeed - the current bandwidth of the bundle
- ifInUcastPkts - the number of frames received on the bundle
- ifOutUcastPkts - the number of frames transmitted on the bundle

ifInErrors - frame (not fragment) errors

Expires March 2001

[Page 9]

ifOutErrors - frame (not fragment) errors

The following objects of the ifTable have specific meaning for an MFR bundle link:

ifAdminStatus - the bundle link admin status
ifOperStatus - the bundle link operational status
ifSpeed - the bandwidth of the bundle link interface
ifInUcastPkts - the number of frames received on the bundle link
ifOutUcastPkts - the number of frames transmitted on the bundle link
ifInErrors - frame and fragment errors
ifOutErrors - frame and fragment errors

2.3.2. Relationship With Interface Stack Table

The bundles and bundle links will appear in the ifStackTable defined in [RFC 2863](#) [[RFC2863](#)]. Each bundle link will appear a lower layer to its owner bundle. The bundle will appear as a higher layer to the bundle links and as a lower layer to a frame relay service or UNI.

2.3.3. Relationship With Frame Relay DTE MIB

The bundle will have a one-to-one correspondence with a DLCMI or UNI that appear in the DTE MIB tables [[RFC2115](#)].

2.3.4. Relationship With Frame Relay Service MIB

There is a one-to-one relationship between the MFR bundle and the frame relay service logical port defined in [RFC1604](#) [[RFC1604](#)].

Expires March 2001

[Page 10]

2.3.5. Example

Figure two shows an example of how the various tables are related. This example shows two bundles composed of 2 T1s each. The bundles have a mfrBundleIndex of 10 and 20 respectively.

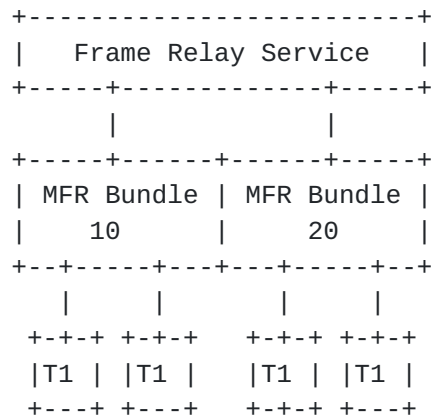


Figure 2: Frame Relay Service Being Carried on 4 T1s

The assignment of the ifTable index values could for example be:

ifIndex	Description	ifType
1	FrameRelayService	frameRelayService(44)
2	MFR Bundle #10	frf16MfrBundle(163)
3	MFR Bundle #20	frf16MfrBundle(163)
4	ds1 #1/MFR Bundle Link #1	ds1(18)
5	ds1 #2/MFR Bundle Link #2	ds1(18)
6	ds1 #3/MFR Bundle Link #3	ds1(18)
7	ds1 #4/MFR Bundle Link #4	ds1(18)

The ifStackTable is then used to show the relationships between the various interfaces.

HigherLayer	LowerLayer
0	1
1	2
1	3
2	4
2	5
3	6
3	7
4	0
5	0
6	0

Expires March 2001

[Page 11]

The mfrBundleIfIndexMappingTable shows the relationship between the ifTable ifIndex and the mfrBundleIndex:

ifIndex	mfrBundleIfIndexMappingIndex
2	10
3	20

The mfrBundleTable shows the relationship between the mfrBundleIndex and the ifIndex:

mfrBundleIndex	mfrBundleIfIndex
10	2
20	3

The mfrBundleLinkTable shows the relationship between the bundles and bundle links:

mfrBundleIndex	mfrBundleLinkIfIndex
10	4
10	5
20	6
20	7

2.4. Creation Of Bundles and Bundle Links

2.4.1. Creation Of Bundles

A new bundle is created by setting a createAndGo(4) value in the mfrBundleRowStatus RowStatus object. Optionally, an agent could also support setting a value of createAndWait(5) followed by a set to the value active(1).

When a bundle is created, the agent must create a new interface in the ifTable. The ifIndex for this new interface is used for the value of mfrBundleIfIndex.

2.4.2. Creation Of Bundle Links

A new bundle link is created by setting a createAndGo(4) value in the mfrBundleLinkRowStatus RowStatus object.

The bundle link is associated with a specific physical interface and uses the ifIndex of the physical interface. The mfrBundleLinkEntry

Expires March 2001

[Page 12]

row objects may be created after or during creation of the physical interface's ifEntry row objects.

The bundle identified in the object mfrBundleIndex must exist at time of bundle link creation.

2.5. Notifications

The linkUp and linkDown traps are defined in [RFC 2223](#) [[RFC2223](#)].

2.5.1. Bundle

The following SNMP traps are defined for MFR bundles.

2.5.1.1. linkUp

This trap is sent when the ifOperStatus of a bundle transitions from down to up. This occurs when a sufficient number of links (determined by mfrBundleActivationClass and mfrBundleThreshold) are in the operationally up state.

2.5.1.2. linkDown

This trap is sent when the ifOperStatus of a bundle transitions from up to down. This occurs when an insufficient number of links (determined by mfrBundleActivationClass and mfrBundleThreshold) are in the operationally up state.

2.5.2. Bundle Link

The following SNMP traps are defined for MFR bundle links.

2.5.2.1. linkUp

This trap is sent when a mfrBundleLinkState object transitions to the value mfrBundleLinkStateUp.

2.5.2.2. linkDown

This trap is sent when a mfrBundleLinkState object transitions from the value mfrBundleLinkStateUp.

Expires March 2001

[Page 13]

2.5.2.3. mfrMibTrapBundleLinkMismatch

This trap indicates that a bundle link mismatch has been detected.
The following objects are reported:

- mfrBundleNearEndName: configured name of near end bundle
- mfrBundleFarEndName: previously reported name of far end bundle
- mfrBundleLinkNearEndName: configured name of near end bundle
- mfrBundleLinkFarEndName: reported name of far end bundle
- mfrBundleLinkFarEndBundleName: currently reported name of far end bundle

Note that the configured items may have been configured automatically. Note also that the mfrBundleLinkMismatch counter is incremented when the trap is sent.

Expires March 2001

[Page 14]

3. Object Definitions

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. Objects in the MIB are defined using the subset of Abstract Syntax Notation One (ASN.1) defined in the SMI. In particular, each object type is named by an OBJECT IDENTIFIER, an administratively assigned name. The object type together with an object instance serves to uniquely identify a specific instantiation of the object. For human convenience, we often use a textual string, termed the descriptor, to refer to the object type.

```
FR-MFR-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
    MODULE-IDENTITY, OBJECT-TYPE, Integer32, Counter32,  
        NOTIFICATION-TYPE, transmission  
    FROM SNMPv2-SMI  
    TEXTUAL-CONVENTION, TestAndIncr, RowStatus  
    FROM SNMPv2-TC  
    MODULE-COMPLIANCE, OBJECT-GROUP, NOTIFICATION-GROUP  
    FROM SNMPv2-CONF  
    SnmpAdminString  
    FROM SNMP-FRAMEWORK-MIB  
    InterfaceIndex, ifIndex  
    FROM IF-MIB;
```

```
mfrMib MODULE-IDENTITY
```

```
    LAST-UPDATED "200010020000Z"  
    ORGANIZATION "IETF Frame Relay Service MIB (frnetmib)  
        Working Group"
```

```
CONTACT-INFO
```

```
"WG Charter:
```

```
    http://www.ietf.org/html.charters/frnetmib-charter.html
```

```
WG-email:      frnetmib@sunroof.eng.sun.com
```

```
Subscribe:     frnetmib-request@sunroof.eng.sun.com
```

```
Email Archive: ftp://ftp.ietf.org/ietf-mail-archive/frnetmib
```

```
Chair:         Andy Malis
```

```
                Vivace Networks
```

```
Email:         Andy.Malis@vivacenetworks.com
```

```
WG editor:     Prayson Pate
```

```
                Overture Networks
```

```
Email:         prayson.pate@overturenetworks.com
```

```
Co-author:     Bob Lynch
```

```
                Larscom Incorporated
```

EMail: blynch@larscom.com

Expires March 2001

[Page 15]

Co-author: Kenneth Rehbehn
Megisto Systems, Inc.
Email: krehbehn@megisto.com"

DESCRIPTION

"This is the MIB used to control and monitor the multilink
frame relay (MFR) function described in FRF.16."

--
--
-- Revision History
--
--

REVISION "200010020000Z"

DESCRIPTION

"Published as RFC [RFC-EDITOR: Enter RFC # here]."

::= { transmission xx } -- xx to be assigned by IANA

--
--
-- Textual Conventions
--
--

MfrBundleLinkState ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The possible states for a bundle link, as defined in
Annex A of FRF.16."

REFERENCE "FRF.16 Annex A"

SYNTAX INTEGER {

mfrBundleLinkStateAddSent	(1),
mfrBundleLinkStateAddRx	(2),
mfrBundleLinkStateAddAckRx	(3),
mfrBundleLinkStateUp	(4),
mfrBundleLinkStateIdlePending	(5),
mfrBundleLinkStateIdle	(6),
mfrBundleLinkStateDown	(7),
mfrBundleLinkStateDownIdle	(8)

}

--
--
-- Object Identifiers
--
--

Expires March 2001

[Page 16]

```
mfrMibScalarObjects      OBJECT IDENTIFIER ::= { mfrMib 1 }
mfrMibBundleObjects      OBJECT IDENTIFIER ::= { mfrMib 2 }
mfrMibBundleLinkObjects  OBJECT IDENTIFIER ::= { mfrMib 3 }
mfrMibTraps               OBJECT IDENTIFIER ::= { mfrMib 4 }
mfrMibConformance        OBJECT IDENTIFIER ::= { mfrMib 5 }

mfrMibTrapsPrefix        OBJECT IDENTIFIER ::= { mfrMibTraps 0 }

mfrMibGroups             OBJECT IDENTIFIER ::= { mfrMibConformance 1 }
mfrMibCompliances        OBJECT IDENTIFIER ::= { mfrMibConformance 2 }

-- -----
-- -----
-- Scalars
-- -----
-- -----

mfrBundleMaxNumBundles OBJECT-TYPE
    SYNTAX  Integer32
    MAX-ACCESS read-only
    STATUS  current
    DESCRIPTION
        "This object is used to inform the manager of the
         maximum number of bundles supported by this device."
    ::= { mfrMibScalarObjects 1 }

mfrBundleNextIndex OBJECT-TYPE
    SYNTAX  TestAndIncr
    MAX-ACCESS read-write
    STATUS  current
    DESCRIPTION
        "This object is used to assist the manager in
         selecting a value for mfrBundleIndex during row creation
         in the mfrBundleTable. It can also be used to avoid race
         conditions with multiple managers trying to create
         rows in the table (see RFC 2494 [RFC2494] for one such
         alogrithm)."
    REFERENCE "RFC 2494"
    ::= { mfrMibScalarObjects 2 }

-- -----
-- -----
-- Bundle Table
-- -----
-- -----

mfrBundleTable OBJECT-TYPE
    SYNTAX  SEQUENCE OF MfrBundleEntry
```


MAX-ACCESS not-accessible

Expires March 2001

[Page 17]

STATUS current

DESCRIPTION

"The bundle configuration and status table. There is a one-to-one correspondence between a bundle and an interface represented in the ifTable.

The following objects of the ifTable have specific meaning for an MFR bundle:

- ifAdminStatus - the bundle admin status
- ifOperStatus - the bundle operational status
- ifSpeed - the current bandwidth of the bundle
- ifInUcastPkts - the number of frames received on the bundle
- ifOutUcastPkts - the number of frames transmitted on the bundle
- ifInErrors - frame (not fragment) errors
- ifOutErrors - frame (not fragment) errors

"

::= { mfrMibBundleObjects 3 }

mfrBundleEntry OBJECT-TYPE

SYNTAX MfrBundleEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the bundle table."

INDEX { mfrBundleIndex }

::= { mfrBundleTable 1 }

MfrBundleEntry ::=

SEQUENCE {

- mfrBundleIndex
- Integer32,
- mfrBundleIfIndex
- InterfaceIndex,
- mfrBundleRowStatus
- RowStatus,
- mfrBundleNearEndName
- SnmpAdminString,
- mfrBundleFragmentation
- INTEGER,
- mfrBundleMaxFragSize
- Integer32,
- mfrBundleTimerHello
- INTEGER,
- mfrBundleTimerAck
- INTEGER,
- mfrBundleCountMaxRetry

INTEGER,

Expires March 2001

[Page 18]

```
mfrBundleActivationClass
    INTEGER,
mfrBundleThreshold
    Integer32,
mfrBundleMaxDiffDelay
    Integer32,
mfrBundleSeqNumSize
    INTEGER,
mfrBundleMaxBundleLinks
    Integer32,
mfrBundleLinksConfigured
    Integer32,
mfrBundleLinksActive
    Integer32,
mfrBundleBandwidth
    Integer32,
mfrBundleFarEndName
    SnmpAdminString,
mfrBundleResequencingErrors
    Counter32
}
```

mfrBundleIndex OBJECT-TYPE

SYNTAX Integer32 (1..2147483647)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The index into the table. While this corresponds to an entry in the ifTable, the value of mfrBundleIndex need not match that of the ifIndex in the ifTable. A manager can use mfrBundleNextIndex to select a unique mfrBundleIndex for creating a new row."

::= { mfrBundleEntry 1 }

mfrBundleIfIndex OBJECT-TYPE

SYNTAX InterfaceIndex

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The value must match an entry in the interface table whose ifType must be set to frf16MfrBundle(163).

For example: if the value of mfrBundleIfIndex is 10, then a corresponding entry should be present in the ifTable with an index of 10 and an ifType of 163."

::= { mfrBundleEntry 2 }

mfrBundleRowStatus OBJECT-TYPE

SYNTAX RowStatus

Expires March 2001

[Page 19]

MAX-ACCESS read-create
STATUS current
DESCRIPTION
 "The mfrBundleRowStatus object allows create, change,
 and delete operations on bundle entries."
REFERENCE ["RFC 1903"](#)
::= { mfrBundleEntry 3 }

mfrBundleNearEndName OBJECT-TYPE
SYNTAX SnmpAdminString
MAX-ACCESS read-create
STATUS current
DESCRIPTION
 "The configured name of the bundle."
REFERENCE "FRF.16 [section 3.4.1](#)"
::= { mfrBundleEntry 4 }

mfrBundleFragmentation OBJECT-TYPE
SYNTAX INTEGER {
 enable (1),
 disable (2)
}
MAX-ACCESS read-create
STATUS current
DESCRIPTION
 "Controls whether the bundle performs/accepts
 fragmentation and re-assembly. The possible
 values are:

 enable(1) - Bundle links will fragment frames

 disable(2) - Bundle links will not fragment
 frames."
DEFVAL { disable }
::= { mfrBundleEntry 5 }

mfrBundleMaxFragSize OBJECT-TYPE
SYNTAX Integer32 (-1..8184)
UNITS "Octets"
MAX-ACCESS read-create
STATUS current
DESCRIPTION
 "The maximum fragment size supported. Note that this
 is only valid if mfrBundleFragmentation is set to enable(1).

 Zero is not a valid fragment size.

 A bundle that does not support fragmentation must return

this object with a value of -1."

Expires March 2001

[Page 20]

```
DEFVAL { -1 }
::= { mfrBundleEntry 6 }

mfrBundleTimerHello OBJECT-TYPE
    SYNTAX  INTEGER (1..180)
    UNITS   "Seconds"
    MAX-ACCESS  read-create
    STATUS   current
    DESCRIPTION
        "The configured MFR Hello Timer value."
    REFERENCE "FRF.16 section 4.3.8.1"
    DEFVAL { 10 }
    ::= { mfrBundleEntry 7 }

mfrBundleTimerAck OBJECT-TYPE
    SYNTAX  INTEGER (1..10)
    UNITS   "Seconds"
    MAX-ACCESS  read-create
    STATUS   current
    DESCRIPTION
        "The configured MFR T_ACK value."
    REFERENCE "FRF.16 section 4.3.8.2"
    DEFVAL { 4 }
    ::= { mfrBundleEntry 8 }

mfrBundleCountMaxRetry OBJECT-TYPE
    SYNTAX  INTEGER (1..5)
    MAX-ACCESS  read-create
    STATUS   current
    DESCRIPTION
        "The MFR N_MAX_RETRY value."
    REFERENCE "FRF.16 section 4.3.8.3"
    DEFVAL { 2 }
    ::= { mfrBundleEntry 9 }

mfrBundleActivationClass OBJECT-TYPE
    SYNTAX  INTEGER {
        mfrBundleActivationClassA (1),
        mfrBundleActivationClassB (2),
        mfrBundleActivationClassC (3),
        mfrBundleActivationClassD (4)
    }
    MAX-ACCESS  read-create
    STATUS   current
    DESCRIPTION
        "Controls the conditions under which the bundle is activated.
        The following settings are available:
```


mfrBundleActivationClassA(1) - at least one must link up

Expires March 2001

[Page 21]

mfrBundleActivationClassB(2) - all links must be up
mfrBundleActivationClassC(3) - a certain number must be
up. Refer to
mfrBundleThreshold for
the required number.
mfrBundleActivationClassD(4) - custom (implementation
specific)."

REFERENCE "FRF.16 [section 4.2.2.1](#)"

DEFVAL { mfrBundleActivationClassA }
::= { mfrBundleEntry 10 }

mfrBundleThreshold OBJECT-TYPE

SYNTAX Integer32 (-1..2147483647)

UNITS "Bundle Links"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Specifies the number of links that must be in operational
'up' state before the bundle will transition to an
operational up/active state. If the number of
operational 'up' links falls below this value,
then the bundle will transition to an inactive
state.

Note - this is only valid when mfrBundleActivationClass
is set to mfrBundleActivationClassC or, depending upon the
implementation, to mfrBundleActivationClassD. A bundle that
is not set to one of these must return this object with a
value of -1."

REFERENCE "FRF.16 [section 4.2.2.1](#)"

DEFVAL { -1 }
::= { mfrBundleEntry 11 }

mfrBundleMaxDiffDelay OBJECT-TYPE

SYNTAX Integer32 (-1..2147483647)

UNITS "Milliseconds"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The maximum delay difference between the bundle
links.

A value of -1 indicates that this object does not contain
a valid value"

DEFVAL { -1 }
::= { mfrBundleEntry 12 }

mfrBundleSeqNumSize OBJECT-TYPE

SYNTAX INTEGER {

Expires March 2001

[Page 22]

```
        seqNumSize12bit (1),
        seqNumSize24bit (2)
    }
    MAX-ACCESS read-create
    STATUS current
    DESCRIPTION
        "Controls whether the standard FRF.12 12-bit
        sequence number is used or the optional 24-bit
        sequence number."
    REFERENCE "FRFTC/99-194"
    DEFVAL { seqNumSize12bit }
    ::= { mfrBundleEntry 13 }

mfrBundleMaxBundleLinks OBJECT-TYPE
    SYNTAX Integer32 (1..2147483647)
    UNITS "Bundle Links"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "The maximum number of bundle links supported for
        this bundle."
    ::= { mfrBundleEntry 14 }

mfrBundleLinksConfigured OBJECT-TYPE
    SYNTAX Integer32 (1..2147483647)
    UNITS "Bundle Links"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "The number of links configured for the bundle."
    ::= { mfrBundleEntry 15 }

mfrBundleLinksActive OBJECT-TYPE
    SYNTAX Integer32 (-1..2147483647)
    UNITS "Bundle Links"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "The number of links that are active."
    ::= { mfrBundleEntry 16 }

mfrBundleBandwidth OBJECT-TYPE
    SYNTAX Integer32
    UNITS "Bits/Sec"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "The amount of available bandwidth on the bundle"
```

```
::= { mfrBundleEntry 17 }
```

Expires March 2001

[Page 23]

mfrBundleFarEndName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Name of the bundle received from the far end."

REFERENCE "FRF.16 [section 3.4.1](#)"

::= { mfrBundleEntry 18 }

mfrBundleResequencingErrors OBJECT-TYPE

SYNTAX Counter32

UNITS "Error Events"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of resequencing errors. Each event may correspond to multiple lost frames. Example:
Say sequence number 56, 59 and 60 is received for DLCI 100.
It is decided by some means that sequence 57 and 58 is lost.
This counter should then be incremented by ONE, even though two frames were lost."

::= { mfrBundleEntry 19 }

-- -----
-- -----
-- ifIndex Mapping to Bundle Index Table
-- -----
-- -----

mfrBundleIfIndexMappingTable OBJECT-TYPE

SYNTAX SEQUENCE OF MfrBundleIfIndexMappingEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table mapping the values of ifIndex to the mfrBundleIndex. This is required in order to find the mfrBundleIndex given an ifIndex. The mapping of mfrBundleIndex to ifIndex is provided by the mfrBundleIfIndex entry in the mfrBundleTable."

::= { mfrMibBundleObjects 4 }

mfrBundleIfIndexMappingEntry OBJECT-TYPE

SYNTAX MfrBundleIfIndexMappingEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Each row describes one ifIndex to mfrBundleIndex mapping."

INDEX { ifIndex }

```
::= { mfrBundleIfIndexMappingTable 1 }
```

Expires March 2001

[Page 24]

```

MfrBundleIfIndexMappingEntry ::=
    SEQUENCE {
        mfrBundleIfIndexMappingIndex
            Integer32
    }

```

```

mfrBundleIfIndexMappingIndex OBJECT-TYPE
    SYNTAX  Integer32 (1..2147483647)
    MAX-ACCESS  read-only
    STATUS  current
    DESCRIPTION
        "The mfrBundleIndex of the given ifIndex."
    ::= { mfrBundleIfIndexMappingEntry 2 }

```

```

-- -----
-- -----
-- Bundle Link Table
-- -----
-- -----

```

```

mfrBundleLinkTable OBJECT-TYPE
    SYNTAX  SEQUENCE OF MfrBundleLinkEntry
    MAX-ACCESS  not-accessible
    STATUS  current
    DESCRIPTION
        "The bundle link configuration and status table.  There
        is a one-to-one correspondence between a bundle link
        and a physical interface represented in the ifTable.  The
        ifIndex of the physical interface is used to index the
        bundle link table, and to create rows.

```

The following objects of the ifTable have specific meaning for an MFR bundle link:

```

        ifAdminStatus - the bundle link admin status
        ifOperStatus  - the bundle link operational
                        status
        ifSpeed        - the bandwidth of the bundle
                        link interface
        ifInUcastPkts - the number of frames received
                        on the bundle link
        ifOutUcastPkts - the number of frames transmitted
                        on the bundle link
        ifInErrors     - frame and fragment errors
        ifOutErrors    - frame and fragment errors"
    ::= { mfrMibBundleLinkObjects 1 }

```

```

mfrBundleLinkEntry OBJECT-TYPE

```


SYNTAX MfrBundleLinkEntry

Expires March 2001

[Page 25]

```
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "An entry in the bundle link table."
INDEX { ifIndex }
::= { mfrBundleLinkTable 1 }
```

```
MfrBundleLinkEntry ::=
SEQUENCE {
    mfrBundleLinkRowStatus
        RowStatus,
    mfrBundleLinkConfigBundleIndex
        Integer32,
    mfrBundleLinkNearEndName
        SnmpAdminString,
    mfrBundleLinkState
        MfrBundleLinkState,
    mfrBundleLinkFarEndName
        SnmpAdminString,
    mfrBundleLinkFarEndBundleName
        SnmpAdminString,
    mfrBundleLinkDelay
        Integer32,
    mfrBundleLinkFramesControlTx
        Counter32,
    mfrBundleLinkFramesControlRx
        Counter32,
    mfrBundleLinkFramesControlInvalid
        Counter32,
    mfrBundleLinkTimerExpiredCount
        Counter32,
    mfrBundleLinkLoopbackSuspected
        Counter32,
    mfrBundleLinkUnexpectedSequence
        Counter32,
    mfrBundleLinkMismatch
        Counter32
}
```

mfrBundleLinkRowStatus OBJECT-TYPE

```
SYNTAX RowStatus
MAX-ACCESS read-create
STATUS current
DESCRIPTION
```

"The mfrBundleLinkRowStatus object allows create, change,
and delete operations on mfrBundleLink entries.

The create operation must fail if no physical interface

is associated with the bundle link."

Expires March 2001

[Page 26]

```
::= { mfrBundleLinkEntry 1 }
```

mfrBundleLinkConfigBundleIndex OBJECT-TYPE

SYNTAX Integer32 (1..2147483647)

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The mfrBundleLinkConfigBundleIndex object allows the manager to control the bundle to which the bundle link is assigned. If no value were in this field, then the bundle would remain in NOT_READY rowStatus and be unable to go to active. With an appropriate mfrBundleIndex in this field, then we could put the mfrBundleLink row in NOT_IN_SERVICE or ACTIVE rowStatus."

```
::= { mfrBundleLinkEntry 2 }
```

mfrBundleLinkNearEndName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The configured bundle link name that is sent to the far end."

```
::= { mfrBundleLinkEntry 3 }
```

mfrBundleLinkState OBJECT-TYPE

SYNTAX MfrBundleLinkState

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Current bundle link state as defined by the MFR protocol described in Annex A of FRF.16."

REFERENCE "FRF.16 Annex A"

```
::= { mfrBundleLinkEntry 4 }
```

mfrBundleLinkFarEndName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Name of bundle link received from far end."

REFERENCE "FRF.16 [section 3.4.2](#)"

```
::= { mfrBundleLinkEntry 5 }
```

mfrBundleLinkFarEndBundleName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Name of far end bundle for this link received from far end."

Expires March 2001

[Page 27]

REFERENCE "FRF.16 [section 3.4.1](#)"

::= { mfrBundleLinkEntry 6 }

mfrBundleLinkDelay OBJECT-TYPE

SYNTAX Integer32 (-1..2147483647)

UNITS "Milliseconds"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Current round-trip delay for this bundle link. The value -1 is returned when an implementation does not support measurement of the bundle link delay."

REFERENCE "FRF.16 [section 3.4.4](#)"

::= { mfrBundleLinkEntry 7 }

mfrBundleLinkFramesControlTx OBJECT-TYPE

SYNTAX Counter32

UNITS "Frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Number of MFR control frames sent."

REFERENCE "FRF.16 [section 3.2](#)"

::= { mfrBundleLinkEntry 8 }

mfrBundleLinkFramesControlRx OBJECT-TYPE

SYNTAX Counter32

UNITS "Frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Number of valid MFR control frames received."

REFERENCE "FRF.16 [section 3.2](#)"

::= { mfrBundleLinkEntry 9 }

mfrBundleLinkFramesControlInvalid OBJECT-TYPE

SYNTAX Counter32

UNITS "Frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of invalid MFR control frames received."

REFERENCE "FRF.16 [section 3.2](#)"

::= { mfrBundleLinkEntry 10 }

mfrBundleLinkTimerExpiredCount OBJECT-TYPE

SYNTAX Counter32

UNITS "Timer Expiration Events"

MAX-ACCESS read-only

Expires March 2001

[Page 28]

STATUS current
DESCRIPTION
"Number of times the T_HELLO or T_ACK timers expired."
REFERENCE "FRF.16 [section 4.3.8.1](#) and 4.3.8.2"
::= { mfrBundleLinkEntry 11 }

mfrBundleLinkLoopbackSuspected OBJECT-TYPE

SYNTAX Counter32
UNITS "Loopback Suspected Events"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of times a loopback has been suspected
(based upon the use of magic numbers)."
REFERENCE "FRF.16 [section 4.3.7](#)"
::= { mfrBundleLinkEntry 12 }

mfrBundleLinkUnexpectedSequence OBJECT-TYPE

SYNTAX Counter32
UNITS "Frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of data MFR frames discarded because the sequence
number of the frame for a DLCI was less than (delayed frame)
or equal to (duplicate frame) the one expected for that DLCI.

Example:
Say frames with sequence numbers 56, 58, 59 is received for
DLCI 100. While waiting for sequence number 57 another frame
with sequence number 58 arrives. Frame 58 is discarded and
the counter is incremented."
REFERENCE "FRF.16 [section 4.2.3.2](#)"
::= { mfrBundleLinkEntry 13 }

mfrBundleLinkMismatch OBJECT-TYPE

SYNTAX Counter32
UNITS "Bundle Name Mismatch Events"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of times that the unit has been notified by the
remote peer that the bundle name is inconsistent with other
bundle links attached to the far-end bundle."
REFERENCE "FRF.16 [section 4.3.2.4](#)"
::= { mfrBundleLinkEntry 14 }

-- -----

--

Expires March 2001

[Page 29]

-- Notifications/Traps

-- -----
-- -----

mfrMibTrapBundleLinkMismatch NOTIFICATION-TYPE

OBJECTS {

 mfrBundleNearEndName,
 mfrBundleFarEndName,
 mfrBundleLinkNearEndName,
 mfrBundleLinkFarEndName,
 mfrBundleLinkFarEndBundleName
}

STATUS current

DESCRIPTION

"This trap indicates that a bundle link mismatch has
been detected. The following objects are reported:

mfrBundleNearEndName: configured name of near end bundle

mfrBundleFarEndName: previously reported name of
far end bundle

mfrBundleLinkNearEndName: configured name of near end bundle

mfrBundleLinkFarEndName: reported name of far end bundle

mfrBundleLinkFarEndBundleName: currently reported name of
far end bundle

Note: that the configured items may have been configured
automatically.

Note: The mfrBundleLinkMismatch counter is incremented when
the trap is sent."

REFERENCE "FRF.16 [section 4.3.2.4](#)"

::= { mfrMibTrapsPrefix 1 }

-- -----
-- -----
-- Conformance/Compliance
-- -----
-- -----

mfrMibCompliance MODULE-COMPLIANCE

STATUS current

DESCRIPTION

"The compliance statement for equipment that implements
the FRF16 MIB. All of the current groups are mandatory,
but a number of objects may be read-only if the

Expires March 2001

[Page 30]

```
        implementation does not allow configuration."
MODULE -- this module
MANDATORY-GROUPS {
    mfrMibBundleGroup,
    mfrMibBundleLinkGroup,
    mfrMibTrapGroup
}

OBJECT      mfrBundleFragmentation
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, but the value used must be
    reported."

OBJECT      mfrBundleMaxFragSize
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, but the value used must be
    reported.
    A value of -1 indicates that the value is not applicable."

OBJECT      mfrBundleThreshold
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, but the value used must be
    reported.
    A value of -1 indicates that the value is not applicable."

OBJECT      mfrBundleMaxDiffDelay
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, but the value used must be
    reported."

OBJECT      mfrBundleSeqNumSize
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, but the value used must be
    reported.
    A value of -1 indicates that the value is not applicable."

 ::= { mfrMibCompliances 1 }

-- -----
-- -----
-- Units of Conformance
-- -----
-- -----
```

Expires March 2001

[Page 31]

mfrMibBundleGroup OBJECT-GROUP

OBJECTS {

mfrBundleMaxNumBundles,
mfrBundleNextIndex,
mfrBundleIfIndex,
mfrBundleRowStatus,
mfrBundleNearEndName,
mfrBundleFragmentation,
mfrBundleMaxFragSize,
mfrBundleTimerHello,
mfrBundleTimerAck,
mfrBundleCountMaxRetry,
mfrBundleActivationClass,
mfrBundleThreshold,
mfrBundleMaxDiffDelay,
mfrBundleMaxBundleLinks,
mfrBundleLinksConfigured,
mfrBundleLinksActive,
mfrBundleBandwidth,
mfrBundleSeqNumSize,
mfrBundleFarEndName,
mfrBundleResequencingErrors,
mfrBundleIfIndexMappingIndex

}

STATUS current

DESCRIPTION

"Group of objects describing bundles."

::= { mfrMibGroups 1 }

mfrMibBundleLinkGroup OBJECT-GROUP

OBJECTS {

mfrBundleLinkRowStatus,
mfrBundleLinkConfigBundleIndex,
mfrBundleLinkNearEndName,
mfrBundleLinkState,
mfrBundleLinkFarEndName,
mfrBundleLinkFarEndBundleName,
mfrBundleLinkDelay,
mfrBundleLinkFramesControlTx,
mfrBundleLinkFramesControlRx,
mfrBundleLinkFramesControlInvalid,
mfrBundleLinkTimerExpiredCount,
mfrBundleLinkLoopbackSuspected,
mfrBundleLinkUnexpectedSequence,
mfrBundleLinkMismatch

}

STATUS current

DESCRIPTION

"Group of objects describing bundle links."

Expires March 2001

[Page 32]

```
::= { mfrMibGroups 2 }
```

```
mfrMibTrapGroup NOTIFICATION-GROUP
```

```
  NOTIFICATIONS {
```

```
    mfrMibTrapBundleLinkMismatch
```

```
  }
```

```
  STATUS current
```

```
  DESCRIPTION
```

```
    "Group of objects describing notifications (traps)."
```

```
::= { mfrMibGroups 3 }
```

```
END
```


4. Acknowledgments

This document was produced by the Frame Relay Service MIB (frnetmib) Working Group in conjunction with the Frame Relay Forum.

5. References

- [RFC2571] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing SNMP Management Frameworks", [RFC 2571](#), April 1999
- [RFC1155] Rose, M., and K. McCloghrie, "Structure and Identification of Management Information for TCP/IP-based Internets", STD 16, [RFC 1155](#), May 1990
- [RFC1212] Rose, M., and K. McCloghrie, "Concise MIB Definitions", STD 16, [RFC 1212](#), March 1991
- [RFC1215] M. Rose, "A Convention for Defining Traps for use with the SNMP", [RFC 1215](#), March 1991
- [RFC2578] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M., and S. Waldbusser, "Structure of Management Information Version 2 (SMIV2)", STD 58, [RFC 2578](#), April 1999
- [RFC2579] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M., and S. Waldbusser, "Textual Conventions for SMIV2", STD 58, [RFC 2579](#), April 1999
- [RFC2580] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M., and S. Waldbusser, "Conformance Statements for SMIV2", STD 58, [RFC 2580](#), April 1999
- [RFC1157] Case, J., Fedor, M., Schoffstall, M., and J. Davin, "Simple Network Management Protocol", STD 15, [RFC 1157](#), May 1990.
- [RFC1901] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Introduction to Community-based SNMPv2", [RFC 1901](#), January 1996.
- [RFC1906] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Transport Mappings for Version 2 of the Simple Network Management Protocol (SNMPv2)", [RFC 1906](#), January 1996.
- [RFC2572] Case, J., Harrington D., Presuhn R., and B. Wijnen, "Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)", [RFC 2572](#), April 1999
- [RFC2574] Blumenthal, U., and B. Wijnen, "User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)", [RFC 2574](#), April 1999
- [RFC1905] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Protocol Operations for Version 2 of the Simple Network

Expires March 2001

[Page 35]

Management Protocol (SNMPv2)", [RFC 1905](#), January 1996.

- [RFC2573] Levi, D., Meyer, P., and B. Stewart, "SNMPv3 Applications", [RFC 2573](#), April 1999
- [RFC2575] Wijnen, B., Presuhn, R., and K. McCloghrie, "View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)", [RFC 2575](#), April 1999
- [RFC2570] Case, J., Mundy, R., Partain, D., and B. Stewart, "Introduction to Version 3 of the Internet-standard Network Management Framework", [RFC 2570](#), April 1999
- [Q.922] ITU-T, Recommendation Q.922: "ISDN Data Link Layer Specification For Frame Mode Bearer Services"
- [Q.933] ITU-T, Recommendation Q.933: "Signalling Specification For Frame Mode Basic Call Control"
- [FRF.4] R. Cherukuri (ed), FRF.4: "Frame Relay User-to-Network SVC Implementation Agreement" January 5, 1994.
- [FRF.16] M. Sheehan (ed), FRF.16: "UNI/NNI Multilink Frame Relay Interworking Implementation Agreement" August 20, 1999.
- [RFC1604] T. Brown, "Definitions of Managed Objects for Frame Relay Service" [RFC 1604](#), Bell Communications Research, March 1994.
[RFC-EDITOR: Update to current RFC that replaces [RFC1604](#)]
- [RFC2494] D. Fowler, "Definitions of Managed Objects for the DS0 and DS0 Bundle Interface Type" [RFC 2494](#), Newbridge Networks, November 1997.
- [RFC2863] K. McCloghrie, F. Kastenholz, "The Interfaces Group MIB using SMIV2" [RFC 2233](#), Cisco Systems, FTP Software, June 2000.
- [ATMLANE] T. Newton, ed., "LAN Emulation Client Management Specification Version 2.0" AF-LANE-0093.000, ATM Forum, October, 1998
- [ATMIMA] R. Vallee, ed., "Inverse Multiplexing for ATM Specification Version 1.1" (Appendix A) AF-PHY-0086.001, ATM Forum, March, 1999
- [RFC2115] C. Brown, F. Baker, "Management Information Base for Frame Relay DTEs Using SMIV2" [RFC 2115](#), Cadia Networks, Cisco Systems, September 1997.

Expires March 2001

[Page 36]

6. Security Considerations

There are a number of management objects defined in this MIB that have a MAX-ACCESS clause of read-write and/or read-create. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

No managed objects in this MIB contain sensitive information.

SNMPv1 by itself is not a secure environment. Even if the network itself is secure (for example by using IPSec), even then, there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in this MIB.

It is recommended that the implementers consider the security features as provided by the SNMPv3 framework. Specifically, the use of the User-based Security Model [RFC 2574](#) [[RFC2574](#)] and the View-based Access Control Model [RFC 2575](#) [[RFC2575](#)] is recommended.

It is then a customer/user responsibility to ensure that the SNMP entity giving access to an instance of this MIB, is properly configured to give access to the objects only to those principals (users) that have legitimate rights to indeed GET or SET (change/create/delete) them.

7. Authors' Addresses

Prayson Pate
Overture Networks
P. O. Box 14864
RTP, NC, USA 27709

Phone: +1 919 558 2200

E-Mail: prayson.pate@overturenetworks.com

Bob Lynch
Larscom Incorporated
P. O. Box 14993
RTP, NC, USA 27560

Phone: +1 919 991-9062

E-Mail: blynch@larscom.com

Kenneth Rehbehn
Megisto Systems, Inc.
20251 Century Boulevard
Germantown, MD, USA 20874

Phone: +1 301 529-4427

E-Mail: krehbehn@megisto.com

Expires March 2001

[Page 38]

8. Full Copyright Section

Copyright (C) The Internet Society (2000). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

