

## IP Version 6 Addressing Architecture

<[draft-ietf-ipv6-addr-arch-v4-03.txt](#)>

### Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet Draft expires November 3, 2005.

### Abstract

This specification defines the addressing architecture of the IP Version 6 protocol [[IPV6](#)]. The document includes the IPv6 addressing model, text representations of IPv6 addresses, definition of IPv6 unicast addresses, anycast addresses, and multicast addresses, and an IPv6 node's required addresses.

This document obsoletes [RFC-3513](#) "IP Version 6 Addressing Architecture".

INTERNET-DRAFT

IPv6 Addressing Architecture

April 2005

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction.....</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">IPv6 Addressing.....</a>	<a href="#">3</a>
<a href="#">2.1</a>	<a href="#">Addressing Model.....</a>	<a href="#">4</a>
<a href="#">2.2</a>	<a href="#">Text Representation of Addresses.....</a>	<a href="#">4</a>
<a href="#">2.3</a>	<a href="#">Text Representation of Address Prefixes.....</a>	<a href="#">5</a>
<a href="#">2.4</a>	<a href="#">Address Type Identification.....</a>	<a href="#">7</a>
<a href="#">2.5</a>	<a href="#">Unicast Addresses.....</a>	<a href="#">7</a>
<a href="#">2.5.1</a>	<a href="#">Interface Identifiers.....</a>	<a href="#">8</a>
<a href="#">2.5.2</a>	<a href="#">The Unspecified Address.....</a>	<a href="#">10</a>
<a href="#">2.5.3</a>	<a href="#">The Loopback Address.....</a>	<a href="#">10</a>
<a href="#">2.5.4</a>	<a href="#">Global Unicast Addresses.....</a>	<a href="#">10</a>
<a href="#">2.5.5</a>	<a href="#">IPv6 Addresses with Embedded IPv4 Addresses.....</a>	<a href="#">11</a>
<a href="#">2.5.6</a>	<a href="#">Link-Local IPv6 Unicast Addresses.....</a>	<a href="#">12</a>
<a href="#">2.5.7</a>	<a href="#">Site-Local IPv6 Unicast Addresses.....</a>	<a href="#">12</a>
<a href="#">2.6</a>	<a href="#">Anycast Addresses.....</a>	<a href="#">13</a>
<a href="#">2.6.1</a>	<a href="#">Required Anycast Address.....</a>	<a href="#">13</a>
<a href="#">2.7</a>	<a href="#">Multicast Addresses.....</a>	<a href="#">14</a>
<a href="#">2.7.1</a>	<a href="#">Pre-Defined Multicast Addresses.....</a>	<a href="#">16</a>
<a href="#">2.8</a>	<a href="#">A Node's Required Addresses.....</a>	<a href="#">18</a>
<a href="#">3.</a>	<a href="#">Security Considerations.....</a>	<a href="#">18</a>
<a href="#">4.</a>	<a href="#">IANA Considerations.....</a>	<a href="#">19</a>
<a href="#">5.</a>	<a href="#">References.....</a>	<a href="#">19</a>
<a href="#">6.</a>	<a href="#">Author's Addresses.....</a>	<a href="#">20</a>
<a href="#">7.</a>	<a href="#">Disclaimer of Validity.....</a>	<a href="#">20</a>
<a href="#">8.</a>	<a href="#">Copyright Statement.....</a>	<a href="#">21</a>
<a href="#">9.</a>	<a href="#">Intellectual Property.....</a>	<a href="#">21</a>
	<a href="#">APPENDIX A: Creating Modified EUI-64 format Interface IDs.....</a>	<a href="#">22</a>
	<a href="#">APPENDIX B: Changes from <a href="#">RFC-3513</a>.....</a>	<a href="#">25</a>

INTERNET-DRAFT

IPv6 Addressing Architecture

April 2005

## [1.0](#) INTRODUCTION

This specification defines the addressing architecture of the IP Version 6 protocol. It includes the basic formats for the various types of IPv6 addresses (unicast, anycast, and multicast).

The authors would like to acknowledge the contributions of Paul Francis, Scott Bradner, Jim Bound, Brian Carpenter, Matt Crawford, Deborah Estrin, Roger Fajman, Bob Fink, Peter Ford, Bob Gilligan, Dimitry Haskin, Tom Harsch, Christian Huitema, Tony Li, Greg Minshall, Thomas Narten, Erik Nordmark, Yakov Rekhter, Bill Simpson, Sue Thomson, Markku Savela, Larry Masinter, Jun-ichiro Itojun Hagino, Tatuya Jinmei, Suresh Krishnan, and Mahmood Ali.

## [2.0](#) IPv6 ADDRESSING

IPv6 addresses are 128-bit identifiers for interfaces and sets of interfaces (where "interface" is as defined in Section 2 of [[IPV6](#)]). There are three types of addresses:

- Unicast: An identifier for a single interface. A packet sent to a unicast address is delivered to the interface identified by that address.
- Anycast: An identifier for a set of interfaces (typically belonging to different nodes). A packet sent to an anycast address is delivered to one of the interfaces identified by that address (the "nearest" one, according to the routing protocols' measure of distance).
- Multicast: An identifier for a set of interfaces (typically belonging to different nodes). A packet sent to a multicast address is delivered to all interfaces identified by that address.

There are no broadcast addresses in IPv6, their function being superseded by multicast addresses.

In this document, fields in addresses are given a specific name, for example "subnet". When this name is used with the term "ID" for identifier after the name (e.g., "subnet ID"), it refers to the contents of the named field. When it is used with the term "prefix" (e.g., "subnet prefix") it refers to all of the address from the left up to and including this field.

In IPv6, all zeros and all ones are legal values for any field,

unless specifically excluded. Specifically, prefixes may contain, or end with, zero-valued fields.

## [2.1](#) Addressing Model

IPv6 addresses of all types are assigned to interfaces, not nodes. An IPv6 unicast address refers to a single interface. Since each interface belongs to a single node, any of that node's interfaces' unicast addresses may be used as an identifier for the node.

All interfaces are required to have at least one link-local unicast address (see [Section 2.8](#) for additional required addresses). A single interface may also have multiple IPv6 addresses of any type (unicast, anycast, and multicast) or scope. Unicast addresses with scope greater than link-scope are not needed for interfaces that are not used as the origin or destination of any IPv6 packets to or from non-neighbors. This is sometimes convenient for point-to-point interfaces. There is one exception to this addressing model:

A unicast address or a set of unicast addresses may be assigned to multiple physical interfaces if the implementation treats the multiple physical interfaces as one interface when presenting it to the internet layer. This is useful for load-sharing over multiple physical interfaces.

Currently IPv6 continues the IPv4 model that a subnet prefix is associated with one link. Multiple subnet prefixes may be assigned to the same link.

## [2.2](#) Text Representation of Addresses

There are three conventional forms for representing IPv6 addresses as text strings:

1. The preferred form is `x:x:x:x:x:x:x:x`, where the 'x's are one to four hexadecimal digits of the eight 16-bit pieces of the address. Examples:

`ABCD:EF01:2345:6789:ABCD:EF01:2345:6789`

`2001:DB8:0:0:8:800:200C:417A`

Note that it is not necessary to write the leading zeros in an individual field, but there must be at least one numeral in every field (except for the case described in 2.).

2. Due to some methods of allocating certain styles of IPv6 addresses, it will be common for addresses to contain long strings of zero bits. In order to make writing addresses containing zero bits easier a special syntax is available to compress the zeros. The use of `::` indicates one or more groups of 16 bits of zeros. The `::` can only appear once in an address. The `::` can also be used to compress leading or trailing zeros in an address.

For example the following addresses:

<code>2001:DB8:0:0:8:800:200C:417A</code>	a unicast address
<code>FF01:0:0:0:0:0:0:101</code>	a multicast address
<code>0:0:0:0:0:0:0:1</code>	the loopback address
<code>0:0:0:0:0:0:0:0</code>	the unspecified address

may be represented as:

<code>2001:DB8::8:800:200C:417A</code>	a unicast address
<code>FF01::101</code>	a multicast address
<code>::1</code>	the loopback address
<code>::</code>	the unspecified address

3. An alternative form that is sometimes more convenient when dealing with a mixed environment of IPv4 and IPv6 nodes is `x:x:x:x:x:x:d.d.d.d`, where the 'x's are the hexadecimal values of the six high-order 16-bit pieces of the address, and the 'd's are the decimal values of the four low-order 8-bit pieces of the address (standard IPv4 representation). Examples:

`0:0:0:0:0:0:13.1.68.3`

`0:0:0:0:0:FFFF:129.144.52.38`

or in compressed form:

`::13.1.68.3`

`::FFFF:129.144.52.38`

### [2.3](#) Text Representation of Address Prefixes

The text representation of IPv6 address prefixes is similar to the way IPv4 addresses prefixes are written in CIDR notation [[CIDR](#)]. An IPv6 address prefix is represented by the notation:

`ipv6-address/prefix-length`

where

`ipv6-address` is an IPv6 address in any of the notations listed in [Section 2.2](#).

`prefix-length` is a decimal value specifying how many of the leftmost contiguous bits of the address comprise the prefix.

For example, the following are legal representations of the 60-bit prefix 20010DB80000CD3 (hexadecimal):

`2001:0DB8:0000:CD30:0000:0000:0000:0000/60`

`2001:0DB8::CD30:0:0:0:0/60`

`2001:0DB8:0:CD30::/60`

The following are NOT legal representations of the above prefix:

2001:0DB8:0:CD3/60      may drop leading zeros, but not trailing zeros, within any 16-bit chunk of the address

2001:0DB8::CD30/60      address to left of "/" expands to  
2001:0DB8:0000:0000:0000:0000:CD30

2001:0DB8::CD3/60      address to left of "/" expands to  
2001:0DB8:0000:0000:0000:0000:0CD3

When writing both a node address and a prefix of that node address (e.g., the node's subnet prefix), the two can be combined as follows:

the node address      2001:0DB8:0:CD30:123:4567:89AB:CDEF  
and its subnet number 2001:0DB8:0:CD30::/60

can be abbreviated as 2001:0DB8:0:CD30:123:4567:89AB:CDEF/60

## [2.4](#) Address Type Identification

The type of an IPv6 address is identified by the high-order bits of the address, as follows:

Address type	Binary prefix	IPv6 notation	Section
-----	-----	-----	-----

Unspecified	00...0 (128 bits)	::/128	2.5.2
Loopback	00...1 (128 bits)	::1/128	2.5.3
Multicast	11111111	FF00::/8	2.7
Link-local unicast	1111111010	FE80::/10	2.5.6
Global unicast	(everything else)		

Anycast addresses are taken from the unicast address spaces (of any scope) and are not syntactically distinguishable from unicast addresses.

The general format of global unicast addresses is described in [Section 2.5.4](#). Some special-purpose subtypes of global unicast addresses which contain embedded IPv4 addresses (for the purposes of IPv4-IPv6 interoperability) are described in [Section 2.5.5](#).

Future specifications may redefine one or more sub-ranges of the global unicast space for other purposes, but unless and until that happens, implementations must treat all addresses that do not start with any of the above-listed prefixes as global unicast addresses.


## [2.5 Unicast Addresses](#)

IPv6 unicast addresses are aggregatable with prefixes of arbitrary bit-length similar to IPv4 addresses under Classless Interdomain Routing.


There are several types of unicast addresses in IPv6, in particular global unicast, site-local unicast (deprecated, see [Section 2.5.7](#)), and link-local unicast. There are also some special-purpose subtypes of global unicast, such as IPv6 addresses with embedded IPv4 addresses. Additional address types or subtypes can be defined in the future.

IPv6 nodes may have considerable or little knowledge of the internal structure of the IPv6 address, depending on the role the node plays (for instance, host versus router). At a minimum, a node may consider that unicast addresses (including its own) have no internal structure:





A slightly sophisticated host (but still rather simple) may additionally be aware of subnet prefix(es) for the link(s) it is attached to, where different addresses may have different values for n:

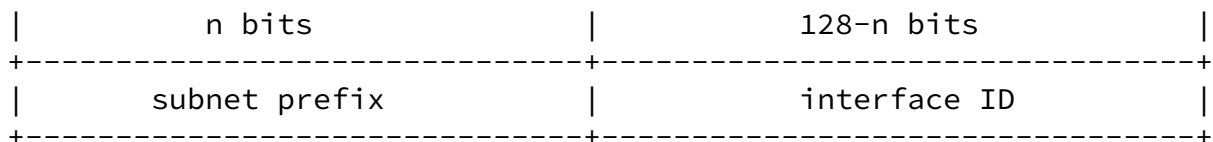

Though a very simple router may have no knowledge of the internal structure of IPv6 unicast addresses, routers will more generally have knowledge of one or more of the hierarchical boundaries for the operation of routing protocols. The known boundaries will differ from router to router, depending on what positions the router holds in the routing hierarchy.

Except for the knowledge of the subnet boundary discussed in the pervious paragraphs nodes should not make any assumptions about the structure of an IPv6 address.

### [2.5.1](#) Interface Identifiers

Interface identifiers in IPv6 unicast addresses are used to identify interfaces on a link. They are required to be unique within a subnet prefix. It is recommended that the same interface identifier not be assigned to different nodes on a link. They may also be unique over a broader scope. In some cases an interface's identifier will be derived directly from that interface's link-layer address. The same interface identifier may be used on multiple interfaces on a single node, as long as they are attached to different subnets.

Note that the uniqueness of interface identifiers is independent of the uniqueness of IPv6 addresses. For example, a global unicast address may be created with a local scope interface identifier and a link-local address may be created with a universal scope interface identifier.

For all unicast addresses, except those that start with binary value 000, Interface IDs are required to be 64 bits long and to be

constructed in Modified EUI-64 format.

Modified EUI-64 format based Interface identifiers may have universal scope when derived from a universal token (e.g., IEEE 802 48-bit MAC or IEEE EUI-64 identifiers [[EUI64](#)]) or may have local scope where a global token is not available (e.g., serial links, tunnel end-points, etc.) or where global tokens are undesirable (e.g., temporary tokens for privacy [[PRIV](#)]).

Modified EUI-64 format interface identifiers are formed by inverting the "u" bit (universal/local bit in IEEE EUI-64 terminology) when forming the interface identifier from IEEE EUI-64 identifiers. In the resulting Modified EUI-64 format the "u" bit is set to one (1) to indicate universal scope, and it is set to zero (0) to indicate local scope. The first three octets in binary of an IEEE EUI-64 identifier are as follows:

0	0 0	1 1	2
0	7 8	5 6	3
+-----+-----+-----+-----+-----+-----+			
cccc ccug cccc cccc cccc cccc			
+-----+-----+-----+-----+-----+-----+			

written in Internet standard bit-order , where "u" is the universal/local bit, "g" is the individual/group bit, and "c" are the bits of the company\_id. [Appendix A](#): "Creating Modified EUI-64 format Interface Identifiers" provides examples on the creation of Modified EUI-64 format based interface identifiers.

The motivation for inverting the "u" bit when forming an interface identifier is to make it easy for system administrators to hand configure non-global identifiers when hardware tokens are not available. This is expected to be case for serial links, tunnel end-points, etc. The alternative would have been for these to be of the form 0200:0:0:1, 0200:0:0:2, etc., instead of the much simpler 0:0:0:1, 0:0:0:2, etc.

IPv6 nodes are not required to validate that interface identifiers created with modified EUI-64 tokens with the "u" bit set to universal are unique.

The use of the universal/local bit in the Modified EUI-64 format identifier is to allow development of future technology that can take advantage of interface identifiers with universal scope.

The details of forming interface identifiers are defined in the

appropriate "IPv6 over <link>" specification such as "IPv6 over Ethernet" [[ETHER](#)], "IPv6 over FDDI" [[FDDI](#)], etc.

### [2.5.2](#) The Unspecified Address

The address 0:0:0:0:0:0:0:0 is called the unspecified address. It must never be assigned to any node. It indicates the absence of an address. One example of its use is in the Source Address field of any IPv6 packets sent by an initializing host before it has learned its own address.

The unspecified address must not be used as the destination address of IPv6 packets or in IPv6 Routing Headers. An IPv6 packet with a source address of unspecified must never be forwarded by an IPv6 router.


### [2.5.3](#) The Loopback Address

The unicast address 0:0:0:0:0:0:0:1 is called the loopback address. It may be used by a node to send an IPv6 packet to itself. It must not be assigned to any physical interface. It is treated as having link-local scope, and may be thought of as the link-local unicast address of a virtual interface (typically called "the loopback interface") to an imaginary link that goes nowhere.

The loopback address must not be used as the source address in IPv6 packets that are sent outside of a single node. An IPv6 packet with a destination address of loopback must never be sent outside of a single node and must never be forwarded by an IPv6 router. A packet received on an interface with destination address of loopback must be dropped.

### [2.5.4](#) Global Unicast Addresses

The general format for IPv6 global unicast addresses is as follows:

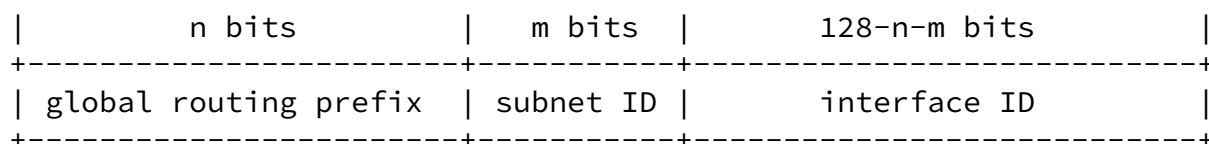

where the global routing prefix is a (typically hierarchically-structured) value assigned to a site (a cluster of subnets/links), the subnet ID is an identifier of a link within the site, and the interface ID is as defined in [Section 2.5.1](#).

All global unicast addresses other than those that start with binary 000 have a 64-bit interface ID field (i.e.,  $n + m = 64$ ), formatted as described in [Section 2.5.1](#). Global unicast addresses that start with binary 000 have no such constraint on the size or structure of the interface ID field.


Examples of global unicast addresses that start with binary 000 are the IPv6 address with embedded IPv4 addresses described in [Section 2.5.5](#). An example of global addresses starting with a binary value other than 000 (and therefore having a 64-bit interface ID field) can be found in [[GLOBAL](#)].

### [2.5.5](#) IPv6 Addresses with Embedded IPv4 Addresses

Two types of IPv6 addresses are defined that carry an IPv4 address in the low-order 32 bits of the address. These are the "IPv4-Compatible IPv6 Address" and the "IPv4-Mapped IPv6 Address".

#### [2.5.5.1](#) IPv4-Compatible IPv6 Address

The "IPv4-compatible IPv6 address", was defined to assist in the IPv6 transition. The format of the "IPv4-compatible IPv6 address" is:

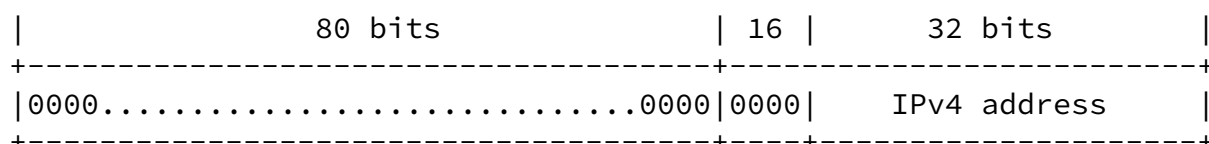

Note: The IPv4 address used in the "IPv4-compatible IPv6 address" must be a globally-unique IPv4 unicast address.

The "IPv4-compatible IPv6 address" is now deprecated because the current IPv6 transition mechanisms no longer use these addresses. New or updated implementations are not required to support this address type.

#### [2.5.5.2](#) IPv4-Mapped IPv6 Address

A second type of IPv6 address that holds an embedded IPv4 address is defined. This address type is used to represent the addresses of IPv4 nodes as IPv6 addresses. The format of the "IPv4-mapped IPv6 address" is:


[draft-ietf-ipv6-addr-arch-v4-03.txt](#)

[Page 11]

INTERNET-DRAFT

IPv6 Addressing Architecture


April 2005

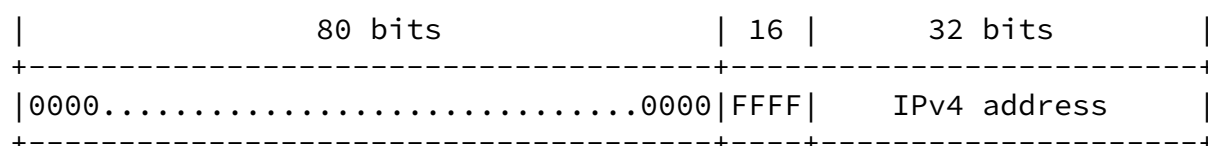

See [[RFC4038](#)] for background on the usage of the "IPv4-mapped IPv6 address".

#### [2.5.6](#) Link-Local IPv6 Unicast Addresses

Link-Local addresses are for use on a single link. Link-Local addresses have the following format:

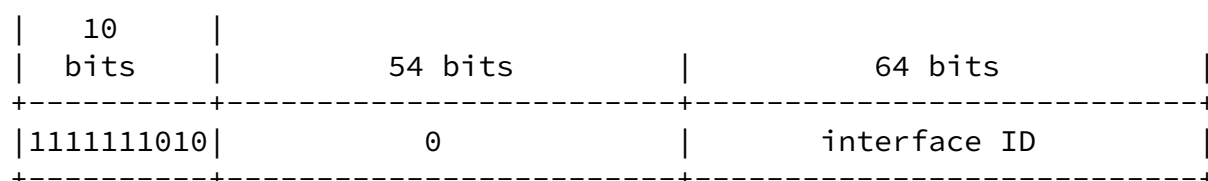

Link-Local addresses are designed to be used for addressing on a single link for purposes such as automatic address configuration, neighbor discovery, or when no routers are present.


Routers must not forward any packets with link-local source or

destination addresses to other links.

### 2.5.7 Site-Local IPv6 Unicast Addresses

Site-local addresses were originally designed to be used for addressing inside of a site without the need for a global prefix. Site-Local addresses are now deprecated as defined in [SLDEP].

Site-Local addresses have the following format:

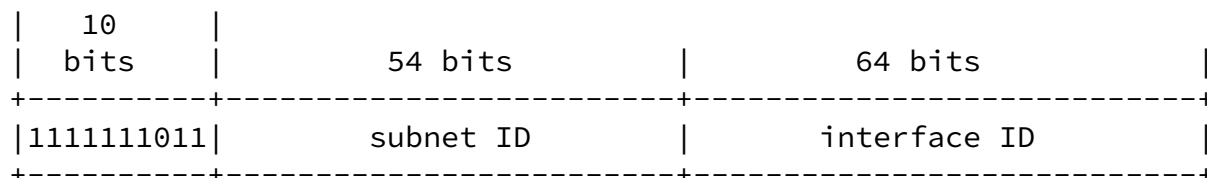

The special behavior of this prefix defined in [RFC3513] must no longer be supported in new implementations (i.e., new implementations must treat this prefix as Global Unicast).

Existing implementations and deployments may continue to use this prefix.

## 2.6 Anycast Addresses

An IPv6 anycast address is an address that is assigned to more than one interface (typically belonging to different nodes), with the property that a packet sent to an anycast address is routed to the "nearest" interface having that address, according to the routing protocols' measure of distance.

Anycast addresses are allocated from the unicast address space, using any of the defined unicast address formats. Thus, anycast addresses are syntactically indistinguishable from unicast addresses. When a unicast address is assigned to more than one interface, thus turning it into an anycast address, the nodes to which the address is assigned must be explicitly configured to know that it is an anycast address.

For any assigned anycast address, there is a longest prefix P of that address that identifies the topological region in which all

interfaces belonging to that anycast address reside. Within the region identified by P, the anycast address must be maintained as a separate entry in the routing system (commonly referred to as a "host route"); outside the region identified by P, the anycast address may be aggregated into the routing entry for prefix P.

Note that in the worst case, the prefix P of an anycast set may be the null prefix, i.e., the members of the set may have no topological locality. In that case, the anycast address must be maintained as a separate routing entry throughout the entire Internet, which presents a severe scaling limit on how many such "global" anycast sets may be supported. Therefore, it is expected that support for global anycast sets may be unavailable or very restricted.

One expected use of anycast addresses is to identify the set of routers belonging to an organization providing Internet service. Such addresses could be used as intermediate addresses in an IPv6 Routing header, to cause a packet to be delivered via a particular service provider or sequence of service providers.

Some other possible uses are to identify the set of routers attached to a particular subnet, or the set of routers providing entry into a particular routing domain.

#### [2.6.1 Required Anycast Address](#)

The Subnet-Router anycast address is predefined. Its format is as follows:

[draft-ietf-ipv6-addr-arch-v4-03.txt](#)

[Page 13]

---

INTERNET-DRAFT

IPv6 Addressing Architecture

April 2005

	n bits		128-n bits	
+-----		+-----		+
	subnet prefix		0000000000000000	
+-----		+-----		+


The "subnet prefix" in an anycast address is the prefix which identifies a specific link. This anycast address is syntactically the same as a unicast address for an interface on the link with the interface identifier set to zero.

Packets sent to the Subnet-Router anycast address will be delivered to one router on the subnet. All routers are required to support the Subnet-Router anycast addresses for the subnets to which they have interfaces.

The subnet-router anycast address is intended to be used for applications where a node needs to communicate with any one of the set of routers.

## 2.7 Multicast Addresses

An IPv6 multicast address is an identifier for a group of interfaces (typically on different nodes). An interface may belong to any number of multicast groups. Multicast addresses have the following format:

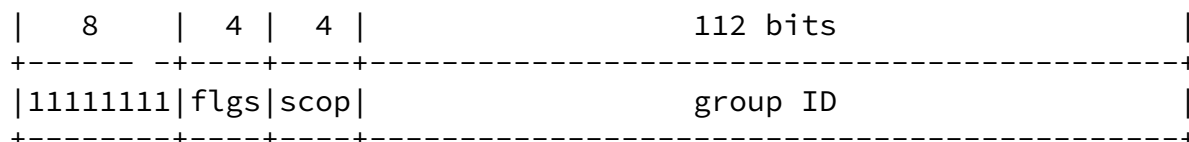

binary 11111111 at the start of the address identifies the address as being a multicast address.

```

flgs is a set of 4 flags:  +-+--+--+
                           |0|0|0|T|
                           +-+--+--+

```

The high-order 3 flags are reserved, and must be initialized to 0.

T = 0 indicates a permanently-assigned ("well-known") multicast address, assigned by the Internet Assigned Number Authority (IANA).

T = 1 indicates a non-permanently-assigned ("transient")

multicast address.

scop is a 4-bit multicast scope value used to limit the scope of the multicast group. The values are:



0 reserved  
1 interface-local scope  
2 link-local scope  
3 reserved  
4 admin-local scope  
5 site-local scope  
6 (unassigned)  
7 (unassigned)  
8 organization-local scope  
9 (unassigned)  
A (unassigned)  
B (unassigned)  
C (unassigned)  
D (unassigned)  
E global scope  
F reserved

interface-local scope spans only a single interface on a node, and is useful only for loopback transmission of multicast.

link-local multicast scope spans the same topological region as the corresponding unicast scope.

admin-local scope is the smallest scope that must be administratively configured, i.e., not automatically derived from physical connectivity or other, non-multicast-related configuration.

site-local scope is intended to span a single site.

organization-local scope is intended to span multiple sites belonging to a single organization.

scopes labeled "(unassigned)" are available for administrators to define additional multicast regions.

group ID identifies the multicast group, either permanent or transient, within the given scope.

The "meaning" of a permanently-assigned multicast address is independent of the scope value. For example, if the "NTP servers group" is assigned a permanent multicast address with a group ID of

101 (hex), then:

FF01:0:0:0:0:0:0:101 means all NTP servers on the same interface (i.e., the same node) as the sender.

FF02:0:0:0:0:0:0:101 means all NTP servers on the same link as the sender.

FF05:0:0:0:0:0:0:101 means all NTP servers in the same site as the sender.

FF0E:0:0:0:0:0:0:101 means all NTP servers in the Internet.

Non-permanently-assigned multicast addresses are meaningful only within a given scope. For example, a group identified by the non-permanent, site-local multicast address FF15:0:0:0:0:0:0:101 at one site bears no relationship to a group using the same address at a different site, nor to a non-permanent group using the same group ID with different scope, nor to a permanent group with the same group ID.

Multicast addresses must not be used as source addresses in IPv6 packets or appear in any Routing header.

Routers must not forward any multicast packets beyond of the scope indicated by the scop field in the destination multicast address.

Nodes must not originate a packet to a multicast address whose scop field contains the reserved value 0; if such a packet is received, it must be silently dropped. Nodes should not originate a packet to a multicast address whose scop field contains the reserved value F; if such a packet is sent or received, it must be treated the same as packets destined to a global (scop E) multicast address.

#### [2.7.1](#) Pre-Defined Multicast Addresses

The following well-known multicast addresses are pre-defined. The group ID's defined in this section are defined for explicit scope values.

Use of these group IDs for any other scope values, with the T flag equal to 0, is not allowed.

Reserved Multicast Addresses:   FF00:0:0:0:0:0:0:0

```
FF02:0:0:0:0:0:0:0
FF03:0:0:0:0:0:0:0
FF04:0:0:0:0:0:0:0
FF05:0:0:0:0:0:0:0
FF06:0:0:0:0:0:0:0
FF07:0:0:0:0:0:0:0
FF08:0:0:0:0:0:0:0
FF09:0:0:0:0:0:0:0
FF0A:0:0:0:0:0:0:0
FF0B:0:0:0:0:0:0:0
FF0C:0:0:0:0:0:0:0
FF0D:0:0:0:0:0:0:0
FF0E:0:0:0:0:0:0:0
FF0F:0:0:0:0:0:0:0
```

The above multicast addresses are reserved and shall never be assigned to any multicast group.

```
All Nodes Addresses:  FF01:0:0:0:0:0:0:1
                      FF02:0:0:0:0:0:0:1
```

The above multicast addresses identify the group of all IPv6 nodes, within scope 1 (interface-local) or 2 (link-local).

```
All Routers Addresses:  FF01:0:0:0:0:0:0:2
                        FF02:0:0:0:0:0:0:2
                        FF05:0:0:0:0:0:0:2
```

The above multicast addresses identify the group of all IPv6 routers, within scope 1 (interface-local), 2 (link-local), or 5 (site-local).

```
Solicited-Node Address:  FF02:0:0:0:0:1:FFXX:XXXX
```

Solicited-node multicast address are computed as a function of a node's unicast and anycast addresses. A solicited-node multicast address is formed by taking the low-order 24 bits of an address (unicast or anycast) and appending those bits to the prefix FF02:0:0:0:0:1:FF00::/104 resulting in a multicast address in the range

FF02:0:0:0:0:1:FF00:0000

to

FF02:0:0:0:0:1:FFFF:FFFF

For example, the solicited node multicast address corresponding to the IPv6 address 4037::01:800:200E:8C6C is FF02::1:FF0E:8C6C. IPv6

addresses that differ only in the high-order bits, e.g. due to multiple high-order prefixes associated with different aggregations, will map to the same solicited-node address thereby, reducing the number of multicast addresses a node must join.

A node is required to compute and join (on the appropriate interface) the associated Solicited-Node multicast addresses for all Unicast and Anycast Addresses that have been configured for the node's interfaces (manually or automatically).

## [2.8](#) A Node's Required Addresses

A host is required to recognize the following addresses as identifying itself:

- o Its required Link-Local Address for each interface.
- o Any additional Unicast and Anycast Addresses that have been configured for the node's interfaces (manually or automatically).
- o The loopback address.
- o The All-Nodes Multicast Addresses defined in [Section 2.7.1](#).
- o The Solicited-Node Multicast Address for each of its unicast and anycast addresses.
- o Multicast Addresses of all other groups to which the node belongs.

A router is required to recognize all addresses that a host is required to recognize, plus the following addresses as identifying itself:

- o The Subnet-Router Anycast Addresses for all interfaces for which it is configured to act as a router.

- o All other Anycast Addresses with which the router has been configured.
- o The All-Routers Multicast Addresses defined in [Section 2.7.1](#).

### [3. Security Considerations](#)

IPv6 addressing documents do not have any direct impact on Internet infrastructure security. Authentication of IPv6 packets is defined in [\[AUTH\]](#).

### [4. IANA Considerations](#)

The "IPv4-compatible IPv6 address" is deprecated by this document. The IANA should continue to list the address block containing this address as "Reserved by IETF" and not reassign it for any other purpose.

The IANA should update the references for the IPv6 Address Architecture in the IANA registries to this RFC when it is published.

### [5. References](#)

#### [5.1 Normative References](#)

[IPV6] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", [RFC2460](#), December 1998.

[RFC2026] Bradner, S., "The Internet Standards Process -- Revision 3", [RFC2026](#), [BCP00009](#), October 1996.

#### [5.2 Non-Normative References](#)

[ANYCST] Partridge, C., Mendez, T., and W. Milliken, "Host Anycasting Service", [RFC1546](#), November 1993.

- [AUTH] Kent, S., and R. Atkinson, "IP Authentication Header", [RFC2402](#), November 1998.
- [CIDR] Fuller, V., Li, T., Yu, J., and K. Varadhan, "Classless Inter-Domain Routing (CIDR): An Address Assignment and Aggregation Strategy", [RFC1519](#), September 1993.
- [ETHER] Crawford, M., "Transmission of IPv6 Packets over Ethernet Networks", [RFC2464](#), December 1998.
- [EUI64] IEEE, "Guidelines for 64-bit Global Identifier (EUI-64) Registration Authority", <http://standards.ieee.org/regauth/oui/tutorials/EUI64.html>, March 1997.
- [FDDI] Crawford, M., "Transmission of IPv6 Packets over FDDI Networks", [RFC2467](#), December 1998.
- [GLOBAL] Hinden, R., Deering, S., and E. Nordmark, "IPv6 Global Unicast Address Format", [RFC3587](#), August 2003.

- [MASGN] Hinden, R., "IPv6 Multicast Address Assignments", [RFC2375](#), July 1998.
- [PRIV] Narten, T. and R. Draves, "Privacy Extensions for Stateless Address Autoconfiguration in IPv6", [RFC3041](#), January 2001.
- [RFC4038] Shin, M-K., et. al., "Application Aspects of IPv6 Transition", [RFC4038](#), March 2005.
- [SLDEP] Huitema, C. and B. Carpenter, "Deprecating Site Local Addresses", [RFC3879](#), September 2004.
- [TOKEN] Crawford, M., Narten, T., and S. Thomas, "Transmission of IPv6 Packets over Token Ring Networks", [RFC2470](#), December 1998.
- [TRAN] Gilligan, R. and E. Nordmark, "Transition Mechanisms for IPv6 Hosts and Routers", [RFC2893](#), August 2000.

## 6. Author's Addresses

Robert M. Hinden  
Nokia  
313 Fairchild Drive  
Mountain View, CA 94043  
USA

phone: +1 650 625-2004  
email: bob.hinden@nokia.com

Stephen E. Deering  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA

## 7. Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

[draft-ietf-ipv6-addr-arch-v4-03.txt](#)

[Page 20]

---

INTERNET-DRAFT

IPv6 Addressing Architecture

April 2005

## 8. Copyright Statement

Copyright (C) The Internet Society (2005). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

## 9. Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in

this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

#### APPENDIX A: Creating Modified EUI-64 format Interface Identifiers

-----

Depending on the characteristics of a specific link or node there are a number of approaches for creating Modified EUI-64 format interface



identifiers. This appendix describes some of these approaches.

#### Links or Nodes with IEEE EUI-64 Identifiers

The only change needed to transform an IEEE EUI-64 identifier to an interface identifier is to invert the "u" (universal/local) bit. For example, a globally unique IEEE EUI-64 identifier of the form:

0	1	3	4	6
0	5	1	7	3
+-----+-----+-----+-----+-----+				
cccccc0gcccccccc ccccccccmmmmmmmm mmmmmmmmmmmmmmmm mmmmmmmmmmmmmmmm				
+-----+-----+-----+-----+-----+				


where "c" are the bits of the assigned company\_id, "0" is the value of the universal/local bit to indicate universal scope, "g" is individual/group bit, and "m" are the bits of the manufacturer-selected extension identifier. The IPv6 interface identifier would be of the form:

0	1	3	4	6
0	5	1	7	3
+-----+-----+-----+-----+-----+				
cccccc1gcccccccc ccccccccmmmmmmmm mmmmmmmmmmmmmmmm mmmmmmmmmmmmmmmm				
+-----+-----+-----+-----+-----+				


The only change is inverting the value of the universal/local bit.

#### Links or Nodes with IEEE 802 48 bit MAC's

[EUI64] defines a method to create a IEEE EUI-64 identifier from an IEEE 48bit MAC identifier. This is to insert two octets, with hexadecimal values of 0xFF and 0xFE, in the middle of the 48 bit MAC (between the company\_id and vendor supplied id). For example the 48 bit IEEE MAC with global scope:

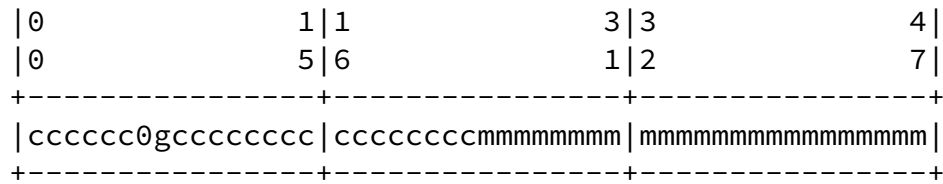


where "c" are the bits of the assigned company\_id, "0" is the value of the universal/local bit to indicate global scope, "g" is individual/group bit, and "m" are the bits of the manufacturer-selected extension identifier. The interface identifier would be of the form:

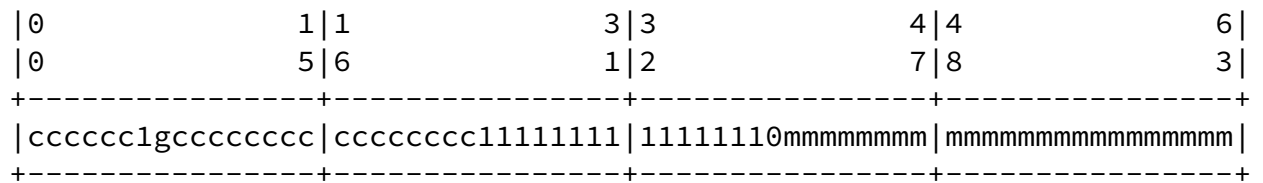

When IEEE 802 48bit MAC addresses are available (on an interface or a node), an implementation may use them to create interface identifiers due to their availability and uniqueness properties.

## Links with Other Kinds of Identifiers

There are a number of types of links that have link-layer interface identifiers other than IEEE EUI-64 or IEEE 802 48-bit MACs. Examples include LocalTalk and Arcnet. The method to create an Modified EUI-64 format identifier is to take the link identifier (e.g., the LocalTalk 8 bit node identifier) and zero fill it to the left. For example a LocalTalk 8 bit node identifier of hexadecimal value 0x4F results in the following interface identifier:

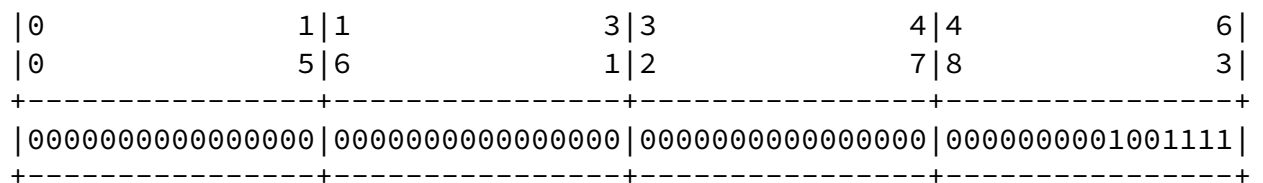

Note that this results in the universal/local bit set to "0" to indicate local scope.

## Links without Identifiers

There are a number of links that do not have any type of built-in identifier. The most common of these are serial links and configured tunnels. Interface identifiers must be chosen that are unique within

INTERNET-DRAFT

IPv6 Addressing Architecture

April 2005

a subnet-prefix.

When no built-in identifier is available on a link the preferred approach is to use a universal interface identifier from another interface or one which is assigned to the node itself. When using this approach no other interface connecting the same node to the same subnet-prefix may use the same identifier.

If there is no universal interface identifier available for use on the link the implementation needs to create a local-scope interface identifier. The only requirement is that it be unique within a subnet prefix. There are many possible approaches to select a subnet-prefix-unique interface identifier. These include:

- Manual Configuration
- Node Serial Number
- Other node-specific token

The subnet-prefix-unique interface identifier should be generated in a manner that it does not change after a reboot of a node or if interfaces are added or deleted from the node.

The selection of the appropriate algorithm is link and implementation dependent. The details on forming interface identifiers are defined in the appropriate "IPv6 over <link>" specification. It is strongly recommended that a collision detection algorithm be implemented as part of any automatic algorithm.

---

INTERNET-DRAFT

IPv6 Addressing Architecture

April 2005

APPENDIX B: Changes from [RFC-3513](#)

-----

The following changes were made from [RFC-3513](#) "IP Version 6 Addressing Architecture":

- o The restrictions on using IPv6 anycast addresses were removed because there is now sufficient experience with the use of anycast addresses, the issues are not specific to IPv6, and the GROW working group is working in this area.
- o Deprecated the Site-Local unicast prefix. Changes included
  - Removed Site-Local from special list of prefixes in [Section 2.4](#).
  - Split section titled "Local-use IPv6 Unicast Addresses" into two sections, "Link-Local IPv6 Unicast Addresses" and "Site-Local IPv6 Unicast Addresses".
  - Added text to new section describing Site-Local deprecation.
- o Changes to resolve issues raised in IAB response to Robert Elz appeal. Changes include:
  - Added clarification to [Section 2.5](#) that nodes should make no assumptions about the structure of an IPv6 address.
  - Changed the text in [Section 2.5.1](#) and [Appendix A](#) to refer to the modified EUI-64 format interface identifiers with the "u" bit set to one (1) as universal.
  - Added clarification to [Section 2.5.1](#) that IPv6 nodes are not required to validate that interface identifiers created in modified EUI-64 format with the "u" bit set to one are unique.
- o Changed the reference indicated in [Section 2.5.4](#) "Global Unicast Addresses" to [RFC3587](#).
- o Removed mention of NSAP addresses in examples.

- o Clarified that the "x" in the textual representation can be one to four digits.
- o Deprecated the "IPv6 Compatible Address" because it is not being used in the IPv6 transition mechanisms.
- o Editorial changes.