

Network Working Group
INTERNET-DRAFT
Intended Status: Standards Track
Expires: June 15, 2012

M.Venkatesan
Kannan KV Sampath
Aricent
Sam K. Aldrin
Huawei Technologies
Thomas D. Nadeau
CA Technologies

December 15, 2011

MPLS-TP Traffic Engineering (TE) Management Information Base (MIB)
draft-ietf-mpls-tp-te-mib-01.txt

Abstract

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes managed objects of Tunnels, Identifiers, Label Switch Router and Textual conventions for Multiprotocol Label Switching (MPLS) based Transport Profile (TP).

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on June 15, 2012.

Copyright and License Notice

Copyright (c) 2011 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1	Introduction	3
2	The Internet-Standard Management Framework	3
3	Overview	3
3.1	Conventions used in this document	3
3.2	Terminology	3
3.3	Acronyms	3
4	Motivations	4
5	Feature List	4
6	Brief description of MIB Objects	4
6.1	mplsNodeConfigTable	5
6.2	mplsNodeIpMapTable	5
6.3	mplsNodeIccMapTable	6
6.4	mplsTunnelExtTable	6
7	MIB Module Interdependencies	6
8	Dependencies between MIB Module Tables	8
9	Example of MPLS-TP tunnel setup	8
10	MPLS Textual Convention Extension MIB definitions	13
11	MPLS Identifier MIB definitions	16
12	MPLS LSR Extension MIB definitions	20
13	MPLS Tunnel Extension MIB definitions	24
14	Security Consideration	36
15	IANA Considerations	37
16	References	37
16.1	Normative References	37
16.2	Informative References	38
17	Acknowledgments	38
18	Authors' Addresses	38

1 Introduction

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes managed objects of Tunnels, Identifiers, Label Switch Router and Textual conventions for Multiprotocol Label Switching (MPLS) based Transport Profile (TP).

This MIB module should be used in conjunction with the MPLS traffic Engineering MIB [[RFC3812](#)] and companion document MPLS Label Switch Router MIB [[RFC3813](#)] for MPLS based traffic engineering configuration and management.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#), [RFC2119](#).

2. The Internet-Standard Management Framework

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to [section 7 of RFC3410](#) [[RFC3410](#)].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP). Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This memo specifies a MIB module that is compliant to the SMIV2, which is described in STD 58, [RFC2578](#), STD 58, [RFC2579](#) and STD58, [RFC2580](#).

3. Overview

3.1 Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [[RFC2119](#)].

3.2 Terminology

This document uses terminology from the MPLS architecture document [[RFC3031](#)], MPLS Traffic Engineering Management information [[RFC3812](#)], MPLS Label Switch Router MIB [[RFC3813](#)] and MPLS-TP Identifiers document [[TPIDS](#)].

3.3 Acronyms

GMPLS: Generalized Multi-Protocol Label Switching
ICC: ITU Carrier Code
IP: Internet Protocol
LSP: Label Switching Path
LSR: Label Switching Router
MIB: Management Information Base
MPLS: Multi-Protocol Label Switching
MPLS-TP: MPLS Transport Profile
OSPF: Open Shortest Path First
PW: Pseudowire
TE: Traffic Engineering
TP: Transport Profile

4. Motivations

The existing MPLS TE [[RFC3812](#)] and GMPLS MIBs [[RFC4802](#)] do not support the transport network requirements of NON-IP based management and static bidirectional tunnels.

5. Feature List

The MPLS transport profile MIB module is designed to satisfy the following requirements and constraints:

The MIB module supports point-to-point, co-routed bi-directional associated bi-directional tunnels.

- The MPLS tunnels need not be interfaces, but it is possible to configure a TP tunnel as an interface.
- The mplsTunnelTable [[RFC3812](#)] to be also used for MPLS-TP tunnels
- The mplsTunnelTable is extended to support MPLS-TP specific objects.
- A node configuration table (mplsNodeConfigTable) is used to translate the Global_Node_ID or ICC to the local identifier in order to index mplsTunnelTable.
- The MIB module supports persistent, as well as non-persistent tunnels.

6. Brief description of MIB Objects

The objects described in this section support the functionality described in documents [[RFC5654](#)] and [[TPIDS](#)]. The tables support

both IP compatible and ICC based tunnel configurations.

6.1. mplsNodeConfigTable

The mplsNodeConfigTable is used to assign a local identifier for a given ICC or Global_Node_ID combination as defined in [TPIDS]. An ICC is a string of one to six characters, each character being either alphabetic (i.e. A-Z) or numeric (i.e. 0-9) characters. Alphabetic characters in the ICC should be represented with upper case letters. In the IP compatible mode, Global_Node_ID, is used to uniquely identify a node.

Each ICC or Global_Node_ID contains one unique entry in the table representing a node. Every node is assigned a local identifier within a range of 0 to 16777215. This local identifier is used for indexing into mplsTunnelTable as mplsTunnelIngressLSRId and mplsTunnelEgressLSRId.

For IP compatible environment, MPLS-TP tunnel is indexed by Tunnel Index, Tunnel Instance, Source Global_ID, Source Node_ID, Destination Global_ID and Destination Node_ID.

For ICC based environment, MPLS-TP tunnel is indexed by Tunnel Index, Tunnel Instance, Source ICC and Destination ICC.

As mplsTunnelTable is indexed by mplsTunnelIndex, mplsTunnelInstance, mplsTunnelIngressLSRId, and mplsTunnelEgressLSRId, the MPLS-TP tunnel identifiers cannot be used directly.

The mplsNodeConfigTable will be used to store an entry for ICC or Global_Node_ID with a local identifier to be used as LSR ID in mplsTunnelTable. As the regular TE tunnels use IP address as LSR ID, the local identifier should be below the first valid IP address, which is 16777216[1.0.0.0].

6.2. mplsNodeIpMapTable

The read-only mplsNodeIpMaptable is used to query the local identifier assigned and stored in mplsNodeConfigTable for a given Global_Node_ID. In order to query the local identifier, in the IP compatible mode, this table is indexed with Global_Node_ID. In the IP compatible mode for a TP tunnel, Global_Node_ID is used.

A separate query is made to get the local identifier of both Ingress and Egress Global_Node_ID identifiers. These local

identifiers are used as `mplsTunnelIngressLSRId` and `mplsTunnelEgressLSRId`, while indexing `mplsTunnelTable`.

6.3. `mplsNodeIccMapTable`

The read-only `mplsNodeIccMapTable` is used to query the local identifier assigned and stored in the `mplsNodeConfigTable` for a given ICC.

A separate query is made to get the local identifier of both Ingress and Egress ICC. These local identifiers are used as `mplsTunnelIngressLSRId` and `mplsTunnelEgressLSRId`, while indexing `mplsTunnelTable`.


6.4. `mplsTunnelExtTable`

`mplsTunnelExtTable` extends the `mplsTunnelTable` to add MPLS-TP tunnel specific additional objects. All the additional attributes specific to TP tunnel are contained in this extended table and could be accessed with the `mplsTunnelTable` indices.

7. MIB Module Interdependencies

This section provides an overview of the relationship between the MPLS-TP TE MIB module and other MPLS MIB modules.

The arrows in the following diagram show a 'depends on' relationship. A relationship "MIB module A depends on MIB module B" means that MIB module A uses an object, object identifier, or textual convention defined in MIB module B, or that MIB module A contains a pointer (index or RowPointer) to an object in MIB module B.

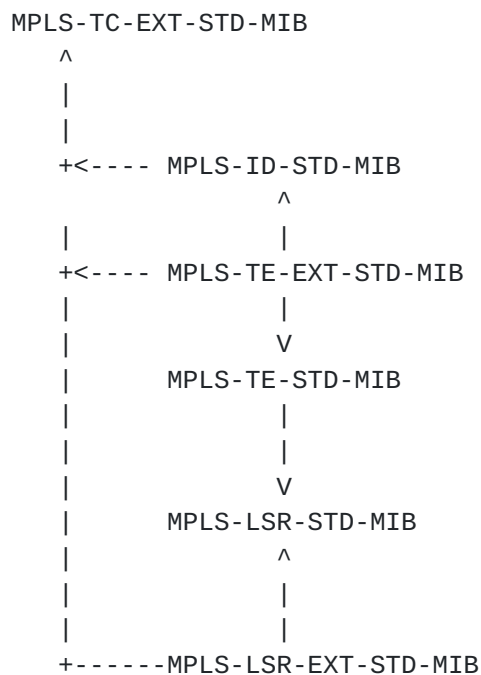

Thus:

- All the new MPLS extension MIB modules depend on MPLS-TC-EXT-STD-MIB.
- MPLS-TE-STD-MIB [[RFC3812](#)] contains references to objects in MPLS-ID-STD-MIB.
- MPLS-TE-EXT-STD-MIB contains references to objects in MPLS-TE-STD-MIB [[RFC3812](#)].
- MPLS-LSR-EXT-STD-MIB contains references to objects in MPLS-LSR-STD-MIB [[RFC3813](#)].

MPLS-TE-STD-MIB [[RFC 3812](#)] is extended by MPLS-TE-EXT-STD-MIB mib module for associating the reverse direction tunnel information.

Note that the nature of the 'extends' relationship is a sparse augmentation so that the entry in the `mplsTunnelExtTable` has the same index values as the in the `mplsTunnelTable`.


MPLS-LSR-STD-MIB [[RFC 3813](#)] is extended by MPLS-LSR-EXT-STD-MIB mib module for pointing back to the tunnel entry for easy tunnel access from XC entry.

Note that the nature of the 'extends' relationship

is a sparse augmentation so that the entry in the mplsXCExtTable has the same index values as the in the mplsXCTable.

8. Dependencies between MIB Module Tables

The tables in MPLS-TE-EXT-STD-MIB are related as shown on the diagram below. The arrows indicate a reference from one table to another.

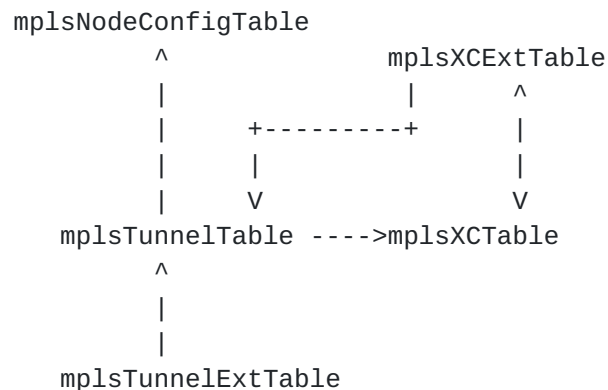

An existing mplsTunnelTable uses the mplsNodeConfigTable table to map the Global_Node_ID and/or ICC with the local number in order to accommodate in the existing tunnel table's ingress/egress LSR-id.

New mplsTunnelExtTable table provides the reverse direction LSP information for the existing tunnel table in order to achieve bidirectional LSPs.

mplsXCExtTable is extended from mplsLsrXCTable to provide backward reference to tunnel entry.

9. Example of MPLS-TP tunnel setup

In this section, we provide an example of the IP based MPLS-TP co-routed bidirectional tunnel setup. This example provides the usage of MPLS-TP Tunnel MIB along with the extended new MIB modules introduced in this document.

Do note that a MPLS-TP tunnel could be setup statically as well as signaled via control plane. This example considers configuration on a head-end LSR to setup a static MPLS-TP tunnel. Only relevant objects which are applicable for MPLS-TP tunnel are illustrated here.

In mplsNodeConfigTable:

```

{
  -- Non-IP Ingress LSR-Id (Index to the table)
  mplsNodeConfigLocalId      = 1,

```



```
mplsNodeConfigGlobalId      = 1234,
mplsNodeConfigNodeId        = 10,
-- Mandatory parameters needed to activate the row go here
mplsNodeConfigRowStatus     = createAndGo (4)

-- Non-IP Egress LSR-Id (Index to the table)
mplsNodeConfigLocalId       = 2,
mplsNodeConfigGlobalId      = 1234,
mplsNodeConfigNodeId        = 20,
-- Mandatory parameters needed to activate the row go here
mplsNodeConfigRowStatus     = createAndGo (4)
}
```

This will create an entry in the mplsNodeConfigTable for a Global_Node_ID. A separate entry is made for both Ingress LSR and Egress LSR.

The following read-only mplsNodeIpMapTable table is populated automatically upon creating an entry in mplsNodeConfigTable and this table is used to retrieve the local identifier for the given Global_Node_ID.

In mplsNodeIpMapTable:

```
{
-- Global_ID (Index to the table)
mplsNodeIpMapGlobalId       = 1234,
-- Node Identifier (Index to the table)
mplsNodeIpMapNodeId         = 10,
mplsNodeIpMapLocalId        = 1

-- Global_ID (Index to the table)
mplsNodeIpMapGlobalId       = 1234,
-- Node Identifier (Index to the table)
mplsNodeIpMapNodeId         = 20,
mplsNodeIpMapLocalId        = 2
}
```

The following denotes the configured tunnel "head" entry:

In mplsTunnelTable:

```
{
mplsTunnelIndex             = 1,
mplsTunnelInstance          = 1,
-- Local map number created in mplsNodeConfigTable for Ingress
  LSR-Id
mplsTunnelIngressLSRId      = 1,
```



```

-- Local map number created in mplsNodeConfigTable for Egress
  LSR-Id
  mplsTunnelEgressLSRId      = 2,
  mplsTunnelName              = "TP forward LSP",
  mplsTunnelDescr             = "East to West",
  mplsTunnelIsIf              = true (1),
-- RowPointer MUST point to the first accessible column
  mplsTunnelXCPointer        =
                                mplsXCLspId.4.0.0.0.1.1.0.4.0.0.0.12,
  mplsTunnelSignallingProto   = none (1),
  mplsTunnelSetupPrio         = 0,
  mplsTunnelHoldingPrio       = 0,
  mplsTunnelSessionAttributes = 0,
  mplsTunnelLocalProtectInUse = false (0),
-- RowPointer MUST point to the first accessible column
  mplsTunnelResourcePointer   = mplsTunnelResourceMaxRate.5,
  mplsTunnelInstancePriority  = 1,
  mplsTunnelHopTableIndex     = 1,
  mplsTunnelIncludeAnyAffinity = 0,
  mplsTunnelIncludeAllAffinity = 0,
  mplsTunnelExcludeAnyAffinity = 0,
  mplsTunnelRole              = head (1),
-- Mandatory parameters needed to activate the row go here
  mplsTunnelRowStatus         = createAndGo (4)
}

```

In mplsTunnelTable:

```

{
  mplsTunnelIndex            = 1,
  mplsTunnelInstance         = 2,
-- Local map number created in mplsNodeConfigTable for Ingress
  LSR-Id
  mplsTunnelIngressLSRId     = 1,
-- Local map number created in mplsNodeConfigTable for Egress
  LSR-Id
  mplsTunnelEgressLSRId      = 2,
  mplsTunnelName              = "TP reverse LSP",
  mplsTunnelDescr             = "West to East",
  mplsTunnelIsIf              = true (1),
-- RowPointer MUST point to the first accessible column
  mplsTunnelXCPointer        =
                                mplsXCLspId.4.0.0.0.1.4.0.0.0.16.1.0,
  mplsTunnelSignallingProto   = none (1),
  mplsTunnelSetupPrio         = 0,
  mplsTunnelHoldingPrio       = 0,
  mplsTunnelSessionAttributes = 0,
  mplsTunnelLocalProtectInUse = false (0),

```



```
-- RowPointer MUST point to the first accessible column
mplsTunnelResourcePointer    = mplsTunnelResourceMaxRate.5,
mplsTunnelInstancePriority    = 1,
mplsTunnelHopTableIndex      = 1,
mplsTunnelIncludeAnyAffinity = 0,
mplsTunnelIncludeAllAffinity = 0,
mplsTunnelExcludeAnyAffinity = 0,
mplsTunnelRole                = head (1),
-- Mandatory parameters needed to activate the row go here
mplsTunnelRowStatus           = createAndGo (4)
}
```

Now the TP specific Tunnel parameters are configured in the extended Tunnel table

In mplsTunnelExtTable:

```
{
  Index = same as one used for mplsTunnelTable,
  -- As per [TPIDS] LSP_ID is defined as follows,
  -- For corouted bidirectional tunnel
  -- LSP_ID => East-Global_Node_ID::East-Tunnel_Num::
  --           West-Global_Node_ID::West-Tunnel_Num::LSP_Num
  -- LSP_ID of this tunnel: 1234_10::1::1234_20::1::0
  -- Where,
  -- LSP_Num - 0 indicates the configured head end tunnel.

  -- West tunnel number is assigned in the destination
  -- tunnel index,
  -- single LSP number is common for both forward and reverse
  -- directions, as the single tunnel head entry originates
  -- both the forward and reverse LSPs.
  -- mplsTunnelExtDestTnlIndex = West-Tunnel_Num
  -- mplsTunnelExtDestTnlLspIndex = LSP_Num

  mplsTunnelExtDestTnlIndex      = 1,
  mplsTunnelExtDestTnlLspIndex   = 0

  -- For associated bidirectional tunnel
  -- LSP_ID => East-Global_Node_ID::East-Tunnel_Num::
  --           East-LSP_Num::West-Global_Node_ID::
  --           West-Tunnel_Num::West-LSP_Num
  -- West tunnel number is assigned in the destination
  -- tunnel index, since the head end tunnel is different for
  -- both the forward and reverse direction LSPs,
  -- Destination LSP index points the reverse direction LSP
  -- in a different tunnel.
  -- mplsTunnelExtDestTnlIndex = West-Tunnel_Num
  -- mplsTunnelExtDestTnlLspIndex = West-LSP_Num
}
```



```
}
```

We must next create the appropriate in-segment and out-segment entries. These are done in [\[RFC3813\]](#) using the `mplsInSegmentTable` and `mplsOutSegmentTable`.

For the forward direction.

In `mplsOutSegmentTable`:

```
{
    mplsOutSegmentIndex      = 0x00000012,
    mplsOutSegmentInterface  = 13, -- outgoing interface
    mplsOutSegmentPushTopLabel = true(1),
    mplsOutSegmentTopLabel   = 22, -- outgoing label

    -- RowPointer MUST point to the first accessible column.
    mplsOutSegmentTrafficParamPtr = 0.0,
    mplsOutSegmentRowStatus       = createAndGo (4)
}
```

For the reverse direction.

In `mplsInSegmentTable`:

```
{
    mplsInSegmentIndex      = 0x00000016
    mplsInSegmentLabel      = 21, -- incoming label
    mplsInSegmentNPop       = 1,
    mplsInSegmentInterface  = 13, -- incoming interface

    -- RowPointer MUST point to the first accessible column.
    mplsInSegmentTrafficParamPtr = 0.0,
    mplsInSegmentRowStatus       = createAndGo (4)
}
```

Next, two cross-connect entries are created in the `mplsXCTable` of the MPLS-LSR-STD-MIB [\[RFC3813\]](#), thereby associating the newly created segments together.

In `mplsXCTable`:

```
{
    mplsXCIndex              = 0x01,
    mplsXCInSegmentIndex     = 0x00000000,
    mplsXCOutSegmentIndex    = 0x00000012,
    mplsXCLspId              = 0x0102 -- unique ID
    -- only a single outgoing label
    mplsXCLabelStackIndex    = 0x00,
    mplsXCRowStatus          = createAndGo(4)
}
```



```
}
```

```
In mplsXCTable:
```

```
{
    mplsXCIndex                = 0x01,
    mplsXCInSegmentIndex       = 0x00000016,
    mplsXCOutSegmentIndex      = 0x00000000,
    mplsXCCLspId               = 0x0102 -- unique ID
    -- only a single outgoing label
    mplsXCLabelStackIndex      = 0x00,
    mplsXCRowStatus             = createAndGo(4)
}
```

This table entry is extended by entry in the mplsXCExtTable. Note that the nature of the 'extends' relationship is a sparse augmentation so that the entry in the mplsXCExtTable has the same index values as the entry in the mplsXCTable.

First for the forward direction:

```
In mplsXCExtTable
{
    -- Back pointer from XC table to Tunnel table
    mplsXCExtTunnelPointer      = mplsTunnelName.1.1.1.2
}
```

Next for the reverse direction:

```
In mplsXCExtTable
{
    -- Back pointer from XC table to Tunnel table
    mplsXCExtTunnelPointer      = mplsTunnelName.1.2.1.2
}
```

10. MPLS Textual Convention Extension MIB definitions

```
MPLS-TC-EXT-STD-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
    MODULE-IDENTITY, Unsigned32
        FROM SNMPv2-SMI                -- [RFC2578]
```

```
    TEXTUAL-CONVENTION
        FROM SNMPv2-TC                -- [RFC2579]
```

```
    mplsStdMIB
        FROM MPLS-TC-STD-MIB          -- [RFC3811]
```


;

mplsTcExtStdMIB MODULE-IDENTITY

LAST-UPDATED

"201106160000Z" -- June 16, 2011

ORGANIZATION

"Multiprotocol Label Switching (MPLS) Working Group"

CONTACT-INFO

"

Venkatesan Mahalingam
Aricent,
India

Email: venkat.mahalingams@gmail.com

Kannan KV Sampath
Aricent,
India

Email: Kannan.Sampath@aricent.com

Sam Aldrin
Huawei Technologies
2330 Central Express Way,
Santa Clara, CA 95051, USA

Email: aldrin.ietf@gmail.com

Thomas D. Nadeau
CA Technologies
273 Corporate Drive, Portsmouth, NH, USA

Email: thomas.nadeau@ca.com

"

DESCRIPTION

"Copyright (c) 2011 IETF Trust and the persons identified
as the document authors. All rights reserved.

This MIB module contains Textual Conventions for
MPLS based transport networks."

-- Revision history.

REVISION

"201106160000Z" -- June 16, 2011

DESCRIPTION

"MPLS Textual Convention Extensions"

::= { mplsStdMIB xxx } -- xxx to be replaced with correct value

MplsGlobalId ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"This object contains the Textual Convention of IP based operator unique identifier (Global_ID), the Global_ID

can contain the 2-octet or 4-octet value of the operator's Autonomous System Number (ASN).

It is expected that the Global_ID will be derived from the globally unique ASN of the autonomous system hosting the PEs containing the actual AIIs.

The presence of a Global_ID based on the operator's ASN ensures that the AII will be globally unique.

When the Global_ID is derived from a 2-octet AS number, the two high-order octets of this 4-octet identifier MUST be set to zero.

Further ASN 0 is reserved. A Global_ID of zero means that no Global_ID is present. Note that a Global_ID of zero is limited to entities contained within a single operator and MUST NOT be used across an NNI.

A non-zero Global_ID MUST be derived from an ASN owned by the operator."

SYNTAX OCTET STRING (SIZE (4))

MplsNodeId ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"The Node_ID is assigned within the scope of the Global_ID. The value 0 (or 0.0.0.0 in dotted decimal notation) is reserved and MUST NOT be used.

When IPv4 addresses are in use, the value of this object can be derived from the LSR's /32 IPv4 loop back address. When IPv6 addresses are in use, the value of this object can be a 32-bit value unique within the scope of a Global_ID.

Note that, when IP reach ability is not needed, the 32-bit Node_ID is not required to have any association with the IPv4 address space."

SYNTAX Unsigned32

MplsIccId ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The ICC is a string of one to six characters, each character being either alphabetic (i.e. A-Z) or

numeric (i.e. 0-9) characters.

Alphabetic characters in the ICC SHOULD be represented

with upper case letters."

SYNTAX OCTET STRING (SIZE (1..6))

MplsLocalId ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"This textual convention is used in accommodating the bigger size Global_Node_ID and/or ICC with lower size LSR identifier in order to index the mplsTunnelTable.

The Local Identifier is configured between 1 and 16777215, as valid IP address range starts from 16777216 (01.00.00.00). This range is chosen to identify the mplsTunnelTable's Ingress/Egress LSR-id is IP address or Local identifier, if the configured range is not IP address, administrator is expected to retrieve the complete information (Global_Node_ID or ICC) from mplsNodeConfigTable. This way, existing mplsTunnelTable is reused for bidirectional tunnel extensions for MPLS based transport networks.

This Local Identifier allows the administrator to assign a unique identifier to map Global_Node_ID and/or ICC."

SYNTAX Unsigned32(1..16777215)

-- MPLS-TC-EXT-STD-MIB module ends

END

11. MPLS Identifier MIB definitions

MPLS-ID-STD-MIB DEFINITIONS ::= BEGIN

IMPORTS

MODULE-IDENTITY, OBJECT-TYPE, NOTIFICATION-TYPE

FROM SNMPv2-SMI

-- [[RFC2578](#)]

MODULE-COMPLIANCE, OBJECT-GROUP, NOTIFICATION-GROUP

FROM SNMPv2-CONF

-- [[RFC2580](#)]

mplsStdMIB

FROM MPLS-TC-STD-MIB

-- [[RFC3811](#)]

MplsGlobalId, MplsIccId, MplsNodeId

FROM MPLS-TC-EXT-STD-MIB

;

mplsIdStdMIB MODULE-IDENTITY

LAST-UPDATED

"201106160000Z" -- June 16, 2011

ORGANIZATION

"Multiprotocol Label Switching (MPLS) Working Group"

CONTACT-INFO

"

Venkatesan Mahalingam
Aricent,
India

Email: venkat.mahalingams@gmail.com

Kannan KV Sampath
Aricent,
India

Email: Kannan.Sampath@aricent.com

Sam Aldrin
Huawei Technologies
2330 Central Express Way,
Santa Clara, CA 95051, USA

Email: aldrin.ietf@gmail.com

Thomas D. Nadeau
CA Technologies
273 Corporate Drive, Portsmouth, NH, USA

Email: thomas.nadeau@ca.com

"

DESCRIPTION

"Copyright (c) 2011 IETF Trust and the persons identified
as the document authors. All rights reserved.

This MIB module contains generic object definitions for
MPLS Traffic Engineering in transport networks."

-- Revision history.

REVISION

"201106160000Z" -- June 16, 2011

DESCRIPTION

"MPLS identifiers mib object extension"

::= { mplsStdMIB xxx } -- xxx to be replaced with correct value

-- traps

mplsIdNotifications OBJECT IDENTIFIER ::= { mplsIdStdMIB 0 }

-- tables, scalars


```
mplsIdObjects      OBJECT IDENTIFIER ::= { mplsIdStdMIB 1 }
-- conformance
mplsIdConformance  OBJECT IDENTIFIER ::= { mplsIdStdMIB 2 }

-- MPLS common objects

mplsGlobalId OBJECT-TYPE
    SYNTAX      MplsGlobalId
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION

        "This object allows the administrator to assign a unique
        operator identifier also called MPLS-TP Global_ID."
    REFERENCE
        "MPLS-TP Identifiers [TPIDS]."
    ::= { mplsIdObjects 1 }

mplsIcc OBJECT-TYPE
    SYNTAX      MplsIccId
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "This object allows the operator or service provider to
        assign a unique MPLS-TP ITU-T Carrier Code (ICC) to a
        network."
    REFERENCE
        "MPLS-TP Identifiers [TPIDS]."
    ::= { mplsIdObjects 2 }

mplsNodeId OBJECT-TYPE
    SYNTAX      MplsNodeId
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "This object allows the operator or service provider to
        assign a unique MPLS-TP Node_ID.

        The Node_ID is assigned within the scope of the Global_ID."
    REFERENCE
        "MPLS-TP Identifiers [TPIDS]."
    ::= { mplsIdObjects 3 }

-- Module compliance.
```



```
mplsIdGroups
    OBJECT IDENTIFIER ::= { mplsIdConformance 1 }

mplsIdCompliances
    OBJECT IDENTIFIER ::= { mplsIdConformance 2 }

-- Compliance requirement for fully compliant implementations.

mplsIdModuleFullCompliance MODULE-COMPLIANCE
    STATUS current
    DESCRIPTION
        "Compliance statement for agents that provide full
        support the MPLS-ID-STD-MIB module."

    MODULE -- this module

        -- The mandatory group has to be implemented by all
        -- LSRs that originate/terminate MPLS-TP paths.

        MANDATORY-GROUPS {
            mplsIdScalarGroup
        }

        ::= { mplsIdCompliances 1 }

-- Compliance requirement for read-only implementations.

mplsIdModuleReadOnlyCompliance MODULE-COMPLIANCE
    STATUS current
    DESCRIPTION
        "Compliance statement for agents that provide full
        support the MPLS-ID-STD-MIB module."

    MODULE -- this module

        -- The mandatory group has to be implemented by all
        -- LSRs that originate/terminate MPLS-TP paths.

        MANDATORY-GROUPS {
            mplsIdScalarGroup
        }

        ::= { mplsIdCompliances 2 }

-- Units of conformance.
```



```
mplsIdScalarGroup OBJECT-GROUP
    OBJECTS { mplsGlobalId,
               mplsNodeId,
               mplsIcc
    }
    STATUS current
    DESCRIPTION
        "Scalar object needed to implement MPLS TP path."
    ::= { mplsIdGroups 1 }

-- MPLS-ID-STD-MIB module ends
END
```

12. MPLS LSR Extension MIB definitions

```
MPLS-LSR-EXT-STD-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
    MODULE-IDENTITY, OBJECT-TYPE
        FROM SNMPv2-SMI -- [RFC2578]
    MODULE-COMPLIANCE, OBJECT-GROUP
        FROM SNMPv2-CONF -- [RFC2580]
    mplsStdMIB
        FROM MPLS-TC-STD-MIB -- [RFC3811]
    RowPointer
        FROM SNMPv2-TC -- [RFC2579]
    mplsXCIndex, mplsXCInSegmentIndex, mplsXCOutSegmentIndex,
    mplsInSegmentGroup, mplsOutSegmentGroup, mplsXCGroup,
    mplsPerfGroup, mplsLsrNotificationGroup
        FROM MPLS-LSR-STD-MIB; -- [RFC3813]
```

```
mplsLsrExtStdMIB MODULE-IDENTITY
```

```
    LAST-UPDATED
```

```
        "201106160000Z" -- June 16, 2011
```

```
    ORGANIZATION
```

```
        "Multiprotocol Label Switching (MPLS) Working Group"
```

```
    CONTACT-INFO
```

```
        "
```

```
            Venkatesan Mahalingam
```

```
            Aricent,
```

```
            India
```

```
            Email: venkat.mahalingams@gmail.com
```

```
            Kannan KV Sampath
```

```
            Aricent,
```

```
            India
```

```
            Email: Kannan.Sampath@aricent.com
```


Sam Aldrin
Huawei Technologies
2330 Central Express Way,
Santa Clara, CA 95051, USA

Email: aldrin.ietf@gmail.com

Thomas D. Nadeau
CA Technologies
273 Corporate Drive, Portsmouth, NH, USA
Email: thomas.nadeau@ca.com

"

DESCRIPTION

"Copyright (c) 2011 IETF Trust and the persons identified
as the document authors. All rights reserved.

This MIB module contains generic object definitions for
MPLS LSR in transport networks."

-- Revision history.

REVISION

"201106160000Z" -- June 16, 2011

DESCRIPTION

"MPLS LSR specific mib objects extension"

::= { mplsStdMIB xxx } -- xxx to be replaced with correct value

-- traps

mplsLsrExtNotifications OBJECT IDENTIFIER ::= { mplsLsrExtStdMIB 0 }

-- tables, scalars

mplsLsrExtObjects OBJECT IDENTIFIER ::= { mplsLsrExtStdMIB 1 }

-- conformance

mplsLsrExtConformance OBJECT IDENTIFIER ::= { mplsLsrExtStdMIB 2 }

-- MPLS LSR common objects

mplsXCExtTable OBJECT-TYPE

SYNTAX SEQUENCE OF MplsXCExtEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table sparse augments the mplsXCTable of
MPLS-LSR-STD-MIB [[RFC 3813](#)] to provide MPLS-TP specific
information about associated tunnel information"

REFERENCE

"1. Multiprotocol Label Switching (MPLS) Label Switching
Router (LSR) Management Information Base (MIB), [RFC 3813](#)."


```
::= { mplsLsrExtObjects 1 }
```

```
mplsXCExtEntry OBJECT-TYPE
```

```
SYNTAX MplsXCExtEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

"An entry in this table extends the cross connect information represented by an entry in the mplsXCTable in MPLS-LSR-STD-MIB [[RFC 3813](#)] through a sparse augmentation. An entry can be created by a network administrator via SNMP SET commands, or in response to signaling protocol events."

```
REFERENCE
```

"1. Multiprotocol Label Switching (MPLS) Label Switching Router (LSR) Management Information Base (MIB), [RFC 3813](#)."

```
INDEX { mplsXCIndex, mplsXCInSegmentIndex,  
        mplsXCOutSegmentIndex }
```

```
::= { mplsXCExtTable 1 }
```

```
MplsXCExtEntry ::= SEQUENCE {
```

```
    mplsXCExtTunnelPointer      RowPointer
```

```
}
```

```
mplsXCExtTunnelPointer OBJECT-TYPE
```

```
SYNTAX RowPointer
```

```
MAX-ACCESS read-create
```

```
STATUS current
```

```
DESCRIPTION
```

"This object indicates the back pointer to the tunnel entry segment. This object cannot be modified if mplsXCRowStatus for the corresponding entry in the mplsXCTable is active(1)."

```
REFERENCE
```

"1. Multiprotocol Label Switching (MPLS) Label Switching Router (LSR) Management Information Base (MIB), [RFC 3813](#)."

```
::= { mplsXCExtEntry 1 }
```

```
mplsLsrExtGroups
```

```
    OBJECT IDENTIFIER ::= { mplsLsrExtConformance 1 }
```

```
mplsLsrExtCompliances
```

```
    OBJECT IDENTIFIER ::= { mplsLsrExtConformance 2 }
```

```
-- Compliance requirement for fully compliant implementations.
```

```
mplsLsrExtModuleFullCompliance MODULE-COMPLIANCE
```

```
    STATUS current
```


DESCRIPTION

"Compliance statement for agents that provide full support for MPLS-LSR-EXT-STD-MIB.

The mandatory group has to be implemented by all LSRs that originate, terminate, or act as transit for TE-LSPs/tunnels. In addition, depending on the type of tunnels supported, other groups become mandatory as explained below."

MODULE MPLS-LSR-STD-MIB -- The MPLS-LSR-STD-MIB, [RFC3813](#)

```
MANDATORY-GROUPS {  
    mplsInSegmentGroup,  
    mplsOutSegmentGroup,  
    mplsXCGroup,  
    mplsPerfGroup,  
    mplsLsrNotificationGroup  
}
```

MODULE -- this module

```
MANDATORY-GROUPS {  
    mplsXCExtGroup  
}
```

OBJECT mplsXCExtTunnelPointer

SYNTAX RowPointer

MIN-ACCESS read-only

DESCRIPTION

"The only valid value for Tunnel Pointer is mplsTunnelTable entry."

::= { mplsLsrExtCompliances 1 }

-- Compliance requirement for implementations that provide read-only
-- access.

mplsLsrExtModuleReadOnlyCompliance MODULE-COMPLIANCE

STATUS current

DESCRIPTION

"Compliance requirement for implementations that only provide read-only support for MPLS-LSR-EXT-STD-MIB. Such devices can then be monitored but cannot be configured using this MIB module."


```
MODULE MPLS-LSR-STD-MIB
```

```
MANDATORY-GROUPS {  
    mplsInterfaceGroup,  
    mplsInSegmentGroup,  
    mplsOutSegmentGroup,  
  
    mplsXCGroup,  
    mplsPerfGroup  
}
```

```
MODULE -- this module
```

```
MANDATORY-GROUPS {  
    mplsXCExtGroup  
}
```

```
OBJECT      mplsXCExtTunnelPointer  
SYNTAX      RowPointer  
MIN-ACCESS  read-only  
DESCRIPTION  
    "The only valid value for Tunnel Pointer is mplsTunnelTable  
    entry."
```

```
::= { mplsLsrExtCompliances 2 }
```

```
mplsXCExtGroup OBJECT-GROUP  
OBJECTS {  
    mplsXCExtTunnelPointer  
}  
STATUS current  
DESCRIPTION  
    "This object should be supported in order to access  
    the tunnel entry from XC entry."  
::= { mplsLsrExtGroups 1 }
```

```
-- MPLS-LSR-EXT-STD-MIB module ends  
END
```

13. MPLS Tunnel Extension MIB definitions

```
MPLS-TE-EXT-STD-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS  
    MODULE-IDENTITY, OBJECT-TYPE, Unsigned32, Gauge32,  
    NOTIFICATION-TYPE
```



```
    FROM SNMPv2-SMI -- [RFC2578]
MODULE-COMPLIANCE, OBJECT-GROUP, NOTIFICATION-GROUP
    FROM SNMPv2-CONF -- [RFC2580]
RowStatus, StorageType
    FROM SNMPv2-TC -- [RFC2579]
MplsLocalId, MplsGlobalId, MplsNodeId, MplsIccId
    FROM MPLS-TC-EXT-STD-MIB

mplsStdMIB, MplsTunnelIndex, MplsTunnelInstanceIndex
    FROM MPLS-TC-STD-MIB -- [RFC3811]
mplsTunnelIndex, mplsTunnelInstance, mplsTunnelIngressLSRId,
mplsTunnelEgressLSRId
    FROM MPLS-TE-STD-MIB -- [RFC3812]
;

mplsTeExtStdMIB MODULE-IDENTITY
    LAST-UPDATED
        "201106160000Z" -- June 16, 2011
    ORGANIZATION
        "Multiprotocol Label Switching (MPLS) Working Group"
    CONTACT-INFO
        "
            Venkatesan Mahalingam
            Aricent,
            India
            Email: venkat.mahalingams@gmail.com

            Kannan KV Sampath
            Aricent,

            India
            Email: Kannan.Sampath@aricent.com

            Sam Aldrin
            Huawei Technologies
            2330 Central Express Way,
            Santa Clara, CA 95051, USA
            Email: aldrin.ietf@gmail.com

            Thomas D. Nadeau
            CA Technologies
            273 Corporate Drive, Portsmouth, NH, USA
            Email: thomas.nadeau@ca.com
        "
    DESCRIPTION
        "Copyright (c) 2011 IETF Trust and the persons identified
        as the document authors. All rights reserved.
```


This MIB module contains generic object definitions for
MPLS Traffic Engineering in transport networks."

-- Revision history.

REVISION

"201106160000Z" -- June 16, 2011

DESCRIPTION

"MPLS TE mib objects extension"

::= { mplsStdMIB xxx } -- xxx to be replaced with correct value

-- Top level components of this MIB module.

-- traps

mplsTeExtNotifications OBJECT IDENTIFIER ::= { mplsTeExtStdMIB 0 }

-- tables, scalars

mplsTeExtObjects OBJECT IDENTIFIER ::= { mplsTeExtStdMIB 1 }

-- conformance

mplsTeExtConformance OBJECT IDENTIFIER ::= { mplsTeExtStdMIB 2 }

-- Start of MPLS Transport Profile Node configuration table

mplsNodeConfigTable OBJECT-TYPE

SYNTAX SEQUENCE OF MplsNodeConfigEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table allows the administrator to map a node or LSR
Identifier (IP compatible [Global_Node_ID] or ICC) with
a local identifier.

This table is created to reuse the existing
mplsTunnelTable for MPLS based transport network
tunnels also.

Since the MPLS tunnel's Ingress/Egress LSR identifiers'
size (Unsigned32) value is not compatible for
MPLS-TP tunnel i.e. Global_Node_Id of size 8 bytes and
ICC of size 6 bytes, there exists a need to map the
Global_Node_ID or ICC with the local identifier of size
4 bytes (Unsigned32) value in order
to index (Ingress/Egress LSR identifier)
the existing mplsTunnelTable."

::= { mplsTeExtObjects 1 }

mplsNodeConfigEntry OBJECT-TYPE

SYNTAX MplsNodeConfigEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in this table represents a mapping identification for the operator or service provider with node or LSR.

As per [[TPIDS](#)], this mapping is

represented as Global_Node_ID or ICC.

Note: Each entry in this table should have a unique Global_ID and Node_ID combination."

INDEX { mplsNodeConfigLocalId }

::= { mplsNodeConfigTable 1 }

```
MplsNodeConfigEntry ::= SEQUENCE {  
    mplsNodeConfigLocalId      MplsLocalId,  
    mplsNodeConfigGlobalId     MplsGlobalId,  
    mplsNodeConfigNodeId       MplsNodeId,  
    mplsNodeConfigIccId        MplsIccId,  
    mplsNodeConfigRowStatus    RowStatus,  
    mplsNodeConfigStorageType  StorageType  
}
```

mplsNodeConfigLocalId OBJECT-TYPE

SYNTAX MplsLocalId

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object allows the administrator to assign a unique local identifier to map Global_Node_ID or ICC."

::= { mplsNodeConfigEntry 1 }

mplsNodeConfigGlobalId OBJECT-TYPE

SYNTAX MplsGlobalId

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object indicates the Global Operator Identifier.

This object value should be zero when

mplsNodeConfigIccId is configured with non-null value."

REFERENCE

"MPLS-TP Identifiers [[TPIDS](#)]."

::= { mplsNodeConfigEntry 2 }

mplsNodeConfigNodeId OBJECT-TYPE

SYNTAX MplsNodeId

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object indicates the Node_ID within the operator.

This object value should be zero when mplsNodeConfigIccId is configured with non-null value."

REFERENCE

"MPLS-TP Identifiers [[TPIDS](#)]."

::= { mplsNodeConfigEntry 3 }

mplsNodeConfigIccId OBJECT-TYPE

SYNTAX MplsIccId

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object allows the operator or service provider to configure a unique MPLS-TP ITU-T Carrier Code (ICC) either for Ingress ID or Egress ID.

This object value should be zero when mplsNodeConfigGlobalId and mplsNodeConfigNodeId are assigned with non-zero value."

REFERENCE

"MPLS-TP Identifiers [[TPIDS](#)]."

::= { mplsNodeConfigEntry 4 }

mplsNodeConfigRowStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"This object allows the administrator to create, modify, and/or delete a row in this table."

::= { mplsNodeConfigEntry 5 }

mplsNodeConfigStorageType OBJECT-TYPE

SYNTAX StorageType

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"This variable indicates the storage type for this object.

Conceptual rows having the value 'permanent' need not allow write-access to any columnar


```
        objects in the row."
    DEFVAL { volatile }
    ::= { mplsNodeConfigEntry 6 }

-- End of MPLS Transport Profile Node configuration table

-- Start of MPLS Transport Profile Node IP compatible mapping table

mplsNodeIpMapTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF MplsNodeIpMapEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "This read-only table allows the administrator to retrieve
        the local identifier for a given Global_Node_ID in an IP
        compatible operator environment.

        This table MAY be used in on-demand and/or proactive
        OAM operations to get the Ingress/Egress LSR
        identifier (Local Identifier) from Src-Global_Node_ID
        or Dst-Global_Node_ID and the Ingress and Egress LSR
        identifiers are used to retrieve the tunnel entry.

        This table returns nothing when the associated entry
        is not defined in mplsNodeConfigTable."
    ::= { mplsTeExtObjects 2 }

mplsNodeIpMapEntry OBJECT-TYPE
    SYNTAX      MplsNodeIpMapEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "An entry in this table represents a mapping of
        Global_Node_ID with the local identifier.

        An entry in this table is created automatically when
        the Local identifier is associated with Global_ID and
        Node_Id in the mplsNodeConfigTable.

        Note: Each entry in this table should have a unique
        Global_ID and Node_ID combination."
    INDEX { mplsNodeIpMapGlobalId,
            mplsNodeIpMapNodeId
    }
```



```
 ::= { mplsNodeIpMapTable 1 }

MplsNodeIpMapEntry ::= SEQUENCE {
    mplsNodeIpMapGlobalId      MplsGlobalId,
    mplsNodeIpMapNodeId        MplsNodeId,
    mplsNodeIpMapLocalId       MplsLocalId
}

mplsNodeIpMapGlobalId OBJECT-TYPE
    SYNTAX      MplsGlobalId
    MAX-ACCESS   not-accessible

    STATUS      current
    DESCRIPTION
        "This object indicates the Global_ID."
    ::= { mplsNodeIpMapEntry 1 }

mplsNodeIpMapNodeId OBJECT-TYPE
    SYNTAX      MplsNodeId
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "This object indicates the Node_ID within the
         operator."
    ::= { mplsNodeIpMapEntry 2 }

mplsNodeIpMapLocalId OBJECT-TYPE
    SYNTAX      MplsLocalId
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION
        "This object contains an IP compatible local identifier
         which is defined in mplsNodeConfigTable."
    ::= { mplsNodeIpMapEntry 3 }

-- End MPLS Transport Profile Node IP compatible table

-- Start of MPLS Transport Profile Node ICC based table

mplsNodeIccMapTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF MplsNodeIccMapEntry
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "This read-only table allows the administrator to retrieve
         the local identifier for a given ICC operator in an ICC
         operator environment."
```


This table MAY be used in on-demand and/or proactive OAM operations to get the Ingress/Egress LSR identifier (Local Identifier) from Src-ICC or Dst-ICC and the Ingress and Egress LSR identifiers are used to retrieve the tunnel entry.

This table returns nothing when the associated entry is not defined in mplsNodeConfigTable."

::= { mplsTeExtObjects 3 }

mplsNodeIccMapEntry OBJECT-TYPE

SYNTAX MplsNodeIccMapEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in this table represents a mapping of ICC with the local identifier.

An entry in this table is created automatically when the Local identifier is associated with ICC in the mplsNodeConfigTable."

INDEX { mplsNodeIccMapIccId }

::= { mplsNodeIccMapTable 1 }

MplsNodeIccMapEntry ::= SEQUENCE {

mplsNodeIccMapIccId MplsIccId,

mplsNodeIccMapLocalId MplsLocalId

}

mplsNodeIccMapIccId OBJECT-TYPE

SYNTAX MplsIccId

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object allows the operator or service provider to configure a unique MPLS-TP ITU-T Carrier Code (ICC) either for Ingress or Egress LSR ID.

The ICC is a string of one to six characters, each character being either alphabetic (i.e. A-Z) or numeric (i.e. 0-9) characters. Alphabetic characters in the ICC should be represented with upper case letters."

::= { mplsNodeIccMapEntry 1 }

mplsNodeIccMapLocalId OBJECT-TYPE

SYNTAX MplsLocalId

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object contains an ICC based local identifier
which is defined in mplsNodeConfigTable."

::= { mplsNodeIccMapEntry 2 }

-- End MPLS Transport Profile Node ICC based table

-- Start of MPLS Tunnel table extension

mplsTunnelExtTable OBJECT-TYPE

SYNTAX SEQUENCE OF MplsTunnelExtEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table represents MPLS-TP specific extensions to
mplsTunnelTable.

As per MPLS-TP Identifiers [[TPIDS](#)] draft, LSP_ID is

Src-Global_Node_ID::Src-Tunnel_Num::Dst-Global_Node_ID::
Dst-Tunnel_Num::LSP_Num for IP operator and

Src-ICC::Src-Tunnel_Num::Dst-ICC::Dst-Tunnel_Num::LSP_Num
for ICC operator,

mplsTunnelTable is reused for forming the LSP_ID
as follows,

Source Tunnel_Num is mapped with mplsTunnelIndex,
Source Node_ID is mapped with
mplsTunnelIngressLSRId, Destination Node_ID is
mapped with mplsTunnelEgressLSRId LSP_Num is mapped with
mplsTunnelInstance.

Source Global_Node_ID and/or ICC and Destination
Global_Node_ID and/or ICC are maintained in the
mplsNodeConfigTable and mplsNodeConfigLocalId is
used to create an entry in mplsTunnelTable."

REFERENCE

"MPLS-TP Identifiers [[TPIDS](#)]."

::= { mplsTeExtObjects 4 }

mplsTunnelExtEntry OBJECT-TYPE

SYNTAX MplsTunnelExtEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in this table represents MPLS-TP
specific additional tunnel configurations."

INDEX {

mplsTunnelIndex,
mplsTunnelInstance,
mplsTunnelIngressLSRId,
mplsTunnelEgressLSRId

}

::= { mplsTunnelExtTable 1 }

MplsTunnelExtEntry ::= SEQUENCE {

mplsTunnelExtDestTnlIndex MplsTunnelIndex,

mplsTunnelExtDestTnlLspIndex MplsTunnelInstanceIndex

}

mplsTunnelExtDestTnlIndex OBJECT-TYPE

SYNTAX MplsTunnelIndex

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"This object is applicable only for the bidirectional
tunnel that has the forward and reverse LSPs in the
same tunnel or in the different tunnels.

This object holds the same value as that of the
mplsTunnelIndex of mplsTunnelEntry if the forward and
reverse LSPs are in the same tunnel. Otherwise,
this object holds the value of the other direction
associated LSP's mplsTunnelIndex from a different tunnel.

The values of this object and the
mplsTunnelExtDestTnlLspIndex object together can be used
to identify an opposite direction LSP i.e. if the
mplsTunnelIndex and mplsTunnelInstance hold the value for
forward LSP, this object and mplsTunnelExtDestTnlLspIndex
can be used to retrieve the reverse direction LSP and
vice versa.

This object and mplsTunnelExtDestTnlLspIndex values
provide the first two indices of tunnel entry and
the remaining indices can be derived as follows,
if both the forward and reverse LSPs are present in
the same tunnel, the opposite direction LSP's Ingress and
Egress Identifier will be same for both the LSPs,

else the Ingress and Egress Identifiers should be swapped in order to index the other direction tunnel.

The value of zero for this object is invalid."

::= { mplsTunnelExtEntry 1 }

mplsTunnelExtDestTnlLspIndex OBJECT-TYPE

SYNTAX MplsTunnelInstanceIndex

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"This object is applicable only for the bidirectional tunnel that has the forward and reverse LSPs in the same tunnel or in the different tunnels.

This object should contain different value if both the forward and reverse LSPs present in the same tunnel.

This object can contain same value or different values if the forward and reverse LSPs present in the different tunnels.

The value of zero for this object is valid for the configured tunnel."

::= { mplsTunnelExtEntry 2 }

-- End of MPLS Tunnel table extension

-- Notifications.

-- Notifications objects need to be added here.

-- End of notifications.

-- Module compliance.

mplsTeExtGroups

OBJECT IDENTIFIER ::= { mplsTeExtConformance 1 }

mplsTeExtCompliances

OBJECT IDENTIFIER ::= { mplsTeExtConformance 2 }

-- Compliance requirement for fully compliant implementations.

mplsTeExtModuleFullCompliance MODULE-COMPLIANCE

STATUS current

DESCRIPTION

"Compliance statement for agents that provide full support the MPLS-TE-EXT-STD-MIB module."

MODULE -- this module

-- The mandatory group has to be implemented by all
-- LSRs that originate/terminate MPLS-TP tunnels.
-- In addition, depending on the type of tunnels
-- supported, other groups become mandatory as
-- explained below.

MANDATORY-GROUPS {
 mplsTunnelExtGroup
}

GROUP mplsTunnelExtIpOperatorGroup

DESCRIPTION

"This group is mandatory for devices which support
configuration of IP based identifier tunnels."

GROUP mplsTunnelExtIccOperatorGroup

DESCRIPTION

"This group is mandatory for devices which support
configuration of ICC based tunnels."

::= { mplsTeExtCompliances 1 }

-- Compliance requirement for read-only implementations.

mplsTeExtModuleReadOnlyCompliance MODULE-COMPLIANCE

STATUS current

DESCRIPTION

"Compliance statement for agents that provide full
support the MPLS-TE-EXT-STD-MIB module."

MODULE -- this module

-- The mandatory group has to be implemented by all
-- LSRs that originate/terminate MPLS-TP tunnels.
-- In addition, depending on the type of tunnels
-- supported, other groups become mandatory as
-- explained below.

MANDATORY-GROUPS {
 mplsTunnelExtGroup
}

GROUP mplsTunnelExtIpOperatorGroup

DESCRIPTION

"This group is mandatory for devices which support configuration of IP based identifier tunnels."

GROUP mplsTunnelExtIccOperatorGroup

DESCRIPTION

"This group is mandatory for devices which support configuration of ICC based tunnels."

::= { mplsTeExtCompliances 2 }

-- Units of conformance.

mplsTunnelExtGroup OBJECT-GROUP

OBJECTS {

mplsTunnelExtDestTnlIndex,
mplsTunnelExtDestTnlLspIndex

}

STATUS current

DESCRIPTION

"Necessary, but not sufficient, set of objects to implement tunnels. In addition, depending on the operating environment, the following groups are mandatory."

::= { mplsTeExtGroups 1 }

mplsTunnelExtIpOperatorGroup OBJECT-GROUP

OBJECTS { mplsNodeConfigGlobalId,
mplsNodeConfigNodeId,
mplsNodeConfigRowStatus,
mplsNodeConfigStorageType,
mplsNodeIpMapLocalId

}

STATUS current

DESCRIPTION

"Object(s) needed to implement IP compatible tunnels."

::= { mplsTeExtGroups 2 }

mplsTunnelExtIccOperatorGroup OBJECT-GROUP

OBJECTS { mplsNodeConfigIccId,
mplsNodeConfigRowStatus,
mplsNodeConfigStorageType,
mplsNodeIccMapLocalId

}


```
STATUS    current
DESCRIPTION
    "Object(s) needed to implement ICC based tunnels."
 ::= { mplsTeExtGroups 3 }

-- MPLS-TE-EXT-STD-MIB module ends
END
```

14. Security Consideration

There is a number of management objects defined in this MIB module that has a MAX-ACCESS clause of read-write.. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. It is thus important to control even GET and/or NOTIFY access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP. These are the tables and objects and their sensitivity/vulnerability:

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example by using IPsec), even then, there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in this MIB module.

It is RECOMMENDED that implementers consider the security features as provided by the SNMPv3 framework (see [\[RFC3410\]](#), [section 8](#)), including full supports for the SNMPv3 cryptographic mechanisms (for authentication and privacy).

Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module is properly configured to give access to the objects only to those principles (users) that have legitimate rights to indeed GET or SET (change/create/delete) them.

15. IANA Considerations

To be added in a later version of this document.

16. References

16.1 Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2578] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Structure of Management Information Version 2 (SMIv2)", STD 58, [RFC 2578](#), April 1999.
- [RFC2579] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Textual Conventions for SMIv2", STD 58, [RFC 2579](#), April 1999.
- [RFC2580] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Conformance Statements for SMIv2", STD 58, [RFC 2580](#), April 1999.
- [RFC3031] Rosen, E., Viswanathan, A., and R. Callon, "Multiprotocol Label Switching Architecture", [RFC 3031](#), January 2001.

16.2 Informative References

- [RFC3812] Srinivasan, C., Viswanathan, A., and T. Nadeau, "Multiprotocol Label Switching (MPLS) Traffic Engineering (TE) Management Information Base (MIB)", [RFC 3812](#), June 2004.
- [RFC3813] Srinivasan, C., Viswanathan, A., and T. Nadeau, "Multiprotocol Label Switching (MPLS) Label Switching (LSR) Router Management Information Base (MIB)", [RFC 3813](#), June 2004.
- [RFC3410] J. Case, R. Mundy, D. pertain, B.Stewart, "Introduction and Applicability Statement for Internet Standard Management Framework", [RFC 3410](#), December 2002.
- [RFC3811] Nadeau, T., Ed., and J. Cucchiara, Ed., "Definitions of Textual Conventions (TCs) for Multiprotocol Label Switching (MPLS) Management", [RFC 3811](#), June 2004.
- [RFC5654] Niven-Jenkins, B., Ed., Brungard, D., Ed., Betts, M., Ed., Sprecher, N., and S. Ueno, "Requirements of an MPLS Transport Profile", [RFC 5654](#), September 2009.

[TPIDS] M. Bocci, et al, "MPLS-TP Identifiers",
[draft-ietf-mpls-tp-identifiers-03](#), October 25, 2010

17. Acknowledgments

To be added in a later version of this document.

18. Authors' Addresses

Sam Aldrin
Huawei Technologies
2330 Central Express Way,
Santa Clara, CA 95051, USA
Email: aldrin.ietf@gmail.com

Thomas D. Nadeau
CA Technologies
273 Corporate Drive, Portsmouth, NH, USA

Email: thomas.nadeau@ca.com

Venkatesan Mahalingam
Aricent
India
Email: venkat.mahalingams@gmail.com

Kannan KV Sampath
Aricent
India
Email: Kannan.Sampath@aricent.com

