

NETMOD Working Group
Internet-Draft
Intended status: Standards Track
Expires: April 18, 2016

L. Lhotka
CZ.NIC
A. Lindem
Cisco Systems
October 16, 2015

A YANG Data Model for Routing Management
draft-ietf-netmod-routing-cfg-20

Abstract

This document contains a specification of three YANG modules. Together they form the core routing data model which serves as a framework for configuring and managing a routing subsystem. It is expected that these modules will be augmented by additional YANG modules defining data models for routing protocols, route filters and other functions. The core routing data model provides common building blocks for such extensions - routing instances, routes, routing information bases (RIB), and routing protocols.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on April 18, 2016.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect

to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Terminology and Notation	3
2.1.	Glossary of New Terms	4
2.2.	Tree Diagrams	5
2.3.	Prefixes in Data Node Names	5
3.	Objectives	6
4.	The Design of the Core Routing Data Model	6
4.1.	System-Controlled and User-Controlled List Entries	8
5.	Basic Building Blocks	8
5.1.	Routing Instance	8
5.1.1.	Parameters of IPv6 Router Interfaces	9
5.2.	Route	10
5.3.	Routing Information Base (RIB)	11
5.4.	Routing Protocol	11
5.4.1.	Routing Pseudo-Protocols	12
5.4.2.	Defining New Routing Protocols	12
5.5.	RPC Operations	13
6.	Interactions with Other YANG Modules	13
6.1.	Module "ietf-interfaces"	13
6.2.	Module "ietf-ip"	13
7.	Routing Management YANG Module	14
8.	IPv4 Unicast Routing Management YANG Module	29
9.	IPv6 Unicast Routing Management YANG Module	33
10.	IANA Considerations	46
11.	Security Considerations	47
12.	Acknowledgments	48
13.	References	48
13.1.	Normative References	48
13.2.	Informative References	49
Appendix A.	The Complete Data Trees	49
A.1.	Configuration Data	49
A.2.	State Data	50
Appendix B.	Minimum Implementation	51
Appendix C.	Example: Adding a New Routing Protocol	52
Appendix D.	Example: NETCONF <get> Reply	54
Appendix E.	Change Log	61
E.1.	Changes Between Versions -19 and -20	61
E.2.	Changes Between Versions -18 and -19	61
E.3.	Changes Between Versions -17 and -18	61
E.4.	Changes Between Versions -16 and -17	62
E.5.	Changes Between Versions -15 and -16	62

E.6.	Changes Between Versions -14 and -15	63
E.7.	Changes Between Versions -13 and -14	63
E.8.	Changes Between Versions -12 and -13	63
E.9.	Changes Between Versions -11 and -12	64
E.10.	Changes Between Versions -10 and -11	64
E.11.	Changes Between Versions -09 and -10	65
E.12.	Changes Between Versions -08 and -09	65
E.13.	Changes Between Versions -07 and -08	65
E.14.	Changes Between Versions -06 and -07	65
E.15.	Changes Between Versions -05 and -06	66
E.16.	Changes Between Versions -04 and -05	66
E.17.	Changes Between Versions -03 and -04	67
E.18.	Changes Between Versions -02 and -03	67
E.19.	Changes Between Versions -01 and -02	68
E.20.	Changes Between Versions -00 and -01	68
Authors' Addresses		69

[1.](#) Introduction

This document contains a specification of the following YANG modules:

- o Module "ietf-routing" provides generic components of a routing data model.
- o Module "ietf-ipv4-unicast-routing" augments the "ietf-routing" module with additional data specific to IPv4 unicast.
- o Module "ietf-ipv6-unicast-routing" augments the "ietf-routing" module with additional data specific to IPv6 unicast. It also augments the "ietf-interfaces" module [[RFC7223](#)] with IPv6 router configuration variables required by [[RFC4861](#)].

These modules together define the so-called core routing data model, which is intended as a basis for future data model development covering more sophisticated routing systems. While these three modules can be directly used for simple IP devices with static routing (see [Appendix B](#)), their main purpose is to provide essential building blocks for more complicated data models involving multiple routing protocols, multicast routing, additional address families, and advanced functions such as route filtering or policy routing. To this end, it is expected that the core routing data model will be augmented by numerous modules developed by other IETF working groups.

[2.](#) Terminology and Notation

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

The following terms are defined in [[RFC6241](#)]:

- o client,
- o message,
- o protocol operation,
- o server.

The following terms are defined in [[RFC6020](#)]:

- o augment,
- o configuration data,
- o container,
- o container with presence,
- o data model,
- o data node,
- o feature,
- o leaf,
- o list,
- o mandatory node,
- o module,
- o schema tree,
- o state data,
- o RPC operation.

[2.1](#). Glossary of New Terms

core routing data model: YANG data model comprising "ietf-routing", "ietf-ipv4-unicast-routing" and "ietf-ipv6-unicast-routing" modules.

direct route: a route to a directly connected network.

routing information base (RIB): An object containing a list of routes together with other information. See [Section 5.3](#) for details.

system-controlled entry: An entry of a list in state data ("config false") that is created by the system independently of what has been explicitly configured. See [Section 4.1](#) for details.

user-controlled entry: An entry of a list in state data ("config false") that is created and deleted as a direct consequence of certain configuration changes. See [Section 4.1](#) for details.

[2.2.](#) Tree Diagrams

A simplified graphical representation of the complete data tree is presented in [Appendix A](#), and similar diagrams of its various subtrees appear in the main text.

- o Brackets "[" and "]" enclose list keys.
- o Curly braces "{" and "}" contain names of optional features that make the corresponding node conditional.
- o Abbreviations before data node names: "rw" means configuration (read-write), "ro" state data (read-only), "-x" RPC operations, and "-n" notifications.
- o Symbols after data node names: "?" means an optional node, "!" a container with presence, and "*" denotes a "list" or "leaf-list".
- o Parentheses enclose choice and case nodes, and case nodes are also marked with a colon (":").
- o Ellipsis ("...") stands for contents of subtrees that are not shown.

[2.3.](#) Prefixes in Data Node Names

In this document, names of data nodes, RPC operations and other data model objects are often used without a prefix, as long as it is clear from the context in which YANG module each name is defined. Otherwise, names are prefixed using the standard prefix associated with the corresponding YANG module, as shown in Table 1.

Prefix	YANG module	Reference
if	ietf-interfaces	[RFC7223]
ip	ietf-ip	[RFC7277]
rt	ietf-routing	Section 7
v4ur	ietf-ipv4-unicast-routing	Section 8
v6ur	ietf-ipv6-unicast-routing	Section 9
yang	ietf-yang-types	[RFC6991]
inet	ietf-inet-types	[RFC6991]

Table 1: Prefixes and corresponding YANG modules

3. Objectives

The initial design of the core routing data model was driven by the following objectives:

- o The data model should be suitable for the common address families, in particular IPv4 and IPv6, and for unicast and multicast routing, as well as Multiprotocol Label Switching (MPLS).
- o A simple IP routing system, such as one that uses only static routing, should be configurable in a simple way, ideally without any need to develop additional YANG modules.
- o On the other hand, the core routing framework must allow for complicated implementations involving multiple routing information bases (RIB) and multiple routing protocols, as well as controlled redistributions of routing information.
- o Device vendors will want to map the data models built on this generic framework to their proprietary data models and configuration interfaces. Therefore, the framework should be flexible enough to facilitate such a mapping and accommodate data models with different logic.

4. The Design of the Core Routing Data Model

The core routing data model consists of three YANG modules. The first module, "ietf-routing", defines the generic components of a routing system. The other two modules, "ietf-ipv4-unicast-routing" and "ietf-ipv6-unicast-routing", augment the "ietf-routing" module with additional data nodes that are needed for IPv4 and IPv6 unicast routing, respectively. Figures 1 and 2 show abridged views of the configuration and state data hierarchies. See [Appendix A](#) for the complete data trees.

```

+--rw routing
  +--rw routing-instance* [name]
    +--rw name
    +--rw type?
    +--rw enabled?
    +--rw router-id?
    +--rw description?
    +--rw routing-protocols
      | +--rw routing-protocol* [type name]
      |   +--rw type
      |   +--rw name
      |   +--rw description?
      |   +--rw static-routes
      |   ...
    +--rw ribs
      +--rw rib* [name]
        +--rw name
        +--rw address-family?
        +--rw description?

```

Figure 1: Configuration data hierarchy.

```

+--ro routing-state
  +--ro routing-instance* [name]
    +--ro name
    +--ro type?
    +--ro router-id?
    +--ro interfaces
      | +--ro interface*
    +--ro routing-protocols
      | +--ro routing-protocol* [type name]
      |   +--ro type
      |   +--ro name
    +--ro ribs
      +--ro rib* [name]
        +--ro name
        +--ro address-family
        +--ro default-rib?
        +--ro routes
        ...

```

Figure 2: State data hierarchy.

As can be seen from Figures 1 and 2, the core routing data model introduces several generic components of a routing framework: routing instances, RIBs containing lists of routes, and routing protocols. [Section 5](#) describes these components in more detail.

[4.1.](#) System-Controlled and User-Controlled List Entries

The core routing data model defines several lists in the schema tree, for example "routing-instance" or "rib", that have to be populated with at least one entry in any properly functioning device, and additional entries may be configured by a client.

In such a list, the server creates the required item as a so-called system-controlled entry in state data, i.e., inside the "routing-state" container.

Additional entries may be created in the configuration by a client, e.g., via the NETCONF protocol. These are so-called user-controlled entries. If the server accepts a configured user-controlled entry, then this entry also appears in the state data version of the list.

Corresponding entries in both versions of the list (in state data and configuration) have the same value of the list key.

A client may also provide supplemental configuration of system-controlled entries. To do so, the client creates a new entry in the configuration with the desired contents. In order to bind this entry to the corresponding entry in the state data list, the key of the configuration entry has to be set to the same value as the key of the state entry.

An example can be seen in [Appendix D](#): the "/routing-state/routing-instance" list has a single system-controlled entry whose "name" key has the value "rtr0". This entry is configured by the "/routing/routing-instance" entry whose "name" key is also "rtr0".

Deleting a user-controlled entry from the configuration list results in the removal of the corresponding entry in the state data list. In contrast, if a system-controlled entry is deleted from the configuration list, only the extra configuration specified in that entry is removed but the corresponding state data entry remains in the list.

[5.](#) Basic Building Blocks

This section describes the essential components of the core routing data model.

[5.1.](#) Routing Instance

The core routing data model supports one or more routing instances appearing as entries of the "routing-instance" list. Each routing instance has separate configuration and state data under

"/rt:routing/rt:routing-instance" and "/rt:routing-state/rt:routing-instance", respectively.

No attempt has been made to define the semantics for every type of routing instance. The core routing data model defines identities for two ubiquitous routing instance types:

- o "default-routing-instance" - this routing instance type represents the default (or only) routing instance. All implementations MUST provide one and only one system-controlled routing instance of this type.
- o "vrf-routing-instance" - this routing instance type represents VRF (virtual routing and forwarding) routing instances that are used for virtual private networks (VPN) including BGP/MPLS VPN_[RFC4364].

It is expected that future YANG modules will define other types of routing instances. For every such type, an identity derived from "rt:routing-instance" SHALL be defined. This identity is then referred to by the value of the "type" leaf (a child node of "routing-instance" list).

By default, all network layer interfaces are assigned to the routing instance of the "default-routing-instance" type. This can be changed by configuring the "rt:routing-instance" leaf in the interface configuration.

5.1.1. Parameters of IPv6 Router Interfaces

YANG module "ietf-ipv6-unicast-routing" ([Section 9](#)) augments the configuration and state data of IPv6 interfaces with definitions of the following variables as required by [\[RFC4861\]](#), sec. 6.2.1:

- o send-advertisements,
- o max-rtr-adv-interval,
- o min-rtr-adv-interval,
- o managed-flag,
- o other-config-flag,
- o link-mtu,
- o reachable-time,

- o retrans-timer,
- o cur-hop-limit,
- o default-lifetime,
- o prefix-list: a list of prefixes to be advertised.

The following parameters are associated with each prefix in the list:

- * valid-lifetime,
- * on-link-flag,
- * preferred-lifetime,
- * autonomous-flag.

NOTES:

1. The "IsRouter" flag, which is also required by [[RFC4861](#)], is implemented in the "ietf-ip" module [[RFC7277](#)] (leaf "ip:forwarding").
2. The original specification [[RFC4861](#)] allows the implementations to decide whether the "valid-lifetime" and "preferred-lifetime" parameters remain the same in consecutive advertisements, or decrement in real time. However, the latter behavior seems problematic because the values might be reset again to the (higher) configured values after a configuration is reloaded. Moreover, no implementation is known to use the decrementing behavior. The "ietf-ipv6-unicast-routing" module therefore assumes the former behavior with constant values.

[5.2.](#) Route

Routes are basic elements of information in a routing system. The core routing data model defines only the following minimal set of route attributes:

- o "destination-prefix": IP prefix specifying the set of destination addresses for which the route may be used. This attribute is mandatory.
- o "route-preference": an integer value (also known as administrative distance) that is used for selecting a preferred route among

routes with the same destination prefix. A lower value means a more preferred route.

- o "next-hop": determines the action to be performed with a packet.

Routes are primarily state data that appear as entries of RIBs ([Section 5.3](#)) but they may also be found in configuration data, for example as manually configured static routes. In the latter case, configurable route attributes are generally a subset of route attributes described above.

[5.3.](#) Routing Information Base (RIB)

Every routing instance manages one or more routing information bases (RIB). A RIB is a list of routes complemented with administrative data. Each RIB contains only routes of one address family. An address family is represented by an identity derived from the "rt:address-family" base identity.

In the core routing data model, RIBs are state data represented as entries of the list "/routing-state/routing-instance/ribs/rib". The contents of RIBs are controlled and manipulated by routing protocol operations which may result in route additions, removals and modifications. This also includes manipulations via the "static" and/or "direct" pseudo-protocols, see [Section 5.4.1](#).

Each routing instance has, for every supported address family, one RIB marked as the so-called default RIB. Its role is explained in [Section 5.4](#).

Simple router implementations that do not advertise the feature "multiple-ribs" will typically create one system-controlled RIB per routing instance and supported address family, and mark it as the default RIB.

More complex router implementations advertising the "multiple-ribs" feature support multiple RIBs per address family that can be used for policy routing and other purposes.

[5.4.](#) Routing Protocol

The core routing data model provides an open-ended framework for defining multiple routing protocol instances within a routing instance. Each routing protocol instance **MUST** be assigned a type, which is an identity derived from the "rt:routing-protocol" base identity. The core routing data model defines two identities for the direct and static pseudo-protocols ([Section 5.4.1](#)).

Multiple routing protocol instances of the same type MAY be configured within the same routing instance.

[5.4.1.](#) Routing Pseudo-Protocols

The core routing data model defines two special routing protocol types - "direct" and "static". Both are in fact pseudo-protocols, which means they are confined to the local device and do not exchange any routing information with adjacent routers.

Every routing instance MUST implement exactly one instance of the "direct" pseudo-protocol type. It is the source of direct routes for all configured address families. Direct routes are normally supplied by the operating system kernel, based on the configuration of network interface addresses, see [Section 6.2](#). Direct routes MUST be installed in default RIBs of all supported address families.

A pseudo-protocol of the type "static" allows for specifying routes manually. It MAY be configured in zero or multiple instances, although a typical configuration will have exactly one instance per routing instance.

[5.4.2.](#) Defining New Routing Protocols

It is expected that future YANG modules will create data models for additional routing protocol types. Such a new module has to define the protocol-specific configuration and state data, and it has to fit it into the core routing framework in the following way:

- o A new identity MUST be defined for the routing protocol and its base identity MUST be set to "rt:routing-protocol", or to an identity derived from "rt:routing-protocol".
- o Additional route attributes MAY be defined, preferably in one place by means of defining a YANG grouping. The new attributes have to be inserted by augmenting the definitions of the nodes

/rt:routing-state/rt:ribs/rt:rib/rt:routes/rt:route

and

/rt:fib-route/rt:output/rt:route,

and possibly other places in the configuration, state data, notifications, and RPC input or output.

- o Configuration parameters and/or state data for the new protocol can be defined by augmenting the "routing-protocol" data node under both "/routing" and "/routing-state".

By using a "when" statement, the augmented configuration parameters and state data specific to the new protocol SHOULD be made conditional and valid only if the value of "rt:type" or "rt:source-protocol" is equal to the new protocol's identity.

It is also RECOMMENDED that protocol-specific data nodes be encapsulated in an appropriately named container with presence. Such a container may contain mandatory data nodes that are otherwise forbidden at the top level of an augment.

The above steps are implemented by the example YANG module for the RIP routing protocol in [Appendix C](#).

[5.5](#). RPC Operations

The "ietf-routing" module defines one RPC operation:

- o fib-route: query a routing instance for the active route in the Forwarding Information Base (FIB). It is the route that is currently used for sending datagrams to a destination host whose address is passed as an input parameter.

[6](#). Interactions with Other YANG Modules

The semantics of the core routing data model also depends on several configuration parameters that are defined in other YANG modules.

[6.1](#). Module "ietf-interfaces"

The following boolean switch is defined in the "ietf-interfaces" YANG module [[RFC7223](#)]:

```
/if:interfaces/if:interface/if:enabled
```

If this switch is set to "false" for a network layer interface, then all routing and forwarding functions MUST be disabled on that interface.

[6.2](#). Module "ietf-ip"

The following boolean switches are defined in the "ietf-ip" YANG module [[RFC7277](#)]:

```
/if:interfaces/if:interface/ip:ipv4/ip:enabled
```

If this switch is set to "false" for a network layer interface, then all IPv4 routing and forwarding functions MUST be disabled on that interface.

/if:interfaces/if:interface/ip:ipv4/ip:forwarding

If this switch is set to "false" for a network layer interface, then the forwarding of IPv4 datagrams through this interface MUST be disabled. However, the interface MAY participate in other IPv4 routing functions, such as routing protocols.

/if:interfaces/if:interface/ip:ipv6/ip:enabled

If this switch is set to "false" for a network layer interface, then all IPv6 routing and forwarding functions MUST be disabled on that interface.

/if:interfaces/if:interface/ip:ipv6/ip:forwarding

If this switch is set to "false" for a network layer interface, then the forwarding of IPv6 datagrams through this interface MUST be disabled. However, the interface MAY participate in other IPv6 routing functions, such as routing protocols.

In addition, the "ietf-ip" module allows for configuring IPv4 and IPv6 addresses and network prefixes or masks on network layer interfaces. Configuration of these parameters on an enabled interface MUST result in an immediate creation of the corresponding direct route. The destination prefix of this route is set according to the configured IP address and network prefix/mask, and the interface is set as the outgoing interface for that route.

[7.](#) Routing Management YANG Module

RFC Editor: In this section, replace all occurrences of 'XXXX' with the actual RFC number and all occurrences of the revision date below with the date of RFC publication (and remove this note).

<CODE BEGINS> file "ietf-routing@2015-10-16.yang"

```
module ietf-routing {  
    namespace "urn:ietf:params:xml:ns:yang:ietf-routing";  
  
    prefix "rt";  
  
    import ietf-yang-types {  
        prefix "yang";
```

```
}

import ietf-interfaces {
  prefix "if";
}

organization
  "IETF NETMOD (NETCONF Data Modeling Language) Working Group";

contact
  "WG Web:  <http://tools.ietf.org/wg/netmod/>
   WG List: <mailto:netmod@ietf.org>

   WG Chair: Thomas Nadeau
             <mailto:tnadeau@lucidvision.com>

   WG Chair: Juergen Schoenwaelder
             <mailto:j.schoenwaelder@jacobs-university.de>

   WG Chair: Kent Watsen
             <mailto:kwatsen@juniper.net>

   Editor:   Ladislav Lhotka
             <mailto:lhotka@nic.cz>";

description
  "This YANG module defines essential components for the management
   of a routing subsystem.

   Copyright (c) 2015 IETF Trust and the persons identified as
   authors of the code. All rights reserved.

   Redistribution and use in source and binary forms, with or
   without modification, is permitted pursuant to, and subject to
   the license terms contained in, the Simplified BSD License set
   forth in Section 4.c of the IETF Trust's Legal Provisions
   Relating to IETF Documents
   (http://trustee.ietf.org/license-info).

   The key words 'MUST', 'MUST NOT', 'REQUIRED', 'SHALL', 'SHALL
   NOT', 'SHOULD', 'SHOULD NOT', 'RECOMMENDED', 'MAY', and
   'OPTIONAL' in the module text are to be interpreted as described
   in RFC 2119 (http://tools.ietf.org/html/rfc2119).

   This version of this YANG module is part of RFC XXXX
   (http://tools.ietf.org/html/rfcXXXX); see the RFC itself for
   full legal notices.";
```

```
revision 2015-10-16 {
  description
    "Initial revision.";
  reference
    "RFC XXXX: A YANG Data Model for Routing Management";
}

/* Features */

feature multiple-ribs {
  description
    "This feature indicates that the server supports user-defined
    RIBs.

    Servers that do not advertise this feature SHOULD provide
    exactly one system-controlled RIB per routing-instance and
    supported address family and make them also the default RIBs.
    These RIBs then appear as entries of the list
    /routing-state/routing-instance/ribs/rib.";
}

feature router-id {
  description
    "This feature indicates that the server supports configuration
    of an explicit 32-bit router ID that is used by some routing
    protocols.

    Servers that do not advertise this feature set a router ID
    algorithmically, usually to one of configured IPv4 addresses.
    However, this algorithm is implementation-specific.";
}

/* Identities */

identity address-family {
  description
    "Base identity from which identities describing address
    families are derived.";
}

identity ipv4 {
  base address-family;
  description
    "This identity represents IPv4 address family.";
}

identity ipv6 {
  base address-family;
```



```
    description
      "This identity represents IPv6 address family.";
  }

  identity routing-instance {
    description
      "Base identity from which identities describing routing
       instance types are derived.";
  }

  identity default-routing-instance {
    base routing-instance;
    description
      "This identity represents either a default routing instance, or
       the only routing instance on systems that do not support
       multiple instances.";
  }

  identity vrf-routing-instance {
    base routing-instance;
    description
      "This identity represents a VRF routing instance. The type is
       distinct from the default-routing-instance. There may be
       multiple vrf-routing-interfaces.";
  }

  identity routing-protocol {
    description
      "Base identity from which routing protocol identities are
       derived.";
  }

  identity direct {
    base routing-protocol;
    description
      "Routing pseudo-protocol that provides routes to directly
       connected networks.";
  }

  identity static {
    base routing-protocol;
    description
      "Static routing pseudo-protocol.";
  }

  /* Type Definitions */

  typedef routing-instance-ref {
```

```
    type leafref {
      path "/rt:routing/rt:routing-instance/rt:name";
    }
    description
      "This type is used for leafs that reference a routing instance
      configuration.";
  }

  typedef routing-instance-state-ref {
    type leafref {
      path "/rt:routing-state/rt:routing-instance/rt:name";
    }
    description
      "This type is used for leafs that reference state data of a
      routing instance.";
  }

  typedef route-preference {
    type uint32;
    description
      "This type is used for route preferences.";
  }

  /* Groupings */

  grouping address-family {
    description
      "This grouping provides a leaf identifying an address
      family.";
    leaf address-family {
      type identityref {
        base address-family;
      }
      mandatory "true";
      description
        "Address family.";
    }
  }

  grouping router-id {
    description
      "This grouping provides router ID.";
    leaf router-id {
      type yang:dotted-quad;
      description
        "A 32-bit number in the form of a dotted quad that is used by
        some routing protocols identifying a router.";
      reference

```

```
    "RFC 2328: OSPF Version 2.";
  }
}

grouping special-next-hop {
  description
    "This grouping provides a leaf with an enumeration of special
    next-hops.";
  leaf special-next-hop {
    type enumeration {
      enum blackhole {
        description
          "Silently discard the packet.";
      }
      enum unreachable {
        description
          "Discard the packet and notify the sender with an error
          message indicating that the destination host is
          unreachable.";
      }
      enum prohibit {
        description
          "Discard the packet and notify the sender with an error
          message indicating that the communication is
          administratively prohibited.";
      }
      enum receive {
        description
          "The packet will be received by the local system.";
      }
    }
  }
  description
    "Special next-hop options.";
}

grouping next-hop-content {
  description
    "Generic parameters of next-hops in static routes.";
  choice next-hop-options {
    mandatory "true";
    description
      "Options for next-hops in static routes.

      Modules for address families MUST augment this choice with
      the 'next-hop-address' case, which is a leaf containing a
      gateway address of that address family."
  }
}
```

```
        It is expected that further cases will be added through
        augments from other modules, e.g., for Equal-Cost Multipath
        routing (ECMP).";
    leaf outgoing-interface {
        type if:interface-ref;
        description
            "Name of the outgoing interface.";
    }
    case special-next-hop {
        uses special-next-hop;
    }
}

grouping next-hop-state-content {
    description
        "Generic parameters of next-hops in state data.";
    choice next-hop-options {
        mandatory "true";
        description
            "Options for next-hops in state data.

            Modules for address families MUST augment this choice with
            the 'next-hop-address' case, which is a leaf containing a
            gateway address of that address family.

            It is expected that further cases will be added through
            augments from other modules, e.g., for ECMP or recursive
            next-hops.";
        leaf outgoing-interface {
            type if:interface-state-ref;
            description
                "Name of the outgoing interface.";
        }
        case special-next-hop {
            uses special-next-hop;
        }
    }
}

grouping route-metadata {
    description
        "Common route metadata.";
    leaf source-protocol {
        type identityref {
            base routing-protocol;
        }
        mandatory "true";
    }
}
```

```
    description
      "Type of the routing protocol from which the route
       originated.";
  }
  leaf active {
    type empty;
    description
      "Presence of this leaf indicates that the route is preferred
       among all routes in the same RIB that have the same
       destination prefix.";
  }
  leaf last-updated {
    type yang:date-and-time;
    description
      "Time stamp of the last modification of the route. If the
       route was never modified, it is the time when the route was
       inserted into the RIB.";
  }
}

/* State data */

augment "/if:interfaces-state/if:interface" {
  description
    "This augment adds a reference to the routing-instance to which
     the interface is assigned.";
  leaf routing-instance {
    type routing-instance-state-ref;
    description
      "The name of the routing instance to which the interface is
       assigned.";
  }
}

container routing-state {
  config "false";
  description
    "State data of the routing subsystem.";
  list routing-instance {
    key "name";
    min-elements "1";
    description
      "Each list entry is a container for state data of a routing
       instance.

       An implementation MUST provide one and only one
       system-controlled routing instance(s) of the type
       'rt:default-routing-instance', and MAY support other types.
```

An implementation MAY restrict the number of routing instances of each supported type.";

```
leaf name {
  type string;
  description
    "The name of the routing instance.

    For system-controlled instances the name SHOULD be
    persistent, i.e., it doesn't change after a reboot.";
}
leaf type {
  type identityref {
    base routing-instance;
  }
  description
    "The routing instance type.";
}
uses router-id {
  description
    "Global router ID.

    It may be either configured or assigned algorithmically by
    the implementation.";
}
container interfaces {
  description
    "Network layer interfaces belonging to the routing
    instance.";
  leaf-list interface {
    type if:interface-state-ref;
    must "../..name = /if:interfaces-state/"
      + "if:interface[if:name=current()]/"
      + "rt:routing-instance" {
      error-message
        "Routing instance is not assigned to the interface.";
      description
        "This reference must mirror a corresponding assignment
        of the ancestor routing-instance to the interface.";
    }
    description
      "Each entry is a reference to the name of a configured
      network layer interface.";
  }
}
container routing-protocols {
  description
    "Container for the list of routing protocol instances.";
  list routing-protocol {
```

```
    key "type name";
    description
        "State data of a routing protocol instance.

        An implementation MUST provide exactly one
        system-controlled instance of the type 'direct'. Other
        instances MAY be created by configuration.";
    leaf type {
        type identityref {
            base routing-protocol;
        }
        description
            "Type of the routing protocol.";
    }
    leaf name {
        type string;
        description
            "The name of the routing protocol instance.

            For system-controlled instances this name is
            persistent, i.e., it SHOULD NOT change across
            reboots.";
    }
}
}
container ribs {
    description
        "Container for RIBs.";
    list rib {
        key "name";
        min-elements "1";
        description
            "Each entry represents a RIB identified by the 'name'
            key. All routes in a RIB MUST belong to the same address
            family.

            For each routing instance, an implementation SHOULD
            provide one system-controlled default RIB for each
            supported address family.";
        leaf name {
            type string;
            description
                "The name of the RIB.";
        }
        uses address-family;
        leaf default-rib {
            if-feature multiple-ribs;
            type boolean;
        }
    }
}
```

```
    default "true";
    description
        "This flag has the value of 'true' if and only if the
        RIB is the default RIB for the given address family.

        A default RIB always receives direct routes. By
        default it also receives routes from all routing
        protocols.";
}
container routes {
    description
        "Current content of the RIB.";
    list route {
        description
            "A RIB route entry. This data node MUST be augmented
            with information specific for routes of each address
            family.";
        leaf route-preference {
            type route-preference;
            description
                "This route attribute, also known as administrative
                distance, allows for selecting the preferred route
                among routes with the same destination prefix. A
                smaller value means a more preferred route.";
        }
        container next-hop {
            description
                "Route's next-hop attribute.";
            uses next-hop-state-content;
        }
        uses route-metadata;
    }
}
}
}
}
}
}
}
}

/* Configuration Data */

augment "/if:interfaces/if:interface" {
    description
        "This augment adds a routing-instance reference to interface
        configuration.";
    leaf routing-instance {
        type routing-instance-ref;
        description
            "The name of the routing instance to which the interface is
```


to be assigned.

By default, all network layer interfaces belong to the routing-instance of the 'default-routing-instance' type.";

```
}
}

container routing {
  description
    "Configuration parameters for the routing subsystem.";
  list routing-instance {
    key "name";
    description
      "Configuration of a routing instance.";
    leaf name {
      type string;
      description
        "The name of the routing instance.

        For system-controlled entries, the value of this leaf must
        be the same as the name of the corresponding entry in
        state data.

        For user-controlled entries, an arbitrary name can be
        used.";
    }
    leaf type {
      type identityref {
        base routing-instance;
      }
      default "rt:default-routing-instance";
      description
        "The type of the routing instance.";
    }
    leaf enabled {
      type boolean;
      default "true";
      description
        "Enable/disable the routing instance.

        If this parameter is false, the parent routing instance is
        disabled and does not appear in state data, despite any
        other configuration that might be present.";
    }
    uses router-id {
      if-feature router-id;
      description
        "Configuration of the global router ID. Routing protocols
```

```
        that use router ID can use this parameter or override it
        with another value.";
    }
    leaf description {
        type string;
        description
            "Textual description of the routing instance.";
    }
    container routing-protocols {
        description
            "Configuration of routing protocol instances.";
        list routing-protocol {
            key "type name";
            description
                "Each entry contains configuration of a routing protocol
                instance.";
            leaf type {
                type identityref {
                    base routing-protocol;
                }
                description
                    "Type of the routing protocol - an identity derived
                    from the 'routing-protocol' base identity.";
            }
            leaf name {
                type string;
                description
                    "An arbitrary name of the routing protocol instance.";
            }
            leaf description {
                type string;
                description
                    "Textual description of the routing protocol
                    instance.";
            }
        }
        container static-routes {
            when "../type='rt:static'" {
                description
                    "This container is only valid for the 'static'
                    routing protocol.";
            }
            description
                "Configuration of the 'static' pseudo-protocol.

                Address-family-specific modules augment this node with
                their lists of routes.";
        }
    }
}
```

```
}
container ribs {
  description
    "Configuration of RIBs.";
  list rib {
    key "name";
    description
      "Each entry contains configuration for a RIB identified
      by the 'name' key.

      Entries having the same key as a system-controlled entry
      of the list /routing-state/routing-instance/ribs/rib are
      used for configuring parameters of that entry. Other
      entries define additional user-controlled RIBs.";
    leaf name {
      type string;
      description
        "The name of the RIB.

        For system-controlled entries, the value of this leaf
        must be the same as the name of the corresponding
        entry in state data.

        For user-controlled entries, an arbitrary name can be
        used.";
    }
    uses address-family {
      description
        "Address family of the RIB.

        It is mandatory for user-controlled RIBs. For
        system-controlled RIBs it can be omitted, otherwise it
        must match the address family of the corresponding
        state entry.";
      refine "address-family" {
        mandatory "false";
      }
    }
    leaf description {
      type string;
      description
        "Textual description of the RIB.";
    }
  }
}
```

```
/* RPC operations */

rpc fib-route {
  description
    "Return the active FIB route that a routing-instance uses for
    sending packets to a destination address.";
  input {
    leaf routing-instance-name {
      type routing-instance-state-ref;
      mandatory "true";
      description
        "Name of the routing instance whose forwarding information
        base is being queried.

        If the routing instance with name equal to the value of
        this parameter doesn't exist, then this operation SHALL
        fail with error-tag 'data-missing' and error-app-tag
        'routing-instance-not-found'.";
    }
    container destination-address {
      description
        "Network layer destination address.

        Address family specific modules MUST augment this
        container with a leaf named 'address'.";
      uses address-family;
    }
  }
  output {
    container route {
      description
        "The active FIB route for the specified destination.

        If the routing instance has no active FIB route for the
        destination address, no output is returned - the server
        SHALL send an <rpc-reply> containing a single element
        <ok>.

        Address family specific modules MUST augment this list
        with appropriate route contents.";
      uses address-family;
      container next-hop {
        description
          "Route's next-hop attribute.";
        uses next-hop-state-content;
      }
      uses route-metadata;
    }
  }
}
```

```
    }  
  }  
}
```

<CODE ENDS>

8. IPv4 Unicast Routing Management YANG Module

RFC Editor: In this section, replace all occurrences of 'XXXX' with the actual RFC number and all occurrences of the revision date below with the date of RFC publication (and remove this note).

<CODE BEGINS> file "ietf-ipv4-unicast-routing@2015-10-16.yang"

```
module ietf-ipv4-unicast-routing {  
  
  namespace "urn:ietf:params:xml:ns:yang:ietf-ipv4-unicast-routing";  
  
  prefix "v4ur";  
  
  import ietf-routing {  
    prefix "rt";  
  }  
  
  import ietf-inet-types {  
    prefix "inet";  
  }  
  
  organization  
    "IETF NETMOD (NETCONF Data Modeling Language) Working Group";  
  
  contact  
    "WG Web:  <http://tools.ietf.org/wg/netmod/>  
    WG List:  <mailto:netmod@ietf.org>  
  
    WG Chair: Thomas Nadeau  
              <mailto:tnadeau@lucidvision.com>  
  
    WG Chair: Juergen Schoenwaelder  
              <mailto:j.schoenwaelder@jacobs-university.de>  
  
    WG Chair: Kent Watsen  
              <mailto:kwatsen@juniper.net>  
  
    Editor:   Ladislav Lhotka  
              <mailto:lhotka@nic.cz>;  
  
  description
```

"This YANG module augments the 'ietf-routing' module with basic configuration and state data for IPv4 unicast routing.

Copyright (c) 2015 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Simplified BSD License set forth in [Section 4.c](#) of the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>).

The key words 'MUST', 'MUST NOT', 'REQUIRED', 'SHALL', 'SHALL NOT', 'SHOULD', 'SHOULD NOT', 'RECOMMENDED', 'MAY', and 'OPTIONAL' in the module text are to be interpreted as described in [RFC 2119](#) (<http://tools.ietf.org/html/rfc2119>).

This version of this YANG module is part of RFC XXXX (<http://tools.ietf.org/html/rfcXXXX>); see the RFC itself for full legal notices.";

```
revision 2015-10-16 {
  description
    "Initial revision.";
  reference
    "RFC XXXX: A YANG Data Model for Routing Management";
}

/* Identities */

identity ipv4-unicast {
  base rt:ipv4;
  description
    "This identity represents the IPv4 unicast address family.";
}

/* State data */

augment "/rt:routing-state/rt:routing-instance/rt:ribs/rt:rib/"
  + "rt:routes/rt:route" {
  when "../..rt:address-family = 'v4ur:ipv4-unicast'" {
    description
      "This augment is valid only for IPv4 unicast.";
  }
  description
    "This leaf augments an IPv4 unicast route.";
  leaf destination-prefix {
```

```
    type inet:ipv4-prefix;
    description
      "IPv4 destination prefix.";
  }
}

augment "/rt:routing-state/rt:routing-instance/rt:ribs/rt:rib/"
  + "rt:routes/rt:route/rt:next-hop/rt:next-hop-options" {
  when "../.../rt:address-family = 'v4ur:ipv4-unicast'" {
    description
      "This augment is valid only for IPv4 unicast.";
  }
  description
    "Augment 'next-hop-options' in IPv4 unicast routes.";
  leaf next-hop-address {
    type inet:ipv4-address;
    description
      "IPv4 address of the next-hop.";
  }
}

/* Configuration data */

augment "/rt:routing/rt:routing-instance/rt:routing-protocols/"
  + "rt:routing-protocol/rt:static-routes" {
  description
    "This augment defines the configuration of the 'static'
    pseudo-protocol with data specific to IPv4 unicast.";
  container ipv4 {
    description
      "Configuration of a 'static' pseudo-protocol instance
      consists of a list of routes.";
    list route {
      key "destination-prefix";
      description
        "A list of static routes.";
      leaf destination-prefix {
        type inet:ipv4-prefix;
        mandatory "true";
        description
          "IPv4 destination prefix.";
      }
      leaf description {
        type string;
        description
          "Textual description of the route.";
      }
    }
    container next-hop {
```

```
        description
            "Configuration of next-hop.";
        uses rt:next-hop-content {
            augment "next-hop-options" {
                description
                    "Augment 'next-hop-options' in IPv4 static routes.";
                leaf next-hop-address {
                    type inet:ipv4-address;
                    description
                        "IPv4 address of the next-hop.";
                }
            }
        }
    }
}

/* RPC operations */

augment "/rt:fib-route/rt:input/rt:destination-address" {
    when "rt:address-family='v4ur:ipv4-unicast'" {
        description
            "This augment is valid only for IPv4 unicast.";
    }
    description
        "This leaf augments the 'rt:destination-address' parameter of
        the 'rt:fib-route' operation.";
    leaf address {
        type inet:ipv4-address;
        description
            "IPv4 destination address.";
    }
}

augment "/rt:fib-route/rt:output/rt:route" {
    when "rt:address-family='v4ur:ipv4-unicast'" {
        description
            "This augment is valid only for IPv4 unicast.";
    }
    description
        "This leaf augments the reply to the 'rt:fib-route'
        operation.";
    leaf destination-prefix {
        type inet:ipv4-prefix;
        description
            "IPv4 destination prefix.";
    }
}
```



```
    }

    augment "/rt:fib-route/rt:output/rt:route/rt:next-hop/"
      + "rt:next-hop-options" {
        when "../rt:address-family='v4ur:ipv4-unicast'" {
          description
            "This augment is valid only for IPv4 unicast.";
        }
        description
          "Augment 'next-hop-options' in the reply to the 'rt:fib-route'
            operation.";
        leaf next-hop-address {
          type inet:ipv4-address;
          description
            "IPv4 address of the next-hop.";
        }
      }
    }
  }
}

<CODE ENDS>
```

9. IPv6 Unicast Routing Management YANG Module

RFC Editor: In this section, replace all occurrences of 'XXXX' with the actual RFC number and all occurrences of the revision date below with the date of RFC publication (and remove this note).

```
<CODE BEGINS> file "ietf-ipv6-unicast-routing@2015-10-16.yang"

module ietf-ipv6-unicast-routing {

  namespace "urn:ietf:params:xml:ns:yang:ietf-ipv6-unicast-routing";

  prefix "v6ur";

  import ietf-routing {
    prefix "rt";
  }

  import ietf-inet-types {
    prefix "inet";
  }

  import ietf-interfaces {
    prefix "if";
  }

  import ietf-ip {
```

```
    prefix "ip";
  }

  organization
    "IETF NETMOD (NETCONF Data Modeling Language) Working Group";

  contact
    "WG Web:    <http://tools.ietf.org/wg/netmod/>
    WG List:    <mailto:netmod@ietf.org>

    WG Chair: Thomas Nadeau
               <mailto:tnadeau@lucidvision.com>

    WG Chair: Juergen Schoenwaelder
               <mailto:j.schoenwaelder@jacobs-university.de>

    WG Chair: Kent Watsen
               <mailto:kwatsen@juniper.net>

    Editor:    Ladislav Lhotka
               <mailto:lhotka@nic.cz>";

  description
    "This YANG module augments the 'ietf-routing' module with basic
    configuration and state data for IPv6 unicast routing.

    Copyright (c) 2015 IETF Trust and the persons identified as
    authors of the code. All rights reserved.

    Redistribution and use in source and binary forms, with or
    without modification, is permitted pursuant to, and subject to
    the license terms contained in, the Simplified BSD License set
    forth in Section 4.c of the IETF Trust's Legal Provisions
    Relating to IETF Documents
    (http://trustee.ietf.org/license-info).

    The key words 'MUST', 'MUST NOT', 'REQUIRED', 'SHALL', 'SHALL
    NOT', 'SHOULD', 'SHOULD NOT', 'RECOMMENDED', 'MAY', and
    'OPTIONAL' in the module text are to be interpreted as described
    in RFC 2119 (http://tools.ietf.org/html/rfc2119).

    This version of this YANG module is part of RFC XXXX
    (http://tools.ietf.org/html/rfcXXXX); see the RFC itself for
    full legal notices.";

  revision 2015-10-16 {
    description
      "Initial revision.";
```

```
    reference
      "RFC XXXX: A YANG Data Model for Routing Management";
  }

  /* Identities */

  identity ipv6-unicast {
    base rt:ipv6;
    description
      "This identity represents the IPv6 unicast address family.";
  }

  /* State data */

  augment "/if:interfaces-state/if:interface/ip:ipv6" {
    description
      "Augment interface state data with IPv6-specific parameters of
      router interfaces.";
    container ipv6-router-advertisements {
      description
        "Parameters of IPv6 Router Advertisements.";
      leaf send-advertisements {
        type boolean;
        description
          "A flag indicating whether or not the router sends periodic
          Router Advertisements and responds to Router
          Solicitations.";
      }
      leaf max-rtr-adv-interval {
        type uint16 {
          range "4..1800";
        }
        units "seconds";
        description
          "The maximum time allowed between sending unsolicited
          multicast Router Advertisements from the interface.";
      }
      leaf min-rtr-adv-interval {
        type uint16 {
          range "3..1350";
        }
        units "seconds";
        description
          "The minimum time allowed between sending unsolicited
          multicast Router Advertisements from the interface.";
      }
      leaf managed-flag {
        type boolean;
      }
    }
  }
```

```
    description
      "The value that is placed in the 'Managed address
        configuration' flag field in the Router Advertisement.";
  }
  leaf other-config-flag {
    type boolean;
    description
      "The value that is placed in the 'Other configuration' flag
        field in the Router Advertisement.";
  }
  leaf link-mtu {
    type uint32;
    description
      "The value that is placed in MTU options sent by the
        router. A value of zero indicates that no MTU options are
        sent.";
  }
  leaf reachable-time {
    type uint32 {
      range "0..3600000";
    }
    units "milliseconds";
    description
      "The value that is placed in the Reachable Time field in
        the Router Advertisement messages sent by the router. A
        value of zero means unspecified (by this router).";
  }
  leaf retrans-timer {
    type uint32;
    units "milliseconds";
    description
      "The value that is placed in the Retrans Timer field in the
        Router Advertisement messages sent by the router. A value
        of zero means unspecified (by this router).";
  }
  leaf cur-hop-limit {
    type uint8;
    description
      "The value that is placed in the Cur Hop Limit field in the
        Router Advertisement messages sent by the router. A value
        of zero means unspecified (by this router).";
  }
  leaf default-lifetime {
    type uint16 {
      range "0..9000";
    }
    units "seconds";
    description
```

```
"The value that is placed in the Router Lifetime field of
Router Advertisements sent from the interface, in seconds.
A value of zero indicates that the router is not to be
used as a default router.";
}
container prefix-list {
  description
    "A list of prefixes that are placed in Prefix Information
    options in Router Advertisement messages sent from the
    interface.

    By default, these are all prefixes that the router
    advertises via routing protocols as being on-link for the
    interface from which the advertisement is sent.";
  list prefix {
    key "prefix-spec";
    description
      "Advertised prefix entry and its parameters.";
    leaf prefix-spec {
      type inet:ipv6-prefix;
      description
        "IPv6 address prefix.";
    }
    leaf valid-lifetime {
      type uint32;
      units "seconds";
      description
        "The value that is placed in the Valid Lifetime in the
        Prefix Information option. The designated value of all
        1's (0xffffffff) represents infinity.

        An implementation SHOULD keep this value constant in
        consecutive advertisements except when it is
        explicitly changed in configuration.";
    }
    leaf on-link-flag {
      type boolean;
      description
        "The value that is placed in the on-link flag ('L-bit')
        field in the Prefix Information option.";
    }
    leaf preferred-lifetime {
      type uint32;
      units "seconds";
      description
        "The value that is placed in the Preferred Lifetime in
        the Prefix Information option, in seconds. The
        designated value of all 1's (0xffffffff) represents
```

```
        infinity.

        An implementation SHOULD keep this value constant in
        consecutive advertisements except when it is
        explicitly changed in configuration.";
    }
    leaf autonomous-flag {
        type boolean;
        description
            "The value that is placed in the Autonomous Flag field
            in the Prefix Information option.";
    }
}
}
}

augment "/rt:routing-state/rt:routing-instance/rt:ribs/rt:rib/"
    + "rt:routes/rt:route" {
    when "../..../rt:address-family = 'v6ur:ipv6-unicast'" {
        description
            "This augment is valid only for IPv6 unicast.";
    }
    description
        "This leaf augments an IPv6 unicast route.";
    leaf destination-prefix {
        type inet:ipv6-prefix;
        description
            "IPv6 destination prefix.";
    }
}

augment "/rt:routing-state/rt:routing-instance/rt:ribs/rt:rib/"
    + "rt:routes/rt:route/rt:next-hop/rt:next-hop-options" {
    when "../..../rt:address-family = 'v6ur:ipv6-unicast'" {
        description
            "This augment is valid only for IPv6 unicast.";
    }
    description
        "Augment 'next-hop-options' in IPv6 unicast routes.";
    leaf next-hop-address {
        type inet:ipv6-address;
        description
            "IPv6 address of the next-hop.";
    }
}

/* Configuration data */
```

```
augment "/if:interfaces/if:interface/ip:ipv6" {
  description
    "Augment interface configuration with IPv6-specific parameters
    of router interfaces.";
  container ipv6-router-advertisements {
    description
      "Configuration of IPv6 Router Advertisements.";
    leaf send-advertisements {
      type boolean;
      default "false";
      description
        "A flag indicating whether or not the router sends periodic
        Router Advertisements and responds to Router
        Solicitations.";
      reference
        "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
        AdvSendAdvertisements.";
    }
    leaf max-rtr-adv-interval {
      type uint16 {
        range "4..1800";
      }
      units "seconds";
      default "600";
      description
        "The maximum time allowed between sending unsolicited
        multicast Router Advertisements from the interface.";
      reference
        "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
        MaxRtrAdvInterval.";
    }
    leaf min-rtr-adv-interval {
      type uint16 {
        range "3..1350";
      }
      units "seconds";
      must ". <= 0.75 * ../max-rtr-adv-interval" {
        description
          "The value MUST NOT be greater than 75 % of
          'max-rtr-adv-interval'.";
      }
      description
        "The minimum time allowed between sending unsolicited
        multicast Router Advertisements from the interface.

        The default value to be used operationally if this leaf is
        not configured is determined as follows:
```

```
- if max-rtr-adv-interval >= 9 seconds, the default value
  is 0.33 * max-rtr-adv-interval;

- otherwise it is 0.75 * max-rtr-adv-interval.";
reference
  "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
  MinRtrAdvInterval.";
}
leaf managed-flag {
  type boolean;
  default "false";
  description
    "The value to be placed in the 'Managed address
    configuration' flag field in the Router Advertisement.";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
    AdvManagedFlag.";
}
leaf other-config-flag {
  type boolean;
  default "false";
  description
    "The value to be placed in the 'Other configuration' flag
    field in the Router Advertisement.";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
    AdvOtherConfigFlag.";
}
leaf link-mtu {
  type uint32;
  default "0";
  description
    "The value to be placed in MTU options sent by the router.
    A value of zero indicates that no MTU options are sent.";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
    AdvLinkMTU.";
}
leaf reachable-time {
  type uint32 {
    range "0..3600000";
  }
  units "milliseconds";
  default "0";
  description
    "The value to be placed in the Reachable Time field in the
    Router Advertisement messages sent by the router. A value
    of zero means unspecified (by this router).";
```



```
reference
  "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
  AdvReachableTime.";
}
leaf retrans-timer {
  type uint32;
  units "milliseconds";
  default "0";
  description
    "The value to be placed in the Retrans Timer field in the
    Router Advertisement messages sent by the router. A value
    of zero means unspecified (by this router).";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
    AdvRetransTimer.";
}
leaf cur-hop-limit {
  type uint8;
  description
    "The value to be placed in the Cur Hop Limit field in the
    Router Advertisement messages sent by the router. A value
    of zero means unspecified (by this router).

    If this parameter is not configured, the device SHOULD use
    the value specified in IANA Assigned Numbers that was in
    effect at the time of implementation.";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
    AdvCurHopLimit.

    IANA: IP Parameters,
    http://www.iana.org/assignments/ip-parameters";
}
leaf default-lifetime {
  type uint16 {
    range "0..9000";
  }
  units "seconds";
  description
    "The value to be placed in the Router Lifetime field of
    Router Advertisements sent from the interface, in seconds.
    It MUST be either zero or between max-rtr-adv-interval and
    9000 seconds. A value of zero indicates that the router is
    not to be used as a default router. These limits may be
    overridden by specific documents that describe how IPv6
    operates over different link layers.

    If this parameter is not configured, the device SHOULD use
```

```
        a value of 3 * max-rtr-adv-interval.";
    reference
        "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
        AdvDefaultLifeTime.";
}
container prefix-list {
    description
        "Configuration of prefixes to be placed in Prefix
        Information options in Router Advertisement messages sent
        from the interface.

        Prefixes that are advertised by default but do not have
        their entries in the child 'prefix' list are advertised
        with the default values of all parameters.

        The link-local prefix SHOULD NOT be included in the list
        of advertised prefixes.";
    reference
        "RFC 4861: Neighbor Discovery for IP version 6 (IPv6) -
        AdvPrefixList.";
    list prefix {
        key "prefix-spec";
        description
            "Configuration of an advertised prefix entry.";
        leaf prefix-spec {
            type inet:ipv6-prefix;
            description
                "IPv6 address prefix.";
        }
        choice control-adv-prefixes {
            default "advertise";
            description
                "The prefix either may be explicitly removed from the
                set of advertised prefixes, or parameters with which
                it is advertised may be specified (default case).";
            leaf no-advertise {
                type empty;
                description
                    "The prefix will not be advertised.

                    This can be used for removing the prefix from the
                    default set of advertised prefixes.";
            }
            case advertise {
                leaf valid-lifetime {
                    type uint32;
                    units "seconds";
                    default "2592000";
                }
            }
        }
    }
}
```

```
description
  "The value to be placed in the Valid Lifetime in
  the Prefix Information option. The designated
  value of all 1's (0xffffffff) represents
  infinity.";
reference
  "RFC 4861: Neighbor Discovery for IP version 6
  (IPv6) - AdvValidLifetime.";
}
leaf on-link-flag {
  type boolean;
  default "true";
  description
    "The value to be placed in the on-link flag
    ('L-bit') field in the Prefix Information
    option.";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6
    (IPv6) - AdvOnLinkFlag.";
}
leaf preferred-lifetime {
  type uint32;
  units "seconds";
  must ". <= ../valid-lifetime" {
    description
      "This value MUST NOT be greater than
      valid-lifetime.";
  }
  default "604800";
  description
    "The value to be placed in the Preferred Lifetime
    in the Prefix Information option. The designated
    value of all 1's (0xffffffff) represents
    infinity.";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6
    (IPv6) - AdvPreferredLifetime.";
}
leaf autonomous-flag {
  type boolean;
  default "true";
  description
    "The value to be placed in the Autonomous Flag
    field in the Prefix Information option.";
  reference
    "RFC 4861: Neighbor Discovery for IP version 6
    (IPv6) - AdvAutonomousFlag.";
}
```

```

    }
  }
}

augment "/rt:routing/rt:routing-instance/rt:routing-protocols/"
+ "rt:routing-protocol/rt:static-routes" {
  description
    "This augment defines the configuration of the 'static'
    pseudo-protocol with data specific to IPv6 unicast.";
  container ipv6 {
    description
      "Configuration of a 'static' pseudo-protocol instance
      consists of a list of routes.";
    list route {
      key "destination-prefix";
      description
        "A list of static routes.";
      leaf destination-prefix {
        type inet:ipv6-prefix;
        mandatory "true";
        description
          "IPv6 destination prefix.";
      }
      leaf description {
        type string;
        description
          "Textual description of the route.";
      }
      container next-hop {
        description
          "Configuration of next-hop.";
        uses rt:next-hop-content {
          augment "next-hop-options" {
            description
              "Augment 'next-hop-options' in IPv6 static routes.";
            leaf next-hop-address {
              type inet:ipv6-address;
              description
                "IPv6 address of the next-hop.";
            }
          }
        }
      }
    }
  }
}

```

```
}

/* RPC operations */

augment "/rt:fib-route/rt:input/rt:destination-address" {
  when "rt:address-family='v6ur:ipv6-unicast'" {
    description
      "This augment is valid only for IPv6 unicast.";
  }
  description
    "This leaf augments the 'rt:destination-address' parameter of
    the 'rt:fib-route' operation.";
  leaf address {
    type inet:ipv6-address;
    description
      "IPv6 destination address.";
  }
}

augment "/rt:fib-route/rt:output/rt:route" {
  when "rt:address-family='v6ur:ipv6-unicast'" {
    description
      "This augment is valid only for IPv6 unicast.";
  }
  description
    "This leaf augments the reply to the 'rt:fib-route'
    operation.";
  leaf destination-prefix {
    type inet:ipv6-prefix;
    description
      "IPv6 destination prefix.";
  }
}

augment "/rt:fib-route/rt:output/rt:route/rt:next-hop/"
  + "rt:next-hop-options" {
  when "../rt:address-family='v6ur:ipv6-unicast'" {
    description
      "This augment is valid only for IPv6 unicast.";
  }
  description
    "Augment 'next-hop-options' in the reply to the 'rt:fib-route'
    operation.";
  leaf next-hop-address {
    type inet:ipv6-address;
    description
      "IPv6 address of the next-hop.";
  }
}
```

```
}  
}
```

<CODE ENDS>

10. IANA Considerations

RFC Ed.: In this section, replace all occurrences of 'XXXX' with the actual RFC number (and remove this note).

This document registers the following namespace URIs in the IETF XML registry [[RFC3688](#)]:

URI: urn:ietf:params:xml:ns:yang:ietf-routing

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-ipv4-unicast-routing

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-ipv6-unicast-routing

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

This document registers the following YANG modules in the YANG Module Names registry [[RFC6020](#)]:

```
-----
name:      ietf-routing
namespace: urn:ietf:params:xml:ns:yang:ietf-routing
prefix:    rt
reference:  RFC XXXX
-----

-----
name:      ietf-ipv4-unicast-routing
namespace: urn:ietf:params:xml:ns:yang:ietf-ipv4-unicast-routing
prefix:    v4ur
reference:  RFC XXXX
-----

-----
name:      ietf-ipv6-unicast-routing
namespace: urn:ietf:params:xml:ns:yang:ietf-ipv6-unicast-routing
prefix:    v6ur
reference:  RFC XXXX
-----
```

11. Security Considerations

Configuration and state data conforming to the core routing data model (defined in this document) are designed to be accessed via the NETCONF protocol [[RFC6241](#)]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [[RFC6242](#)]. The NETCONF access control model [[RFC6536](#)] provides the means to restrict access for particular NETCONF users to a pre-configured subset of all available NETCONF protocol operations and content.

A number of data nodes defined in the YANG modules belonging to the configuration part of the core routing data model are writable/creatable/deletable (i.e., "config true" in YANG terms, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations to these data nodes, such as "edit-config", can have negative effects on the network if the protocol operations are not properly protected.

The vulnerable "config true" parameters and subtrees are the following:

/if:interfaces/if:interface/rt:routing-instance: This leaf assigns a network layer interface to a routing instance.

/routing/routing-instance/routing-protocols/routing-protocol: This list specifies the routing protocols configured on a device.

/routing/routing-instance/ribs/rib: This list specifies the RIBs configured for the device.

Unauthorised access to any of these lists can adversely affect the routing subsystem of both the local device and the network. This may lead to network malfunctions, delivery of packets to inappropriate destinations and other problems.

12. Acknowledgments

The authors wish to thank Nitin Bahadur, Martin Bjorklund, Dean Bogdanovic, Jeff Haas, Joel Halpern, Wes Hardaker, Sriganesh Kini, David Lamparter, Andrew McGregor, Jan Medved, Xiang Li, Stephane Litkowski, Thomas Morin, Tom Petch, Bruno Rijsman, Juergen Schoenwaelder, Phil Shafer, Dave Thaler, Yi Yang, Derek Man-Kit Yeung and Jeffrey Zhang for their helpful comments and suggestions.

13. References

13.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<http://www.rfc-editor.org/info/rfc3688>>.
- [RFC4861] Narten, T., Nordmark, E., Simpson, W., and H. Soliman, "Neighbor Discovery for IP version 6 (IPv6)", [RFC 4861](#), DOI 10.17487/RFC4861, September 2007, <<http://www.rfc-editor.org/info/rfc4861>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), DOI 10.17487/RFC6020, October 2010, <<http://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<http://www.rfc-editor.org/info/rfc6241>>.

- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", [RFC 6991](#), DOI 10.17487/RFC6991, July 2013, <<http://www.rfc-editor.org/info/rfc6991>>.
- [RFC7223] Bjorklund, M., "A YANG Data Model for Interface Management", [RFC 7223](#), DOI 10.17487/RFC7223, May 2014, <<http://www.rfc-editor.org/info/rfc7223>>.
- [RFC7277] Bjorklund, M., "A YANG Data Model for IP Management", [RFC 7277](#), DOI 10.17487/RFC7277, June 2014, <<http://www.rfc-editor.org/info/rfc7277>>.

13.2. Informative References

- [RFC4364] Rosen, E. and Y. Rekhter, "BGP/MPLS IP Virtual Private Networks (VPNs)", [RFC 4364](#), DOI 10.17487/RFC4364, February 2006, <<http://www.rfc-editor.org/info/rfc4364>>.
- [RFC6087] Bierman, A., "Guidelines for Authors and Reviewers of YANG Data Model Documents", [RFC 6087](#), DOI 10.17487/RFC6087, January 2011, <<http://www.rfc-editor.org/info/rfc6087>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<http://www.rfc-editor.org/info/rfc6242>>.
- [RFC6536] Bierman, A. and M. Bjorklund, "Network Configuration Protocol (NETCONF) Access Control Model", [RFC 6536](#), DOI 10.17487/RFC6536, March 2012, <<http://www.rfc-editor.org/info/rfc6536>>.

Appendix A. The Complete Data Trees

This appendix presents the complete configuration and state data trees of the core routing data model. See [Section 2.2](#) for an explanation of the symbols used. Data type of every leaf node is shown near the right end of the corresponding line.

A.1. Configuration Data

```

+--rw routing
  +--rw routing-instance* [name]
    +--rw name                string
    +--rw type?               identityref
    +--rw enabled?            boolean
    +--rw router-id?          yang:dotted-quad
    +--rw description?        string
    +--rw routing-protocols
      | +--rw routing-protocol* [type name]
      |   +--rw type          identityref
      |   +--rw name          string
      |   +--rw description?   string
      |   +--rw static-routes
      |     +--rw v6ur:ipv6
      |       | +--rw v6ur:route* [destination-prefix]
      |       |   +--rw v6ur:destination-prefix inet:ipv6-prefix
      |       |   +--rw v6ur:description?      string
      |       |   +--rw v6ur:next-hop
      |       |     +--rw (next-hop-options)
      |       |       +--:(outgoing-interface)
      |       |       | +--rw v6ur:outgoing-interface?
      |       |       +--:(special-next-hop)
      |       |       | +--rw v6ur:special-next-hop?
      |       |       +--:(next-hop-address)
      |       |       +--rw v6ur:next-hop-address?
      |     +--rw v4ur:ipv4
      |       +--rw v4ur:route* [destination-prefix]
      |       +--rw v4ur:destination-prefix inet:ipv4-prefix
      |       +--rw v4ur:description?      string
      |       +--rw v4ur:next-hop
      |         +--rw (next-hop-options)
      |           +--:(outgoing-interface)
      |           | +--rw v4ur:outgoing-interface?
      |           +--:(special-next-hop)
      |           | +--rw v4ur:special-next-hop?
      |           +--:(next-hop-address)
      |           +--rw v4ur:next-hop-address?
    +--rw ribs
      +--rw rib* [name]
        +--rw name                string
        +--rw address-family?     identityref
        +--rw description?        string

```

[A.2.](#) State Data

```

+--ro routing-state
  +--ro routing-instance* [name]
    +--ro name                string
    +--ro type?               identityref
    +--ro router-id?          yang:dotted-quad
    +--ro interfaces
      | +--ro interface*    if:interface-state-ref
    +--ro routing-protocols
      | +--ro routing-protocol* [type name]
      |   +--ro type        identityref
      |   +--ro name        string
    +--ro ribs
      +--ro rib* [name]
        +--ro name                string
        +--ro address-family      identityref
        +--ro default-rib?        boolean {multiple-ribs}?
        +--ro routes
          +--ro route*
            +--ro route-preference?      route-preference
            +--ro next-hop
              | +--ro (next-hop-options)
              |   +--:(outgoing-interface)
              |   | +--ro outgoing-interface?
              |   +--:(special-next-hop)
              |   | +--ro special-next-hop?      enumeration
              |   +--:(next-hop-address)
              |   | +--ro v6ur:next-hop-address?
              |   +--:(next-hop-address)
              |   | +--ro v4ur:next-hop-address?
            +--ro source-protocol      identityref
            +--ro active?              empty
            +--ro last-updated?        yang:date-and-time
            +--ro v6ur:destination-prefix? inet:ipv6-prefix
            +--ro v4ur:destination-prefix? inet:ipv4-prefix

```

[Appendix B.](#) Minimum Implementation

Some parts and options of the core routing model, such as user-defined RIBs, are intended only for advanced routers. This appendix gives basic non-normative guidelines for implementing a bare minimum of available functions. Such an implementation may be used for hosts or very simple routers.

A minimum implementation provides a single system-controlled routing instance of the type "default-routing-instance", and will not allow clients to create any user-controlled instances.

Typically, the feature "multiple-ribs" will not be supported. This means that a single system-controlled RIB is available for each supported address family - IPv4, IPv6 or both. These RIBs must be the default RIBs. No user-controlled RIBs are allowed.

In addition to the mandatory instance of the "direct" pseudo-protocol, a minimum implementation should support configuring instance(s) of the "static" pseudo-protocol.

Platforms with severely constrained resources may use deviations for restricting the data model, e.g., limiting the number of "static" routing protocol instances.

[Appendix C](#). Example: Adding a New Routing Protocol

This appendix demonstrates how the core routing data model can be extended to support a new routing protocol. The YANG module "example-rip" shown below is intended as an illustration rather than a real definition of a data model for the RIP routing protocol. For the sake of brevity, this module does not obey all the guidelines specified in [[RFC6087](#)]. See also [Section 5.4.2](#).

```
module example-rip {  
    namespace "http://example.com/rip";  
  
    prefix "rip";  
  
    import ietf-interfaces {  
        prefix "if";  
    }  
  
    import ietf-routing {  
        prefix "rt";  
    }  
  
    identity rip {  
        base rt:routing-protocol;  
        description  
            "Identity for the RIP routing protocol.";  
    }  
  
    typedef rip-metric {  
        type uint8 {  
            range "0..16";  
        }  
    }  
}
```

```
grouping route-content {
  description
    "This grouping defines RIP-specific route attributes.";
  leaf metric {
    type rip-metric;
  }
  leaf tag {
    type uint16;
    default "0";
    description
      "This leaf may be used to carry additional info, e.g. AS
       number.";
  }
}

augment "/rt:routing-state/rt:routing-instance/rt:ribs/rt:rib/"
  + "rt:routes/rt:route" {
  when "rt:source-protocol = 'rip:rip'" {
    description
      "This augment is only valid for a routes whose source
       protocol is RIP.";
  }
  description
    "RIP-specific route attributes.";
  uses route-content;
}

augment "/rt:fib-route/rt:output/rt:route" {
  description
    "RIP-specific route attributes in the output of 'active-route'
     RPC.";
  uses route-content;
}

augment "/rt:routing/rt:routing-instance/rt:routing-protocols/"
  + "rt:routing-protocol" {
  when "rt:type = 'rip:rip'" {
    description
      "This augment is only valid for a routing protocol instance
       of type 'rip'.";
  }
  container rip {
    presence "RIP configuration";
    description
      "RIP instance configuration.";
    container interfaces {
      description
        "Per-interface RIP configuration.";
    }
  }
}
```

```
list interface {
  key "name";
  description
    "RIP is enabled on interfaces that have an entry in this
    list, unless 'enabled' is set to 'false' for that
    entry.";
  leaf name {
    type if:interface-ref;
  }
  leaf enabled {
    type boolean;
    default "true";
  }
  leaf metric {
    type rip-metric;
    default "1";
  }
}
}
leaf update-interval {
  type uint8 {
    range "10..60";
  }
  units "seconds";
  default "30";
  description
    "Time interval between periodic updates.";
}
}
}
```

[Appendix D](#). Example: NETCONF <get> Reply

This section contains a sample reply to the NETCONF <get> message, which could be sent by a server supporting (i.e., advertising them in the NETCONF <hello> message) the following YANG modules:

- o ietf-interfaces [[RFC7223](#)],
- o ietf-ip [[RFC7277](#)],
- o ietf-routing ([Section 7](#)),
- o ietf-ipv4-unicast-routing ([Section 8](#)),
- o ietf-ipv6-unicast-routing ([Section 9](#)).

We assume a simple network set-up as shown in Figure 3: router "A" uses static default routes with the "ISP" router as the next-hop. IPv6 router advertisements are configured only on the "eth1" interface and disabled on the upstream "eth0" interface.

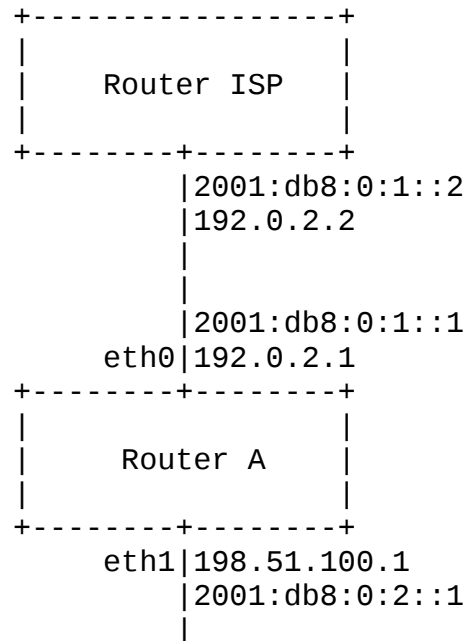


Figure 3: Example network configuration

A reply to the NETCONF <get> message sent by router "A" would then be as follows:

```

<?xml version="1.0"?>
<rpc-reply
  message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
  xmlns:v4ur="urn:ietf:params:xml:ns:yang:ietf-ipv4-unicast-routing"
  xmlns:v6ur="urn:ietf:params:xml:ns:yang:ietf-ipv6-unicast-routing"
  xmlns:if="urn:ietf:params:xml:ns:yang:ietf-interfaces"
  xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-type"
  xmlns:ip="urn:ietf:params:xml:ns:yang:ietf-ip"
  xmlns:rt="urn:ietf:params:xml:ns:yang:ietf-routing">
  <data>
    <if:interfaces>
      <if:interface>
        <if:name>eth0</if:name>
        <if:type>ianaift:ethernetCsmacd</if:type>
        <if:description>
          Uplink to ISP.
        </if:description>
      </if:interface>
    </if:interfaces>
  </data>
</rpc-reply>

```

```
<rt:routing-instance>rtr0</rt:routing-instance>
<ip:ipv4>
  <ip:address>
    <ip:ip>192.0.2.1</ip:ip>
    <ip:prefix-length>24</ip:prefix-length>
  </ip:address>
  <ip:forwarding>true</ip:forwarding>
</ip:ipv4>
<ip:ipv6>
  <ip:address>
    <ip:ip>2001:0db8:0:1::1</ip:ip>
    <ip:prefix-length>64</ip:prefix-length>
  </ip:address>
  <ip:forwarding>true</ip:forwarding>
  <ip:autoconf>
    <ip:create-global-addresses>>false</ip:create-global-addresses>
  </ip:autoconf>
</ip:ipv6>
</if:interface>
<if:interface>
  <if:name>eth1</if:name>
  <if:type>ianaift:ethernetCsmacd</if:type>
  <if:description>
    Interface to the internal network.
  </if:description>
  <rt:routing-instance>rtr0</rt:routing-instance>
  <ip:ipv4>
    <ip:address>
      <ip:ip>198.51.100.1</ip:ip>
      <ip:prefix-length>24</ip:prefix-length>
    </ip:address>
    <ip:forwarding>true</ip:forwarding>
  </ip:ipv4>
  <ip:ipv6>
    <ip:address>
      <ip:ip>2001:0db8:0:2::1</ip:ip>
      <ip:prefix-length>64</ip:prefix-length>
    </ip:address>
    <ip:forwarding>true</ip:forwarding>
    <ip:autoconf>
      <ip:create-global-addresses>>false</ip:create-global-addresses>
    </ip:autoconf>
  </ip:ipv6>
</if:interface>
</if:interfaces>
<if:interfaces-state>
  <if:interface>
    <if:name>eth0</if:name>
```



```
<if:type>ianaift:ethernetCsmacd</if:type>
<if:phys-address>00:0C:42:E5:B1:E9</if:phys-address>
<if:oper-status>up</if:oper-status>
<rt:routing-instance>rtr0</rt:routing-instance>
<if:statistics>
  <if:discontinuity-time>
    2015-10-24T17:11:27+02:00
  </if:discontinuity-time>
</if:statistics>
<ip:ipv4>
  <ip:forwarding>true</ip:forwarding>
  <ip:mtu>1500</ip:mtu>
  <ip:address>
    <ip:ip>192.0.2.1</ip:ip>
    <ip:prefix-length>24</ip:prefix-length>
  </ip:address>
</ip:ipv4>
<ip:ipv6>
  <ip:forwarding>true</ip:forwarding>
  <ip:mtu>1500</ip:mtu>
  <ip:address>
    <ip:ip>2001:0db8:0:1::1</ip:ip>
    <ip:prefix-length>64</ip:prefix-length>
  </ip:address>
  <v6ur:ipv6-router-advertisements>
    <v6ur:send-advertisements>true</v6ur:send-advertisements>
    <v6ur:prefix-list>
      <v6ur:prefix>
        <v6ur:prefix-spec>2001:db8:0:2::/64</v6ur:prefix-spec>
      </v6ur:prefix>
    </v6ur:prefix-list>
  </v6ur:ipv6-router-advertisements>
</ip:ipv6>
</if:interface>
<if:interface>
  <if:name>eth1</if:name>
  <if:type>ianaift:ethernetCsmacd</if:type>
  <if:phys-address>00:0C:42:E5:B1:EA</if:phys-address>
  <if:oper-status>up</if:oper-status>
  <rt:routing-instance>rtr0</rt:routing-instance>
  <if:statistics>
    <if:discontinuity-time>
      2015-10-24T17:11:29+02:00
    </if:discontinuity-time>
  </if:statistics>
  <ip:ipv4>
    <ip:forwarding>true</ip:forwarding>
    <ip:mtu>1500</ip:mtu>
```

```
<ip:address>
  <ip:ip>198.51.100.1</ip:ip>
  <ip:prefix-length>24</ip:prefix-length>
</ip:address>
</ip:ipv4>
<ip:ipv6>
  <ip:forwarding>true</ip:forwarding>
  <ip:mtu>1500</ip:mtu>
  <ip:address>
    <ip:ip>2001:0db8:0:2::1</ip:ip>
    <ip:prefix-length>64</ip:prefix-length>
  </ip:address>
  <v6ur:ipv6-router-advertisements>
    <v6ur:send-advertisements>true</v6ur:send-advertisements>
    <v6ur:prefix-list>
      <v6ur:prefix>
        <v6ur:prefix-spec>2001:db8:0:2::/64</v6ur:prefix-spec>
      </v6ur:prefix>
    </v6ur:prefix-list>
  </v6ur:ipv6-router-advertisements>
</ip:ipv6>
</if:interface>
</if:interfaces-state>
<rt:routing>
  <rt:routing-instance>
    <rt:name>rtr0</rt:name>
    <rt:description>Router A</rt:description>
    <rt:router-id>192.0.2.1</rt:router-id>
    <rt:routing-protocols>
      <rt:routing-protocol>
        <rt:type>rt:static</rt:type>
        <rt:name>st0</rt:name>
        <rt:description>
          Static routing is used for the internal network.
        </rt:description>
        <rt:static-routes>
          <v4ur:ipv4>
            <v4ur:route>
              <v4ur:destination-prefix>
                0.0.0.0/0
              </v4ur:destination-prefix>
              <v4ur:next-hop>
                <v4ur:next-hop-address>192.0.2.2</v4ur:next-hop-address>
              </v4ur:next-hop>
            </v4ur:route>
          </v4ur:ipv4>
          <v6ur:ipv6>
            <v6ur:route>
```

```
<v6ur:destination-prefix>::/0</v6ur:destination-prefix>
<v6ur:next-hop>
  <v6ur:next-hop-address>
    2001:db8:0:1::2
  </v6ur:next-hop-address>
</v6ur:next-hop>
</v6ur:route>
</v6ur:ipv6>
</rt:static-routes>
</rt:routing-protocol>
</rt:routing-protocols>
</rt:routing-instance>
</rt:routing>
<rt:routing-state>
<rt:routing-instance>
  <rt:name>rtr0</rt:name>
  <rt:interfaces>
    <rt:interface>eth0</rt:interface>
    <rt:interface>eth1</rt:interface>
  </rt:interfaces>
  <rt:routing-protocols>
    <rt:routing-protocol>
      <rt:type>rt:static</rt:type>
      <rt:name>st0</rt:name>
    </rt:routing-protocol>
  </rt:routing-protocols>
<rt:ribs>
  <rt:rib>
    <rt:name>ipv4-master</rt:name>
    <rt:address-family>v4ur:ipv4-unicast</rt:address-family>
    <rt:default-rib>true</rt:default-rib>
    <rt:routes>
      <rt:route>
        <v4ur:destination-prefix>
          192.0.2.1/24
        </v4ur:destination-prefix>
        <rt:next-hop>
          <rt:outgoing-interface>eth0</rt:outgoing-interface>
        </rt:next-hop>
        <rt:route-preference>0</rt:route-preference>
        <rt:source-protocol>rt:direct</rt:source-protocol>
        <rt:last-updated>2015-10-24T17:11:27+02:00</rt:last-updated>
      </rt:route>
      <rt:route>
        <v4ur:destination-prefix>
          198.51.100.0/24
        </v4ur:destination-prefix>
        <rt:next-hop>
```

```
    <rt:outgoing-interface>eth1</rt:outgoing-interface>
  </rt:next-hop>
  <rt:source-protocol>rt:direct</rt:source-protocol>
  <rt:route-preference>0</rt:route-preference>
  <rt:last-updated>2015-10-24T17:11:27+02:00</rt:last-updated>
</rt:route>
<rt:route>
  <v4ur:destination-prefix>0.0.0.0/0</v4ur:destination-prefix>
  <rt:source-protocol>rt:static</rt:source-protocol>
  <rt:route-preference>5</rt:route-preference>
  <rt:next-hop>
    <v4ur:next-hop-address>192.0.2.2</v4ur:next-hop-address>
  </rt:next-hop>
  <rt:last-updated>2015-10-24T18:02:45+02:00</rt:last-updated>
</rt:route>
</rt:routes>
</rt:rib>
<rt:rib>
  <rt:name>ipv6-master</rt:name>
  <rt:address-family>v6ur:ipv6-unicast</rt:address-family>
  <rt:default-rib>true</rt:default-rib>
  <rt:routes>
    <rt:route>
      <v6ur:destination-prefix>
        2001:db8:0:1::/64
      </v6ur:destination-prefix>
      <rt:next-hop>
        <rt:outgoing-interface>eth0</rt:outgoing-interface>
      </rt:next-hop>
      <rt:source-protocol>rt:direct</rt:source-protocol>
      <rt:route-preference>0</rt:route-preference>
      <rt:last-updated>2015-10-24T17:11:27+02:00</rt:last-updated>
    </rt:route>
    <rt:route>
      <v6ur:destination-prefix>
        2001:db8:0:2::/64
      </v6ur:destination-prefix>
      <rt:next-hop>
        <rt:outgoing-interface>eth1</rt:outgoing-interface>
      </rt:next-hop>
      <rt:source-protocol>rt:direct</rt:source-protocol>
      <rt:route-preference>0</rt:route-preference>
      <rt:last-updated>2015-10-24T17:11:27+02:00</rt:last-updated>
    </rt:route>
    <rt:route>
      <v6ur:destination-prefix>::/0</v6ur:destination-prefix>
      <rt:next-hop>
        <v6ur:next-hop-address>
```

```
        2001:db8:0:1::2
        </v6ur:next-hop-address>
    </rt:next-hop>
    <rt:source-protocol>rt:static</rt:source-protocol>
    <rt:route-preference>5</rt:route-preference>
    <rt:last-updated>2015-10-24T18:02:45+02:00</rt:last-updated>
    </rt:route>
</rt:routes>
</rt:rib>
</rt:ribs>
</rt:routing-instance>
</rt:routing-state>
</data>
</rpc-reply>
```

[Appendix E](#). Change Log

RFC Editor: Remove this section upon publication as an RFC.

[E.1](#). Changes Between Versions -19 and -20

- o Assignment of L3 interfaces to routing instances is now part of interface configuration.
- o Next-hop options in configuration were aligned with state data.
- o It is recommended to enclose protocol-specific configuration in a presence container.

[E.2](#). Changes Between Versions -18 and -19

- o The leaf "route-preference" was removed from the "routing-protocol" container in both "routing" and "routing-state".
- o The "vrf-routing-instance" identity was added in support of a common routing-instance type in addition to the "default-routing-instance".
- o Removed "enabled" switch from "routing-protocol".

[E.3](#). Changes Between Versions -17 and -18

- o The container "ribs" was moved under "routing-instance" (in both "routing" and "routing-state").
- o Typedefs "rib-ref" and "rib-state-ref" were removed.
- o Removed "recipient-ribs" (both state and configuration).

- o Removed "connected-ribs" from "routing-protocol" (both state and configuration).
- o Configuration and state data for IPv6 RA were moved under "if:interface" and "if:interface-state".
- o Assignment of interfaces to routing instances now use leaf-list rather than list (both config and state). The opposite reference from "if:interface" to "rt:routing-instance" was changed to a single leaf (an interface cannot belong to multiple routing instances).
- o Specification of a default RIB is now a simple flag under "rib" (both config and state).
- o Default RIBs are marked by a flag in state data.

[E.4.](#) Changes Between Versions -16 and -17

- o Added Acee as a co-author.
- o Removed all traces of route filters.
- o Removed numeric IDs of list entries in state data.
- o Removed all next-hop cases except "simple-next-hop" and "special-next-hop".
- o Removed feature "multipath-routes".
- o Augmented "ietf-interfaces" module with a leaf-list of leafrefs pointing from state data of an interface entry to the routing instance(s) to which the interface is assigned.

[E.5.](#) Changes Between Versions -15 and -16

- o Added 'type' as the second key component of 'routing-protocol', both in configuration and state data.
- o The restriction of no more than one connected RIB per address family was removed.
- o Removed the 'id' key of routes in RIBs. This list has no keys anymore.
- o Remove the 'id' key from static routes and make 'destination-prefix' the only key.

- o Added 'route-preference' as a new attribute of routes in RIB.
- o Added 'active' as a new attribute of routes in RIBs.
- o Renamed RPC operation 'active-route' to 'fib-route'.
- o Added 'route-preference' as a new parameter of routing protocol instances, both in configuration and state data.
- o Renamed identity 'rt:standard-routing-instance' to 'rt:default-routing-instance'.
- o Added next-hop lists to state data.
- o Added two cases for specifying next-hops indirectly - via a new RIB or a recursive list of next-hops.
- o Reorganized next-hop in static routes.
- o Removed all 'if-feature' statements from state data.

[E.6.](#) Changes Between Versions -14 and -15

- o Removed all defaults from state data.
- o Removed default from 'cur-hop-limit' in config.

[E.7.](#) Changes Between Versions -13 and -14

- o Removed dependency of 'connected-ribs' on the 'multiple-ribs' feature.
- o Removed default value of 'cur-hop-limit' in state data.
- o Moved parts of descriptions and all references on IPv6 RA parameters from state data to configuration.
- o Added reference to [RFC 6536](#) in the Security section.

[E.8.](#) Changes Between Versions -12 and -13

- o Wrote appendix about minimum implementation.
- o Remove "when" statement for IPv6 router interface state data - it was dependent on a config value that may not be present.
- o Extra container for the next-hop list.

- o Names rather than numeric ids are used for referring to list entries in state data.
- o Numeric ids are always declared as mandatory and unique. Their description states that they are ephemeral.
- o Descriptions of "name" keys in state data lists are required to be persistent.
- o
- o Removed "if-feature multiple-ribs;" from connected-ribs.
- o "rib-name" instead of "name" is used as the name of leafref nodes.
- o "next-hop" instead of "nexthop" or "gateway" used throughout, both in node names and text.

[E.9.](#) Changes Between Versions -11 and -12

- o Removed feature "advanced-router" and introduced two features instead: "multiple-ribs" and "multipath-routes".
- o Unified the keys of config and state versions of "routing-instance" and "rib" lists.
- o Numerical identifiers of state list entries are not keys anymore, but they are constrained using the "unique" statement.
- o Updated acknowledgements.

[E.10.](#) Changes Between Versions -10 and -11

- o Migrated address families from IANA enumerations to identities.
- o Terminology and node names aligned with the I2RS RIB model: router -> routing instance, routing table -> RIB.
- o Introduced uint64 keys for state lists: routing-instance, rib, route, nexthop.
- o Described the relationship between system-controlled and user-controlled list entries.
- o Feature "user-defined-routing-tables" changed into "advanced-router".

- o Made nexthop into a choice in order to allow for nexthop-list (I2RS requirement).
- o Added nexthop-list with entries having priorities (backup) and weights (load balancing).
- o Updated bibliography references.

[E.11.](#) Changes Between Versions -09 and -10

- o Added subtree for state data ("/routing-state").
- o Terms "system-controlled entry" and "user-controlled entry" defined and used.
- o New feature "user-defined-routing-tables". Nodes that are useful only with user-defined routing tables are now conditional.
- o Added grouping "router-id".
- o In routing tables, "source-protocol" attribute of routes now reports only protocol type, and its datatype is "identityref".
- o Renamed "main-routing-table" to "default-routing-table".

[E.12.](#) Changes Between Versions -08 and -09

- o Fixed "must" expression for "connected-routing-table".
- o Simplified "must" expression for "main-routing-table".
- o Moved per-interface configuration of a new routing protocol under 'routing-protocol'. This also affects the 'example-rip' module.

[E.13.](#) Changes Between Versions -07 and -08

- o Changed reference from [RFC6021](#) to RFC6021bis.

[E.14.](#) Changes Between Versions -06 and -07

- o The contents of <get-reply> in [Appendix D](#) was updated: "eth[01]" is used as the value of "location", and "forwarding" is on for both interfaces and both IPv4 and IPv6.
- o The "must" expression for "main-routing-table" was modified to avoid redundant error messages reporting address family mismatch when "name" points to a non-existent routing table.

- o The default behavior for IPv6 RA prefix advertisements was clarified.
- o Changed type of "rt:router-id" to "ip:dotted-quad".
- o Type of "rt:router-id" changed to "yang:dotted-quad".
- o Fixed missing prefixes in XPath expressions.

[E.15.](#) Changes Between Versions -05 and -06

- o Document title changed: "Configuration" was replaced by "Management".
- o New typedefs "routing-table-ref" and "route-filter-ref".
- o Double slashes "/" were removed from XPath expressions and replaced with the single "/".
- o Removed uniqueness requirement for "router-id".
- o Complete data tree is now in [Appendix A](#).
- o Changed type of "source-protocol" from "leafref" to "string".
- o Clarified the relationship between routing protocol instances and connected routing tables.
- o Added a must constraint saying that a routing table connected to the direct pseudo-protocol must not be a main routing table.

[E.16.](#) Changes Between Versions -04 and -05

- o Routing tables are now global, i.e., "routing-tables" is a child of "routing" rather than "router".
- o "must" statement for "static-routes" changed to "when".
- o Added "main-routing-tables" containing references to main routing tables for each address family.
- o Removed the defaults for "address-family" and "safi" and made them mandatory.
- o Removed the default for route-filter/type and made this leaf mandatory.

- o If there is no active route for a given destination, the "active-route" RPC returns no output.
- o Added "enabled" switch under "routing-protocol".
- o Added "router-type" identity and "type" leaf under "router".
- o Route attribute "age" changed to "last-updated", its type is "yang:date-and-time".
- o The "direct" pseudo-protocol is always connected to main routing tables.
- o Entries in the list of connected routing tables renamed from "routing-table" to "connected-routing-table".
- o Added "must" constraint saying that a routing table must not be its own recipient.

[E.17.](#) Changes Between Versions -03 and -04

- o Changed "error-tag" for both RPC operations from "missing element" to "data-missing".
- o Removed the decrementing behavior for advertised IPv6 prefix parameters "valid-lifetime" and "preferred-lifetime".
- o Changed the key of the static route lists from "seqno" to "id" because the routes needn't be sorted.
- o Added 'must' constraint saying that "preferred-lifetime" must not be greater than "valid-lifetime".

[E.18.](#) Changes Between Versions -02 and -03

- o Module "iana-afn-safi" moved to I-D "iana-if-type".
- o Removed forwarding table.
- o RPC "get-route" changed to "active-route". Its output is a list of routes (for multi-path routing).
- o New RPC "route-count".
- o For both RPCs, specification of negative responses was added.
- o Relaxed separation of router instances.

- o Assignment of interfaces to router instances needn't be disjoint.
- o Route filters are now global.
- o Added "allow-all-route-filter" for symmetry.
- o Added [Section 6](#) about interactions with "ietf-interfaces" and "ietf-ip".
- o Added "router-id" leaf.
- o Specified the names for IPv4/IPv6 unicast main routing tables.
- o Route parameter "last-modified" changed to "age".
- o Added container "recipient-routing-tables".

[E.19.](#) Changes Between Versions -01 and -02

- o Added module "ietf-ipv6-unicast-routing".
- o The example in [Appendix D](#) now uses IP addresses from blocks reserved for documentation.
- o Direct routes appear by default in the forwarding table.
- o Network layer interfaces must be assigned to a router instance. Additional interface configuration may be present.
- o The "when" statement is only used with "augment", "must" is used elsewhere.
- o Additional "must" statements were added.
- o The "route-content" grouping for IPv4 and IPv6 unicast now includes the material from the "ietf-routing" version via "uses rt:route-content".
- o Explanation of symbols in the tree representation of data model hierarchy.

[E.20.](#) Changes Between Versions -00 and -01

- o AFN/SAFI-independent stuff was moved to the "ietf-routing" module.
- o Typedefs for AFN and SAFI were placed in a separate "iana-afn-safi" module.

- o Names of some data nodes were changed, in particular "routing-process" is now "router".
- o The restriction of a single AFN/SAFI per router was lifted.
- o RPC operation "delete-route" was removed.
- o Illegal XPath references from "get-route" to the datastore were fixed.
- o Section "Security Considerations" was written.

Authors' Addresses

Ladislav Lhotka
CZ.NIC

Email: lhotka@nic.cz

Acee Lindem
Cisco Systems

Email: acee@cisco.com