

RADEXT Working Group
INTERNET-DRAFT
Category: Proposed Standard
Expires: October 1, 2014
Updates: [3580](#), [4072](#)

Bernard Aboba
Microsoft Corporation
Jouni Malinen
Devicescape Software
Paul Congdon
Tallac Networks
Joseph Salowey
Cisco Systems
Mark Jones
Azuca Systems
28 March 2014

RADIUS Attributes for IEEE 802 Networks
draft-ietf-radext-ieee802ext-12.txt

Abstract

[RFC 3580](#) provides guidelines for the use of the Remote Authentication Dialin User Service (RADIUS) within IEEE 802 local area networks (LANs). This document defines additional attributes for use within IEEE 802 networks, as well as clarifying the usage of the EAP-Key-Name attribute and the Called-Station-Id attribute. This document updates [RFC 3580](#) as well as [RFC 4072](#).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on October 1, 2014.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Table of Contents

1.	Introduction	4
1.1	Terminology	4
1.2	Requirements Language	5
2.	RADIUS attributes	5
2.1	Allowed-Called-Station-Id	5
2.2	EAP-Key-Name	6
2.3	EAP-Peer-Id	7
2.4	EAP-Server-Id	8
2.5	Mobility-Domain-Id	9
2.6	Preauth-Timeout	10
2.7	Network-Id-Name	11
2.8	EAPoL-Announcement	12
2.9	WLAN-HESSID	14
2.10	WLAN-Venue-Info	14
2.11	WLAN-Venue-Language	15
2.12	WLAN-Venue-Name	16
2.13	WLAN-Reason-Code	17
2.14	WLAN-Pairwise-Cipher	18
2.15	WLAN-Group-Cipher	19
2.16	WLAN-AKM-Suite	20
2.17	WLAN-Group-Mgmt-Cipher	21
2.18	WLAN-RF-Band	22
3.	Table of attributes	23
4.	IANA Considerations	24
5.	Security Considerations	24
6.	References	25
6.1	Normative References	25
6.2	Informative References	26
	ACKNOWLEDGMENTS	26
	AUTHORS' ADDRESSES	27

1. Introduction

In situations where it is desirable to centrally manage authentication, authorization and accounting (AAA) for IEEE 802 [[IEEE-802](#)] networks, deployment of a backend authentication and accounting server is desirable. In such situations, it is expected that IEEE 802 authenticators will function as AAA clients.

"IEEE 802.1X Remote Authentication Dial In User Service (RADIUS) Usage Guidelines" [[RFC3580](#)] provides guidelines for the use of the Remote Authentication Dialin User Service (RADIUS) within networks utilizing IEEE 802 local area networks. This document defines additional attributes suitable for usage by IEEE 802 authenticators acting as AAA clients.

1.1. Terminology

This document uses the following terms:

Access Point (AP)

A Station that provides access to the distribution services via the wireless medium for associated Stations.

Association

The service used to establish Access Point/Station mapping and enable Station invocation of the distribution system services.

authenticator

An authenticator is an entity that require authentication from the supplicant. The authenticator may be connected to the supplicant at the other end of a point-to-point LAN segment or wireless link.

authentication server

An authentication server is an entity that provides an authentication service to an authenticator. This service verifies from the credentials provided by the supplicant, the claim of identity made by the supplicant.

Station (STA)

Any device that contains an IEEE 802.11 conformant medium access control (MAC) and physical layer (PHY) interface to the wireless medium (WM).

Supplicant

A supplicant is an entity that is being authenticated by an authenticator. The supplicant may be connected to the authenticator at one end of a point-to-point LAN segment or 802.11 wireless link.

String

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
Type										Length										String...																			
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-

Code

102 [[RFC4072](#)]

Length

>=3

String

The String field is one or more octets, containing the EAP Session-Id, as defined in "Extensible Authentication Protocol (EAP) Key Management Framework" [[RFC5247](#)]. Since the NAS operates as a pass-through in EAP, it cannot know the EAP Session-Id before receiving it from the RADIUS server. As a result, an EAP-Key-Name Attribute sent in an Access-Request MUST only contain a single NUL character. A RADIUS server receiving an Access-Request with an EAP-Key-Name Attribute containing anything other than a single NUL character MUST silently discard the Attribute. In addition, the RADIUS server SHOULD include this Attribute in an Access-Accept or CoA-Request only if an EAP-Key-Name Attribute was present in the Access-Request. Since a NAS will typically only include a EAP-Key-Name Attribute in an Access-Request in situations where the Attribute is required to provision service, if an EAP-Key-Name Attribute is included in an Access-Request but is not present in the Access-Accept, the NAS SHOULD treat the Access-Accept as though it were an Access-Reject. If an EAP-Key-Name Attribute was not present in the Access-Request but is included in the Access-Accept, then the NAS SHOULD silently discard the EAP-Key-Name Attribute. As noted in [[IEEE-802.1X](#)] [Section 6.2.2](#), the Connectivity Association Key Name (CKN) is derived from the EAP Session-Id, and as described in [Section 9.3.3](#), the CKN is subsequently used in the derivation of the Key Encrypting Key (KEK) and the Integrity Check Value Key (ICK), utilized to protect the secret keys (SAKs) utilized by Media Access Control Security (MACsec). As a result, for the NAS to acquire information needed in the MACsec Key Agreement (MKA) exchange, it needs to include the EAP-Key-Name attribute in the Access-Request and receive it from the RADIUS server in the Access-Accept.

[2.3](#). EAP-Peer-Id

Description

The EAP-Peer-Id Attribute contains a Peer-Id generated by the EAP method. Exactly how this name is used depends on the link layer in question. See [[RFC5247](#)] for more discussion. The EAP-Peer-Id Attribute MAY be included in Access-Request, Access-Accept and

Accounting-Request packets. More than one EAP-Peer-Id Attribute MUST NOT be included in an Access-Request; one or more EAP-Peer-Id attributes MAY be included in an Access-Accept.

It should be noted that not all link layers use this name, and existing EAP method implementations do not generate it. Since the NAS operates as a pass-through in EAP [[RFC3748](#)], it cannot know the EAP-Peer-Id before receiving it from the RADIUS server. As a result, an EAP-Peer-Id Attribute sent in an Access-Request MUST only contain a single NUL character. A home RADIUS server receiving an Access-Request an EAP-Peer-Id Attribute containing anything other than a single NUL character MUST silently discard the Attribute. In addition, the home RADIUS server SHOULD include one or more EAP-Peer-Id attributes in an Access-Accept only if an EAP-Peer-Id Attribute was present in the Access-Request. If a NAS receives EAP-Peer-Id Attribute(s) in an Access-Accept without having included one in an Access-Request, the NAS SHOULD silently discard the Attribute(s). A summary of the EAP-Peer-Id Attribute format is shown below. The fields are transmitted from left to right.

```

      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|      Type      | Length |      String...
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Code

TBD2

Length

>=3

String

The String field is one or more octets containing a EAP Peer-Id exported by the EAP method. For details, see [[RFC5247](#)] [Appendix A](#). A robust implementation SHOULD support the field as undistinguished octets. Only a single EAP Peer-Id may be included per Attribute.

[2.4.](#) EAP-Server-Id

Description

The EAP-Server-Id Attribute contains a Server-Id generated by the

EAP method. Exactly how this name is used depends on the link layer in question. See [\[RFC5247\]](#) for more discussion. The EAP-Server-Id Attribute is only allowed in Access-Request, Access-Accept, and Accounting-Request packets. More than one EAP-Server-Id Attribute MUST NOT be included in an Access-Request; one or more EAP-Server-Id attributes MAY be included in an Access-Accept.

It should be noted that not all link layers use this name, and existing EAP method implementations do not generate it. Since the NAS operates as a pass-through in EAP [\[RFC3748\]](#), it cannot know the EAP-Server-Id before receiving it from the RADIUS server. As a result, an EAP-Server-Id Attribute sent in an Access-Request MUST contain only a single NUL character. A home RADIUS server receiving in an Access-Request an EAP-Server-Id Attribute containing anything other than a single NUL character MUST silently discard the Attribute. In addition, the home RADIUS server SHOULD include this Attribute an Access-Accept only if an EAP-Server-Id Attribute was present in the Access-Request. A summary of the EAP-Server-Id Attribute format is shown below. The fields are transmitted from left to right.

```

      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|      Type      | Length |      String...
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Code

TBD3

Length

>=3

String


The String field is one or more octets, containing a EAP Server-Id exported by the EAP method. For details, see [\[RFC5247\]](#) [Appendix A](#). A robust implementation SHOULD support the field as undistinguished octets.

[2.5. Mobility-Domain-Id](#)

Description

A single Mobility-Domain-Id Attribute MAY be included in an Access-Request or Accounting-Request, in order to enable the NAS

to provide the RADIUS server with the Mobility Domain Identifier (MDID), defined in Section 8.4.2.49 of [[IEEE-802.11](#)]. A summary of the Mobility-Domain-Id Attribute format is shown below. The fields are transmitted from left to right.

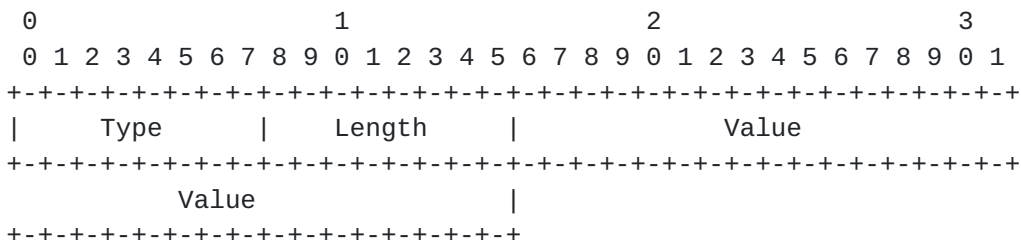

Code


TBD4

Length

6

Value

The Value field is four octets, containing a 32-bit unsigned integer. The two most significant octets MUST be set to zero by the sender, and are ignored by the receiver; the two least significant octets contain the Mobility Domain Identifier (MDID) defined in Section 8.4.2.49 of [[IEEE-802.11](#)].

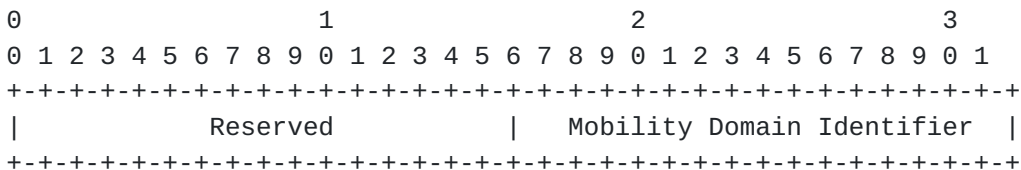

2.6. Preauth-Timeout

Description

This Attribute sets the maximum number of seconds which pre-authentication state is required to be kept by the NAS, without being utilized within a user session. For example, when [[IEEE-802.11](#)] pre-authentication is used, if a user has not attempted to utilize the Pairwise Master Key (PMK) derived as a result of pre-authentication within the time specified by the Preauth-Timeout Attribute, the PMK MAY be discarded by the Access Point. However, once the session is underway, the Preauth-Timeout Attribute has no bearing on the maximum session time for the user,

Unlike the IEEE 802.11 SSID (which is a maximum of 32 octets in length), the NID-Name may be up to 253 octets in length. Consequently, if the MAC address is included within the Called-Station-Id Attribute, it is possible that there will not be enough remaining space to encode the NID-Name as well. Therefore when used with IEEE 802.1X [[IEEE-802.1X](#)], the Called-Station-Id Attribute SHOULD contain only the MAC address, with the Network-Id-Name Attribute used to transmit the NID-Name. The Network-Id-Name Attribute MUST NOT be used to encode the IEEE 802.11 SSID; as

Zero or more EAPoL-Announcement attributes are permitted within an Access-Request, Access-Accept, Access-Challenge, Access-Reject,

The String field is one or more octets, containing EAPoL-Announcement TLVs in the format defined in Figure 11-8 of [Section 11.12](#) of [IEEE-802.1X]. Any EAPoL-Announcement TLV Type MAY be included within an EAPoL-Announcement Attribute, including Organizationally Specific TLVs. If multiple EAPoL-Announcement attributes are present in a packet, their String fields MUST be concatenated before being parsed for EAPoL-Announcement TLVs; this allows EAPoL-Announcement TLVs longer than 253 octets to be transported by RADIUS. Similarly, EAPoL-Announcement TLVs larger than 253 octets MUST be fragmented between multiple EAPoL-Announcement attributes.

2.9. WLAN-HESSID

Description

The WLAN-HESSID attribute contains a MAC address that identifies the Homogenous Extended Service Set. The HESSID is a globally unique identifier that in conjunction with the SSID, encoded within the Called-Station-Id Attribute as described in [\[RFC3580\]](#), may be used to provide network identification for a subscription service provider network (SSPN), as described in Section 8.4.2.94 of [\[IEEE-802.11\]](#). Zero or one WLAN-HESSID Attribute is permitted within an Access-Request or Accounting-Request packet.

A summary of the WLAN-HESSID Attribute format is shown below. The fields are transmitted from left to right.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Type   |   Length   |   String...   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Code

TBD8

Length

19

String

The String field is encoded in upper-case ASCII characters with the octet values separated by dash characters, as described in [RFC 3580](#) [\[RFC3580\]](#). Example: "00-10-A4-23-19-C0".

2.10. WLAN-Venue-Info

Description

The WLAN-Venue-Info attribute identifies the category of venue hosting the WLAN, as defined in Section 8.4.1.34 of [\[IEEE-802.11\]](#). Zero or more WLAN-Venue-Info attributes may be included in an Access-Request or Accounting-Request.

A summary of the WLAN-Venue-Info Attribute format is shown below. The fields are transmitted from left to right.

The WLAN-Venue-Language attribute is an ISO-14962-1997 [ISO-14962-1997] encoded string that defines the language used in

the WLAN-Venue-Name attribute. Zero or more WLAN-Venue-Language attributes may be included in an Access-Request or Accounting-Request and each one indicates the language of the WLAN-Venue-Name attribute that follows it.

A summary of the WLAN-Venue-Language Attribute format is shown below. The fields are transmitted from left to right.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|      Type      |      Length      |      String...
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
      String (cont) |
+--+--+--+--+--+--+--+

```

Code

TBD10

Length

4-5

String

The String field is a two or three character language code selected from ISO-639 [[ISO-639](#)]. A two character language code has a zero ("null" in ISO-14962-1997) appended to make it 3 octets in length.

[2.12.](#) WLAN-Venue-Name

Description

The WLAN-Venue-Name attribute provides additional metadata on the BSS. For example, this information may be used to assist a user in selecting the appropriate BSS with which to associate. Zero or more WLAN-Venue-Name attributes may be included in an Access-Request or Accounting-Request in the same or different languages.

A summary of the WLAN-Venue-Name Attribute format is shown below. The fields are transmitted from left to right.


```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Type   |   Length   |   String...
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Code

TBD11

Length

>=3

String

The String field is a UTF-8 formatted field containing the venue's name. The maximum length of this field is 252 octets.

[2.13.](#) WLAN-Reason-Code

Description

The WLAN-Reason-Code Attribute contains information on the reason why a station has been refused network access and has been disassociated or de-authenticated. This can occur due to policy or for reasons related to the user's subscription.

A WLAN-Reason-Code Attribute MAY be included within an Access-Reject or Disconnect-Request packet, as well as within an Accounting-Request packet. Upon receipt of an Access-Reject or Disconnect-Request packet containing a WLAN-Reason-Code Attribute, the WLAN-Reason-Code value is copied by the Access Point into the Reason Code field of a Disassociation or Deauthentication frame (see clause 8.3.3.4 and 8.3.3.12 respectively in [IEEE- 802.11]), which is subsequently transmitted to the station.

A summary of the WLAN-Reason-Code Attribute format is shown below. The fields are transmitted from left to right.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Type   |   Length   |   Value
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Value   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```


6

Value

The Value field is four octets, containing a 32-bit unsigned integer, in Suite selector format as specified in Figure 8-187 within Section 8.4.2.27.2 of [IEEE-802.11], with values of OUI and Suite type drawn from Table 8-99.

```

0      1      2      3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|                               OUI                               | Suite Type |
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

2.15. WLAN-Group-Cipher

Description

The WLAN-Group-Cipher Attribute contains information on the group cipher suite used to establish the robust security network association (RSNA) between the AP and mobile device. A WLAN-Group-Cipher Attribute MAY be included within Access-Request and Accounting-Request packets.

A summary of the WLAN-Group-Cipher Attribute format is shown below. The fields are transmitted from left to right.

[illegible]

Code

TBD14

Length

6

Value

The Value field is four octets, containing a 32-bit unsigned integer, in Suite selector format as specified in Figure 8-187

within Section 8.4.2.27.2 of [[IEEE-802.11](#)], with values of OUI and Suite type drawn from Table 8-99.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               | Suite Type |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

2.16. WLAN-AKM-Suite

Description

The WLAN-AKM-Suite Attribute contains information on the authentication and key management suite used to establish the robust security network association (RSNA) between the AP and mobile device. A WLAN-AKM-Suite Attribute MAY be included within Access-Request and Accounting-Request packets.

A summary of the WLAN-AKM-Suite Attribute format is shown below. The fields are transmitted from left to right.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Type   | Length |                               Value
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Value |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Code

TBD15

Length

6

Value

The Value field is four octets, containing a 32-bit unsigned integer, in Suite selector format as specified in Figure 8-187 within Section 8.4.2.27.2 of [[IEEE-802.11](#)], with values of OUI and Suite type drawn from Table 8-101:


```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               OUI                               | Suite Type |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

2.17. WLAN-Group-Mgmt-Cipher

Description

The WLAN-Group-Mgmt-Cipher Attribute contains information on group management cipher used to establish the robust security network association (RSNA) between the AP and mobile device.

Zero or one WLAN-Group-Mgmt-Cipher Attribute MAY be included within Access-Request and Accounting-Request packets. Presence of the attribute indicates that the station negotiated to use management frame protection during association.

A summary of the WLAN-Group-Mgmt-Cipher Attribute format is shown below. The fields are transmitted from left to right.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Type   | Length |   Value   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Code

TBD16

Length

6

Value

The Value field is four octets, containing a 32-bit unsigned integer, in Suite selector format as specified in Figure 8-187 within Section 8.4.2.27.2 of [[IEEE-802.11](#)], with values of OUI and Suite type drawn from Table 8-99:


```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               OUI                               | Suite Type |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

2.18. WLAN-RF-Band

Description

The WLAN-RF-Band Attribute contains information on the RF band used by the Access Point for transmission and reception of information to and from the mobile device. Zero or one WLAN-RF-Band Attribute MAY be included within an Access-Request or Accounting-Request packet.

A summary of the WLAN-RF-Band Attribute format is shown below. The fields are transmitted from left to right.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Type   | Length |   Value   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Code

TBD17

Length

6

Value

The Value field is four octets, containing a 32-bit unsigned integer. The three most significant octets MUST be set to zero by the sender, and are ignored by the receiver; the least significant octet contains the RF Band field, whose values are defined in Table 8-53a of [[IEEE-802.11ad](#)].

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Reserved                               | RF Band |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```


3. Table of attributes

The following table provides a guide to which attributes may be found in which kinds of packets, and in what quantity.

Access-Request	Access-Accept	Access-Reject	Access-Challenge	#	Attribute
0	0+	0	0	TBD1	Allowed-Called-Station-Id
0-1	0-1	0	0	102	EAP-Key-Name
0-1	0+	0	0	TBD2	EAP-Peer-Id
0-1	0+	0	0	TBD3	EAP-Server-Id
0-1	0	0	0	TBD4	Mobility-Domain-Id
0-1	0-1	0	0	TBD5	Preauth-Timeout
0-1	0	0	0	TBD6	Network-Id-Name
0+	0+	0+	0+	TBD7	EAPoL-Announcement
0-1	0	0	0	TBD8	WLAN-HESSID
0-1	0	0	0	TBD9	WLAN-Venue-Info
0+	0	0	0	TBD10	WLAN-Venue-Language
0+	0	0	0	TBD11	WLAN-Venue-Name
0	0	0-1	0	TBD12	WLAN-Reason-Code
0-1	0	0	0	TBD13	WLAN-Pairwise-Cipher
0-1	0	0	0	TBD14	WLAN-Group-Cipher
0-1	0	0	0	TBD15	WLAN-AKM-Suite
0-1	0	0	0	TBD16	WLAN-Group-Mgmt-Cipher
0-1	0	0	0	TBD17	WLAN-RF-Band

CoA-Req	Dis-Req	Acct-Req	#	Attribute
0+	0	0+	TBD1	Allowed-Called-Station-Id
0-1	0	0	102	EAP-Key-Name
0	0	0+	TBD2	EAP-Peer-Id
0	0	0+	TBD3	EAP-Server-Id
0	0	0-1	TBD4	Mobility-Domain-Id
0-1	0	0	TBD5	Preauth-Timeout
0	0	0-1	TBD6	Network-Id-Name
0+	0+	0+	TBD7	EAPoL-Announcement
0	0	0-1	TBD8	WLAN-HESSID
0	0	0-1	TBD9	WLAN-Venue-Info
0	0	0+	TBD10	WLAN-Venue-Language
0	0	0+	TBD11	WLAN-Venue-Name
0	0-1	0-1	TBD12	WLAN-Reason-Code
0	0	0-1	TBD13	WLAN-Pairwise-Cipher
0	0	0-1	TBD14	WLAN-Group-Cipher
0	0	0-1	TBD15	WLAN-AKM-Suite
0	0	0-1	TBD16	WLAN-Group-Mgmt-Cipher
0	0	0-1	TBD17	WLAN-RF-Band

The following table defines the meaning of the above table entries.

- 0 This Attribute MUST NOT be present in packet.
- 0+ Zero or more instances of this Attribute MAY be present in the packet.
- 0-1 Zero or one instance of this Attribute MAY be present in the packet.

4. IANA Considerations

This document uses the RADIUS [[RFC2865](#)] namespace, see <http://www.iana.org/assignments/radius-types>. This specification requires assignment of a RADIUS attribute types for the following attributes:

Attribute	Type
=====	=====
Allowed-Called-Station-Id	TBD1
EAP-Peer-Id	TBD2
EAP-Server-Id	TBD3
Mobility-Domain-Id	TBD4
Preauth-Timeout	TBD5
Network-Id-Name	TBD6
EAPoL-Announcement	TBD7
WLAN-HESSID	TBD8
WLAN-Venue-Info	TBD9
WLAN-Venue-Language	TBD10
WLAN-Venue-Name	TBD11
WLAN-Reason-Code	TBD12
WLAN-Pairwise-Cipher	TBD13
WLAN-Group-Cipher	TBD14
WLAN-AKM-Suite	TBD15
WLAN-Group-Mgmt-Cipher	TBD16
WLAN-RF-Band	TBD17

Since this specification relies entirely on values assigned by IEEE 802, no registries are established for maintenance by the IANA.

5. Security Considerations

Since this document describes the use of RADIUS for purposes of authentication, authorization, and accounting in IEEE 802 networks, it is vulnerable to all of the threats that are present in other RADIUS applications. For a discussion of these threats, see [[RFC2607](#)], [[RFC2865](#)], [[RFC3162](#)], [[RFC3579](#)], [[RFC3580](#)] and [[RFC5176](#)]. In particular, when RADIUS traffic is sent in the clear, the attributes defined in this document can be obtained by an attacker snooping the exchange between the RADIUS client and server. As a result, RADIUS confidentiality is desirable; for a review of RADIUS security and crypto-agility requirements, see [[RFC6421](#)].

While it is possible for a RADIUS server to make decisions on whether to Accept or Reject an Access-Request based on the values of the WLAN-Pairwise-Cipher, WLAN-Group-Cipher, WLAN-AKM-Suite, WLAN-Group-Mgmt-Cipher and WLAN-RF-Band Attributes the value of doing this is limited. In general, an Access-Reject should not be necessary, except where Access Points and Stations are misconfigured so as to enable connections to be made with unacceptable values. Rather than rejecting access on an ongoing basis, users would be better served by fixing the misconfiguration.

Where access does need to be rejected, the user should be provided with an indication of why the problem has occurred, or else they are likely to become frustrated. For example, if the values of the WLAN-Pairwise-Cipher, WLAN-Group-Cipher, WLAN-AKM-Suite or WLAN-Group-Mgmt-Cipher Attributes included in the Access-Request are not acceptable to the RADIUS server, then a WLAN-Reason-Code Attribute with a value of 29 (Requested service rejected because of service provider cipher suite or AKM requirement) SHOULD be returned in the Access-Reject. Similarly, if the value of the WLAN-RF-Band Attribute included in the Access-Request is not acceptable to the RADIUS server, then a WLAN-Reason-Code Attribute with a value of 11 (Disassociated because the information in the Supported Channels element is unacceptable) SHOULD be returned in the Access-Reject.

6. References

6.1. Normative references

[IEEE-802] IEEE Standards for Local and Metropolitan Area Networks: Overview and Architecture, ANSI/IEEE Std 802, 1990.

[IEEE-802.11]
Information technology - Telecommunications and Information Exchange Between Systems - Local and Metropolitan Area Networks - Specific Requirements Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications, IEEE Std. 802.11-2012, 2012.

[IEEE-802.11ad]
Information technology - Telecommunications and Information Exchange Between Systems - Local and Metropolitan Area Networks - Specific Requirements Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications, Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band, IEEE Std. 802.11ad-2012, 2012.

[IEEE-802.1X]
IEEE Standard for Local and Metropolitan Area Networks -

Port-Based Network Access Control, IEEE 802.1X-2010, February 2010.

[ISO-639] ISO, "Codes for the Representation of Names of Languages".

[ISO-14962-1997]

ISO, "Space data and information transfer systems - ASCII encoded English", 1997.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), March, 1997.

[RFC2865] Rigney, C., Rubens, A., Simpson, W. and S. Willens, "Remote Authentication Dial In User Service (RADIUS)", [RFC 2865](#), June 2000.

[RFC4072] Eronen, P., Hiller, T. and G. Zorn, "Diameter Extensible Authentication Protocol (EAP) Application", [RFC 4072](#), August 2005.

[RFC5247] Aboba, B., Simon, D. and P. Eronen, "EAP Key Management Framework", [RFC 5247](#), August 2008.

[6.2.](#) Informative references

[RFC2607] Aboba, B. and J. Vollbrecht, "Proxy Chaining and Policy Implementation in Roaming", [RFC 2607](#), June 1999.

[RFC3162] Aboba, B., Zorn, G. and D. Mitton, "RADIUS and IPv6", [RFC 3162](#), August 2001.

[RFC3579] Aboba, B. and P. Calhoun, "RADIUS Support for Extensible Authentication Protocol (EAP)", [RFC 3579](#), September 2003.

[RFC3580] Congdon, P., Aboba, B., Smith, A., Zorn, G. and J. Roese, "IEEE 802.1X Remote Authentication Dial In User Service (RADIUS) Usage Guidelines", [RFC 3580](#), September 2003.

[RFC3748] Aboba, B., Blunk, L., Vollbrecht, J., Carlson, J. and H. Levkowitz, "Extensible Authentication Protocol (EAP)", [RFC 3748](#), June 2004.

[RFC5176] Chiba, M., Dommety, G., Eklund, M., Mitton, D. and B. Aboba, "Dynamic Authorization Extensions to Remote Authentication Dial In User Service (RADIUS)", [RFC 5176](#), January 2008.

[RFC6421] Nelson, D., "Crypto-Agility Requirements for Remote Authentication Dial-In User Service (RADIUS)", [RFC 6421](#),

November 2011.

Acknowledgments

The authors would like to acknowledge Maximilian Riegel, Dorothy Stanley, Yoshihiro Ohba, and the contributors to the IEEE 802.1 and IEEE 802.11 reviews of this document, for useful discussions.

Authors' Addresses

Bernard Aboba
Microsoft Corporation
One Microsoft Way
Redmond, WA 98052

EMail: bernard_aboba@hotmail.com

Jouni Malinen
EMail: j@w1.fi

Paul Congdon
Tallac Networks
6528 Lonetree Blvd.
Rocklin, CA 95765

Phone: +19167576350
EMail: paul.congdon@tallac.com

Joseph Salowey
Cisco Systems
EMail: jsalowey@cisco.com

Mark Jones
Azuca Systems
EMail: mark@azu.ca

