

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: January 7, 2021

Z. Li
China Mobile
M. Chen
Huawei
July 06, 2020

Performance Measurement on LAG
draft-li-ippm-pm-on-lag-00

Abstract

This document defines extensions to One-way Active Measurement Protocol (OWAMP), Two-way Active Measurement Protocol (TWAMP), and Simple Two-Way Active Measurement Protocol (STAMP) to implement performance measurement on every member link of a Link Aggregation Group (LAG). With the measured metrics of each member links of a LAG, it enables operators to enforce performance metric based traffic steering policy among the member links.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#) [\[RFC8174\]](#) when, and only when, they appear in all capitals, as shown here.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 7, 2021.

Internet-Draft

PM on LAG

July 2020

Copyright Notice

Copyright (c) 2020 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Problem Statement	2
2.	Micro Session on LAG	3
3.	Mirco OWAMP Session	4
3.1.	Micro OWAMP-Control	4
3.2.	Micro OWAMP-Test	4
4.	Mirco TWAMP Session	4
4.1.	Micro TWAMP-Control	5
4.2.	Micro TWAMP-Test	5
4.2.1.	Sender Behavior	5
4.2.2.	Reflector Behavior	7
5.	Mirco STAMP Session	10
5.1.	Micro STAMP-Test	10
5.1.1.	Session-Sender Packet Format	10
5.1.2.	Session-Reflector Packet Format	12
5.1.3.	Micro STAMP-Test Procedures	15
6.	IANA Considerations	15
6.1.	Mico OWAMP-Control Command	15
6.2.	Mico TWAMP-Control Command	15
7.	Security Considerations	16
8.	Acknowledgements	16
9.	References	16
9.1.	Normative References	16
9.2.	Informative References	16
	Authors' Addresses	16

[1.](#) Problem Statement

Link Aggregation Group (LAG), as defined in [[IEEE802.1AX](#)], provides mechanisms to combine multiple physical links into a single logical link. This logical link provides higher bandwidth and better resiliency, because if one of the physical member links fails, the

aggregate logical link can continue to forward traffic over the remaining operational physical member links.

Normally, when forwarding traffic over a LAG, a hash based or the like mechanism is used to load balance the traffic among member links of the LAG. In some cases, the link delays of the member links are different because the member links are over different transport paths. To provide low delay service to time sensitive traffic, we have to know the link delay of each member link of a LAG and then steer traffic accordingly. This requires a solution that could measure the performance metrics of each member link of a LAG.

However, when using One-way Active Measurement Protocol (OWAMP) [[RFC4656](#)], Two-way Active Measurement Protocol (TWAMP) [[RFC5357](#)], or Simple Two-Way Active Measurement Protocol (STAMP) [[RFC8762](#)] to measure the performance of a LAG, the LAG is treated as a single logical link/path. The measured metrics reflect the performance of one member link or an average of some/all member links of the LAG.

This document defines extensions to OWAMP [[RFC4656](#)], TWAMP [[RFC5357](#)] or STAMP [[RFC8762](#)] to implement performance measurement on every member link of a LAG.

[2.](#) Micro Session on LAG

To measure performance metrics of every member link of a LAG, multiple sessions (one session for each member link) need to be established between the two hosts that are connected by the LAG. These sessions are called micro sessions in the remainder of this document.

From the OWAMP/TWAMP-Control point of view, micro sessions of a LAG share the same Sender Address, Receiver Address, have different Session Identifiers (SID). As for the Sender Port and Receiver Port, micro sessions may share the same Sender Port and Receiver Port pair, or each micro session is configured with different Sender Port and

Receiver Port pair. But from simplifying operation point of view, the former is recommended.

In addition, with micro sessions, there needs a way to correlate a session with a member link. For example, when receives a Control or Test packet, the Server/Reflector/Receiver needs to know from which member link the packet is received, and then correlate the packet with a micro session. This is different from the existing OWAMP [[RFC4656](#)], TWAMP [[RFC5357](#)], or STAMP [[RFC8762](#)].

This document defines new command types to indicate that a session is a micro session, the details are described in [Section 3](#) and 4 of this

document. For a micro session, on receiving of a Control/Test packet, the receiver uses the receiving link to correlate the packet with a particular session. In the case of two-way measurement, Test packets may need to carry the member link related information for valid checking. For example, when a Sender receives a reflected Test packet, it may needs to check whether the Test packet is from the expected member link.

[3.](#) Mirco OWAMP Session

This document assumes that the OWAMP Server and the OWAMP Receiver of an OWAMP micro session are at the same host.

[3.1.](#) Micro OWAMP-Control

To support micro OWAMP session, a new command, which is referred to as Request-OW-Micro-Session (TBD1), is defined in this document. The Request-OW-Micro-Session command is based on the OWAMP Request-Session command, and uses the message format as described in [Section 3.5](#) of OWAMP [[RFC4656](#)]. Test session creation of micro OWAMP session follows the same procedure as defined in [Section 3.5](#) of OWAMP [[RFC4656](#)] with the following additions:

When a OWAMP Server receives a Request-OW-Micro-Session command, if the Session is accepted, the OWAMP Server MUST build an association between the session and the member link from which the Request-Session message is received.

[3.2.](#) Micro OWAMP-Test

Micro OWAMP-Test reuses the OWAMP-Test packet format and procedures as defined in [Section 4](#) of OWAMP [[RFC4656](#)] with the following additions:

The micro OWAMP Sender MUST send the micro OWAMP-Test packets over the member link with which the session is associated. When receives a Test packet, the micro OWAMP receiver MUST use the member link from which the Test packet is received to correlate the micro OWAMP session.

[4.](#) Mirco TWAMP Session

As above, this document assumes that the TWAMP Server and the TWAMP Session-Reflector of a micro OWAMP session are at the same host.

[4.1.](#) Micro TWAMP-Control

To support micro TWAMP session, a new command, which is referred to as Request-TW-Micro-Session (TBD2), is defined in this document. The Request-TW-Micro-Session command is based on the TWAMP Request-Session command, and uses the message format as described in [Section 3.5](#) of TWAMP [[RFC5357](#)]. Test session creation of micro TWAMP session follows the same procedure as defined in [Section 3.5](#) of TWAMP [[RFC5357](#)] with the following additions:

When a micro TWAMP Server receives a Request-TW-Micro-Session command, if the micro TWAMP Session is accepted, the micro TWAMP Server MUST build an association between the session and the member link from which the Request-Session message is received.

[4.2.](#) Micro TWAMP-Test

The micro TWAMP-Test protocol is based on the TWAMP-Test protocol [[RFC5357](#)] with the following extensions.

[4.2.1.](#) Sender Behavior

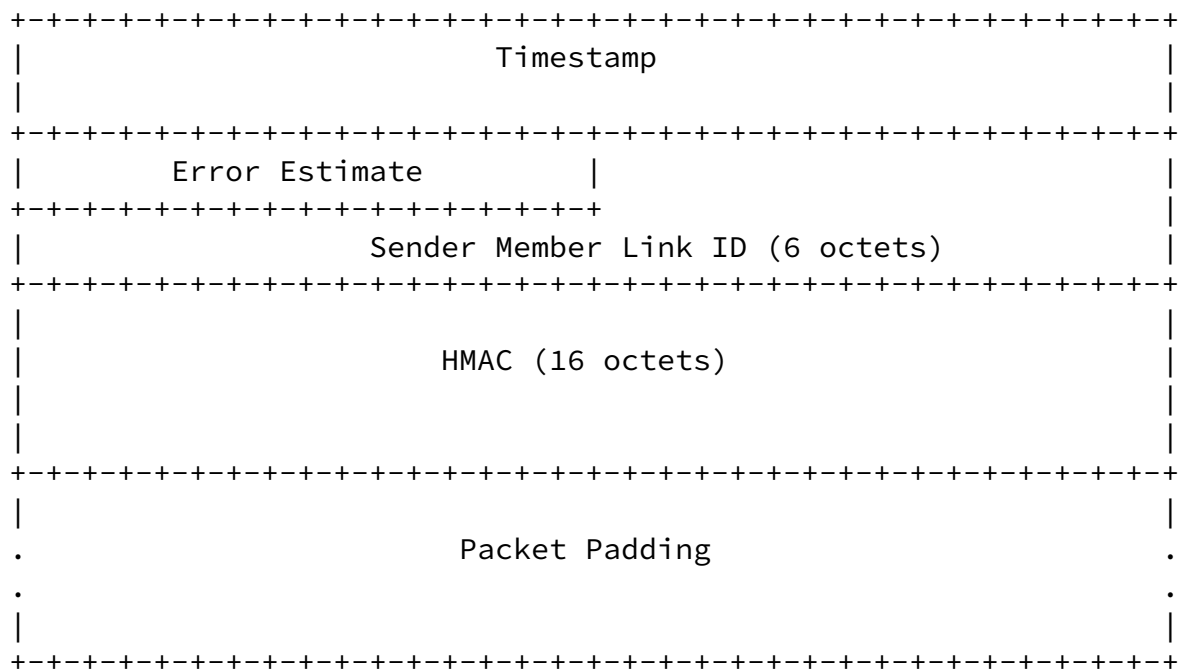


Figure 2: Session-Sender Packet Format in Authenticated Mode

Except for the Sender Member Link ID field, all the other fields are the same as defined in [Section 4.1.2](#) of TWAMP [\[RFC5357\]](#), which is originally defined in [Section 4.1.2](#) of OWAMP [\[RFC4656\]](#). Therefore, it follows the same procedure and guidelines as defined in [Section 4.1.2](#) of TWAMP [\[RFC5357\]](#).

The Sender Member Link ID (6-octets in length): It is defined for the Session-Sender to carry the identifier of the member link that is being measured. The Sender Member Link ID MUST be unique at the Session-Sender.

[4.2.2](#). Reflector Behavior

The micro TWAMP Session-Reflector inherits the behaviors of a TWAMP Session-Reflector as defined in [Section 4.2](#) of [\[RFC5357\]](#).

In addition, when receives a Test packet, the micro TWAMP Session-Reflector MUST use the member link from which the Test packet is received to correlate to a micro TWAMP session. When sends a

response to a received Test packet, the micro TWAMP Session-Reflector

MUST copy the LAG Member Link ID to the response Test packet.

4.2.2.1. Packet Format and Content

The micro TWAMP Session-Reflector packet format is based on the TWAMP Session-Reflector packet format as defined in [Section 4.2.1 of \[RFC5357\]](#). In addition, in order to carry the LAG member link identifier, a new field is added. The formats are as below:

For unauthenticated mode:

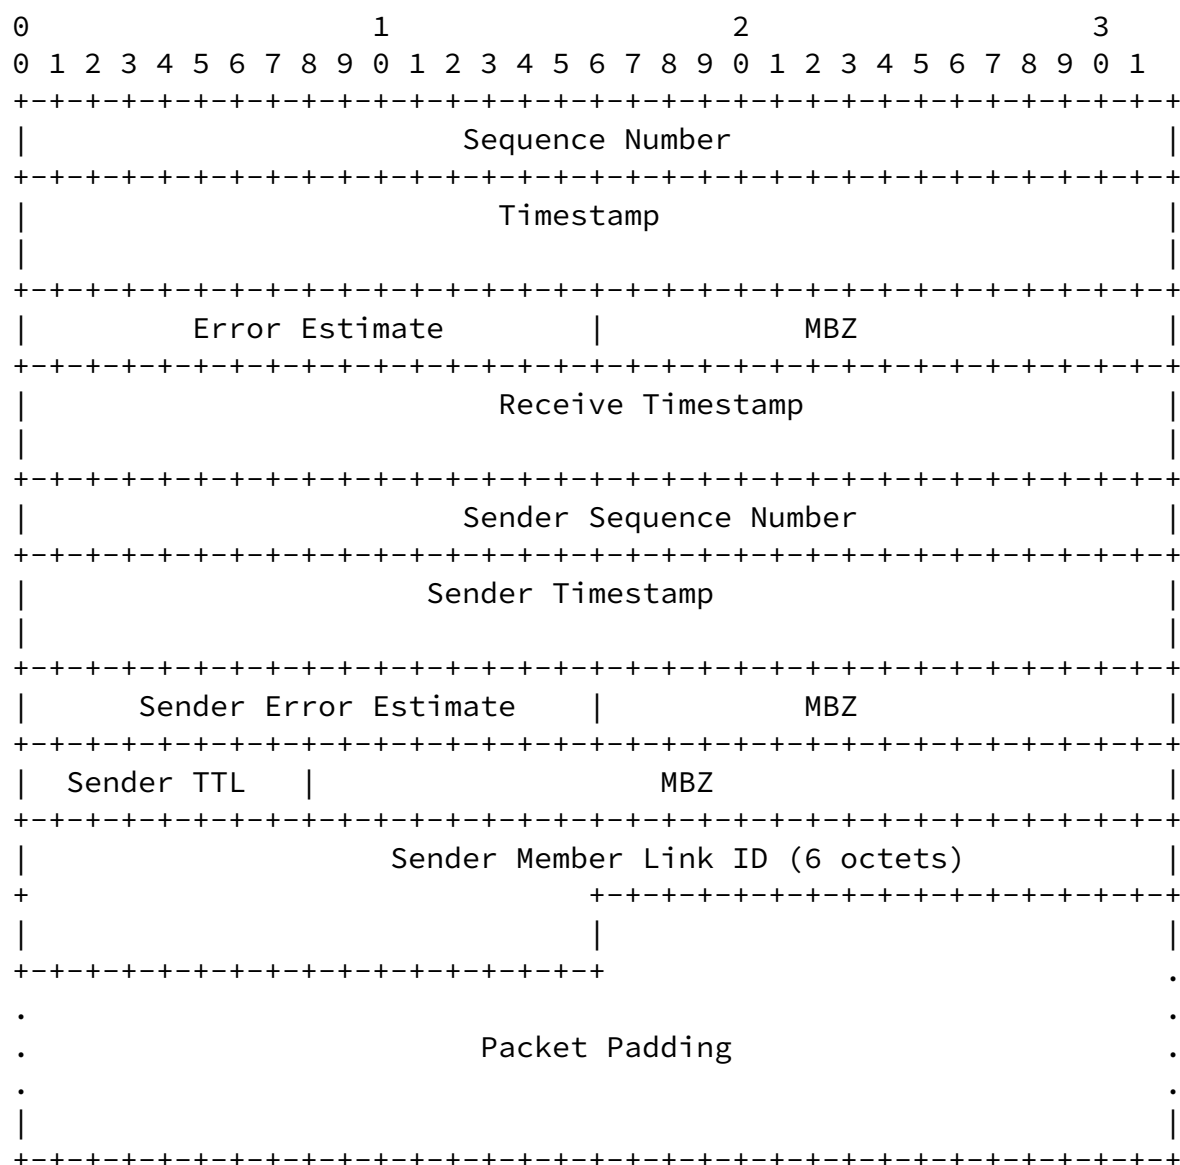
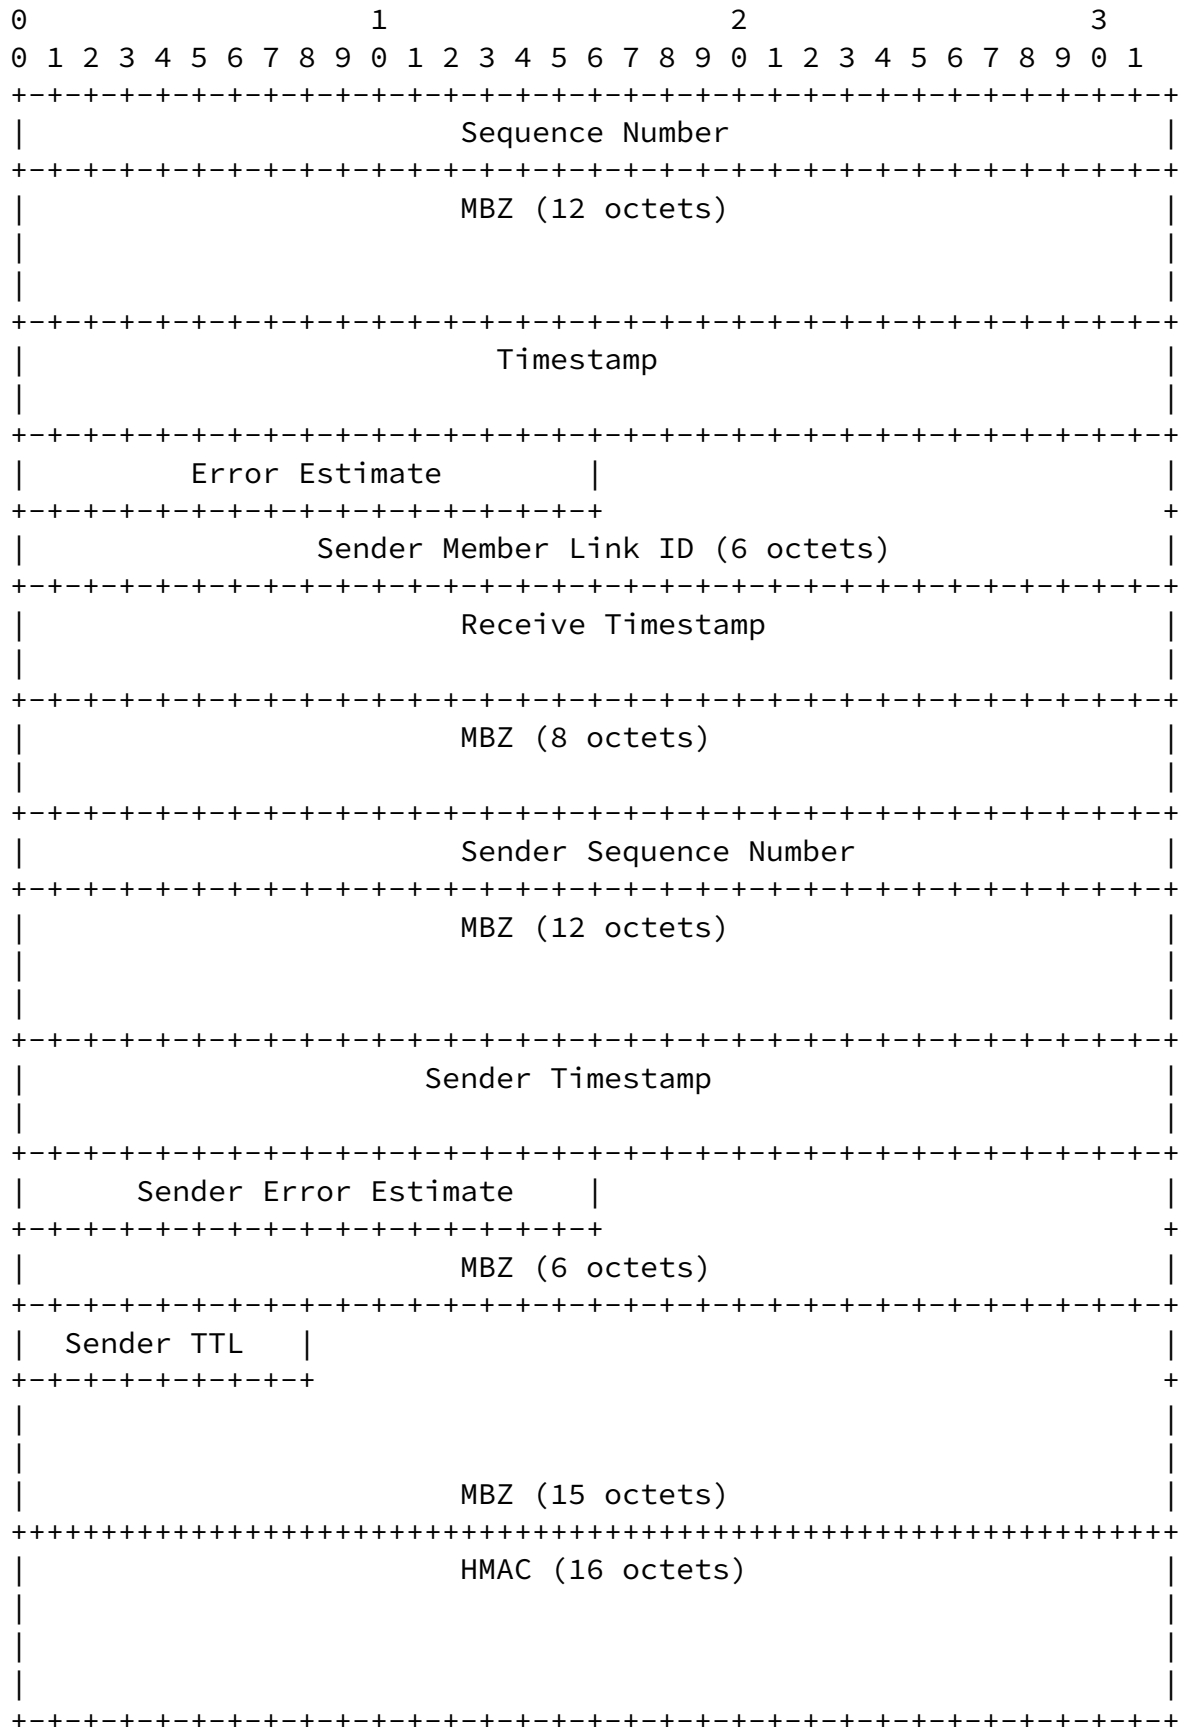


Figure 3: Session-Reflector Packet Format in Unauthenticated Mode

For authenticated and encrypted modes:



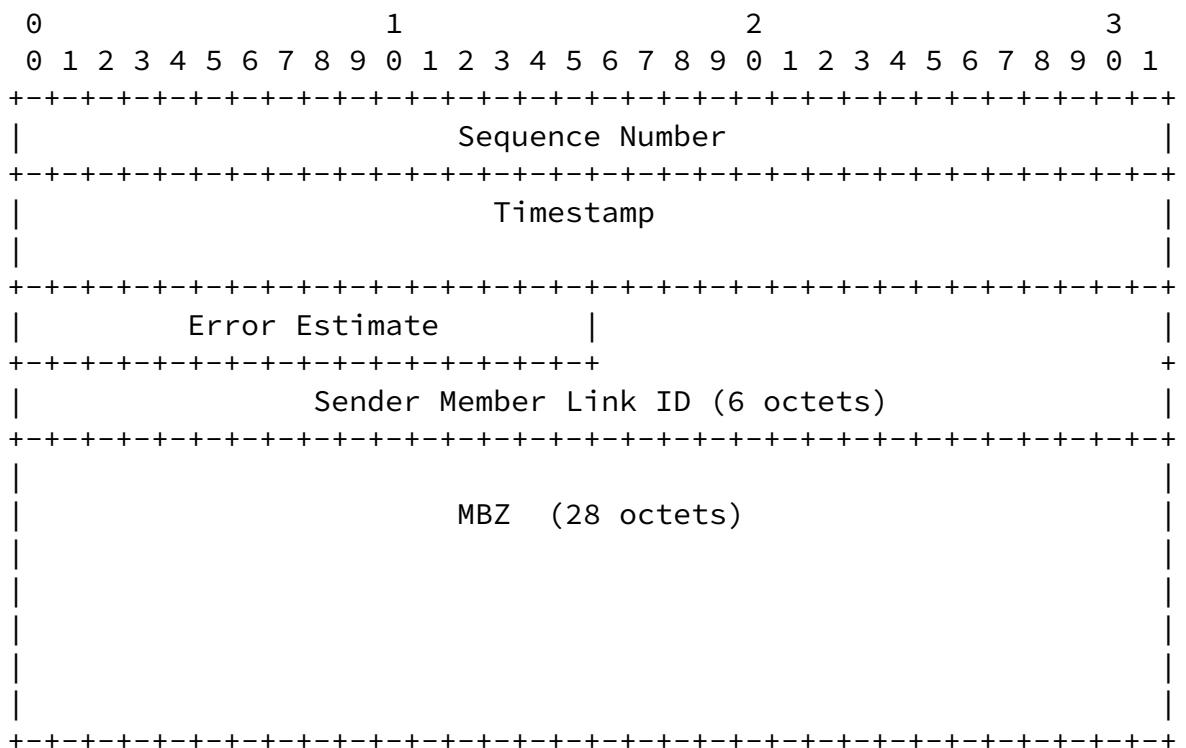


Figure 5: Session-Sender Test Packet in Unauthenticated Mode

Internet-Draft

PM on LAG

July 2020

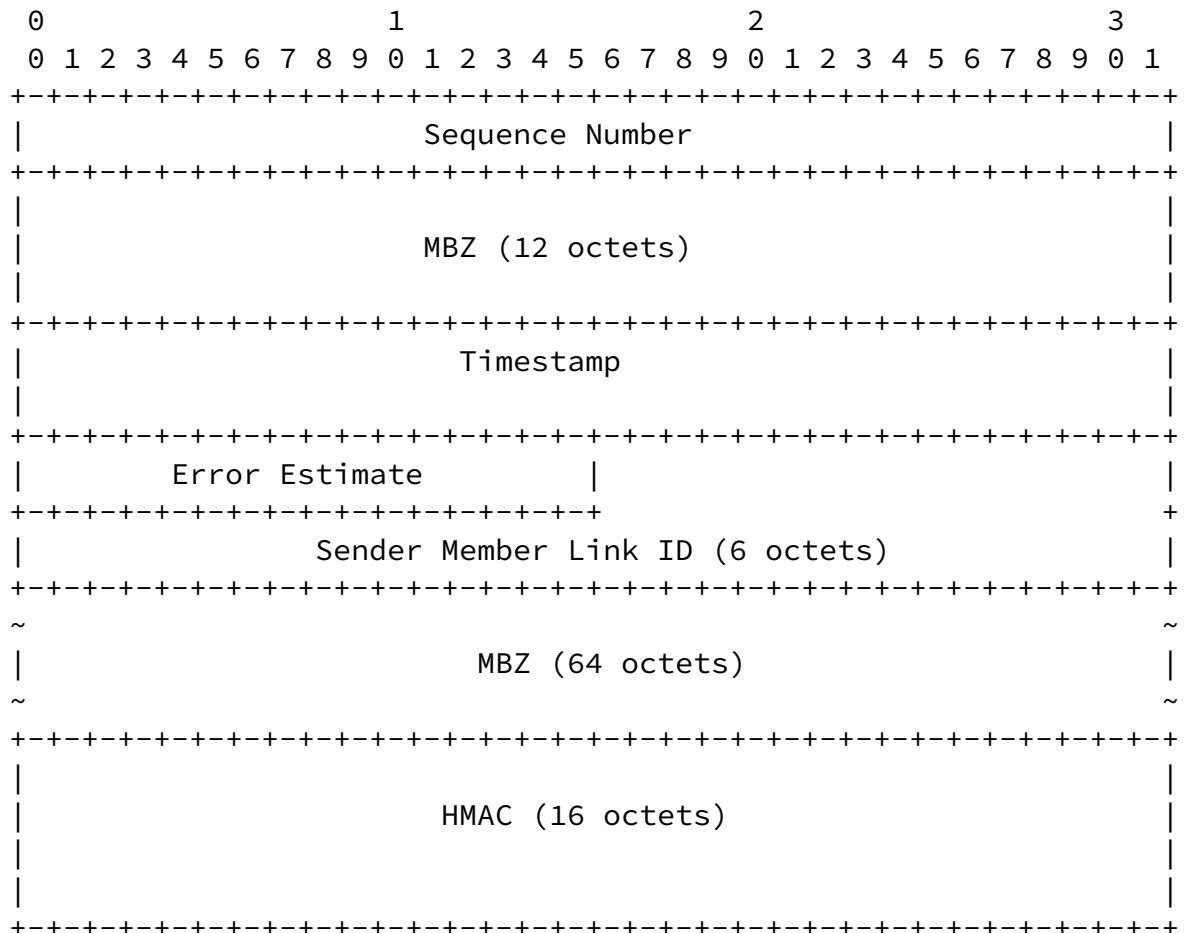



Figure 6: Session-Sender Test Packet in Authenticated Mode

Except for the Sender Member Link ID field, all the other fields are the same as defined in [Section 4.2.1](#) and 4.2.2 of STAMP [[RFC8762](#)].

Sender Member Link ID (6-octets in length): it is defined for the Session-Sender to carry the identifier of the member link that is being measured. The Sender Member Link ID MUST be unique at the Session-Sender.

[5.1.2](#). Session-Reflector Packet Format

The micro STAMP Session-Reflector Test packet formats are based on the STAMP Session-Reflector Test packet formats with a minor extension (a new field: LAG Member Link ID is introduced). The formats are as follows:

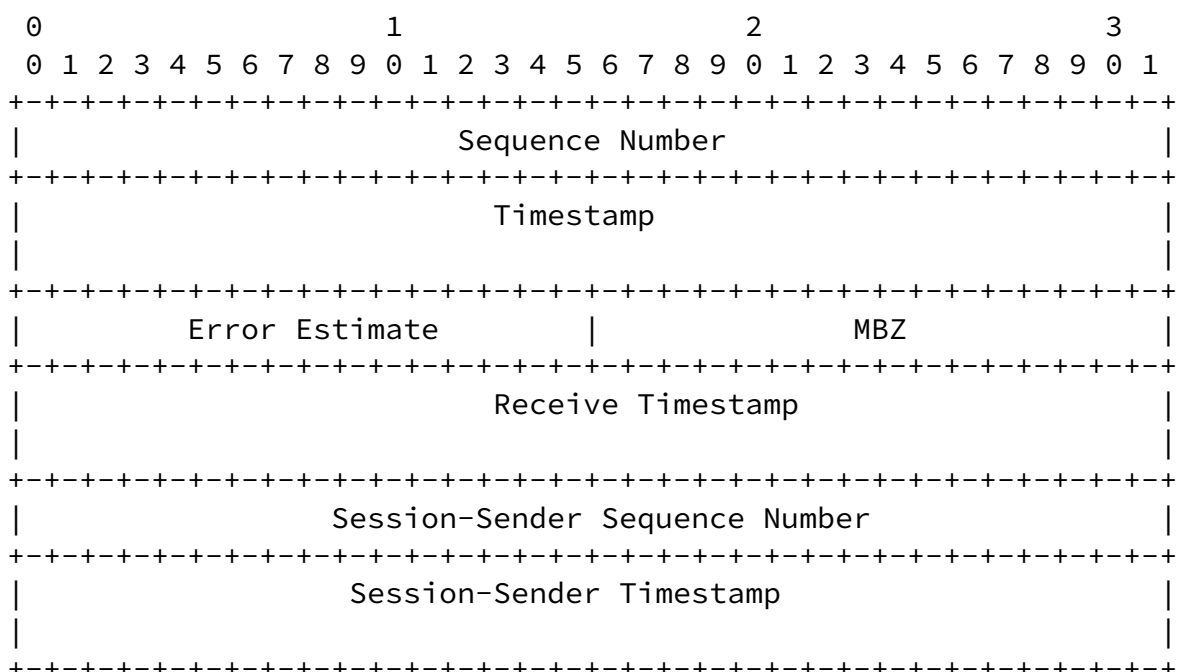

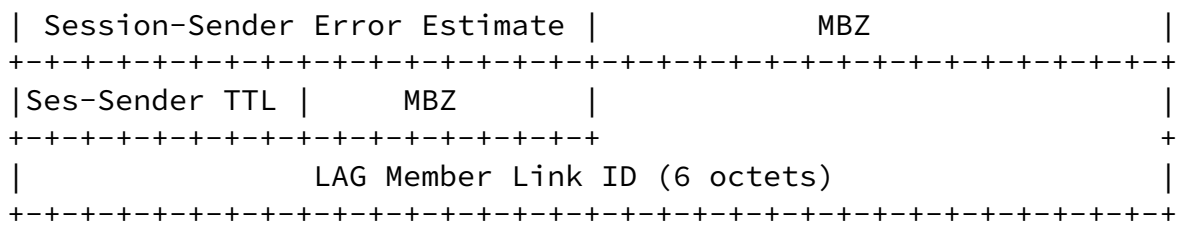
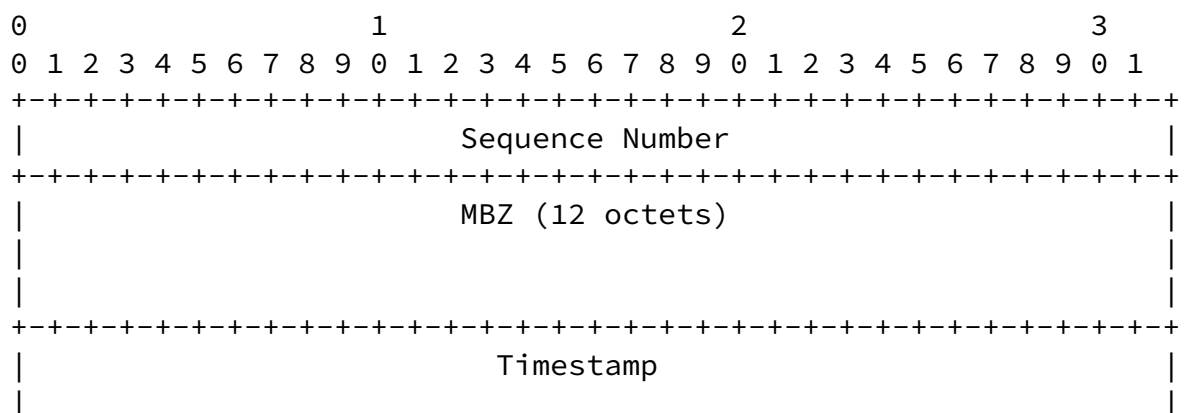


Figure 7: Session-Reflector Test Packet in Unauthenticated Mode



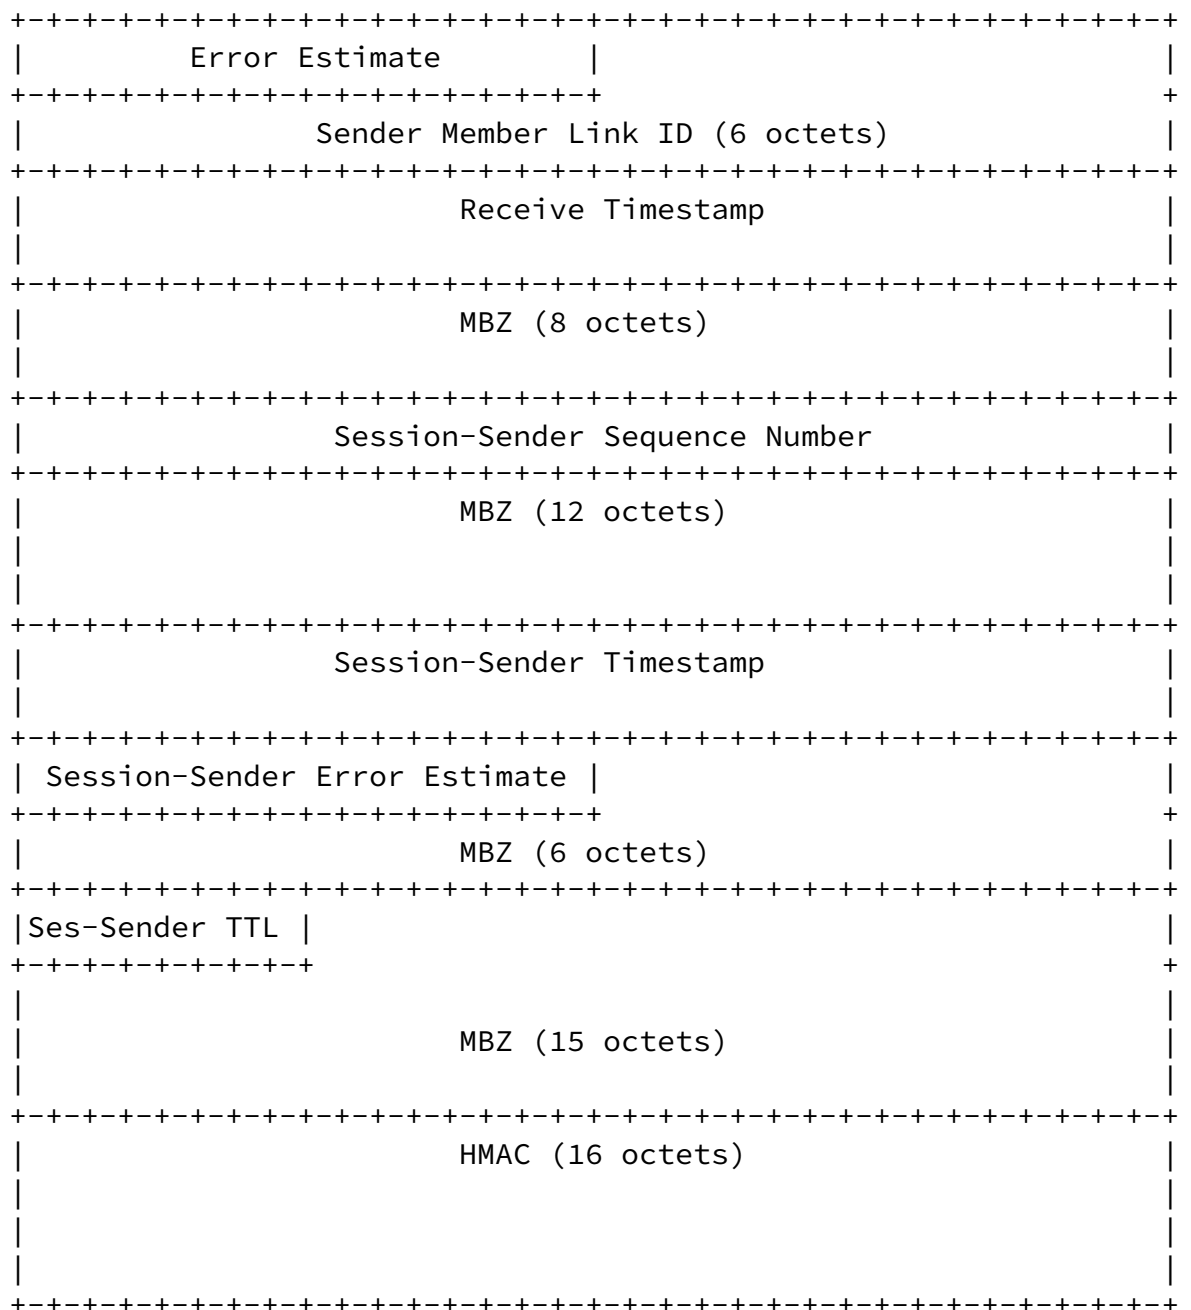


Figure 8: Session-Reflector Test Packet in Authenticated Mode

Except for the Sender Member Link ID field, all the other fields are the same as defined in [Section 4.3.1](#) and 4.3.2 of STAMP [[RFC8762](#)].

Sender Member Link ID (6-octets in length): it is defined for

carrying the Sender Member Link ID copied from the Session-Sender Test packet.

[5.1.3.](#) Micro STAMP-Test Procedures

The micro STAMP-Test reuses the procedures as defined in [Section 4](#) of STAMP [[RFC8762](#)] with the following additions:

The micro STAMP Session-Sender MUST send the micro STAMP-Test packets over the member link with which the session is associated. When receives a Test packet, the micro STAMP Session-Reflector MUST use the member link from which the Test packet is received to correlate to a micro STAMP session.

The micro STAMP Session-Sender may carry an identifier of the member link that is related to this micro STAMP session in the Session-Sender Test packet. The micro STAMP Session-Reflector MUST copy it to the Session-Reflector Test packet ([Section 5.1.2](#) of this document) and send it back to the micro STAMP Session-Sender. The micro STAMP Session-Sender can use it to check whether the reflected Test packet is correctly transmitted over the expected member link.

[6.](#) IANA Considerations

[6.1.](#) Mico OWAMP-Control Command

This document requires the IANA to allocate the following command type from OWAMP-Control Command Number Registry.

Value	Description	Semantics Definition
TBD1	Request-OW-Micro-Session	This document, Section 3.1

[6.2.](#) Mico TWAMP-Control Command

This document requires the IANA to allocate the following command type from TWAMP-Control Command Number Registry.

Value	Description	Semantics Definition
TBD1	Request-TW-Micro-Session	This document, Section 4.1

7. Security Considerations

The security considerations in [[RFC4656](#)], [[RFC5357](#)], [[RFC8762](#)] apply to this document.

8. Acknowledgements

9. References

9.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC4656] Shalunov, S., Teitelbaum, B., Karp, A., Boote, J., and M. Zekauskas, "A One-way Active Measurement Protocol (OWAMP)", [RFC 4656](#), DOI 10.17487/RFC4656, September 2006, <<https://www.rfc-editor.org/info/rfc4656>>.
- [RFC5357] Hedayat, K., Krzanowski, R., Morton, A., Yum, K., and J. Babiarz, "A Two-Way Active Measurement Protocol (TWAMP)", [RFC 5357](#), DOI 10.17487/RFC5357, October 2008, <<https://www.rfc-editor.org/info/rfc5357>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8762] Mirsky, G., Jun, G., Nydell, H., and R. Foote, "Simple Two-Way Active Measurement Protocol", [RFC 8762](#), DOI 10.17487/RFC8762, March 2020, <<https://www.rfc-editor.org/info/rfc8762>>.

9.2. Informative References

- [IEEE802.1AX]
IEEE Std. 802.1AX, "IEEE Standard for Local and metropolitan area networks - Link Aggregation", November 2008.

Authors' Addresses

Zhenqiang Li
China Mobile

Email: li_zhenqiang@hotmail.com

Li & Chen

Expires January 7, 2021

[Page 16]

Internet-Draft

PM on LAG

July 2020

Mach(Guoyi) Chen
Huawei

Email: mach.chen@huawei.com

