

Network Working Group
Internet-Draft
Intended status: Informational
Expires: April 27, 2018

I. Bryskin
Huawei Technologies
X. Liu
Jabil
October 24, 2017

SF Aware TE Topology YANG Model
draft-bryskin-teas-sf-aware-topo-model-00

Abstract

This document describes a YANG data model for TE network topologies that are network service and function aware.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on April 27, 2018.

Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
1.1. Terminology	3
1.2. Tree Structure	3
2. Modeling Considerations	3
3. Model Structure	4
4. YANG Modules	5
5. IANA Considerations	13
6. Security Considerations	13
7. References	14
7.1. Normative References	14
7.2. Informative References	14
Appendix A. Companion YANG Model for Non-NMDA Compliant Implementations	16
A.1. SF Aware TE Topology State Module	16
Appendix B. Data Examples	18
B.1. A Topology with Multiple Connected Network Functions	18
B.2. A Topology with an Encapsulated Network Service	23
Authors' Addresses	27

1. Introduction

Today a network offers to its clients far more services than just connectivity across the network. Large variety of physical, logical and/or virtual service functions, network functions and transport functions (collectively named in this document as SFs) could be allocated for and assigned to a client. As described in [[I-D.bryskin-teas-use-cases-sf-aware-topo-model](#)], there are some important use cases, in which the network needs to represent to the client SFs at the client's disposal as topological elements in relation to other elements of a topology (i.e. nodes, links, link and tunnel termination points) used by the network to describe itself to the client. Not only would such information allow for the client to auto-discover the network's SFs available for the services provisioned for the client, it would also allow for the client selecting the SFs, dual-optimizing the selection on the SF location on the network and connectivity means (e.g. TE tunnels) to inter-connect the SFs. Consequently thus would give to both the network and the client powerful means for the service function chain (SFC [[RFC7498](#)] [[RFC7665](#)]) negotiation to achieve most efficient and cost effective (from the network point of view) and most optimal yet satisfying all necessary constraints of SFCs (from the client's point of view).

This document defines a YANG data model that allows service functions to be represented along with TE topology elements.

Bryskin & Liu

Expires April 27, 2018

[Page 2]

[1.1. Terminology](#)

The keywords "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#), [[RFC2119](#)].

The following terms are defined in [[RFC7950](#)] and are not redefined here:

- o augment
- o data model
- o data node

[1.2. Tree Structure](#)

A simplified graphical representation of the data model is presented in this document, by using the tree format defined in [[I-D.ietf-netmod-yang-tree-diagrams](#)].

[2. Modeling Considerations](#)

The model introduced in this document is an augmentation of the TE Topology model defined in [[I-D.ietf-teas-yang-te-topo](#)]. SFs are modeled as child elements of a TE node similarly to how Link Termination Points (LTPs) and Tunnel Termination Points (TTPs) are modeled in the TE Topology model. The SFs are defined as opaque objects identified via topology unique service-function-id's. Each SF has one or more Connection Points (CPs) identified via SF-unique sf-connection-point-id's, over which the SF could be connected to other SFs resided on the same TE node, as well as to other elements of the TE node, in particular, to the node's LTPs and/or TTPs. An interested client may use service-function-id's to look up the SFs in TOSCA or YANG data store(s) defined by [[ETSI-NFV-MAN](#)] to retrieve the details of the SFs, for example, to understand the SF's mutual substitutability.

The TE Topology model introduces a concept of Connectivity Matrix (CM), and uses the CM to describe which and at what costs a TE node's LTPs could be inter-connected internally across the TE node. The model defined in this document heavily uses the same concept to describe the SF connectivity via introducing 3 additional CMS:

1. SF2SF CM. This CM describes which pairs of SFs could be locally inter-connected, and, if yes, in which direction, via which CPs and at what costs. In other words, the SF2SF CM describes how

Bryskin & Liu

Expires April 27, 2018

[Page 3]

SFs residing on the same TE node could be inter-connected into local from the TE node's perspective SFCs;

2. SF2LTP CM. This CM describes how, in which direction and at what costs the TE node's SFs could be connected to the TE node's LTPs and hence to SFs residing on neighboring TE nodes that are connected to LTPs at the remote ends of corresponding TE links;
3. SF2TTP CM. This CM describes how, in which direction and at what costs the TE node's SFs could be connected to the TE node's TTPs and hence to SFs residing on other TE nodes on the topology that could be inter-connected with the TE node in question via TE tunnels terminated by the corresponding TTPs.

In addition to SF2SF CM, the local SF chaining could be described with the help of ETSI models Virtual Links (VLs) [[ETSI-NFV-MAN](#)]. This option is especially useful when the costs of the local chaining are negligible as compared to ones of the end-to-end SFCs said local SFCs are part of.

[3. Model Structure](#)

```
module: ietf-te-topology-sf
augment /nd:networks/nd:network/nd:network-types/tet:te-topology:
  +-rw sf!
  augment /nd:networks/nd:network/nd:node/tet:te
/tet:te-node-attributes:
  +-rw service-function
    +-rw connectivity-matrices
      |  +-rw connectivity-matrix* [id]
      |    +-rw id              uint32
      |    +-rw from
      |      |  +-rw service-function-id?   string
      |      |  +-rw sf-connection-point-id? string
      |    +-rw to
      |      |  +-rw service-function-id?   string
      |      |  +-rw sf-connection-point-id? string
      |    +-rw enabled?          boolean
      |    +-rw direction?        connectivity-direction
      |    +-rw virtual-link-id?  string
    +-rw link-terminations
      +-rw link-termination* [id]
        +-rw id              uint32
        +-rw from
        |  +-rw tp-ref?    -> ../../../../../../
/lnk:termination-point/tp-id
  +-rw to
    |  +-rw service-function-id?   string
```

Bryskin & Liu

Expires April 27, 2018

[Page 4]

```

    |   +--rw sf-connection-point-id?    string
    +-rw enabled?          boolean
    +-rw direction?        connectivity-direction
augment /nd:networks/nd:network/nd:node/tet:te
/tet:information-source-entry:
    +-ro service-function
        +-ro connectivity-matrices
            |   +-ro connectivity-matrix* [id]
            |       +-ro id                  uint32
            |       +-ro from
            |           |   +-ro service-function-id?    string
            |           |   +-ro sf-connection-point-id?    string
            |           +-ro to
            |               |   +-ro service-function-id?    string
            |               |   +-ro sf-connection-point-id?    string
            |               +-ro enabled?          boolean
            |               +-ro direction?        connectivity-direction
            |               +-ro virtual-link-id?    string
        +-ro link-terminations
            +-ro link-termination* [id]
                +-ro id                  uint32
                +-ro from
                +-ro to
                    |   +-ro service-function-id?    string
                    |   +-ro sf-connection-point-id?    string
                    +-ro enabled?          boolean
                    +-ro direction?        connectivity-direction
augment /nd:networks/nd:network/nd:node/tet:te
/tet:tunnel-termination-point:
    +-rw service-function
        +-rw tunnel-terminations
            +-rw tunnel-termination* [id]
                +-rw id                  uint32
                +-rw service-function-id?    string
                +-rw sf-connection-point-id?    string
                +-rw enabled?          boolean
                +-rw direction?        connectivity-direction

```

[4. YANG Modules](#)

```

<CODE BEGINS> file "ietf-te-topology-sf@2017-10-22.yang"
module ietf-te-topology-sf {
    yang-version 1;
    namespace "urn:ietf:params:xml:ns:yang:ietf-te-topology-sf";
    prefix "tet-sf";

```

Bryskin & Liu

Expires April 27, 2018

[Page 5]

```
import ietf-network {
    prefix "nd";
}

import ietf-network-topology {
    prefix "lnk";
}

import ietf-te-topology {
    prefix "tet";
}

organization
    "Traffic Engineering Architecture and Signaling (TEAS)
     Working Group";

contact
    "WG Web: <http://tools.ietf.org/wg/teas/>
     WG List: <mailto:teas@ietf.org>

     WG Chair: Lou Berger
                 <mailto:lberger@labn.net>

     WG Chair: Vishnu Pavan Beeram
                 <mailto:vbeeram@juniper.net>

     Editors: Igor Bryskin
               <mailto:Igor.Bryskin@huawei.com>

               Xufeng Liu
               <mailto:Xufeng_Liu@jabil.com>";

description "SF aware TE topology model";

revision 2017-10-22 {
    description "Initial revision";
    reference "TBD";
}

/*
 * Typedefs
 */
typedef connectivity-direction {
    type enumeration {
        enum "to" {
            description
                "The direction is uni-directional, towards the 'to'
                 entity direction.";
    }
}
```

Bryskin & Liu

Expires April 27, 2018

[Page 6]

```
    }

    enum "from" {
        description
        "The direction is uni-directional, from the 'to'
         entity direction.";
    }
    enum "bidir" {
        description
        "The direction is bi-directional.";
    }
}

description
"A type used to indicates whether a connectivity is
uni-directional, or bi-directional. If the relation is
uni-directional, the value of this type indicates the
direction.";

} // connectivity-direction

/*
 * Groupings
 */
grouping service-function-node-augmentation {
    description
    "Augmenting a TE node to be network service and function
     aware.";
    container service-function {
        description
        "Containing attributes related to network services and
         network functions";
        container connectivity-matrices {
            description
            "Connectivity relations between network services/functions
             on a TE node, which can be either abstract or physical.";
            reference
            "ETSI GS NFV-MAN 01: Network Functions Virtualisation
             (NFV); Management and Orchestration.
             RFC7665: Service Function Chaining (SFC) Architecture.";
            list connectivity-matrix {
                key "id";
                description
                "Represents the connectivity relations between network
                 services/functions on a TE node.";
                leaf id {
                    type uint32;
                    description "Identifies the connectivity-matrix entry.";
                }
            }
            container from {
```

Bryskin & Liu

Expires April 27, 2018

[Page 7]

```
description
  "Reference to the source network service or
   network function.";
leaf service-function-id {
  type string;
  description
    "Reference to a network service or a network
     function.";
}
leaf sf-connection-point-id {
  type string;
  description
    "Reference to a connection point on a network
     service or a network function.";
}
} // from
container to {
  description
    "Reference to the destination network service or
     network function.";
leaf service-function-id {
  type string;
  description
    "Reference to a network service or a network
     function.";
}
leaf sf-connection-point-id {
  type string;
  description
    "Reference to a connection point on a network
     service or a network function.";
}
} // to
leaf enabled {
  type boolean;
  description
    "'true' if this connectivity entry is enabled.";
}
leaf direction {
  type connectivity-direction;
  description
    "Indicates whether this connectivity is
     uni-directional, or bi-directional. If the
     relation is uni-directional, the value of
     this leaf indicates the direction.";
}
leaf virtual-link-id {
  type string;
```

Bryskin & Liu

Expires April 27, 2018

[Page 8]

```
description
  "Reference to a virtual link that models this
   connectivity relation in the network function
   model.";
}
} // connectivity-matrix
} // connectivity-matrices

container link-terminations {
  description
    "Connectivity relations between network services/functions
     and link termination points on a TE node, which can be
     either abstract or physical.";
  reference
    "ETSI GS NFV-MAN 01: Network Functions Virtualisation
     (NFV); Management and Orchestration.
     RFC7665: Service Function Chaining (SFC) Architecture.";
  list link-termination {
    key "id";
    description
      "Each entry of the list represents the connectivity
       relation between a network service/function and
       a link termination point on a TE node.";
    leaf id {
      type uint32;
      description "Identifies the termination entry.";
    }

    container from {
      description
        "Reference to the link termination point.";
    } // from
    container to {
      description
        "Reference to the network service or network
         function.";
      leaf service-function-id {
        type string;
        description
          "Reference to a network service or a network
           function.";
      }
      leaf sf-connection-point-id {
        type string;
        description
          "Reference to a connection point on a network
           service or a network function.";
      }
    }
  }
}
```

Bryskin & Liu

Expires April 27, 2018

[Page 9]

```
        } // to
        leaf enabled {
          type boolean;
          description
            "'true' if this connectivity entry is enabled.";
        }
        leaf direction {
          type connectivity-direction;
          description
            "Indicates whether this connectivity is
             uni-directional, or bi-directional. If the
             relation is uni-directional, the value of
             this leaf indicates the direction.";
        }
      } // link-termination
    }
  }
} // service-function-node-augmentation

grouping service-function-ttp-augmentation {
  description
    "Augmenting a tunnel termination point to be network service
     aware.";
  container service-function {
    description
      "Containing attributes related to network services and
       network functions";
    container tunnel-terminations {
      description
        "Connectivity relations between network services/functions
         and tunnel termination points on a TE node, which can be
         either abstract or physical.";
      reference
        "ETSI GS NFV-MAN 01: Network Functions Virtualisation
         (NFV); Management and Orchestration.
        RFC7665: Service Function Chaining (SFC) Architecture.";
      list tunnel-termination {
        key "id";
        description
          "Each entry of the list represents the connectivity
           relation between a network service/function and
           a tunnel termination point on a TE node.";
        leaf id {
          type uint32;
          description "Identifies the termination entry.";
        }
      }
      leaf service-function-id {
```

Bryskin & Liu

Expires April 27, 2018

[Page 10]

```
    type string;
    description
      "Reference to a network service or a network
       function.";
  }
  leaf sf-connection-point-id {
    type string;
    description
      "Reference to a connection point on a network
       service or a network function.";
  }
  leaf enabled {
    type boolean;
    description
      "'true' if this connectivity entry is enabled.";
  }
  leaf direction {
    type connectivity-direction;
    description
      "Indicates whether this connectivity is
       uni-directional, or bi-directional. If the
       relation is uni-directional, the value of
       this leaf indicates the direction.";
  }
} // link-termination
}
}
}
} // service-function-ttp-augmentation

grouping sf-topology-type {
  description
    "Identifies the SF aware TE topology type.";
  container sf {
    presence "Indicates that the TE topology is SF aware.";
    description
      "Its presence identifies that the TE topology is SF aware.";
  }
} // sf-topology-type

/*
 * Augmentations
 */
/* Augmentations to network-types/te-topology */
augment "/nd:networks/nd:network/nd:network-types/"
  + "tet:te-topology" {
  description
    "Defines the SF aware TE topology type.";
  uses sf-topology-type;
```

Bryskin & Liu

Expires April 27, 2018

[Page 11]

```
}

/* Augmentations to te-node-attributes */
augment "/nd:networks/nd:network/nd:node/tet:te/"
+ "tet:te-node-attributes" {
description
  "Parameters for SF aware TE topology.";
  uses service-function-node-augmentation;
}

augment "/nd:networks/nd:network/nd:node/tet:te/"
+ "tet:information-source-entry" {
description
  "Parameters for SF aware TE topology.";
  uses service-function-node-augmentation;
}

/* Augmentations to tunnel-termination-point */
augment "/nd:networks/nd:network/nd:node/tet:te/"
+ "tet:tunnel-termination-point" {
description
  "Parameters for SF aware TE topology.";
  uses service-function-ttp-augmentation;
}

/* Augmentations to connectivity-matrix */
augment "/nd:networks/nd:network/nd:node/tet:te/"
+ "tet:te-node-attributes/tet-sf:service-function/"
+ "tet-sf:link-terminations/tet-sf:link-termination/"
+ "tet-sf:from" {
description
  "Add reference to the link termination point.
  This portion cannot be shared with the state module.";
leaf tp-ref {
  type leafref {
    path ".../.../.../.../.../lnk:termination-point/"
    + "lnk:tp-id";
  }
  description
  "Reference to the link termination point.";
}
}

<CODE ENDS>
```

Bryskin & Liu

Expires April 27, 2018

[Page 12]

5. IANA Considerations

RFC Ed.: In this section, replace all occurrences of 'XXXX' with the actual RFC number (and remove this note).

This document registers the following namespace URIs in the IETF XML registry [[RFC3688](#)]:

URI: urn:ietf:params:xml:ns:yang:ietf-te-topology-sf

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-te-topology-sf-state

Registrant Contact: The IESG.

XML: N/A, the requested URI is an XML namespace.

This document registers the following YANG modules in the YANG Module Names registry [[RFC7950](#)]:

name: ietf-te-topology-sf
namespace: urn:ietf:params:xml:ns:yang:ietf-te-topology-packet
prefix: tet-sf
reference: RFC XXXX

name: ietf-te-topology-sf-state
namespace: urn:ietf:params:xml:ns:yang:ietf-te-topology-packet-state
prefix: tet-sf-s
reference: RFC XXXX

6. Security Considerations

The configuration, state, action and notification data defined in this document are designed to be accessed via the NETCONF protocol [[RFC6241](#)]. The data-model by itself does not create any security implications. The security considerations for the NETCONF protocol are applicable. The NETCONF protocol used for sending the data supports authentication and encryption.

Bryskin & Liu

Expires April 27, 2018

[Page 13]

7. References

7.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", [RFC 7950](#), DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.
- [ETSI-NFV-MAN] ETSI, "Network Functions Virtualisation (NFV); Management and Orchestration", ETSI GS NFV-MAN 001 V1.1.1, December 2014.
- [I-D.bryskin-teas-use-cases-sf-aware-topo-model] Bryskin, I., Liu, X., Guichard, J., and Y. Lee, "Use Cases for SF Aware Topology Models", [draft-bryskin-teas-use-cases-sf-aware-topo-model-00](#) (work in progress), June 2017.
- [I-D.ietf-teas-yang-te-topo] Liu, X., Bryskin, I., Beoram, V., Saad, T., Shah, H., and O. Dios, "YANG Data Model for TE Topologies", [draft-ietf-teas-yang-te-topo-12](#) (work in progress), July 2017.
- [I-D.ietf-netmod-revised-datastores] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture", [draft-ietf-netmod-revised-datastores-05](#) (work in progress), October 2017.

7.2. Informative References

- [RFC7498] Quinn, P., Ed. and T. Nadeau, Ed., "Problem Statement for Service Function Chaining", [RFC 7498](#), DOI 10.17487/RFC7498, April 2015, <<https://www.rfc-editor.org/info/rfc7498>>.

Bryskin & Liu

Expires April 27, 2018

[Page 14]

[RFC7665] Halpern, J., Ed. and C. Pignataro, Ed., "Service Function Chaining (SFC) Architecture", [RFC 7665](#), DOI 10.17487/RFC7665, October 2015, <<https://www.rfc-editor.org/info/rfc7665>>.

[I-D.ietf-netmod-yang-tree-diagrams]

Bjorklund, M. and L. Berger, "YANG Tree Diagrams", [draft-ietf-netmod-yang-tree-diagrams-01](#) (work in progress), June 2017.

Appendix A. Companion YANG Model for Non-NMDA Compliant Implementations

The YANG module `ietf-te-topology-sf` defined in this document is designed to be used in conjunction with implementations that support the Network Management Datastore Architecture (NMDA) defined in [[I-D.ietf-netmod-revised-datastores](#)]. In order to allow implementations to use the model even in cases when NMDA is not supported, the following companion module, `ietf-te-topology-sf-state`, is defined as state model, which mirrors the module `ietf-te-topology-sf` defined earlier in this document. However, all data nodes in the companion module are non-configurable, to represent the applied configuration or the derived operational states.

The companion module, `ietf-te-topology-sf-state`, is redundant and SHOULD NOT be supported by implementations that support NMDA.

As the structure of the companion module mirrors that of the cooresponding NMDA model, the YANG tree of the companion module is not depicted separately.

A.1. SF Aware TE Topology State Module

```
<CODE BEGINS> file "ietf-te-topology-sf-state@2017-10-22.yang"
module ietf-te-topology-sf-state {
    yang-version 1;
    namespace "urn:ietf:params:xml:ns:yang:ietf-te-topology-sf-state";
    prefix "tet-sf-s";

    import ietf-te-topology-sf {
        prefix "tet-sf";
    }

    import ietf-network-state {
        prefix "nd-s";
    }

    import ietf-network-topology-state {
        prefix "lnk-s";
    }

    import ietf-te-topology-state {
        prefix "tet-s";
    }

organization
    "Traffic Engineering Architecture and Signaling (TEAS)"
```

Bryskin & Liu

Expires April 27, 2018

[Page 16]

```
Working Group";  
  
contact  
  "WG Web:  <http://tools.ietf.org/wg/teas/>  
  WG List:  <mailto:teas@ietf.org>  
  
  WG Chair: Lou Berger  
            <mailto:lberger@labn.net>  
  
  WG Chair: Vishnu Pavan Beeram  
            <mailto:vbeeram@juniper.net>  
  
  Editors: Igor Bryskin  
            <mailto:Igor.Bryskin@huawei.com>  
  
            Xufeng Liu  
            <mailto:Xufeng_Liu@jabil.com>;  
  
description "SF aware TE topology model";  
  
revision 2017-10-22 {  
  description "Initial revision";  
  reference "TBD";  
}  
  
/*  
 * Augmentations  
 */  
/* Augmentations to network-types/te-topology */  
augment "/nd-s:networks/nd-s:network/nd-s:network-types/"  
  + "tet-s:te-topology" {  
  description  
    "Defines the SF aware TE topology type.";  
  uses tet-sf:sf-topology-type;  
}  
  
/* Augmentations to connectivity-matrix */  
augment "/nd-s:networks/nd-s:network/nd-s:node/tet-s:te/"  
  + "tet-s:te-node-attributes" {  
  description  
    "Parameters for SF aware TE topology.";  
  uses tet-sf:service-function-node-augmentation;  
}  
  
augment "/nd-s:networks/nd-s:network/nd-s:node/tet-s:te/"  
  + "tet-s:information-source-entry" {  
  description  
    "Parameters for SF aware TE topology.";
```

Bryskin & Liu

Expires April 27, 2018

[Page 17]

```
    uses tet-sf:service-function-node-augmentation;
}


/* Augmentations to tunnel-termination-point */
augment "/nd-s:networks/nd-s:network/nd-s:node/tet-s:te/"
+ "tet-s:tunnel-termination-point" {
description
  "Parameters for SF aware TE topology.";
  uses tet-sf:service-function-ttp-augmentation;
}

/* Augmentations to connectivity-matrix */
augment "/nd-s:networks/nd-s:network/nd-s:node/tet-s:te/"
+ "tet-s:te-node-attributes/tet-sf-s:service-function/"
+ "tet-sf-s:link-terminations/tet-sf-s:link-termination/"
+ "tet-sf-s:from" {
description
  "Add reference to the link termination point.
  This portion cannot be shared with the state module.";
leaf tp-ref {
  type leafref {
    path ".../.../.../.../.../.../lnk-s:termination-point/"
    + "lnk-s:tp-id";
  }
  description
    "Reference to the link termination point.";
}
}

<CODE ENDS>
```

[Appendix B. Data Examples](#)

[B.1. A Topology with Multiple Connected Network Functions](#)

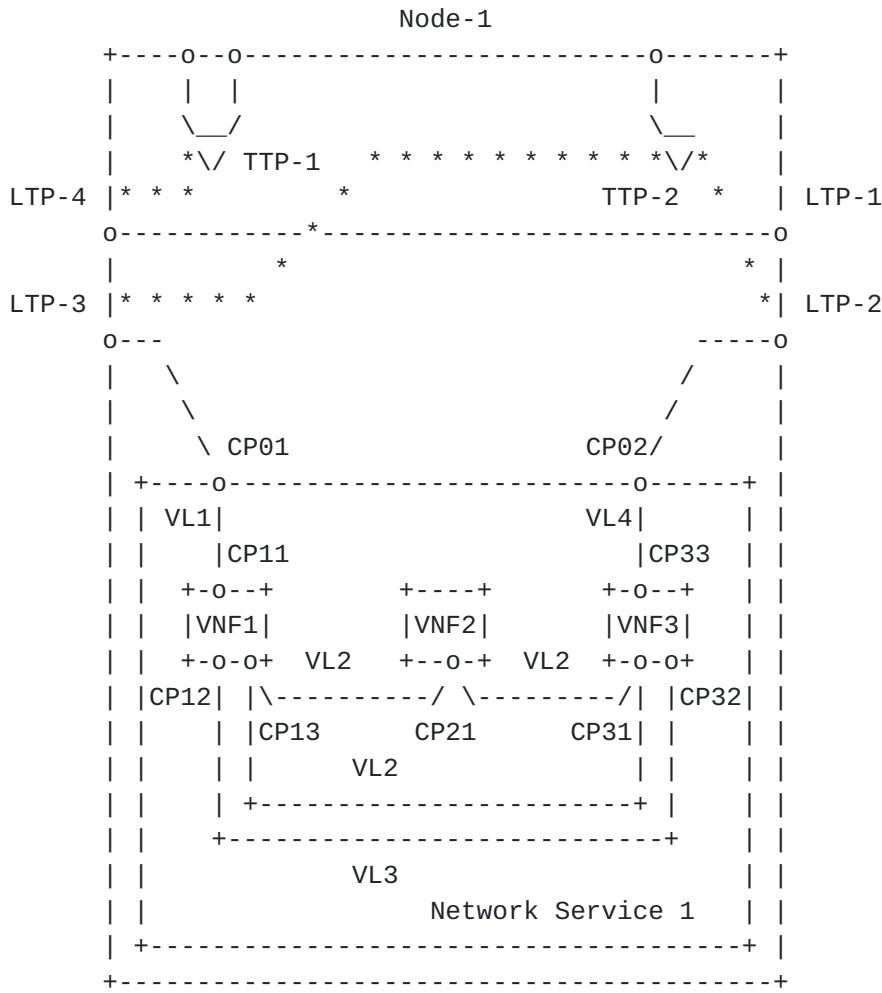

The configuration instance data for Node-1 in the above figure could be as follows:

```
{
  "networks": {
    "network": [
      {
        "network-types": {
          "te-topology": {
            "sf": {}
          }
        },
        "network-id": "network-sf-aware",
        "provider-id": 201,
        "client-id": 300,
        "te-topology-id": "te-topology:network-sf-aware",
        "node": [
          {
            "node-id": "Node-1",

```

Bryskin & Liu

Expires April 27, 2018

[Page 19]

```
"te-node-id": "2.0.1.1",
"te": {
  "te-node-attributes": {
    "domain-id": 1,
    "is-abstract": [null],
    "connectivity-matrices": {
    },
    "service-function": {
      "connectivity-matrices": {
        "connectivity-matrix": [
          {
            "id": 10,
            "from": {
              "service-function-id": "Network Service 1",
              "sf-connection-point-id": "CP01"
            },
            "to": {
              "service-function-id": "VNF1",
              "sf-connection-point-id": "CP11"
            }
            "direction": "bidir",
            "virtual-link-id": "VL1"
          },
          {
            "id": 13,
            "from": {
              "service-function-id": "VNF1",
              "sf-connection-point-id": "CP12"
            },
            "to": {
              "service-function-id": "VNF3",
              "sf-connection-point-id": "CP32"
            }
            "direction": "bidir",
            "virtual-link-id": "VL3"
          },
          {
            "id": 12,
            "from": {
              "service-function-id": "VNF1",
              "sf-connection-point-id": "CP13"
            },
            "to": {
              "service-function-id": "VNF2",
              "sf-connection-point-id": "CP21"
            }
            "direction": "bidir",
            "virtual-link-id": "VL2"
          }
        ]
      }
    }
  }
}
```

Bryskin & Liu

Expires April 27, 2018

[Page 20]

```
},
{
  "id": 23,
  "from": {
    "service-function-id": "VNF2",
    "sf-connection-point-id": "CP21"
  },
  "to": {
    "service-function-id": "VNF3"
    "sf-connection-point-id": "CP31"
  }
  "direction": "bidir",
  "virtual-link-id": "VL2"
},
{
  "id": 30,
  "from": {
    "service-function-id": "Network Service 1",
    "sf-connection-point-id": "CP02"
  },
  "to": {
    "service-function-id": "VNF3",
    "sf-connection-point-id": "CP33"
  }
  "direction": "bidir",
  "virtual-link-id": "VL4"
}
]
},
"link-terminations": {
  "link-termination": [
    {
      "id": 2,
      "from": {
        "tp-ref": "LTP-2"
      },
      "to": {
        "service-function-id": "Network Service 1",
        "sf-connection-point-id": "CP02"
      }
      "direction": "bidir"
    },
    {
      "id": 3,
      "from": {
        "tp-ref": "LTP-3"
      },
      "to": {
```

Bryskin & Liu

Expires April 27, 2018

[Page 21]

```
        "service-function-id": "Network Service 1",
        "sf-connection-point-id": "CP01"
    }
    "direction": "bidir"
}
]
}
}
}
]
}
}
}
}
]
},
{
"tunnel-tp-id": 10001,
"name": "TTP-1",
"service-function-terminations": {
}
},
{
"tunnel-tp-id": 10002,
"name": "TTP-2",
"service-function-terminations": {
}
}
],
},
"termination-point": [
{
"tp-id": "LTP-1",
"te-tp-id": 10001
"te": {
"interface-switching-capability": [
{
"switching-capability": "switching-l2sc",
"encoding": "lsp-encoding-ethernet"
}
]
}
},
{
"tp-id": "LTP-2",
"te-tp-id": 10002
"te": {
"interface-switching-capability": [
{
"switching-capability": "switching-l2sc",
"encoding": "lsp-encoding-ethernet"
}
]
}
}
]
```

Bryskin & Liu

Expires April 27, 2018

[Page 22]

```
        },
        {
          "tp-id": "LTP-3",
          "te-tp-id": 10003
          "te": {
            "interface-switching-capability": [
              {
                "switching-capability": "switching-l2sc",
                "encoding": "lsp-encoding-ethernet"
              }
            ]
          }
        },
        {
          "tp-id": "LTP-4",
          "te-tp-id": 10004
          "te": {
            "interface-switching-capability": [
              {
                "switching-capability": "switching-l2sc",
                "encoding": "lsp-encoding-ethernet"
              }
            ]
          }
        }
      ]
    }
  }
}
```


B.2. A Topology with an Encapsulated Network Service

In this example, a network service consists of several interconnected network functions (NFs), and is represented by this model as an encapsulated opaque object without the details between its internals.

Bryskin & Liu

Expires April 27, 2018

[Page 23]

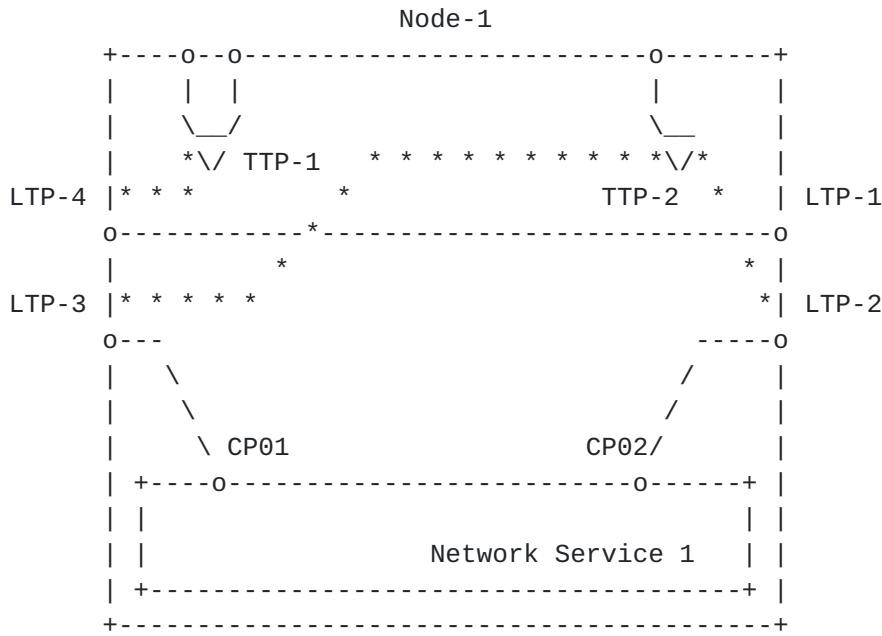

The configuration instance data for Node-1 in the above figure could be as follows:

```
{
  "networks": {
    "network": [
      {
        "network-types": {
          "te-topology": {
            "sf": {}
          }
        },
        "network-id": "network-sf-aware",
        "provider-id": 201,
        "client-id": 300,
        "te-topology-id": "te-topology:network-sf-aware",
        "node": [
          {
            "node-id": "Node-1",
            "te-node-id": "2.0.1.1",
            "te": {
              "te-node-attributes": {
                "domain-id": 1,
                "is-abstract": [null],
                "connectivity-matrices": {}
              },
              "service-function": {
                "connectivity-matrices": {}
              },
            }
          }
        ]
      }
    ]
  }
}
```

Bryskin & Liu

Expires April 27, 2018

[Page 24]

```
"link-terminations": {
    "link-termination": [
        {
            "id": 2,
            "from": {
                "tp-ref": "LTP-2"
            },
            "to": {
                "service-function-id": "Network Service 1",
                "sf-connection-point-id": "CP02"
            }
            "direction": "bidir"
        },
        {
            "id": 3,
            "from": {
                "tp-ref": "LTP-3"
            },
            "to": {
                "service-function-id": "Network Service 1",
                "sf-connection-point-id": "CP01"
            }
            "direction": "bidir"
        }
    ]
}
},
{
    "tunnel-termination-point": [
        {
            "tunnel-tp-id": 10001,
            "name": "TTP-1",
            "service-function-terminations": {
            }
        },
        {
            "tunnel-tp-id": 10002,
            "name": "TTP-2",
            "service-function-terminations": {
            }
        }
    ]
},
{
    "termination-point": [
        {
            "tp-id": "LTP-1",
            "te-tp-id": 10001
            "te": {
            }
        }
    ]
}
```

Bryskin & Liu

Expires April 27, 2018

[Page 25]

```
"interface-switching-capability": [
    {
        "switching-capability": "switching-l2sc",
        "encoding": "lsp-encoding-ethernet"
    }
]
},
{
    "tp-id": "LTP-2",
    "te-tp-id": 10002
    "te": {
        "interface-switching-capability": [
            {
                "switching-capability": "switching-l2sc",
                "encoding": "lsp-encoding-ethernet"
            }
        ]
    }
},
{
    "tp-id": "LTP-3",
    "te-tp-id": 10003
    "te": {
        "interface-switching-capability": [
            {
                "switching-capability": "switching-l2sc",
                "encoding": "lsp-encoding-ethernet"
            }
        ]
    }
},
{
    "tp-id": "LTP-4",
    "te-tp-id": 10004
    "te": {
        "interface-switching-capability": [
            {
                "switching-capability": "switching-l2sc",
                "encoding": "lsp-encoding-ethernet"
            }
        ]
    }
},
]
```

Bryskin & Liu

Expires April 27, 2018

[Page 26]

```
        ]  
    }  
}
```

Authors' Addresses

Igor Bryskin
Huawei Technologies

EMail: Igor.Bryskin@huawei.com

Xufeng Liu
Jabil

EMail: Xufeng_Liu@jabil.com

