

Network Working Group  
Internet-Draft  
Intended status: Informational  
Expires: July 09, 2013

R. Gieben  
SIDN Labs  
W. Mekking  
NLnet Labs  
January 07, 2013

**Authenticated Denial of Existence in the DNS**  
**draft-gieben-auth-denial-of-existence-dns-02**

Abstract

Authenticated denial of existence allows a resolver to validate that a certain domain name does not exist. It is also used to signal that a domain name exists, but does not have the specific RR type you were asking for. When returning a negative DNSSEC response, a name server usually includes up to two NSEC records. With NSEC3 this amount is three. This document provides additional background commentary and some context for the NSEC and NSEC3 mechanisms used by DNSSEC to provide authenticated denial of existence responses

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on July 09, 2013.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document.

Table of Contents



<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Denial of Existence . . . . .	<a href="#">3</a>
<a href="#">2.1.</a>	NXDOMAIN Responses . . . . .	<a href="#">4</a>
<a href="#">2.2.</a>	NODATA Responses . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Secure Denial of Existence . . . . .	<a href="#">5</a>
<a href="#">3.1.</a>	NXT . . . . .	<a href="#">6</a>
<a href="#">3.2.</a>	NSEC . . . . .	<a href="#">6</a>
<a href="#">3.3.</a>	NODATA Responses . . . . .	<a href="#">8</a>
<a href="#">3.4.</a>	Drawbacks of NSEC . . . . .	<a href="#">9</a>
<a href="#">4.</a>	Experimental and Deprecated Mechanisms: NO, NSEC2 and DNSNR .	<a href="#">9</a>
<a href="#">5.</a>	NSEC3 . . . . .	<a href="#">10</a>
<a href="#">5.1.</a>	Opt-Out . . . . .	<a href="#">12</a>
<a href="#">5.2.</a>	Loading an NSEC3 Zone . . . . .	<a href="#">13</a>
<a href="#">5.3.</a>	Wildcards in the DNS . . . . .	<a href="#">13</a>
<a href="#">5.4.</a>	CNAME Records . . . . .	<a href="#">15</a>
<a href="#">5.5.</a>	The Closest Encloser NSEC3 Record . . . . .	<a href="#">16</a>
<a href="#">5.6.</a>	Three To Tango . . . . .	<a href="#">20</a>
<a href="#">6.</a>	Security Considerations . . . . .	<a href="#">21</a>
<a href="#">7.</a>	IANA Considerations . . . . .	<a href="#">21</a>
<a href="#">8.</a>	Acknowledgments . . . . .	<a href="#">21</a>
<a href="#">9.</a>	References . . . . .	<a href="#">22</a>
<a href="#">9.1.</a>	Normative References . . . . .	<a href="#">22</a>
<a href="#">9.2.</a>	Informative References . . . . .	<a href="#">22</a>
<a href="#">Appendix A.</a>	List of Hashed Owner Names . . . . .	<a href="#">23</a>
<a href="#">Appendix B.</a>	Changelog . . . . .	<a href="#">23</a>
<a href="#">B.1.</a>	-00 . . . . .	<a href="#">24</a>
<a href="#">B.2.</a>	-01 . . . . .	<a href="#">24</a>
<a href="#">B.3.</a>	-02 . . . . .	<a href="#">24</a>
	Authors' Addresses . . . . .	<a href="#">24</a>

## [1.](#) Introduction

DNSSEC can be somewhat of a complicated matter, and there are certain areas of the specification that are more difficult to comprehend than others. One such area is "authenticated denial of existence".

Denial of existence is a mechanism that informs a resolver that a certain domain name does not exist. It is also used to signal that a domain name exists, but does not have the specific RR type you were asking for.

The first is referred to as an NXDOMAIN (non-existent domain) ([\[RFC2308\] Section 2.1](#)) and the latter a NODATA ([\[RFC2308\] Section 2.2](#)) response. Both are also known as negative responses.

Authenticated denial of existence uses cryptography to sign the negative response. However, if there is no answer, what is it that needs to be signed? To further complicate this matter, there is the desire to pre-generate negative responses that are applicable for all

queries for non-existent names in the signed zone. See [Section 3](#) for the details.

In this document, we will explain how authenticated denial of existence works. We begin by explaining the current technique in the DNS and work our way up to DNSSEC. We explain the first steps taken in DNSSEC and describe how NSEC and NSEC3 work. The NXT, NO, NSEC2 and DNSNR records also briefly make their appearance, as they have paved the way for NSEC and NSEC3.

To complete the picture, we also need to explain DNS wildcards as these complicate matters, especially combined with CNAME records.

Note: In this document, domain names in zone file examples will have a trailing dot, in the running text they will not. This text is written for people who have a fair understanding of DNSSEC. The following RFCs are not required reading, but they help in understanding the problem space.

- o [RFC 5155](#) [[RFC5155](#)] - Hashed Authenticated Denial of Existence;
- o [RFC 4592](#) [[RFC4592](#)] - The Role of Wildcards in the DNS.

And these provide some general DNSSEC information.

- o [RFC 4033](#), [RFC 4034](#), [RFC 4035](#) [[RFC4033](#)], [[RFC4034](#)], [[RFC4035](#)] - DNSSEC Specification;
- o [RFC 4956](#) [[RFC4956](#)] - DNS Security (DNSSEC) Opt-In. This RFC has experimental status, but is a good read.

These three drafts give some background information on the NSEC3 development.

- o The NO record [[I-D.ietf-dnsext-not-existing-rr](#)];
- o The NSEC2 record [[I-D.laurie-dnsext-nsec2v2](#)];
- o The DNSNR record [[I-D.arends-dnsnr](#)].

## **2. Denial of Existence**

We start with the basics and take a look at NXDOMAIN handling in the DNS. To make it more visible we are going to use a small DNS zone, with 3 names ("example.org", "a.example.org" and "d.example.org") and 3 types (SOA, A and TXT). For brevity, the class is not shown (defaults to IN), the NS records are left out and the SOA record is shortened, resulting in the following zone file:

```
example.org.      SOA ( ... )
a.example.org.    A 192.0.2.1
                  TXT "a record"
```

d.example.org.      A 192.0.2.1  
                      TXT "d record"

The unsigned "example.org" zone.

Figure 1

### **2.1. NXDOMAIN Responses**

If a resolver asks for the TXT type belonging to "a.example.org" to the name server serving this zone, it sends the following question: "a.example.org TXT"

The name server looks in its zone data and generates an answer. In this case a positive one: "Yes it exists and this is the data", resulting in this reply:

```
;; status: NOERROR, id: 28203

;; ANSWER SECTION:
a.example.org.      TXT "a record"

;; AUTHORITY SECTION:
example.org.        NS a.example.org.
```

The "status: NOERROR" signals that everything is OK, "id" is an integer used to match questions and answers. In the ANSWER section, we find our answer. The AUTHORITY section holds the names of the name servers that have information concerning the "example.org" zone. Note that including this information is optional.

If a resolver asks for "b.example.org TXT" it gets an answer that this name does not exist:

```
;; status: NXDOMAIN, id: 7042

;; AUTHORITY SECTION:
example.org.        SOA ( ... )
```

In this case, we do not get an ANSWER section and the status is set to NXDOMAIN. From this the resolver concludes that "b.example.org" does not exist. The AUTHORITY section holds the SOA record of "example.org" that the resolver can use to cache the negative response.

### **2.2. NODATA Responses**

It is important to realize that NXDOMAIN is not the only type of does-not-exist. A name may exist, but the type you are asking for may not. This occurrence of non-existence is called a NODATA response. Let us ask our name server for "a.example.org AAAA", and look at the answer:

```
;; status: NOERROR, id: 7944
```

```
;; AUTHORITY SECTION:  
example.org.      SOA ( ... )
```

Gieben & Mekking

Expires July 09, 2013

[Page 4]



The status NOERROR shows that the "a.example.org" name exists, but the reply does not contain an ANSWER section. This differentiates a NODATA response from an NXDOMAIN response, the rest of the packet is very similar. The resolver has to put these pieces of information together and conclude that "a.example.org" exists, but it does not have an "AAAA" record.

### 3. Secure Denial of Existence

The above has to be translated to the security aware world of DNSSEC. But there are a few requirements DNSSEC brings to the table:

1. There is no online signing defined in DNSSEC. Although a name server is free to compute the answer and signature(s) on-the-fly, the protocol is written with a "first sign, then load" attitude in mind. It is rather asymmetrical, but a lot of the design in DNSSEC stems from fact that you need to accommodate authenticated denial of existence. If the DNS did not have NXDOMAIN, DNSSEC would be a lot simpler, but a lot less useful!
2. The DNS packet header is not signed. This means that a "status: NXDOMAIN" can not be trusted. In fact the entire header may be forged, including the AD bit (AD stands for Authentic Data, see [RFC 3655](#) [[RFC3655](#)]), which may give some food for thought;
3. DNS wildcards and CNAME records complicate matters significantly. More about this in later sections ([Section 5.3](#) and [Section 5.4](#)).

The first requirement implies that all denial of existence answers need to be pre-computed, but it is impossible to pre-compute (all conceivable) non-existence answers. A generic denial record which can be used in all denial of existence proofs is not an option: such a record is susceptible to replay attacks. When you are querying a name server for a record that actually exists, a man-in-the-middle may replay that generic denial record and it would be impossible to tell whether the response was genuine or spoofed.

This has been solved by introducing a record that defines an interval between two existing names. Or to put it another way: it defines the holes (non-existing names) in the zone. This record can be signed beforehand and given to the resolver.

Given all these troubles, why didn't the designers of DNSSEC go for the (easy) route and allowed for online signing? Well, at that time (pre 2000), online signing was not feasible with the then current hardware. Keep in mind that the larger servers get between 2000 and 6000 queries per second (qps), with peaks up to 20,000 qps or more. Scaling signature generation to these kind of levels is always a challenge. Another issue was (and is) key

management, for online signing to work you need access to the private key(s). This is considered a security risk.

The road to the current solution (NSEC/NSEC3) was long. It started with the NXT (next) record. The NO (not existing) record was introduced, but never made it to RFC. Later on, NXT was superseded by the NSEC (next secure) record. From there it went through NSEC2/DNSNR to finally reach NSEC3 (next secure, version 3) in [RFC 5155](#).

### **[3.1.](#) NXT**

The first attempt to specify authenticated denial of existence was NXT ([RFC 2535](#) [[RFC2535](#)]). [Section 5.1](#) of that RFC introduces the record:

"The NXT resource record is used to securely indicate that RRs with an owner name in a certain name interval do not exist in a zone and to indicate what RR types are present for an existing name."

By specifying what you do have, you implicitly tell what you don't have. NXT is superseded by NSEC. In the next section we explain how NSEC (and thus NXT) works.

### **[3.2.](#) NSEC**

In [RFC 3755](#) [[RFC3755](#)] all the DNSSEC types were given new names, SIG was renamed RRSIG, KEY became DNSKEY and NXT was renamed to NSEC and a minor issue was fixed in the process, namely the type bitmap was redefined to allow more than 127 types to be listed ([RFC2535](#), [Section 5.2](#)).


Just as NXT, NSEC is used to describe an interval between names: it indirectly tells a resolver which names do not exist in a zone.

For this to work, we need our "example.org" zone to be sorted in canonical order ([RFC4034](#), [Section 6.1](#)), and then create the NSECs. We add three NSEC records, one for each name, and each one "covers" a certain interval. The last NSEC record points back to the first as required by the RFC, and depicted in Figure 2.

1. The first NSEC covers the interval between "example.org" and "a.example.org";
2. The second NSEC covers "a.example.org" to "d.example.org";
3. The third NSEC points back to "example.org", and covers "d.example.org" to "example.org" (i.e. the end of the zone).

As we have defined the intervals and put those in resource records, we now have something that can be signed.



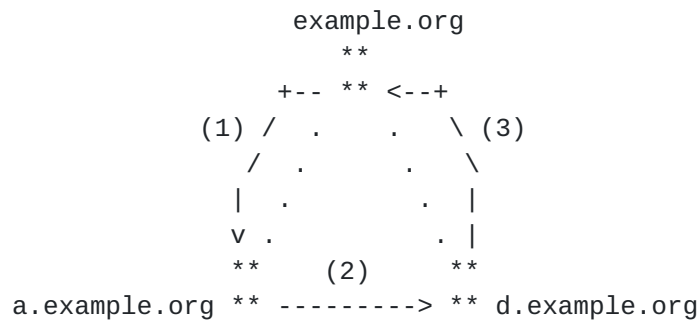

The NSEC records of "example.org". The arrows represent NSEC records, starting from the apex.

Figure 2

This signed zone is loaded into the name server. It looks like this:

```

example.org.      SOA ( ... )
                  DNSKEY ( ... )
                  NSEC a.example.org. SOA NSEC DNSKEY RRSIG
                  RRSIG(SOA) ( ... )
                  RRSIG(DNSKEY) ( ... )
                  RRSIG(NSEC) ( ... )
a.example.org.   A 192.0.2.1
                  TXT "a record"
                  NSEC d.example.org. A TXT NSEC RRSIG
                  RRSIG(A) ( ... )
                  RRSIG(TXT) ( ... )
                  RRSIG(NSEC) ( ... )
d.example.org.   A 192.0.2.1
                  TXT "d record"
                  NSEC example.org. A TXT NSEC RRSIG
                  RRSIG(A) ( ... )
                  RRSIG(TXT) ( ... )
                  RRSIG(NSEC) ( ... )

```

The signed and sorted "example.org" zone with the added NSEC records (and signatures). For brevity, the class is not shown (defaults to IN), the NS records are left out and the SOA, DNSKEY and RRSIG records are shortened.

Figure 3

If a DNSSEC aware resolver asks for "b.example.org", it gets back a "status: NXDOMAIN" packet, which by itself is meaningless (remember that the DNS packet header is not signed and thus can be forged). To be able to securely detect that "b" does not exist, there must also be a signed NSEC record which covers the name space where "b" lives.

The record:

a.example.org. NSEC d.example.org. A TXT NSEC RRSIG

Gieben & Mekking

Expires July 09, 2013

[Page 7]

does precisely that: "b" should come after "a", but the next owner name is "d.example.org", so "b" does not exist.

Only by making that calculation, is a resolver able to conclude that the name "b" does not exist. If the signature of the NSEC record is valid, "b" is proven not to exist. We have authenticated denial of existence.

Note that a man-in-the-middle may still replay this NXDOMAIN response when you're querying for, say, "c.example.org". But it would not do any harm since it is provably the proper response to the query. In the future, there may be data published for "c.example.org". Therefore, the RRSIGs RDATA include a validity period (not visible in the zone above), so that an attacker cannot replay this NXDOMAIN response for "c.example.org" forever.

### **3.3. NODATA Responses**

NSEC records are also used in NODATA responses. In that case we need to look more closely at the type bitmap. The type bitmap in an NSEC record tells which types are defined for a name. If we look at the NSEC record of "a.example.org", we see the following types in the bitmap: A, TXT, NSEC and RRSIG. So for the name "a" this indicates we must have an A, TXT, NSEC and RRSIG record in the zone.

With the type bitmap of the NSEC record, a resolver can establish that a name is there, but the type is not. For example, if a resolver asks for "a.example.org AAAA", the reply that comes back is:

```
;; status: NOERROR, id: 44638
```

```
;; AUTHORITY SECTION:
```

```
example.org.      SOA ( ... )
example.org.      RRSIG(SOA) ( ... )
a.example.org.    NSEC d.example.org. A TXT NSEC RRSIG
a.example.org.    RRSIG(NSEC) ( ... )
```

The resolver should check the AUTHORITY section and conclude that:

- (1) "a.example.org" exists (because of the NSEC with that owner name) and;
- (2) the type (AAAA) does not as it is not listed in the type bitmap.

The techniques used by NSEC form the basics of authenticated denial of existence in DNSSEC.

### **3.4. Drawbacks of NSEC**

There were two issues with NSEC (and NXT). The first is that it allows for zone walking. NSEC records point from one name to another, in our example: "example.org", points to "a.example.org" which points to "d.example.org" which points back to "example.org". So we can reconstruct the entire "example.org" zone, thus defeating attempts to administratively block zone transfers ([\[RFC2065\]](#) [Section 5.5](#)).

The second issue is that when a large, delegation-centric ([\[RFC5155\]](#), [Section 1.1](#)), zone deploys DNSSEC, every name in the zone gets an NSEC plus RRSIG. So this leads to a huge increase in the zone size (when signed). This would in turn mean that operators of such zones who are deploying DNSSEC, face up front costs. This could hinder DNSSEC adoption.

These two issues eventually lead to NSEC3 which:

- o Adds a way to garble the next owner name, thus thwarting zone-walking;
- o Makes it possible to skip names for the next owner name. This feature is called Opt-Out (See [Section 5.1](#)). It means not all names in your zone get an NSEC3 plus ditto signature, making it possible to "grow into" your DNSSEC deployment.

But before we delve into NSEC3, let us first take a look at its predecessors: NO, NSEC2 and, DNSNR.

## **4. Experimental and Deprecated Mechanisms: NO, NSEC2 and DNSNR**

Long before NSEC was defined, the NO record was introduced. It was the first record to use the idea of hashed owner names, to fix the issue of zone walking that was present with the NXT record. It also fixed the type bitmap issue of the NXT record, but not in a space efficient way. At that time (around 2000) zone walking was not considered important enough to warrant the new record. People were also worried that DNSSEC deployment would be hindered by developing an alternate means of denial of existence. Thus the effort was shelved and NXT remained.

When the new DNSSEC specification [\[RFC4034\]](#) was written, people were still not convinced that zone walking was a problem that should be solved. So NSEC saw the light and inherited the two issues from NXT.

Several years after, NSEC2 was introduced as a way to solve the two issues of NSEC. The NSEC2 draft contains the following paragraph:



"This document proposes an alternate scheme which hides owner names while permitting authenticated denial of existence of non-existent names. The scheme uses two new RR types: NSEC2 and EXIST."

When an authenticated denial of existence scheme starts to talk about EXIST records, it is worth paying extra attention. The EXIST record was defined as a record without RDATA that would be used to signal the presence of a domain name. From the draft:

"In order to prove the nonexistence of a record that might be covered by a wildcard, it is necessary to prove the existence of its closest enclosure. This record does that. Its owner is the closest enclosure. It has no RDATA. If there is another RR that proves the existence of the closest enclosure, this SHOULD be used instead of an EXIST record."

The introduction of this record led to questions on what wildcards actually means (especially in the context of DNSSEC). It is probably not a coincidence that "The Role of Wildcards in the Domain Name System" ([[RFC4592](#)]) was standardized before NSEC3.

NSEC2 solved the zone walking issue by hashing (with SHA1 and a salt) the "next owner name" in the record, thereby making it useless for zone walking. But it did not have Opt-Out.

The DNSNR record was another attempt that used hashed names to foil zone walking and it also introduced the concept of opting out (called "Authoritative Only Flag") which limited the use of DNSNR in delegation-centric zones.

All these proposals didn't make it, but did provide valuable insights. To summarize:

- o The NO record introduced hashing, but this idea lingered in the background for a long time;
- o The NSEC2 record made it clear that wildcards were not completely understood;
- o The DNSNR record used a new flag field in the RDATA to signal Opt-Out;

## **5. NSEC3**

From the experience gained with NSEC2 and DNSNR, NSEC3 was forged. It incorporates both Opt-Out and the hashing of names. NSEC3 solves any issues people might have with NSEC, but it introduces some additional complexity.

NSEC3 did not supersede NSEC, they are both defined for DNSSEC. So DNSSEC is blessed with two different means to perform authenticated denial of existence: NSEC and NSEC3. In NSEC3 every name is hashed,



including the owner name. This means that NSEC3 chain is sorted in hash order, instead of canonical order. Because the owner names are hashed, the next owner name for "example.org" is unlikely to be "a.example.org". Because the next owner name is hashed, zone walking becomes more difficult.

To make it even more difficult to retrieve the original names, the hashing can be repeated several times each time taking the previous hash as input. To prevent the reuse of pre-generated hash values between zones a (per zone) salt can also be added. In the NSEC3 for "example.org" we have hashed the names thrice ([\[RFC5155\]](#), [Section 5](#)) and use the salt "DEAD". Lets look at typical NSEC3 record:

```
15bg9l6359f5ch23e34ddua6n1rihl9h.example.org. (  
  NSEC3 1 0 2 DEAD A6EDKB6V8VL50L8JNQQLT74QMJ7HEB84  
  SOA RRSIG DNSKEY NSEC3PARAM )
```

On the first line we see the hashed owner name:

"15bg9l6359f5ch23e34ddua6n1rihl9h.example.org", this is the hashed name of the fully qualified domain name (FQDN) "example.org" encoded as Base32 ([\[RFC4648\]](#)). Note that even though we hashed "example.org", the zone's name is added to make it look like a domain name again. In our zone, the basic format is "Base32(SHA1(FQDN)).example.org". The next hashed owner name "A6EDKB6V8VL50L8JNQQLT74QMJ7HEB84" (line 2) is the hashed version of "d.example.org", represented as Base32. Note that ".example.org" is not added to the next hashed owner name, as this name always falls in the current zone.

The "1 0 2 DEAD" section of the NSEC3 states:

- o Hash Algorithm = 1 (SHA1, this is the default, no other hash algorithms are currently defined for use in NSEC3);
- o Opt-Out = 0 (disabled);
- o Hash Iterations = 2, this yields three iterations, as a zero value is already one iteration;
- o Salt = "DEAD".

At the end we see the type bitmap, which is identical to NSEC's bitmap, that lists the types present at the original owner name. Note that the type NSEC3 is absent from the list in the example above. This is due to the fact that the original owner name ("example.org") does not have the NSEC3 type. It only exists for the hashed name.

Names like "1.h.example.org" hash to one label in NSEC3, "1.h.example.org" becomes:

"117gercprcjgg8j04ev1ndrk8d1jt14k.example.org" when used as an owner name. This is an important observation. By hashing the names you

lose the depth of a zone - hashing introduces a flat space of names, as opposed to NSEC.

The domain name used above ("1.h.example.org") creates an empty non-terminal. Empty non-terminals are domain names that have no RRs associated with them, and exist only because they have one or more subdomains that do ([\[RFC5155\]](#), [Section 1.3](#)). The record:

```
1.h.example.org.    TXT "1.h record"
```

creates two names:

1. "1.h.example.org" that has the type: TXT;
2. "h.example.org" which has no types. This is the empty non-terminal.

An empty non-terminal will get an NSEC3 record, but not an NSEC record. In [Section 5.5](#) is shown how the resolver uses these NSEC3 records to validate the denial of existence proofs.

### [5.1. Opt-Out](#)

Hashing mitigates the zone walking issue of NSEC. The other issue, the high costs of securing a delegation to an insecure zone, is tackled with Opt-Out. When using Opt-Out, names that are an insecure delegation (and empty non-terminals that are only derived from insecure delegations) don't require an NSEC3 record. For each insecure delegation, the zone size can be decreased (compared with a fully signed zone without using Opt-Out) with at least two records: one NSEC3 record and one corresponding RRSIG record. If the insecure delegation would introduce empty non-terminals, even more records can be omitted from the zone.

Opt-Out NSEC3 records are not able to prove or deny the existence of the insecure delegations. In other words, those delegation do not benefit from the cryptographic security that DNSSEC provides.

A recently discovered corner case ([\[RFC5155-errata3441\]](#)) shows that not only those delegations remain insecure, also the empty non-terminal space that is derived from those delegations are insecure. Because the names in this empty non-terminal space do exist according to the definition in [\[RFC4592\]](#), the server should respond to queries for these names with a NODATA response. However, the validator requires an NSEC3 record proving the NODATA response ([\[RFC5155\]](#), [Section 8.5](#)):

"The validator MUST verify that an NSEC3 RR that matches QNAME is present and that both the QTYPE and the CNAME type are not set in its Type Bit Maps field."

A way to resolve this contradiction in the specification is to always provide empty non-terminals with an NSEC3 record, even if it is only derived from an insecure delegation.

## 5.2. Loading an NSEC3 Zone

Whenever an authoritative server receives a query for a non-existing record, it has to hash the incoming query name to determine into which interval between two existing hashes it falls. To do that it needs to know the zone's specific NSEC3 parameters (hash iterations and salt).

One way to learn them is to scan the zone during loading for NSEC3 records and glean the NSEC3 parameters from them. However, it would need to make sure that there is at least one complete set of NSEC3 records for the zone using the same parameters. Therefore, it would need to inspect all NSEC3 records.

A more graceful solution was designed. The solution was to create a new record, NSEC3PARAM, which must be placed at the apex of the zone. Its role is to provide a fixed place where an authoritative name server can directly see the NSEC3 parameters used, and by putting it in the zone it allows for easy transfer to the secondaries. If NSEC3 were designed in the early days of DNS (+/- 1984) this information would probably have been put in the SOA record.

## 5.3. Wildcards in the DNS

So far, we have only talked about denial of existence in negative responses. However, denial of existence may also occur in positive responses, i.e., where the ANSWER section of the response is not empty. This can happen because of wildcards.

Wildcards have been part of the DNS since the first DNS RFCs. They allow to define all names for a certain type in one go. In our "example.org" zone we could for instance add a wildcard record:

```
*.example.org.      TXT "wildcard record"
```

For completeness, our (unsigned) zone now looks like this:

```
example.org.      SOA ( ... )
*.example.org.    TXT "wildcard record"
a.example.org.    A 192.0.2.1
                  TXT "a record"
d.example.org.    A 192.0.2.1
                  TXT "d record"
```

The example.org zone with a wildcard record.

Figure 4

If a resolver asks for "z.example.org TXT", the name server will



respond with an expanded wildcard, instead of an NXDOMAIN:

```
;; status: NOERROR, id: 13658

;; ANSWER SECTION:
z.example.org.      TXT "wildcard record"
```

Note however that the resolver can not detect that this answer came from a wildcard. It just sees the answer as-is. How will this answer look with DNSSEC?

```
;; status: NOERROR, id: 51790

;; ANSWER SECTION:
z.example.org.      TXT "wildcard record"
z.example.org.      RRSIG(TXT) ( ... )

;; AUTHORITY SECTION:
d.example.org.      NSEC example.org. A TXT RRSIG NSEC
d.example.org.      RRSIG(NSEC) ( ... )
```

A response with an expanded wildcard and with DNSSEC.

Figure 5

The RRSIG of the "z.example.org" TXT record indicates there is a wildcard configured. The RDATA of the signature lists a label count [\[RFC4034\], Section 3.1.3.](#), of two (not visible in the answer above), but the owner name of the signature has three labels. This mismatch indicates there is a wildcard "\*.example.org" configured.

An astute reader may notice that it appears as if a "z.example.org" RRSIG(TXT) is created out of thin air. This is not the case. The signature for "z.example.org" does not exist. The signature you are seeing is the one for "\*.example.org" which does exist, only the owner name is switched to "z.example.org". So even with wildcards, no signatures have to be created on the fly.

The DNSSEC standard mandates that an NSEC (or NSEC3) is included in such responses. If it wasn't, an attacker could mount a replay attack and poison the cache with false data: Suppose that the resolver has asked for "a.example.org TXT". An attacker could modify the packet in such way that it looks like the response was generated through wildcard expansion, even though there exists a record for "a.example.org TXT".

The tweaking simply consists of adjusting the ANSWER section to:

```
;; status: NOERROR, id: 31827
```

```
;; ANSWER SECTION
a.example.org.      TXT "wildcard record"
a.example.org.      RRSIG(TXT) ( ... )
```

A forged response without the expanded wildcard.

Figure 6

Note the subtle difference from Figure 5 in the owner name. In this response we see a "a.example.org TXT" record, for which a record with different RDATA (See Figure 4) exist in the zone.

Which would be a perfectly valid answer if we would not require the inclusion of an NSEC or NSEC3 record in the wildcard answer response. The resolver believes that "a.example.org TXT" is a wildcard record, and the real record is obscured. This is bad and defeats all the security DNSSEC can deliver. Because of this, the NSEC or NSEC3 must be present.

Another way of putting this is that DNSSEC is there to ensure the name server has followed the steps as outlined in [[RFC1034](#)], [Section 4.3.2](#) for looking up names in the zone. It explicitly lists wildcard look up as one of these steps (3c), so with DNSSEC this must be communicated to the resolver: hence the NSEC(3) record.

#### [5.4.](#) CNAME Records

So far, the maximum number of NSEC records a response will have is two: one for the denial of existence and another for the wildcard. We say maximum, because sometimes a single NSEC can prove both. With NSEC3, this is three (as to why, we will explain in the next section).

When we take CNAME wildcard records into account, we can have more NSEC(3) records. For every wildcard expansion, we need to prove that the expansion was allowed. Lets add some CNAME wildcard records to our zone:

```
example.org.      SOA ( ... )
*.example.org.    TXT "wildcard record"
a.example.org.    A 192.0.2.1
                  TXT "a record"
*.a.example.org.  CNAME w.b
*.b.example.org.  CNAME w.c
*.c.example.org.  A 192.0.2.1
d.example.org.    A 192.0.2.1
                  TXT "d record"
w.example.org.    CNAME w.a
```

A wildcard CNAME chain added to the "example.org" zone.

Figure 7



A query for "w.example.org A" will result in the following response:

```
;; status: NOERROR, id: 4307

;; ANSWER SECTION:
w.example.org.      CNAME w.a.example.org.
w.example.org.      RRSIG(CNAME) ( ... )
w.a.example.org.    CNAME w.b.example.org.
w.a.example.org.    RRSIG(CNAME) ( ... )
w.b.example.org.    CNAME w.c.example.org.
w.b.example.org.    RRSIG(CNAME) ( ... )
w.c.example.org.    A 192.0.2.1
w.c.example.org.    RRSIG(A) ( ... )

;; AUTHORITY SECTION:
*.a.example.org.    NSEC *.b.example.org. CNAME RRSIG NSEC
*.a.example.org.    RRSIG(NSEC) ( ... )
*.b.example.org.    NSEC *.c.example.org. CNAME RRSIG NSEC
*.b.example.org.    RRSIG(NSEC) ( ... )
*.c.example.org.    NSEC d.example.org. A RRSIG NSEC
*.c.example.org.    RRSIG(NSEC) ( ... )
```

The NSEC record "\*.a.example.org" proves that wildcard expansion to "w.a.example.org" was appropriate: "w.a." falls in the gap "\*.a" to "\*.b". Similar, the NSEC record "\*.b.example.org" proves that there was no direct match for "w.b.example.org" and "\*.c.example.org" denies the direct match for "w.c.example.org".

DNAME records and wildcard names should not be used as reiterated in [\[RFC6672\] Section 3.3](#).

### **5.5. The Closest Encloser NSEC3 Record**

We can have one or more NSEC3 records that deny the existence of the requested name and one NSEC3 record that deny wildcard synthesis. What do we miss?

The short answer is that, due to the hashing in NSEC3 you lose the depth of your zone: Everything is hashed into a flat plane. To make up for this loss of information you need an extra record.

To understand NSEC3, we will need two definitions:

Closest encloser: Introduced in [\[RFC4592\]](#), "The closest encloser is the node in the zone's tree of existing domain names that has the most labels matching the query name (consecutively, counting from the root label downward)." In our example, if the query name is "x.2.example.org" then "example.org" is the "closest encloser";

Next closer name: Introduced in the NSEC3 RFC, this is the closest

encloser with one more label added to the left. So if  
"example.org" is the closest encloser for the query name  
"x.2.example.org", "2.example.org" is the "next closer name".

An NSEC3 "closest enclosure proof" consists of:

1. An NSEC3 record that *\*matches\** the "closest enclosure". This means the unhashed owner name of the record is the closest enclosure. This bit of information tells a resolver: "The name you are asking for does not exist, the closest I have is this".
2. An NSEC3 record that *\*covers\** the "next closer name". This means it defines an interval in which the "next closer name" falls. This tells the resolver: "The next closer name falls in this interval, and therefore the name in your question does not exist. In fact, the closest enclosure is indeed the closest I have".

These two records already deny the existence of the requested name, so we do not need an NSEC3 record that covers the actual queried name: By denying the existence of the next closer name, you also deny the existence of the queried name.

For a given query name, there is one (and only one) place where wildcard expansion is possible. This is the "source of synthesis", and is defined ([\[RFC4592\]](#), [Section 2.1.1](#) and [Section 3.3.1](#)) as:

<asterisk label>.<closest enclosure>

In other words, to deny wildcard synthesis, the resolver needs to know the hash of the source of synthesis. Since it does not know beforehand what the closest enclosure of the query name is, it must be provided in the answer.

Take the following example. We take our zone, and put two TXT records to it. The records added are "1.h.example.org" and "3.3.example.org". It is signed with NSEC3, resulting in the following unsigned zone.

```
example.org.      SOA ( ... )
1.h.example.org.  TXT "1.h record"
3.3.example.org.  TXT "3.3 record"
```

The added TXT records in example.org. These records create two empty non-terminals: `h.example.org` and `3.example.org`.

Figure 8

The resolver asks the following: "x.2.example.org TXT". This leads to an NXDOMAIN response from the server, which contains three NSEC3 records. A list of hashed owner names can be found in [Appendix A](#). Also see Figure 9 the numbers in that figure correspond with the following NSEC3 records:





```


15bg9l6359f5ch23e34ddua6n1rihl9h.example.org. (
  NSEC3 1 0 2 DEAD 1AVVQN74SG75UKFVF25DGCETHGQ638EK SOA RRSIG
    DNSKEY NSEC3PARAM )

75b9id679qqov6ldfhd8ocshsssb6jvq.example.org. (
  NSEC3 1 0 2 DEAD 8555T7QEGAU7PJTKSNBCHG4TD2M0JNPJ TXT RRSIG )

1avvqn74sg75ukfvf25dgcethgq638ek.example.org. (
  NSEC3 1 0 2 DEAD 75B9ID679QQOV6LDFHD80CSHSSSB6JVQ )

```

If we would follow the NSEC approach, the resolver is only interested in one thing. Does the hash of "x.2.example.org" fall in any of the intervals of the NSEC3 records it got?

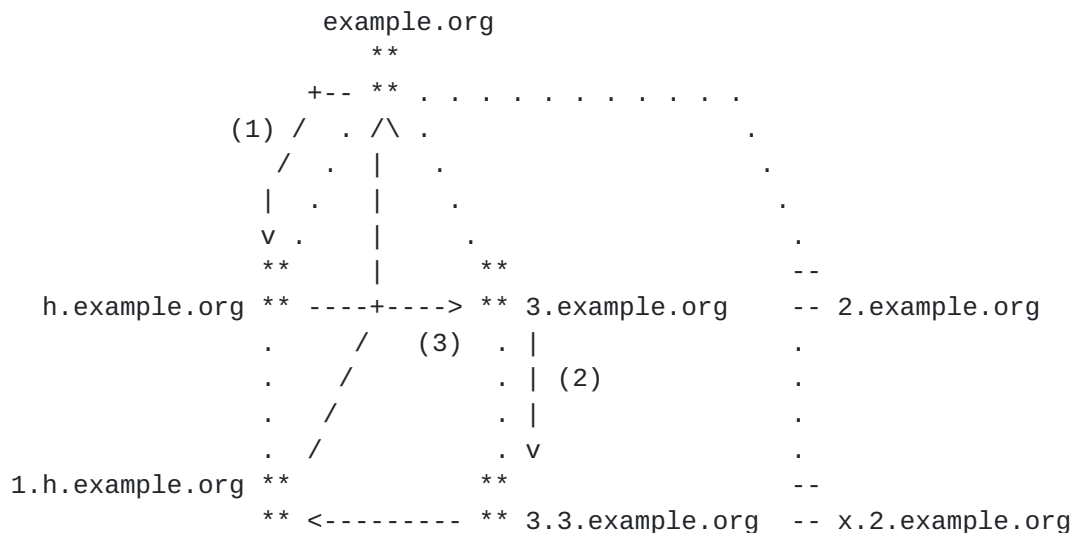

x.2.example.org does not exist. The arrows represent the NSEC3 records, the ones numbered (1), (2) and (3) are the NSEC3s returned in our answer.

Figure 9

The hash of "x.2.example.org" is "ndtu6dste50pr4a1f2qvr1v31g00i2i1". Checking this hash on the first NSEC3 yields that it does not fall in between the interval: "15bg9l6359f5ch23e34ddua6n1rihl9h" and "1avvqn74sg75ukfvf25dgcethgq638ek". For the second NSEC3 the answer is also negative: the hash sorts outside the interval described by "75b9id679qqov6ldfhd8ocshsssb6jvq" and "8555t7qegau7pjtksnbchg4td2m0jnpj". And the last NSEC3 also isn't of any help. What is a resolver to do? It has been given the maximum amount of NSEC3s and they all seem useless.

So this is where the closest enclosure proof comes into play. And for the proof to work, the resolver needs to know what the closest enclosure is. There must be an existing ancestor in the zone: a name

must exist that is shorter than the query name. The resolver keeps hashing increasingly shorter names from the query name until an owner name of an NSEC3 matches. This owner name is the closest encloser.

When the resolver has found the closest enclosure, the next step is to construct the next closer name. This is the closest enclosure with the last chopped label from query name prepended to it: "<last chopped label>.<closest enclosure>". The hash of this name should be covered by the interval set in any of the NSEC3 records.

Then the resolver needs to check the presence of a wildcard. It creates the wildcard name by prepending the asterisk label to the closest enclosure: "\*.<closest enclosure>", and uses the hash of that.

Going back to our example, the resolver must first detect the NSEC3 that matches the closest enclosure. It does this by chopping up the query name, hashing each instance (with the same number of iterations and hash as the zone it is querying) and comparing that to the answers given. So it has the following hashes to work with:

x.2.example.org: "ndtu6dste50pr4a1f2qvr1v31g00i2i1", last chopped label: "<empty>";

2.example.org: "7t70drg4ekc28v93q7gnbleopa7vlp6q", last chopped label: "x";

example.org: "15bg9l6359f5ch23e34ddua6n1rihl9h", last chopped label: "2";

Of these hashes only one matches the owner name of one of the NSEC3 records: "15bg9l6359f5ch23e34ddua6n1rihl9h". This must be the closest enclosure (unhashed: "example.org"). That's the main purpose of that NSEC3 record: tell the resolver what the closest enclosure is.

When using Opt-Out, it is possible that the actual closest enclosure to the QNAME does not have an NSEC3 record. If so, we will have to do with the closest provable enclosure, which is the closest enclosing authoritative name that does have a NSEC3 record. In the worst case, this is the NSEC3 record corresponding to the apex, this name must always have an NSEC3 record.

With the closest (provable) enclosure, the resolver constructs the next closer, which in this case is: "2.example.org"; "2" is the last label chopped, when "example.org" is the closest enclosure. The hash of this name should be covered in any of the other NSEC3s. And it is, "7t70drg4ekc28v93q7gnbleopa7vlp6q" falls in the interval set by: "75b9id679qqov6ldfhd8ocshsssb6jvq" and "8555t7qegau7pjtksnbchg4td2m0jnpj" (this is our second NSEC3).

So what does the resolver learn from this?

- o "example.org" exists;

- o "2.example.org" does not exist.

And if "2.example.org" does not exist, there is also no direct match for "x.2.example.org". The last step is to deny the existence of the source of synthesis, to prove that no wildcard expansion was possible.

The resolver hashes "\*.example.org" to "22670trplhsr72pqmedltg1kdqeolb7" and checks that it is covered: in this case by the last NSEC3 (see Figure 9), the hash falls in the interval set by "1avvqn74sg75ukfvf25dgcethgq638ek" and "75b9id679qqov6ldfhd8ocshsssb6jvq". This means there is no wildcard record directly below the closest encloser and "x.2.example.org" definitely does not exist.

When we have validated the signatures, we reached our goal: authenticated denial of existence.

### **5.6. Three To Tango**

One extra NSEC3 record plus additional signature may seem a lot just to deny the existence of the wildcard record, but we cannot leave it out. If the standard would not mandate the closest encloser NSEC3 record, but instead required two NSEC3 records: one to deny the query name and one to deny the wildcard record. An attacker could fool the resolver that the source of synthesis does not exist, while it in fact does.

Suppose the wildcard record does exist, so our unsigned zone looks like this:

```
example.org.      SOA ( ... )
*.example.org.    TXT "wildcard record"
1.h.example.org.  TXT "1.h record"
3.3.example.org.  TXT "3.3 record"
```

The query "x.2.example.org TXT" should now be answered with:

```
x.2.example.org.  TXT "wildcard record"
```

An attacker can deny this wildcard expansion by calculating the hash for the wildcard name "\*.2.example.org" and searching for an NSEC3 record that covers that hash. The hash of "\*.2.example.org" is "fbq73bfkjlrrkdoqs27k5qf81aqqd7hho". Looking through the NSEC3 records in our zone we see that the NSEC3 record of "3.3" covers this hash:

```
8555t7qegau7pjtksnbchg4td2m0jnpj.example.org. (
  NSEC3 1 0 2 DEAD 15BG9L6359F5CH23E34DDUA6N1RIHL9H TXT RRSIG )
```

This record also covers the query name "x.2.example.org"

("ndtu6dste50pr4a1f2qvr1v31g00i2i1").

Now an attacker adds this NSEC3 record to the AUTHORITY section of the reply to deny both "x.2.example.org" and any wildcard expansion. The net result is that the resolver determines that "x.2.example.org" does not exist, while in fact it should have been synthesized via wildcard expansion. With the NSEC3 matching the closest enclosure "example.org", the resolver can be sure that the wildcard expansion should occur at "\*.example.org" and nowhere else.

Coming back to the original question: why do we need up to three NSEC3 records to deny a requested name? The resolver needs to be explicitly told what the "closest enclosure" is and this takes up a full NSEC3 record. Then, the next closer name needs to be covered in an NSEC3 record, and finally an NSEC3 must say something about whether wildcard expansion was possible. That makes three to tango.

## **6. Security Considerations**

DNSSEC does not protect against denial of service attacks, nor does it provide confidentiality. For more general security considerations related to DNSSEC, please see [RFC 4033](#), [RFC 4034](#), [RFC 4035](#) and [RFC 5155](#) ([\[RFC4033\]](#), [\[RFC4034\]](#), [\[RFC4035\]](#) and [\[RFC5155\]](#)).

These RFCs are concise about why certain design choices have been made in the area of authenticated denial of existence. Implementations that do not correctly handle this aspect of DNSSEC, create a severe hole in the security DNSSEC adds. This is specifically troublesome for secure delegations: If an attacker is able to deny the existence of a DS record, the resolver cannot establish a chain of trust, and the resolver has to fall back to insecure DNS for the remainder of the query resolution.

This document aims to fill this "documentation gap" and provide would-be implementors and other interested parties with enough background knowledge to better understand authenticated denial of existence.

## **7. IANA Considerations**

This document has no actions for IANA.

## **8. Acknowledgments**

This document would not be possible without the help of Ed Lewis, Roy Arends, Wouter Wijngaards, Olaf Kolkman, Carsten Strotmann, Jan-Piet Mens, Peter van Dijk, Marco Davids, Esther Makaay, Antoin Verschuren, Lukas Wunner, Joe Abley and Geoff Huston. Also valuable was the source code of Unbound ("validator/val\_nsec3.c").

Extensive feedback for early versions was received from Karst



Koymans.

Gieben & Mekking

Expires July 09, 2013

[Page 21]

## **9. References**

### **9.1. Normative References**

- [RFC1034] Mockapetris, P., "Domain names - concepts and facilities", STD 13, [RFC 1034](#), November 1987.
- [RFC2065] Eastlake, D.E. and C. Kaufman, "Domain Name System Security Extensions", [RFC 2065](#), January 1997.
- [RFC2308] Andrews, M., "Negative Caching of DNS Queries (DNS NCACHE)", [RFC 2308](#), March 1998.
- [RFC4033] Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "DNS Security Introduction and Requirements", [RFC 4033](#), March 2005.
- [RFC4034] Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "Resource Records for the DNS Security Extensions", [RFC 4034](#), March 2005.
- [RFC4035] Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "Protocol Modifications for the DNS Security Extensions", [RFC 4035](#), March 2005.
- [RFC4592] Lewis, E., "The Role of Wildcards in the Domain Name System", [RFC 4592](#), July 2006.
- [RFC4648] Josefsson, S., "The Base16, Base32, and Base64 Data Encodings", [RFC 4648](#), October 2006.
- [RFC5155] Laurie, B., Sisson, G., Arends, R., and D. Blacka, "DNS Security (DNSSEC) Hashed Authenticated Denial of Existence", [RFC 5155](#), March 2008.
- [RFC6672] Rose, S. and W. Wijngaards, "DNAME Redirection in the DNS", [RFC 6672](#), June 2012.

### **9.2. Informative References**

- [I-D.arends-dnsnr]  
Arends, R., "DNSSEC Non-Repudiation Resource Record", Internet-Draft [draft-arends-dnsnr-00](#), July 2004.
- [I-D.ietf-dnsext-not-existing-rr]  
Josefsson, S., "Authenticating denial of existence in DNS with minimum disclosure", Internet-Draft [draft-ietf-dnsext-not-existing-rr-01](#), November 2000.

[I-D.laurie-dnsext-nsec2v2]

Laurie, B., "DNSSEC NSEC2 Owner and RDATA Format",  
Internet-Draft [draft-laurie-dnsext-nsec2v2-00](#), December  
2004.

- [RFC2535] Eastlake, D., "Domain Name System Security Extensions", [RFC 2535](#), March 1999.
- [RFC3655] Wellington, B. and O. Gudmundsson, "Redefinition of DNS Authenticated Data (AD) bit", [RFC 3655](#), November 2003.
- [RFC3755] Weiler, S., "Legacy Resolver Compatibility for Delegation Signer (DS)", [RFC 3755](#), May 2004.
- [RFC4956] Arends, R., Kosters, M., and D. Blacka, "DNS Security (DNSSEC) Opt-In", [RFC 4956](#), July 2007.
- [RFC5155-errata3441] Lewis, E., "Technical Errata against [RFC 5155](#) (not acknowledged)", January 2013.

## [Appendix A.](#) List of Hashed Owner Names

The following owner names are used in this document. The origin for these names is "example.org".

Original Name	Hashed Name
"a"	"04sksnapca5a17qos3km2l9tl3p5okq4c"
"1.h"	"117gercprcjgg8j04ev1ndrk8d1jt14k"
"@"	"15bg9l6359f5ch23e34ddua6n1rihl9h"
"h"	"1avvqn74sg75ukfvf25dgcethgq638ek"
"*"	"22670trplhsr72pqqmedltg1kdqeolb7"
"3"	"75b9id679qqov6ldfhd8ocshsssb6jvq"
"2"	"7t70drg4ekc28v93q7gnbleopa7vlp6q"
"3.3"	"8555t7qegau7pjtksnbchg4td2m0jnpj"
"d"	"a6edkb6v8vl5ol8jnqqlt74qmj7heb84"
"*.2"	"fbq73bfkjlrkdoqs27k5qf81aqqd7hho"
"b"	"iuu8l5lmt76jeltp0bir3tmg4u3uu8e7"
"x.2"	"ndtu6dste50pr4a1f2qvr1v31g00i2i1"

Hashed owner names for "example.org" in hash order.

Table 1

## [Appendix B.](#) Changelog

[This section should be removed by the RFC editor before publishing]

**B.1.** -00

1. Initial document.

**B.2.** -01

1. Style and language changes;
2. Figure captions;
3. Security considerations added;
4. Fix erroneous NSEC3 RR;
5. Section on CNAMEs added;
6. More detailed text on closest encloser proof.

**B.3.** -02

1. Lowercase NSEC3 hashed ownernames and add reference to Base32;
2. Process the comments from Joe Abley and Geoff Huston.
  - \* Added section about Opt-Out;
  - \* Move experimental records in their own section;
  - \* Added DNAME reference with respect to wildcards;
  - \* Clarify the difference between the wildcard answers;
  - \* Add more context about the NO record;
  - \* Elaborate more about the EXIST records and its problems;
  - \* Added more text about the NSEC3PARAM records;
  - \* Apply assorted fixes throughout the document;
  - \* Moved table with hashed owner names to appendix.

## Authors' Addresses

R. (Miek) Gieben  
SIDN Labs  
Meander 501  
Arnhem 6825 MD  
NL

E-Mail: [miek.gieben@sidn.nl](mailto:miek.gieben@sidn.nl)

URI: <https://sidn.nl/>

Gieben & Mekking

Expires July 09, 2013

[Page 24]

W. (Matthijs) Mekking

NLnet Labs

Science Park 400

Amsterdam 1098 XH

NL

EMail: [matthijs@nlnetlabs.nl](mailto:matthijs@nlnetlabs.nl)

URI: <http://www.nlnetlabs.nl/>

