

RFC Beautification Working Group  
Internet-Draft  
Intended status: Informational  
Expires: April 18, 2014

R. Gieben  
Google  
October 15, 2013

Writing I-Ds and RFCs using Pandoc and a bit of XML  
draft-gieben-pandoc2rfc-03

## Abstract

This document presents a technique for using a Markdown syntax variant, called Pandoc, and a (bit) of XML [[RFC2629](#)] as a source format for documents in the Internet-Drafts (I-Ds) and Request for Comments (RFC) series.

The goal of this technique is to let an author of an I-D focus on the main body of text without being distracted too much by XML tags, it does however not alleviate the need to typeset some files in XML.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on April 18, 2014.

## Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

Internet-Draft

Pandoc2rfc

October 2013

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Pandoc to RFC . . . . .	<a href="#">3</a>
<a href="#">2.1.</a>	Dependencies . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Building an Internet-Draft . . . . .	<a href="#">4</a>
<a href="#">4.</a>	Supported Features . . . . .	<a href="#">5</a>
<a href="#">5.</a>	Unsupported Features and Limitations . . . . .	<a href="#">6</a>
<a href="#">6.</a>	Pandoc Style . . . . .	<a href="#">7</a>
<a href="#">6.1.</a>	Figures . . . . .	<a href="#">7</a>
<a href="#">6.2.</a>	Tables . . . . .	<a href="#">7</a>
<a href="#">6.3.</a>	References . . . . .	<a href="#">7</a>
<a href="#">7.</a>	Acknowledgements . . . . .	<a href="#">8</a>
<a href="#">8.</a>	Security Considerations . . . . .	<a href="#">8</a>
<a href="#">9.</a>	IANA Considerations . . . . .	<a href="#">8</a>
<a href="#">10.</a>	Normative References . . . . .	<a href="#">8</a>
<a href="#">Appendix A.</a>	Changelog . . . . .	<a href="#">8</a>
<a href="#">A.1.</a>	-00 . . . . .	<a href="#">8</a>
<a href="#">A.2.</a>	-01 . . . . .	<a href="#">9</a>
<a href="#">A.3.</a>	-02 . . . . .	<a href="#">9</a>
<a href="#">A.4.</a>	-03 . . . . .	<a href="#">9</a>
<a href="#">Appendix B.</a>	Cheat Sheet . . . . .	<a href="#">9</a>
	Author's Address . . . . .	<a href="#">10</a>

## [1.](#) Introduction

This document presents a technique for using a Markdown [[Markdown](#)] syntax variant, called Pandoc [[Pandoc](#)], and a bit of XML [[RFC2629](#)] as a source format for documents in the Internet-Drafts (I-Ds) and Request for Comments (RFC) series.

The goal of this technique is to let an author of an I-D focus on the main body of text without being distracted too much by XML tags, it does however not alleviate the need to typeset some files in XML.

Pandoc is an almost plain text format and therefore particularly well suited for editing RFC-like documents. The syntax itself is a super set of the syntax championed by Markdown.

Internet-Draft

Pandoc2rfc

October 2013

## [2.](#) Pandoc to RFC

Pandoc's syntax is easy to learn and write and it can be translated to numerous output formats, including, but not limited to: HTML, EPUB, (plain) Markdown and DocBook XML.

Pandoc2rfc allows authors to write in Pandoc syntax which is then transformed to XML and given to `xml2rfc`. The conversions are, in a way amusing, as we start off with (almost) plain text, use elaborate XML and end up with plain text again.

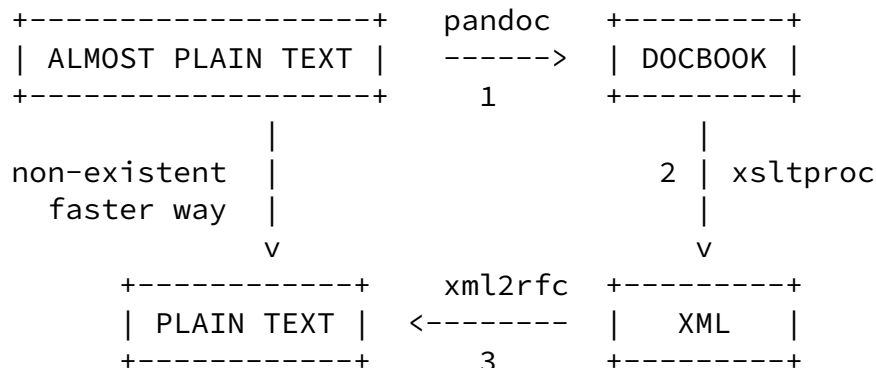


Figure 1: Attempt to justify Pandoc2rfc.

The output of step 2 in Figure 1 is XML which is suitable for inclusion in either the "middle" or "back" section of an RFC.

Even though Pandoc2rfc abstracts away a lot of XML details, there are still places left where XML files need to be edited. Most notably in the "front" section of an RFC.

The simplest way to start using Pandoc2rfc is to create a template XML file and include the appropriate XML for the "front", "middle" and "back" section:

```
<?xml version='1.0' ?>
```

```
<!DOCTYPE rfc SYSTEM 'rfc2629.dtd' [  
<!ENTITY pandocAbstract PUBLIC '' 'abstract.xml'>  
<!ENTITY pandocMiddle PUBLIC '' 'middle.xml'>  
<!ENTITY pandocBack PUBLIC '' 'back.xml'>  
<!ENTITY rfc.2629 PUBLIC '' 'reference.RFC.2629.xml'>  
>
```

```
<rfc ipr='trust200902' docName='draft-gieben-pandoc2rfc'>  
  <front>  
    <title>Writing I-Ds and RFCs using Pandoc</title>  
    <author>  
      <organization/>
```

Gieben

Expires April 18, 2014

[Page 3]

---

Internet-Draft

Pandoc2rfc

October 2013

```
    <address><uri>http://www.example.com</uri></address>  
  </author>  
  <date/>  
  <abstract>  
    &pandocAbstract;  
  </abstract>  
</front>  
<middle>  
  &pandocMiddle;  
</middle>  
<back>  
  <references title="Normative References">  
    &rfc.2629;  
  </references>  
  &pandocBack;  
</back>  
</rfc>
```

Figure 2: A minimal template.xml.

In this case you will need to edit four documents:

1. "abstract.mkd" - contains the abstract;
2. "middle.mkd" - contains the main body of text;
3. "back.mkd" - holds the appendices (if any);
4. And this "template.xml" - probably a fairly static file, among

other things, it holds the author(s) and the references.

Up to date source code for Pandoc2rfc can be found at [[Pandoc2rfc](#)], this includes the style sheet "transform.xsl" which used for the XML transformation (also see [Section 3](#)).

### [2.1](#). Dependencies

Pandoc2rfc needs "xsltproc" [[XSLT](#)] and "pandoc" [[Pandoc](#)] to be installed. The conversion to xml2rfc XML is done with a style sheet based on XSLT version 1.0 [[W3C.REC-xslt-19991116](#)].

When using the template from Figure 2 xml2rfc version 2 (or higher) must be used.

## [3](#). Building an Internet-Draft

Assuming the setup from [Section 2](#), we can build an I-D as follows (in a Unix-like environment):

Gieben

Expires April 18, 2014

[Page 4]

---

Internet-Draft

Pandoc2rfc

October 2013

```
for i in abstract middle back; do
pandoc -st docbook $i.mkd | xsltproc --nonet transform.xsl - > $i.xml
done

xml2rfc template.xml -f draft.txt --text # create text output
xml2rfc template.xml -f draft.html --html # or create HTML output
xml2rfc template.xml -f draft.xml --exp # or create XML output
```

Figure 3: Building an I-D.

Note that the output file names (abstract.xml, middle.xml and back.xml) must match the names used as the XML entities in "template.xml" (See the "!ENTITY" lines in Figure 2). The Pandoc2rfc source repository includes a shell script that incorporates the above transformations. Creating a "draft.txt" or a "draft.xml" can be done with "pandoc2rfc \*.mkd" and "pandoc2rfc -X \*.mkd" respectively.

## [4](#). Supported Features

The full description of Pandoc's syntax can be found in [[PandocGuide](#)]. The following features of xml2rfc are supported by Pandoc2rfc (also see Table 1 in [Appendix B](#) for a "cheat sheet"):

- o Sections with an anchor and title attributes;
- o Several lists styles:
  - \* style="symbols", use "\*" for each item;
  - \* style="numbers", use digits: "1. " for each item;
  - \* style="empty", use "#. " for each item;
  - \* style="format %i", use roman lowercase numerals: "ii. ";
  - \* style="format (%d)", use roman uppercase numerals "II. ";
  - \* style="letters", use lower- or uppercase letters: "a. " and "A. " (note: two spaces as mandated by Pandoc);
  - \* style="hanging", use the Pandoc definition list syntax:

```
Term 1
    : Definition 1
```

Figure 4: Pandoc syntax used for a hanging paragraph.

- o Spanx style="verb", style="emph" and style="strong", respectively use: "`text`", "\_text\_" or "\*\*text\*\*";
- o Block quote is converted to "<list style='empty'" paragraph;
- o Figures with an anchor and title ([Section 6.1](#));
- o Tables with an anchor and title ([Section 6.2](#));
- o References ([Section 6.3](#))
  - \* external ("[<eref>](#)");
  - \* internal ("[<xref>](#)"), to:

- + sections (handled by Pandoc);
  - + figures (handled by XSLT);
  - + tables (handled by XSLT).
- o Citations, by using internal references;
  - o Processing Instructions ("PI"s: "<?rfc?>"), may be used after a section header, they are carried over to the generated XML;
  - o The "<vspace>"-tag is supported and carried over to the generated XML.

## 5. Unsupported Features and Limitations

With Pandoc2rfc an author of an I-D can get a long way without needing to input XML, but it is not a 100% solution. The initial setup and the reference library still forces the author to edit XML files. The meta data feature (Pandoc's "Title Block" extension) is not used in Pandoc2rfc. This information (authors, date, keyword and URLs) should be put in the "template.xml".

Some other quirks:

- o An index is not supported;
- o Comments are supported via HTML comments in the Pandoc source files;
- o Citations are supported via internal references, the citation syntax of Pandoc is not used;

- o Authors still need to know how to deal with possible errors from xml2rfc.

## 6. Pandoc Style

The following sections detail how to use the Pandoc syntax for figures, tables and references to get the desired output.

## [6.1.](#) Figures

Indent the paragraph with 4 spaces as mandated by Pandoc. If you add an inline footnote `_directly_` after the figure, the artwork gets a title attribute with the text of that footnote (and a possible anchor).

## [6.2.](#) Tables

A table can be entered by using Pandoc's table syntax. You can choose multiple styles as input, but they all are converted to the same style (plain "`<texttable>`") table in `xml2rfc`. If you add an inline footnote `_directly_` after the table, it will get a title attribute with the text of that footnote (and a possible anchor). The built in syntax of Pandoc to create a caption with "Table:" should not be used.

## [6.3.](#) References

Pandoc provides a syntax that can be used for references. Its syntax is repeated in this paragraph. Any reference like: "`[Click here](URI)`", is an external reference. An internal (i.e. see Section X) reference is typeset with: "`[](#localid)`".

For referencing RFCs (and other citations), you will need add the reference source in the template, as an external XML entity, Figure 2 provides an example. After that you can use an internal reference: "`[](#RFC2629)`" to reference [RFC 2629](#).

There is no direct support for referencing tables, figures and artworks, but `pandoc2rfc` employs the following "hack". If an inline footnote is added after the figure or table, the text of the footnote is used as the title. The first word up until a double colon "::`" will be used as the anchor. If a figure has an anchor it will be centered on the page.`

Figure 2 for instance, is followed by this inline footnote:

```
^[fig:minimal::A minimal template.xml.]
```

## [7.](#) Acknowledgements



The following people have helped shape Pandoc2rfc: Benno Overeinder, Erlend Hamnaberg, Matthijs Mekking and Trygve Laugstoeil.

## 8. Security Considerations

This document raises no security issues.

## 9. IANA Considerations

This document has no actions for IANA.

## 10. Normative References

[Markdown]

Gruber, J., "Markdown", 2004,  
<<http://daringfireball.net/projects/markdown/>>.

[Pandoc2rfc]

Gieben, R., "Pandoc2rfc git repository", October 2012,  
<<http://github.com/miekg/pandoc2rfc>>.

[PandocGuide]

MacFarlane, J., "Pandoc User's Guide", 2006,  
<<http://johnmacfarlane.net/pandoc/README.html>>.

[Pandoc]

MacFarlane, J., "Pandoc, a universal document converter", 2006, <<http://johnmacfarlane.net/pandoc/>>.

[RFC2629]

Rose, M., "Writing I-Ds and RFCs using XML", [RFC 2629](#), June 1999.

[W3C.REC-xslt-19991116]

Clark, J., "XSL Transformations (XSLT) Version 1.0", World Wide Web Consortium Recommendation REC-xslt-19991116, November 1999,  
<<http://www.w3.org/TR/1999/REC-xslt-19991116>>.

[XSLT]

Veillard, D., "The XSLT C library for GNOME", 2006,  
<<http://xmlsoft.org/XSLT/xsltproc2.html>>.

## Appendix A. Changelog

[This section should be removed by the RFC editor before publishing]

### A.1. -00

1. Initial document.

#### [A.2.](#) -01

1. Lots of updates;
2. Added the style sheet use in an appendix.

#### [A.3.](#) -02

1. Make "template.xml" actually valid XML;
2. Removed the style sheet from the appendix;
3. Make more explicit that typesetting some XML files is still needed;
4. Fix blockquote text and conversion;
5. Overhauled the way references to figures and tables work;
6. Cleaned up and removed duplicate text.

#### [A.4.](#) -03

1. Change affiliation for R. Gieben.

### [Appendix B.](#) Cheat Sheet

Textual construct	Pandoc syntax	Text output
Section Header	"# Section"	1. Section
Unordered List	"* item"	o item
Unordered List	"#. item"	item
Ordered List	"1. item"	1. item
Ordered List	"a. item"	a. item
Ordered List	"ii. item"	i. item
Ordered List	"II. item"	(1) item
Ordered List	"A. item"	A. item
Emphasis	"_text_"	_text_
Strong Emphasis	"**text**"	*text*
Verbatim	"`text`"	"text"
Block Quote	"> quote"	quote
External Reference	"[Click](URI)"	Click [1]
Internal Reference	"[#id]"	<a href="#">Section 1</a>

Figure Anchor	"[fid::text]"	N/A	
Figure Reference	"[](#fid)"	Figure 1	

Gieben

Expires April 18, 2014

[Page 9]

Internet-Draft

Pandoc2rfc

October 2013

Table Anchor	"[tid::text]"	N/A	
Table Reference	"[](#tid)"	Table 1	
Citations	"[](#RFC2119)"	<a href="#">[RFC2199]</a>	
Table	Tables		
Figures	Code Blocks		
Definition List	Definition		

+-----+-----+-----+

Table 1: The most important textual constructs that can be used in Pandoc2rfc. The bottom three create output to voluminous to show in this table.

Author's Address

R. (Miek) Gieben  
Google

Email: [miek@google.com](mailto:miek@google.com)

Gieben

Expires April 18, 2014

[Page 10]