

Network Working Group
Internet-Draft
Expires August 1999

Harrie Hazewinkel
Joint Research Centre of the E.C.
Carl W. Kalbfleisch
Verio, Inc.
Juergen Schoenwaelder
TU Braunschweig
25 February 1999

Definitions of Managed Objects for WWW Services

<[draft-ietf-applmib-wwwmib-11.txt](#)>

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC 2026](#). Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/lid-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

Distribution of this document is unlimited. Please send comments to the Application MIB Working Group, <applmib@ietf.verio.net>.

Copyright Notice

Copyright (C) The Internet Society (1999). All Rights Reserved.

Abstract

This memo defines an experimental portion of the Management Information Base (MIB) for use with network management protocols in the Internet Community. In particular it describes a set of objects for managing World Wide Web (WWW) services.

Table of Contents

1	Introduction	3
2	The SNMP Management Framework	3
3	Terminology	4
4	Overview	5
4.1	Purpose and Requirements	6
4.2	Relationship to other Standards Efforts	6
4.3	WWW Services	7
4.4	Document Transfer Protocol	7
5	Structure of the MIB	8
5.1	Service Information Group	8
5.2	Protocol Statistics Group	9
5.3	Document Statistics Group	9
6	Definitions	12
7	Document Transfer Protocol Mappings	40
7.1	The HyperText Transfer Protocol	40
7.2	The File Transfer Protocol	41
8	Security Considerations	42
9	Intellectual Property	43
10	Acknowledgments	43
11	Editors' Addresses	43
12	References	45
13	Full Copyright Statement	48

Internet-Draft

WWW Service MIB

February 1999

1. Introduction

This memo defines a set of objects for managing World Wide Web (WWW) services. This MIB extends the application management framework defined by the System Application Management MIB (SYSAPPL-MIB) [[23](#)] and the Application Management MIB (APPLICATION-MIB) [[24](#)]. The MIB is also self-contained so that it can be implemented and used without having to implement or install the APPLICATION-MIB or the SYSAPPL-MIB.

The protocol statistics defined in the WWW Service MIB are based on an abstract document transfer protocol (DTP). This memo also defines a mapping of the abstract DTP to HTTP and FTP. Additional mappings may be defined in the future in order to use this MIB with other document transfer protocols. It is anticipated that such future mappings will be defined in separate RFCs.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[17](#)].

2. The SNMP Management Framework

The SNMP Management Framework presently consists of five major components:

- o An overall architecture, described in [RFC 2271](#) [[1](#)].
- o Mechanisms for describing and naming objects and events for the purpose of management. The first version of this Structure of Management Information (SMI) is called SMIV1 and described in

[RFC 1155](#) [2], [RFC 1212](#) [3] and [RFC 1215](#) [4]. The second version, called SMIV2, is described in [RFC 1902](#) [5], [RFC 1903](#) [6] and [RFC 1904](#) [7].

- o Message protocols for transferring management information. The first version of the SNMP message protocol is called SNMPv1 and described in [RFC 1157](#) [8]. A second version of the SNMP message protocol, which is not an Internet standards track protocol, is called SNMPv2c and described in [RFC 1901](#) [9] and [RFC 1906](#) [10]. The third version of the message protocol is called SNMPv3 and described in [RFC 1906](#) [10], [RFC 2272](#) [11] and [RFC 2274](#) [12].
- o Protocol operations for accessing management information. The first set of protocol operations and associated PDU formats is described in [RFC 1157](#) [8]. A second set of protocol operations

and associated PDU formats is described in [RFC 1905](#) [13].

- o A set of fundamental applications described in [RFC 2273](#) [14] and the view-based access control mechanism described in [RFC 2275](#) [15].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. Objects in the MIB are defined using the mechanisms defined in the SMI.

This memo specifies a MIB module that is compliant to the SMIV2. A MIB conforming to the SMIV1 can be produced through the appropriate translations. The resulting translated MIB must be semantically equivalent, except where objects or events are omitted because no translation is possible (use of Counter64). Some machine readable information in SMIV2 will be converted into textual descriptions in SMIV1 during the translation process. However, this loss of machine readable information is not considered to change the semantics of the MIB.

3. Terminology

This section defines the terminology used throughout this document.

- o The 'World Wide Web' (WWW) is a world wide information system which is based on the concept of documents that are linked together by embedding references (links) to other local or remote documents.
- o A 'document' is a coherent piece of data which is accessible in the World Wide Web. No assumptions are made about the content or the type of a document.
- o A 'Uniform Resource Locator' (URL) is a formatted string representation for a document available via the Internet. URLs are used to express references between documents. For the syntax and semantics of the URL string representation refer to [RFC 2396 \[18\]](#)
- o A 'Document Transfer Protocol' (DTP) is a protocol used within the World Wide Web to invoke actions on documents. The DTP is an abstraction from real protocols, such as HTTP [[19](#),[20](#)] or FTP [[21](#)].
- o A 'request' is a DTP protocol operation which is targeted to a 'document' and invokes an action on the target document. The

request type specifies the action that should be performed. A request can have a document associated with it.

- o A 'response' is a DTP protocol operation which is returned as a result of a previous (and associated) request. The response status indicates if the requested action was successful or if errors occurred. A response can have a document associated with it.
- o A 'WWW service' is a set of actions that can be invoked on a document. Typical actions are the transfer of documents or the retrieval of administrative information about documents. WWW services are provided by means of a DTP. A WWW service can be identified by the DTP protocol used to invoke services and the transport endpoint used by that protocol.

- o A 'client' is a program which establishes connections for the purpose of sending requests and receiving responses.
- o A 'server' is a program that accepts connections in order to service requests by sending back responses.
- o A 'proxy' is an intermediary program which acts as both a server and a client for the purpose of making requests on behalf of other clients. Requests are serviced internally or by passing them on, with possible translation, to other servers.
- o A 'caching proxy' is a proxy with the capability of locally storing responses to associated requests. A caching proxy can respond to similar requests with a previously stored response.

[4.](#) Overview

The World Wide Web (WWW) is a global network of information. Information is stored in documents, which can have various formats, including hyper-text and multi-media documents. Access to these documents is provided by servers which are located all around the world and are linked to each other via hyper-links embedded in documents.

The usability of the World Wide Web depends largely on the performance of the services realized by these servers. The services are typically monitored through log files. This becomes a difficult task when a single organization is responsible for a large number of services. It is therefore desirable to treat WWW services as objects that can be managed by using the Internet network management

framework [[22](#)].

[4.1.](#) Purpose and Requirements

The goal of this MIB is to define a standardized set of objects which lead to integrated and improved performance and fault management in a heterogeneous environment of WWW services. This MIB focuses on the

service-oriented view. It does not deal with the process oriented view, which is covered by the System Application MIB [23] and the Application MIB [24].

This document defines a set of managed objects to monitor WWW services for short-term operational purposes, such as problem detection and troubleshooting. No attempts are made here to cover accounting or hit metering issues.

The scope of the MIB is further limited by the requirement that an implementation conforming to this MIB must be possible without putting a huge CPU or memory burden on the WWW server implementation.

In addition, this MIB does not cover WWW service configuration. Server software has become an open market where competing vendors constantly invent new features in order to shape their products. It is therefore not possible to reach consensus on a common way to configure WWW services at this point in time.

[4.2.](#) Relationship to other Standards Efforts

The WWW Service MIB fits into the application management architecture defined in the System Application MIB [23]. The System Application MIB and the Application MIB [24] use a process-oriented view, where an application is viewed as a collection of processes. The WWW Service MIB described in this memo uses a service-oriented view, which looks at the services provided by a set of processes.

The relationship between the process-oriented view and the service-oriented view is a many-to-many relationship, because one process can implement multiple services and multiple services can be implemented by a single set of processes. The Application Management MIB [24] contains generic mapping tables, which map back and forth between both views.

The WWW Service MIB interfaces to the Application MIB [24] by using the service instance identifier (applSrvIndex) for wwwServiceIndex if an applicable instance of applSrvIndex is available. The WWW Service

MIB is self-contained and can be implemented as a stand-alone module if the service-level tables in the Application MIB are not available.

[4.3.](#) WWW Services

The MIB is organized around the concept of WWW services. WWW services are a set of actions that can be invoked on a document. A WWW service is provided or used by either a client, a server or a proxy. Clients send out requests for information to server or proxy server. Servers receive, process and respond to requests received from clients. Servers usually have access to local documents, which can be transferred to clients.

A proxy is a special server, who acts as both a server and a client for the purpose of making requests on behalf of other clients. A proxy is able to translate between the client and the origin server. A proxy might also interact with other information retrieval system, like for example databases.

The MIB defined in this memo distinguishes between outgoing and incoming requests and responses. This makes it possible to obtain statistics for clients, servers and proxies with a single set of objects.

A special proxy server is the caching proxy, which maintains a cache of previously received documents in order to reduce the bandwidth used by World Wide Web clients. One interesting piece of management information is the percentage of requests that were served from the cache of the caching proxy (hits/miss-ratio). This ratio is not contained explicitly in this MIB. Instead, the ratio can be derived from the objects that count incoming and outgoing requests and responses.

[4.4.](#) Document Transfer Protocol

The MIB is based on the concept of an abstract document transfer protocol (DTP). The purpose of the abstract document transfer protocol is to make the MIB definitions independent from concrete protocols, like the Hypertext Transfer Protocol (HTTP) [[19,20](#)] or the File Transfer Protocol (FTP) [[21](#)].

The abstract document transfer protocol makes the following assumptions about a concrete transfer protocol:

Internet-Draft

WWW Service MIB

February 1999

- o The transfer protocol uses a request/response style of interactions.
- o Every request contains a request type, which defines the operations performed by the receiving server. The request type is represented by an OCTET STRING. It might be necessary to define a translation into an OCTET STRING value for protocols that use numbers to identify request types.
- o A response contains a status code, which indicates if the request was processed successfully or which error occurred. The status code is represented as an INTEGER value. It might be necessary to define a mapping for protocols that do not use an INTEGER status code.
- o A transfer protocol can send multiple responses for a single request. Multiple responses are counted separately in the protocol statistics group.

A primary response has to be identified for the document statistics. The primary response is the response that indicates whether the request was successful.

[Section 7](#) of this memo defines a mapping of the document transfer protocol to the HTTP protocol and the FTP protocol. Mappings to other protocols, like NNTP [[25](#)] or WebNFS [[26,27](#)] might be defined in the future.

[5.](#) Structure of the MIB

This section presents the structure of the MIB. The objects are arranged into the following groups:

- o service information
- o protocol statistics
- o document statistics

[5.1.](#) Service Information Group

The service information group consists of a single table describing all the WWW services managed by the SNMP agent. The service table contains administrative network management information for (potentially) multiple WWW services running on a single host. It also

contains information for all services within virtual domains of a host. The columnar objects in the table can be divided into two main groups:

- o global administrative information of the service, such as service contact person, and
- o network information, such as the transfer protocol.

[5.2.](#) Protocol Statistics Group

The protocol statistics group provides network management information about the traffic received or transmitted by a WWW service. This group contains counters related to DTP protocol operations and consists of five tables:

- o The `wwwSummaryTable` contains a set of network traffic related counters. The table provides a summarization of the network traffic and protocol operations related to a WWW service. It is well recognized that certain variables are redundant with respect to the request and response tables, but they are added to provide an operator a quick overview and to reduce SNMP network traffic.
- o The `wwwRequestInTable` contains detailed information about incoming requests. Every particular request type is counted separately.
- o The `wwwRequestOutTable` contains detailed information about outgoing requests. Every particular request type is counted separately.
- o The `wwwResponseInTable` contains detailed information about incoming responses. Every particular response type is counted

separately.

- o The `wwwResponseOutTable` contains detailed information about outgoing responses. Every particular response type is counted separately.

5.3. Document Statistics Group

The document group contains information about the documents which were accessed in the past. The group provides four types of statistics.

1. Details about the last N attempts to invoke actions on documents.
2. The Top N documents sorted by the number of actions invoked on them computed over a time interval.
3. The Top N documents sorted by the number of content bytes transferred computed over a time interval.
4. Summary statistics computed over a time interval.

The Top N document statistics are collected in buckets in order to reduce agent resources and to allow a manager to detect changes in the service usage pattern. Buckets are filled over a configurable time interval. The agent computes the Top N statistics and starts a new bucket once the time interval for the bucket has passed. The time interval is configurable for each WWW service.

The document statistics group associates a response type to the request which invoked an action. In case a DTP sends multiple responses, the primary response must be used to derive the response type of the request/response interaction.

The group consist of the following tables:

- o The `wwwDocCtrlTable` provides the manager a means to limit the document statistic tables in size and to control the expiration

and creation of buckets.

- o The `wwwDocLastNTable` provides the manager information about the last N documents which were accessed. The table lists the documents for which access was attempted along with the request and response type of the DTP and a status message. The request and response types provide a manager information of how attempts to invoke actions were handled by the DTP. The status message object provides human readable text to further describe the response type.

The number of documents in the `wwwDocLastNTable` is controlled by the `wwwDocCtrlLastNSize` object in the `wwwDocCtrlTable`. The `wwwDocCtrlLastNLock` object of the `wwwDocCtrlTable` allows a management application to lock the `wwwDocLastNTable` in order to retrieve a consistent snapshot of the fast changing `wwwDocLastNTable`.

- o The `wwwDocBucketTable` lists the buckets of statistical information that have been collected. An entry in the

`wwwDocBucketTable` contains the creation timestamp of the bucket as well as summary information (number of accesses, number of documents accessed and number of bytes transferred).

The time interval is controlled by the `wwwDocCtrlBucketTimeInterval` object of the `wwwDocCtrlTable`. The maximum number of buckets maintained by the SNMP agent for a particular WWW service is controlled by the `wwwDocCtrlBuckets` object of the `wwwDocCtrlTable`.

- o The `wwwDocAccessTopNTable` provides the manager an overview of the top N documents which were accessed while statistics were collected for a particular bucket. The `wwwDocAccessTopNTable` is sorted by the number of read attempts per document. The maximum number of entries in the `wwwDocAccessTopNTable` is controlled by the `wwwDocCtrlTopNSize` object.
- o The `wwwDocBytesTopNTable` provides the manager an overview of the top N documents which caused most of the network traffic while

statistics were collected for a particular bucket. The `wwwDocBytesTopNTable` is sorted by the number of bytes transferred. The maximum number of entries in the `wwwDocBytesTopNTable` is controlled by the `wwwDocCtrlTopNSize` object.

The Top N statistics and the parameters of the underlying bucket are not visible in the MIB as long as the bucket is filling up. Instead, the following steps must be taken when the time interval for a buckets has passed:

1. A new entry in the `wwwDocBucketTable` is created to summarize the document statistics for that time interval.
2. The corresponding entries in the `wwwDocAccessTopNTable` and the `wwwDocBytesTopNTable` are computed and made available.
3. If the resulting number of entries in the `wwwDocBucketTable` for the WWW service now exceeds `wwwDocCtrlBuckets`, then the oldest bucket for this WWW service and all corresponding entries in the `wwwDocBucketTable`, `wwwDocAccessTopNTable`, and `wwwDocBytesTopNTable` are deleted.

Note that a bucket usually contains much more data than displayed in the Top N tables. The number of entries in the Top N table for a

bucket is controlled by `wwwDocCtrlTopNSize`, while the number of entries in a bucket depends on the number of actions invoked on documents within the time interval over which a bucket is filled up. It is therefore suggested to discard the data associated with a bucket once the entries for the `wwwDocBucketTable`, `wwwDocAccessTopNTable` and `wwwDocBytesTopNTable` have been calculated.

[6.](#) Definitions

WWW-MIB DEFINITIONS ::= BEGIN

IMPORTS

MODULE-IDENTITY, OBJECT-TYPE, mib-2,
Counter32, Counter64, Integer32, Unsigned32, TimeTicks
FROM SNMPv2-SMI

TEXTUAL-CONVENTION, DisplayString, DateAndTime, TimeInterval
FROM SNMPv2-TC

MODULE-COMPLIANCE, OBJECT-GROUP
FROM SNMPv2-CONF

Utf8String
FROM SYSAPPL-MIB;

wwwMIB MODULE-IDENTITY

LAST-UPDATED "9902251400Z"
ORGANIZATION "IETF Application MIB Working Group"
CONTACT-INFO

" Harrie Hazewinkel

Postal: Joint Research Centre of the E.C.
via Fermi - Ispra 21020 (VA)
Italy

Tel: +39+(0)332 786322
Fax: +39+(0)332 785641
E-mail: harrie.hazewinkel@jrc.it

Carl W. Kalbfleisch

Postal: Verio, Inc.
1950 Stemmons Freeway
Suite 2004 - Infomart
Dallas, TX 75207
US

Juergen Schoenwaelder

Postal: TU Braunschweig
Bueltenweg 74/75
38106 Braunschweig
Germany

Tel: +49 531 391-3683

Fax: +49 531 489-5936

E-mail: schoenw@ibr.cs.tu-bs.de"

DESCRIPTION

"This WWW service MIB module is applicable to services realized by a family of 'Document Transfer Protocols' (DTP). Examples of DTPs are HTTP and FTP."

-- Get real registration number from IANA.

-- ::= { mib-2 XXXX }

::= { mib-2 8080 }

--

-- Object Identifier Assignments

--

wwwMIBObjects OBJECT IDENTIFIER ::= { wwwMIB 1 }

wwwMIBConformance OBJECT IDENTIFIER ::= { wwwMIB 2 }

--

-- Textual Conventions

--

WwwRequestType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The WwwRequestType defines the textual identification of request types used by a document transfer protocol. For the proper values for a given DTP, refer to the protocol mappings for that DTP."

SYNTAX OCTET STRING (SIZE (1..40))

WwwResponseType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The WwwResponseType defines the different response values used by document transfer protocols. For the proper values

for a given DTP, refer to the protocol mappings for that DTP."

SYNTAX Integer32 (0..2147483647)

WwwOperStatus ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The operational status of a WWW service. 'down' indicates that the service is not available. 'running' indicates that the service is operational and available. 'halted' indicates that the service is operational but not available. 'congested' indicates that the service is operational but no additional inbound associations can be accommodated. 'restarting' indicates that the service is currently unavailable but is in the process of restarting and will be available soon."

SYNTAX INTEGER {
 down(1),
 running(2),
 halted(3),
 congested(4),
 restarting(5)
 }

WwwDocName ::= TEXTUAL-CONVENTION

DISPLAY-HINT "255a"

STATUS current

DESCRIPTION

"The server relative name of a document. If the URL were <http://www.x.org/standards/search/search.cgi?string=test> then the value of this textual convention would resolve to '/standards/search/search.cgi'. This textual convention uses the character set for URIs as defined in [RFC 2396 section 2](#)."

SYNTAX OCTET STRING (SIZE (0..255))

-- The WWW Service Information Group

--

-- The WWW service information group contains information about
-- the WWW services known by the SNMP agent.

wwwService OBJECT IDENTIFIER ::= { wwwMIBObjects 1 }

wwwServiceTable OBJECT-TYPE

SYNTAX SEQUENCE OF WwwServiceEntry

MAX-ACCESS not-accessible

Internet-Draft

WWW Service MIB

February 1999

```
STATUS      current
DESCRIPTION
    "The table of the WWW services known by the SNMP agent."
 ::= { wwwService 1 }

wwwServiceEntry OBJECT-TYPE
    SYNTAX      WwwServiceEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Details about a particular WWW service."
    INDEX       { wwwServiceIndex }
    ::= { wwwServiceTable 1 }

WwwServiceEntry ::= SEQUENCE {
    wwwServiceIndex      Unsigned32,
    wwwServiceDescription Utf8String,
    wwwServiceContact    Utf8String,
    wwwServiceProtocol   OBJECT IDENTIFIER,
    wwwServiceName        DisplayString,
    wwwServiceType        INTEGER,
    wwwServiceStartTime   DateAndTime,
    wwwServiceOperStatus  WwwOperStatus,
    wwwServiceLastChange  DateAndTime
}

wwwServiceIndex OBJECT-TYPE
    SYNTAX      Unsigned32 (1..4294967295)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An integer used to uniquely identify a WWW service. The
        value must be the same as the corresponding value of the
        applSrvInst defined in the Application Management MIB
        (APPLICATION-MIB) if the applSrvIndex object is available.
        It might be necessary to manually configure sub-agents in
        order to meet this requirement."
    ::= { wwwServiceEntry 1 }
```

wwwServiceDescription OBJECT-TYPE

SYNTAX Utf8String

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Textual description of the WWW service. This shall include at least the vendor and version number of the application realizing the WWW service. In a minimal case, this might

be the Product Token (see [RFC 2068](#)) for the application."
 ::= { wwwServiceEntry 2 }

wwwServiceContact OBJECT-TYPE

SYNTAX Utf8String

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The textual identification of the contact person for this service, together with information on how to contact this person. For instance, this might be a string containing an email address, e.g. '<webmaster@domain.name>'."

::= { wwwServiceEntry 3 }

wwwServiceProtocol OBJECT-TYPE

SYNTAX OBJECT IDENTIFIER

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"An identification of the primary protocol in use by this service. For Internet applications, the IANA maintains a registry of the OIDs which correspond to well-known application protocols. If the application protocol is not listed in the registry, an OID value of the form {applTCPProtoID port} or {applUDPPProtoID port} are used for TCP-based and UDP-based protocols, respectively. In either case 'port' corresponds to the primary port number being used by the protocol."

REFERENCE

"The OID values applTCPProtoID and applUDPPProtoID are defined in the NETWORK-SERVICES-MIB ([RFC 2248](#))."

```
::= { wwwServiceEntry 4 }
```

```
wwwServiceName OBJECT-TYPE
```

```
SYNTAX      DisplayString
```

```
MAX-ACCESS  read-only
```

```
STATUS      current
```

```
DESCRIPTION
```

```
    "The fully qualified domain name by which this service is
       known. This object must contain the virtual host name if
       the service is realized for a virtual host."
```

```
::= { wwwServiceEntry 5 }
```

```
wwwServiceType OBJECT-TYPE
```

```
SYNTAX      INTEGER {
                    wwwOther(1),
                    wwwServer(2),
```

```
        wwwClient(3),
        wwwProxy(4),
        wwwCachingProxy(5)
```

```
    }
```

```
MAX-ACCESS  read-only
```

```
STATUS      current
```

```
DESCRIPTION
```

```
    "The application type using or realizing this WWW service."
```

```
::= { wwwServiceEntry 6 }
```

```
wwwServiceStartTime OBJECT-TYPE
```

```
SYNTAX      DateAndTime
```

```
MAX-ACCESS  read-only
```

```
STATUS      current
```

```
DESCRIPTION
```

```
    "The date and time when this WWW service was last started.
       The value SHALL be '0000000000000000'H if the last start
       time of this WWW service is not known."
```

```
::= { wwwServiceEntry 7 }
```

```
wwwServiceOperStatus OBJECT-TYPE
```

```
SYNTAX      WwOperStatus
```

```
MAX-ACCESS  read-only
```

```

STATUS      current
DESCRIPTION
    "Indicates the operational status of the WWW service."
 ::= { wwwServiceEntry 8 }

wwwServiceLastChange OBJECT-TYPE
    SYNTAX      DateAndTime
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION
        "The date and time when this WWW service entered its current
        operational state. The value SHALL be '0000000000000000'H if
        the time of the last state change is not known."
    ::= { wwwServiceEntry 9 }

-- The WWW Protocol Statistics Group
--
-- The WWW protocol statistics group contains statistics about
-- the DTP requests and responses sent or received.

wwwProtocolStatistics OBJECT IDENTIFIER ::= { wwwMIBObjects 2 }

wwwSummaryTable OBJECT-TYPE

```

```

    SYNTAX      SEQUENCE OF WwwSummaryEntry
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "The table providing overview statistics for the
        WWW services on this system."
    ::= { wwwProtocolStatistics 1 }

wwwSummaryEntry OBJECT-TYPE
    SYNTAX      WwwSummaryEntry
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "Overview statistics for an individual service."
    INDEX       { wwwServiceIndex }

```

```

 ::= { wwwSummaryTable 1 }

WwwSummaryEntry ::= SEQUENCE {
    wwwSummaryInRequests      Counter32,
    wwwSummaryOutRequests     Counter32,
    wwwSummaryInResponses     Counter32,
    wwwSummaryOutResponses    Counter32,
    wwwSummaryInBytes         Counter64,
    wwwSummaryInLowBytes      Counter32,
    wwwSummaryOutBytes        Counter64,
    wwwSummaryOutLowBytes     Counter32
}

wwwSummaryInRequests OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of requests successfully received."
    ::= { wwwSummaryEntry 1 }

wwwSummaryOutRequests OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of requests generated."
    ::= { wwwSummaryEntry 2 }

wwwSummaryInResponses OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only

```

```

    STATUS      current
    DESCRIPTION
        "The number of responses successfully received."
    ::= { wwwSummaryEntry 3 }

wwwSummaryOutResponses OBJECT-TYPE
    SYNTAX      Counter32

```

```

MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "The number of responses generated."
 ::= { wwwSummaryEntry 4 }

wwwSummaryInBytes OBJECT-TYPE
    SYNTAX      Counter64
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of content bytes received."
    ::= { wwwSummaryEntry 5 }

wwwSummaryInLowBytes OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The lowest thirty-two bits of wwwSummaryInBytes."
    ::= { wwwSummaryEntry 6 }

wwwSummaryOutBytes OBJECT-TYPE
    SYNTAX      Counter64
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of content bytes transmitted."
    ::= { wwwSummaryEntry 7 }

wwwSummaryOutLowBytes OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The lowest thirty-two bits of wwwSummaryOutBytes."
    ::= { wwwSummaryEntry 8 }

-- The WWW request tables contain detailed information about
-- requests send or received by WWW services.

```

```

wwwRequestInTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF WwwRequestInEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The table providing detailed statistics for requests
         received by WWW services on this system."
    ::= { wwwProtocolStatistics 2 }

```

```

wwwRequestInEntry OBJECT-TYPE
    SYNTAX      WwwRequestInEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Request statistics for an individual service."
    INDEX       { wwwServiceIndex, wwwRequestInIndex }
    ::= { wwwRequestInTable 1 }

```

```

WwwRequestInEntry ::= SEQUENCE {
    wwwRequestInIndex      WwwRequestType,
    wwwRequestInRequests   Counter32,
    wwwRequestInBytes       Counter32,
    wwwRequestInLastTime   DateAndTime
}

```

```

wwwRequestInIndex OBJECT-TYPE
    SYNTAX      WwwRequestType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The particular request type the statistics apply to."
    ::= { wwwRequestInEntry 1 }

```

```

wwwRequestInRequests OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of requests of this type received by this
         WWW service."
    ::= { wwwRequestInEntry 2 }

```

```

wwwRequestInBytes OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION

```

Internet-Draft

WWW Service MIB

February 1999

"The number of content bytes per request type received
by this WWW service."
::= { wwwRequestInEntry 3 }

wwwRequestInLastTime OBJECT-TYPE

SYNTAX DateAndTime

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The date and time when the last byte of the last complete
request of this type was received by this WWW service. The
value SHALL be '0000000000000000'H if no request of this
type has been received yet."

::= { wwwRequestInEntry 4 }

wwwRequestOutTable OBJECT-TYPE

SYNTAX SEQUENCE OF WwwRequestOutEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The table providing detailed statistics for requests
generated by the services on this system."

::= { wwwProtocolStatistics 3 }

wwwRequestOutEntry OBJECT-TYPE

SYNTAX WwwRequestOutEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Request statistics for an individual service."

INDEX { wwwServiceIndex, wwwRequestOutIndex }

::= { wwwRequestOutTable 1 }

WwwRequestOutEntry ::= SEQUENCE {

wwwRequestOutIndex WwwRequestType,

wwwRequestOutRequests Counter32,

wwwRequestOutBytes Counter32,

wwwRequestOutLastTime DateAndTime

}

wwwRequestOutIndex OBJECT-TYPE

SYNTAX WwwRequestType

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
 "The particular request type the statistics apply to."
 ::= { wwwRequestOutEntry 1 }

wwwRequestOutRequests OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The number of requests of this type generated by this
 WWW service."
 ::= { wwwRequestOutEntry 2 }

wwwRequestOutBytes OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The number of content bytes per requests type generated
 by this WWW service."
 ::= { wwwRequestOutEntry 3 }

wwwRequestOutLastTime OBJECT-TYPE

SYNTAX DateAndTime
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The date and time when the first byte of the last request
 of this type was send by this WWW service. The value SHALL
 be '0000000000000000'H if no request of this type has been
 send yet."
 ::= { wwwRequestOutEntry 4 }

-- The WWW response tables contain detailed information about
-- responses sent or received by WWW services.

wwwResponseInTable OBJECT-TYPE

SYNTAX SEQUENCE OF WwwResponseInEntry

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
 "The table providing detailed statistics for responses
 received by WWW services on this system."
::= { wwwProtocolStatistics 4 }

wwwResponseInEntry OBJECT-TYPE
SYNTAX WwResponseInEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
 "Response statistics for an individual service."

Hazewinkel, et. al.

[Page 22]

Internet-Draft

WWW Service MIB

February 1999

INDEX { wwwServiceIndex, wwwResponseInIndex }
::= { wwwResponseInTable 1 }

WwResponseInEntry ::= SEQUENCE {
 wwwResponseInIndex WwResponseType,
 wwwResponseInResponses Counter32,
 wwwResponseInBytes Counter32,
 wwwResponseInLastTime DateAndTime
}

wwwResponseInIndex OBJECT-TYPE
SYNTAX WwResponseType
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
 "The particular response type the statistics apply to."
::= { wwwResponseInEntry 1 }

wwwResponseInResponses OBJECT-TYPE
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The number of responses of this type received by this
 WWW service."
::= { wwwResponseInEntry 2 }

wwwResponseInBytes OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of content bytes per response type received by this WWW service."

::= { wwwResponseInEntry 3 }

wwwResponseInLastTime OBJECT-TYPE

SYNTAX DateAndTime

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The date and time when the last byte of the last complete response of this type was received by this WWW service. The value SHALL be '0000000000000000'H if no response of this type has been received yet."

::= { wwwResponseInEntry 4 }

wwwResponseOutTable OBJECT-TYPE

SYNTAX SEQUENCE OF WwwResponseOutEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The table providing detailed statistics for responses generated by services on this system."

::= { wwwProtocolStatistics 5 }

wwwResponseOutEntry OBJECT-TYPE

SYNTAX WwwResponseOutEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Response statistics for an individual service."

INDEX { wwwServiceIndex, wwwResponseOutIndex }

::= { wwwResponseOutTable 1 }

WwwResponseOutEntry ::= SEQUENCE {

```

    wwwResponseOutIndex      WwwResponseType,
    wwwResponseOutResponses   Counter32,
    wwwResponseOutBytes       Counter32,
    wwwResponseOutLastTime    DateAndTime
}

wwwResponseOutIndex OBJECT-TYPE
    SYNTAX      WwwResponseType
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "The particular response type the statistics apply to."
    ::= { wwwResponseOutEntry 1 }

wwwResponseOutResponses OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION
        "The number of responses of this type generated by this
         WWW service."
    ::= { wwwResponseOutEntry 2 }

wwwResponseOutBytes OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION

```

```

        "The number of content bytes per response type generated
         by this WWW service."
    ::= { wwwResponseOutEntry 3 }

wwwResponseOutLastTime OBJECT-TYPE
    SYNTAX      DateAndTime
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION
        "The date and time when the first byte of the last response of
         this type was sent by this WWW service. The value SHALL be

```

```

        '0000000000000000'H if response of this type has been send
        yet."
 ::= { wwwResponseOutEntry 4 }

-- The WWW Document Statistics Group
--
-- The WWW document statistics group contains statistics about
-- document read attempts.

wwwDocumentStatistics OBJECT IDENTIFIER ::= { wwwMIBObjects 3 }

wwwDocCtrlTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF WwwDocCtrlEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table which controls how the MIB implementation
        collects and maintains document statistics."
    ::= { wwwDocumentStatistics 1 }

wwwDocCtrlEntry OBJECT-TYPE
    SYNTAX      WwwDocCtrlEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry used to configure the wwwDocLastNTable,
        the wwwDocBucketTable, the wwwDocAccessTopNTable,
        and the wwwDocBytesTopNTable."
    INDEX       { wwwServiceIndex }
    ::= { wwwDocCtrlTable 1 }

WwwDocCtrlEntry ::= SEQUENCE {
    wwwDocCtrlLastNSize      Unsigned32,
    wwwDocCtrlLastNLock     TimeTicks,
    wwwDocCtrlBuckets        Unsigned32,

```

```

    wwwDocCtrlBucketTimeInterval  TimeInterval,
    wwwDocCtrlTopNSize             Unsigned32
}

```

wwwDocCtrlLastNSize OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The maximum number of entries in the wwwDocLastNTable."

DEFVAL { 25 }

::= { wwwDocCtrlEntry 1 }

wwwDocCtrlLastNLock OBJECT-TYPE

SYNTAX TimeTicks

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object allows a manager to lock the wwwDocLastNTable in order to retrieve the wwwDocLastNTable in a consistent state. The agent is expected to take a snapshot of the wwwDocLastNTable when it is locked and to continue updating the real wwwDocLastNTable table so that recent information is available as soon as the wwwDocLastNTable is unlocked again.

Setting this object to a value greater than 0 will lock the table. The timer ticks backwards until it reaches 0. The table unlocks automatically once the timer reaches 0 and the timer stops ticking.

A manager can increase the timer to request more time to read the table. However, any attempt to decrease the timer will fail with an inconsistentValue error. This rule ensures that multiple managers can simultaneously lock and retrieve the wwwDocLastNTable. Note that managers must cooperate in using wwwDocCtrlLastNLock. In particular, a manager MUST not keep the wwwDocLastNTable locked when it is not necessary to finish a retrieval operation."

::= { wwwDocCtrlEntry 2 }

wwwDocCtrlBuckets OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The maximum number of buckets maintained by the agent before the oldest bucket is deleted. The buckets are

used to populate the `wwwDocAccessTopNTable` and the `wwwDocBytesTopNTable`. The time interval captured in each bucket can be configured by setting the `wwwDocCtrlBucketTimeInterval` object."

DEFVAL { 4 } -- 4 buckets times 15 minutes = 1 hour
::= { wwwDocCtrlEntry 3 }

`wwwDocCtrlBucketTimeInterval` OBJECT-TYPE

SYNTAX TimeInterval

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The time interval after which a new bucket is created.

Changing this object has no effect on existing buckets."

DEFVAL { 90000 } -- 15 minutes (resolution .01 s)

::= { wwwDocCtrlEntry 4 }

`wwwDocCtrlTopNSize` OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The maximum number of entries shown in the

`wwwDocAccessTopNTable` and the `wwwDocBytesTopNTable`.

Changing this object has no effect on existing buckets."

DEFVAL { 25 }

::= { wwwDocCtrlEntry 5 }

`wwwDocLastNTable` OBJECT-TYPE

SYNTAX SEQUENCE OF WwDocLastNEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The table which logs the last N access attempts."

::= { wwwDocumentStatistics 2 }

`wwwDocLastNEntry` OBJECT-TYPE

SYNTAX WwDocLastNEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry which describes a recent access attempt."

INDEX { wwwServiceIndex, wwwDocLastNIndex }

::= { wwwDocLastNTable 1 }

WwDocLastNEntry ::= SEQUENCE {

Internet-Draft

WWW Service MIB

February 1999

```

wwwDocLastNIndex      Unsigned32,
wwwDocLastNName       WwwDocName,
wwwDocLastNTimeStamp  DateAndTime,
wwwDocLastNRequestType WwwRequestType,
wwwDocLastNResponseType WwwResponseType,
wwwDocLastNStatusMsg  Utf8String,
wwwDocLastNBytes      Unsigned32
}

```

wwwDocLastNIndex OBJECT-TYPE

SYNTAX Unsigned32 (1..4294967295)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An arbitrary monotonically increasing integer number used for indexing the wwwDocLastNTable. The first document accessed appears in the table with this index value equal to one. Each subsequent document is indexed with the next sequential index value. The Nth document accessed will be indexed by N. This table presents a sliding window of the last wwwDocCtrlLastNSize documents accessed. Thus, entries in this table will be indexed by N-wwwDocCtrlLastNSize thru N if N > wwwDocCtrlLastNSize and 1 thru N if N <= wwwDocCtrlLastNSize.

The wwwDocCtrlLastNLock attribute can be used to lock this table to allow the manager to read its contents."

::= { wwwDocLastNEntry 1 }

wwwDocLastNName OBJECT-TYPE

SYNTAX WwwDocName

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The name of the document for which access was attempted."

::= { wwwDocLastNEntry 2 }

wwwDocLastNTimeStamp OBJECT-TYPE

SYNTAX DateAndTime

MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The date and time of the last attempt to access this
 document."
 ::= { wwwDocLastNEntry 3 }

wwwDocLastNRequestType OBJECT-TYPE

SYNTAX WwvRequestType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The protocol request type which was received by the
 server when this document access was attempted."
 ::= { wwwDocLastNEntry 4 }

wwwDocLastNResponseType OBJECT-TYPE

SYNTAX WwvResponseType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The protocol response type which was sent to the client
 as a result of this attempt to access a document. This
 object contains the type of the primary response if
 there were multiple responses to a single request."
 ::= { wwwDocLastNEntry 5 }

wwwDocLastNStatusMsg OBJECT-TYPE

SYNTAX Utf8String
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "This object contains a human readable description of the
 reason why the wwwDocLastNResponseType was returned to the
 client. This object defines the implementation-specific
 reason if the value of wwwDocLastNResponseType indicates
 an error. For example, this object can indicate that the
 requested document could not be transferred due to a
 timeout condition or the document could not be transferred

because a 'soft link' pointing to the document could not be resolved."

::= { wwwDocLastNEntry 6 }

wwwDocLastNBytes OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of content bytes that were returned as a result of this attempt to access a document."

::= { wwwDocLastNEntry 7 }

wwwDocBucketTable OBJECT-TYPE

SYNTAX SEQUENCE OF WwwDocBucketEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table provides administrative summary information for the buckets maintained per WWW service."

::= { wwwDocumentStatistics 3 }

wwwDocBucketEntry OBJECT-TYPE

SYNTAX WwwDocBucketEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry which describes the parameters associated with a particular bucket."

INDEX { wwwServiceIndex, wwwDocBucketIndex }

::= { wwwDocBucketTable 1 }

WwwDocBucketEntry ::= SEQUENCE {

wwwDocBucketIndex Unsigned32,

wwwDocBucketTimeStamp DateAndTime,

wwwDocBucketAccesses Unsigned32,

wwwDocBucketDocuments Unsigned32,

wwwDocBucketBytes Unsigned32

}

wwwDocBucketIndex OBJECT-TYPE

SYNTAX Unsigned32 (1..4294967295)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An arbitrary monotonically increasing integer number used for indexing the wwwDocBucketTable. The index number wraps to 1 whenever the maximum value is reached."

::= { wwwDocBucketEntry 1 }

wwwDocBucketTimeStamp OBJECT-TYPE

SYNTAX DateAndTime

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The date and time when the bucket was made available."

::= { wwwDocBucketEntry 2 }

wwwDocBucketAccesses OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of access attempts for any document provided by this WWW service during the time interval over which this bucket was created."

::= { wwwDocBucketEntry 3 }

wwwDocBucketDocuments OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of different documents for which access was attempted this this WWW service during the time interval over which this bucket was created."

::= { wwwDocBucketEntry 4 }

wwwDocBucketBytes OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of content bytes which were transferred from this WWW service during the time interval over which this bucket was created."

::= { wwwDocBucketEntry 5 }

wwwDocAccessTopNTable OBJECT-TYPE

SYNTAX SEQUENCE OF WwwDocAccessTopNEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The table of the most frequently accessed documents in a given bucket. This table is sorted by the column wwwDocAccessTopNAccesses. Entries having the same number of accesses are secondarily sorted by wwwDocAccessTopNBytes. Entries with the same number of accesses and the same number of bytes will have an arbitrary order."

::= { wwwDocumentStatistics 4 }

wwwDocAccessTopNEntry OBJECT-TYPE

SYNTAX WwwDocAccessTopNEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the top N table sorted by document accesses."

INDEX { wwwServiceIndex, wwwDocBucketIndex,

wwwDocAccessTopNIndex }

::= { wwwDocAccessTopNTable 1 }

WwwDocAccessTopNEntry ::= SEQUENCE {

wwwDocAccessTopNIndex Unsigned32,

wwwDocAccessTopNName WwwDocName,

wwwDocAccessTopNAccesses Unsigned32,

```

        wwwDocAccessTopNBytes          Unsigned32,
        wwwDocAccessTopNLastResponseType  WwwResponseType
    }

```

wwwDocAccessTopNIndex OBJECT-TYPE

SYNTAX Unsigned32 (1..4294967295)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An arbitrary monotonically increasing integer number used for indexing the wwwDocAccessTopNTable. The index is inversely correlated to the sorting order of the table. The document with the highest access count will get the index value 1."

::= { wwwDocAccessTopNEntry 1 }

wwwDocAccessTopNName OBJECT-TYPE

SYNTAX WwwDocName

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The name of the document for which access was attempted."

::= { wwwDocAccessTopNEntry 2 }

wwwDocAccessTopNAccesses OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of access attempts for this document."

::= { wwwDocAccessTopNEntry 3 }

wwwDocAccessTopNBytes OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of content bytes that were transmitted as a result of attempts to access this document."

::= { wwwDocAccessTopNEntry 4 }

wwwDocAccessTopNLastResponseType OBJECT-TYPE

SYNTAX WwWResponseType

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The protocol response type which was sent to the client as a result of the last attempt to access this document. This object contains the type of the primary response if there were multiple responses to a single request."

::= { wwwDocAccessTopNEntry 5 }

wwwDocBytesTopNTable OBJECT-TYPE

SYNTAX SEQUENCE OF WwWDocBytesTopNEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The table of the documents which caused most network traffic in a given bucket. This table is sorted by the column wwwDocBytesTopNBytes. Entries having the same number bytes are secondarily sorted by wwwDocBytesTopNAccesses. Entries with the same number of accesses and the same number of bytes will have an arbitrary order."

::= { wwwDocumentStatistics 5 }

wwwDocBytesTopNEntry OBJECT-TYPE

SYNTAX WwWDocBytesTopNEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the top N table sorted by network traffic."

INDEX { wwwServiceIndex, wwwDocBucketIndex,
wwwDocBytesTopNIndex }

::= { wwwDocBytesTopNTable 1 }

WwWDocBytesTopNEntry ::= SEQUENCE {

wwwDocBytesTopNIndex Unsigned32,

wwwDocBytesTopNName WwWDocName,

wwwDocBytesTopNAccesses Unsigned32,

wwwDocBytesTopNBytes Unsigned32,

wwwDocBytesTopNLastResponseType WwWResponseType

}

wwwDocBytesTopNIndex OBJECT-TYPE

SYNTAX Unsigned32 (1..4294967295)

MAX-ACCESS not-accessible

STATUS current

Internet-Draft

WWW Service MIB

February 1999

DESCRIPTION

"An arbitrary monotonically increasing integer number used for indexing the wwwDocBytesTopNTable. The index is inversely correlated to the sorting order of the table. The document with the highest byte count will get the index value 1."

::= { wwwDocBytesTopNEntry 1 }

wwwDocBytesTopNName OBJECT-TYPE

SYNTAX WwWDocName

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The name of the document for which access was attempted."

::= { wwwDocBytesTopNEntry 2 }

wwwDocBytesTopNAccesses OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of access attempts for this document."

::= { wwwDocBytesTopNEntry 3 }

wwwDocBytesTopNBytes OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of content bytes that were transmitted as a result of attempts to access this document."

::= { wwwDocBytesTopNEntry 4 }

wwwDocBytesTopNLastResponseType OBJECT-TYPE

SYNTAX WwWResponseType

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The protocol response type which was sent to the client as a result of the last attempt to access this document. This object contains the type of the primary response if there were multiple responses to a single request."

```
 ::= { wwwDocBytesTopNEntry 5 }

--
-- Conformance Definitions
--
```

```
wwwMIBCompliances OBJECT IDENTIFIER ::= { wwwMIBConformance 1 }
wwwMIBGroups       OBJECT IDENTIFIER ::= { wwwMIBConformance 2 }

wwwMinimalCompliance MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
        "The compliance statement for SNMP agents which implement
         the minimal subset of the WWW-MIB. Implementors might
         choose this subset for high-performance server where
         full compliance might be to expensive."
    MODULE -- this module
    MANDATORY-GROUPS {
        wwwServiceGroup,
        wwwSummaryGroup
    }
    OBJECT wwwSummaryOutRequests
    DESCRIPTION
        "Instances of wwwSummaryOutRequests do not exist on pure
         WWW server implementations."
    OBJECT wwwSummaryInResponses
    DESCRIPTION
        "Instances of wwwSummaryOutRequests do not exist on pure
         WWW server implementations."
    OBJECT wwwSummaryInRequests
    DESCRIPTION
        "Instances of wwwSummaryInRequests do not exist on pure
         WWW client implementations."
    OBJECT wwwSummaryOutResponses
    DESCRIPTION
        "Instances of wwwSummaryOutResponses do not exist on pure
         WWW client implementations."
    ::= { wwwMIBCompliances 1 }

wwwFullCompliance MODULE-COMPLIANCE
```



```

STATUS      current
DESCRIPTION
    "The compliance statement for SNMP agents which implement
    the full WWW-MIB."
MODULE -- this module
MANDATORY-GROUPS {
    wwwServiceGroup,
    wwwSummaryGroup
}
GROUP wwwRequestInGroup
DESCRIPTION
    "The wwwRequestInGroup is mandatory only for WWW server
    or proxy server implementations."

```

```

GROUP wwwResponseOutGroup
DESCRIPTION
    "The wwwResponseOutGroup is mandatory only for WWW server
    or proxy server implementations."
GROUP wwwRequestOutGroup
DESCRIPTION
    "The wwwRequestOutGroup is mandatory only for WWW client
    or proxy server implementations."
GROUP wwwResponseInGroup
DESCRIPTION
    "The wwwRequestOutGroup is mandatory only for WWW client
    or proxy server implementations."
GROUP wwwDocumentGroup
DESCRIPTION
    "The wwwDocumentGroup is mandatory only for WWW server
    or proxy server implementations."
OBJECT wwwSummaryOutRequests
DESCRIPTION
    "Instances of wwwSummaryOutRequests do not exist on pure
    WWW server implementations."
OBJECT wwwSummaryInResponses
DESCRIPTION
    "Instances of wwwSummaryOutRequests do not exist on pure
    WWW server implementations."
OBJECT wwwSummaryInRequests
DESCRIPTION

```

```

        "Instances of wwwSummaryInRequests do not exist on pure
        WWW client implementations."
OBJECT wwwSummaryOutResponses
DESCRIPTION
    "Instances of wwwSummaryOutResponses do not exist on pure
    WWW client implementations."
 ::= { wwwMIBCompliances 2 }

wwwServiceGroup OBJECT-GROUP
OBJECTS {
    wwwServiceDescription,
    wwwServiceContact,
    wwwServiceProtocol,
    wwwServiceName,
    wwwServiceType,
    wwwServiceStartTime,
    wwwServiceOperStatus,
    wwwServiceLastChange
}
STATUS      current
DESCRIPTION

```

```

        "A collection of objects providing information about
        the WWW services known by the SNMP agent."
 ::= { wwwMIBGroups 1 }

wwwSummaryGroup OBJECT-GROUP
OBJECTS {
    wwwSummaryInRequests,
    wwwSummaryOutRequests,
    wwwSummaryInResponses,
    wwwSummaryOutResponses,
    wwwSummaryInBytes,
    wwwSummaryInLowBytes,
    wwwSummaryOutBytes,
    wwwSummaryOutLowBytes
}
STATUS      current
DESCRIPTION
    "A collection of objects providing summary statistics

```

```

        about requests and responses generated and received
        by a WWW service."
 ::= { wwwMIBGroups 2 }

wwwRequestInGroup OBJECT-GROUP
OBJECTS {
    wwwRequestInRequests,
    wwwRequestInBytes,
    wwwRequestInLastTime
}
STATUS      current
DESCRIPTION
    "A collection of objects providing detailed statistics
    about requests received by a WWW service."
 ::= { wwwMIBGroups 3 }

wwwRequestOutGroup OBJECT-GROUP
OBJECTS {
    wwwRequestOutRequests,
    wwwRequestOutBytes,
    wwwRequestOutLastTime
}
STATUS      current
DESCRIPTION
    "A collection of objects providing detailed statistics
    about requests generated by a WWW service."
 ::= { wwwMIBGroups 4 }

wwwResponseInGroup OBJECT-GROUP

```

```

OBJECTS {
    wwwResponseInResponses,
    wwwResponseInBytes,
    wwwResponseInLastTime
}
STATUS      current
DESCRIPTION
    "A collection of objects providing detailed statistics
    about responses received by a WWW service."
 ::= { wwwMIBGroups 5 }

```

```

wwwResponseOutGroup OBJECT-GROUP
  OBJECTS {
    wwwResponseOutResponses,
    wwwResponseOutBytes,
    wwwResponseOutLastTime
  }
  STATUS      current
  DESCRIPTION
    "A collection of objects providing detailed statistics
    about responses generated by a WWW service."
  ::= { wwwMIBGroups 6 }

```

```

wwwDocumentGroup OBJECT-GROUP
  OBJECTS {
    wwwDocCtrlLastNSize,
    wwwDocCtrlLastNLock,
    wwwDocCtrlBuckets,
    wwwDocCtrlBucketTimeInterval,
    wwwDocCtrlTopNSize,
    wwwDocLastNName,
    wwwDocLastNTimeStamp,
    wwwDocLastNRequestType,
    wwwDocLastNResponseType,
    wwwDocLastNStatusMsg,
    wwwDocLastNBytes,
    wwwDocBucketTimeStamp,
    wwwDocBucketAccesses,
    wwwDocBucketDocuments,
    wwwDocBucketBytes,
    wwwDocAccessTopNName,
    wwwDocAccessTopNAccesses,
    wwwDocAccessTopNBytes,
    wwwDocAccessTopNLastResponseType,
    wwwDocBytesTopNName,
    wwwDocBytesTopNAccesses,
    wwwDocBytesTopNBytes,

```

```

    wwwDocBytesTopNLastResponseType
  }

```

```
STATUS    current
DESCRIPTION
    "A collection of objects providing information about
    accesses to documents."
::= { wwwMIBGroups 7 }
```

END

[7.](#) Document Transfer Protocol Mappings

This section describes how existing protocols such as HTTP [[19,20](#)] and FTP [[21](#)] can be mapped on the abstract Document Transfer Protocol (DTP) used within the definitions of the WWW MIB. Every mapping must define the identifier which is used to uniquely identify the transfer protocol. In addition, the mappings must define how requests and responses are identified.

[7.1.](#) The HyperText Transfer Protocol

The HyperText Transfer Protocol (HTTP) [[19,20](#)] is an application-level protocol used to transfer hypermedia documents in a distributed networked environment. HTTP is based on the request/response paradigm and can be mapped on the abstract DTP easily.

The HTTP protocol usually runs over TCP and uses the well-known TCP port 80. Therefore, the default value for the `wwwServiceProtocol` object is { `applTCPProtoID 80` }.

HTTP allows for both requests and responses and an open-ended set of message types. The general message syntax of HTTP is therefore used for the protocol mapping. The BNF specification of the general HTTP message syntax as defined in [[20](#)] is as follows:

```
generic-message = start-line
                  *message-header
                  CRLF
                  [ message-body ]
```

```
start-line      = Request-Line | Status-Line
```

```
Request-Line    = Method SP Request-URI SP HTTP-Version CRLF
```

```
Status-Line     = HTTP-Version SP Status-Code SP Reason-Phrase CRLF
```


Every HTTP-message where the start-line is a Request-Line is considered a request in the abstract DTP. Every HTTP-message where the start-line is a Status-Line is considered a response in the abstract DTP. The mappings of `WwwRequestType` and `WwwResponseType` are defined as follows:

- o The `WwwRequestType` corresponds to the method token in the Request-Line.

- o The WwwResponseType corresponds to the Status-Code in the Status-Line.

7.2. The File Transfer Protocol

The File Transfer Protocol (FTP) [21] is an application-level protocol used to transfer files between hosts connected by the TCP/IP suite of protocols. FTP is based on a request/response paradigm and is mapped on the abstract DTP as defined in this section. The FTP model as defined in [21] is depicted below.

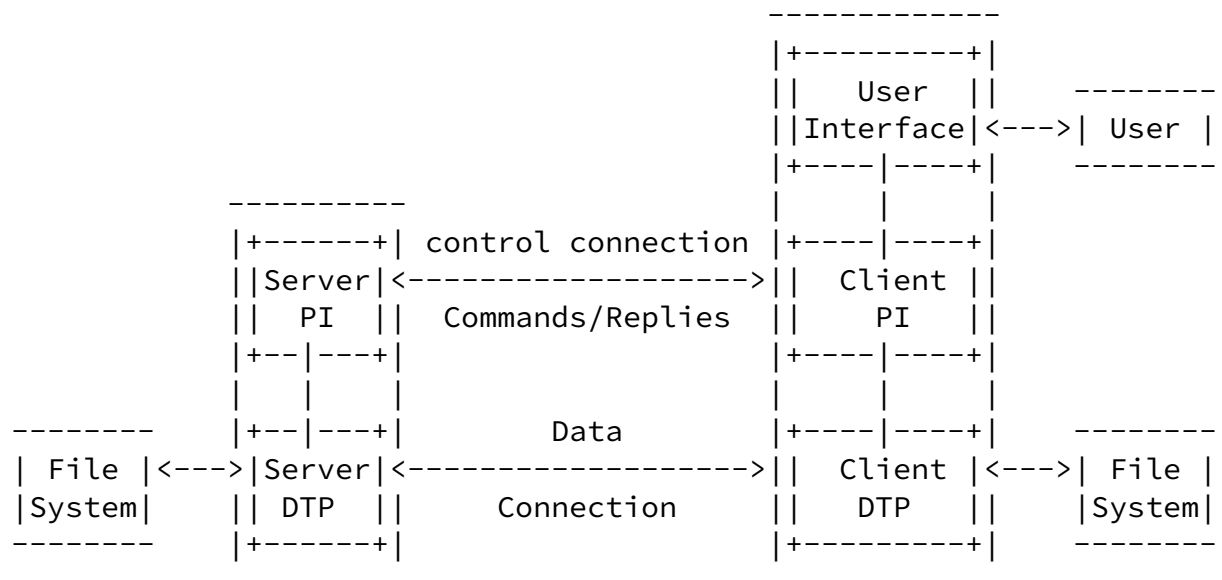

FTP uses two different connection types between a client and a server to transfer files. The control connection is persistent during a FTP session and used to exchange FTP commands and associated replies. The data connection is only available when bulk data has to be transferred.

The FTP protocol usually runs over TCP and uses the well-known TCP port 21 to setup the control connection. Therefore, the default value for the `wwwServiceProtocol` object is { `applTCPProtoID 21` }.

Every FTP command is considered a request in the abstract DTP. Every

FTP reply is considered a response in the abstract DTP. It should be noted that a single FTP command can result in multiple FTP replies (e.g. preliminary positive replies). The primary response for a FTP request contains a status code of the form 2xy, 3xy, 4xy or 5xy. See section 4.2 in [21] for the exact meaning of these status codes. The mappings for `WwwRequestType` and `WwwResponseType` are defined as follows:

- o The `WwwRequestType` corresponds to the FTP command token.
- o The `WwwResponseType` corresponds to the three-digit code which starts a reply. Multi-line replies with the same three-digit code are counted as a single DTP response.

8. Security Considerations

There are a number of management objects defined in this MIB module that have a MAX-ACCESS clause of read-write. Such objects may be considered sensitive or vulnerable in some network environments. The support for write operations in a non-secure environment without proper protection can have a negative effect on network operations.

There are a number of managed objects in this MIB that may contain sensitive information:

- o The document statistics group contains traffic information including the names of documents that were a target of protocol operations. This information is sensitive as it allows to obtain access statistics for documents.
- o The protocol statistics are less sensitive, because they do not contain details about the target of individual requests and responses. However, traffic statistics and error counters still provide usage information about WWW services and about the overall quality of WWW services. It is suggested that sites configure MIB views so that a user of this MIB can only access the portion of the statistics that belong to the WWW services managed by that user.

- o The service and the summary statistics groups provide information about the existence of WWW services and condensed usage statistics. Some sites may want to protect this information as well, especially if they offer private WWW services that should not be known by the outside world.

SNMPv1 by itself is not a secure environment. Even if the network itself is secure (for example by using IPSec), there is no control as to who on the secure network is allowed to access (read/change/create/delete) the objects in this MIB.

It is recommended that implementers consider the security features as provided by the SNMPv3 framework. Specifically, the use of the User-based Security Model [RFC 2274](#) [12] and the View-based Access Control Model [RFC 2275](#) [15] is recommended.

It is then a customer/user responsibility to ensure that the SNMP entity giving access to an instance of this MIB is properly configured to give access to the objects only to those principals (users) that have legitimate rights to indeed read or write (change/create/delete) them.

[9.](#) Intellectual Property

The IETF takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on the IETF's procedures with respect to rights in standards-track and standards-related documentation can be found in [BCP-11](#). Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementors or users of this specification can be obtained from the IETF Secretariat.

The IETF invites any interested party to bring to its attention any

copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this standard. Please address the information to the IETF Executive Director.

10. Acknowledgments

This document was produced by the Application MIB working group. The editors gratefully acknowledge the comments of the following individuals:

Mark Gamble, Cheryl Krupczak, Randy Preshun, Jon Saperia,
Bob Stewart, Martin Toet, Chris Wellens, Kenneth White

11. Editors' Addresses

Harrie Hazewinkel	Email: harrie.hazewinkel@jrc.it
Joint Research Centre of the E.C.	Tel: +39 (0)332 786322
via Fermi - Ispra 21020 (VA)	Fax: +39 (0)332 785641
Italy	

Hazewinkel, et. al.

[Page 43]

Internet-Draft

WWW Service MIB

February 1999

Carl W. Kalbfleisch
Verio, Inc.
1950 Stemmons Frwy
2004 INFOMART
Dallas, TX 75207
USA

Email: cwk@verio.net
Tel: +1 972 238-8303
Fax: +1 972 238-0268

Juergen Schoenwaelder
TU Braunschweig
Bueltenweg 74/75
38106 Braunschweig
Germany

Email: schoenw@ibr.cs.tu-bs.de
Tel: +49 531 391-3683
Fax: +49 531 489-5936

[12.](#) References

- [1] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing SNMP Management Frameworks", [RFC 2271](#), Cabletron Systems, Inc., BMC Software, Inc., IBM T. J. Watson Research, January 1998
- [2] Rose, M., and K. McCloghrie, "Structure and Identification of Management Information for TCP/IP-based Internets", [RFC 1155](#),

Performance Systems International, Hughes LAN Systems, May 1990

- [3] Rose, M., and K. McCloghrie, "Concise MIB Definitions", [RFC 1212](#), Performance Systems International, Hughes LAN Systems, March 1991
- [4] M. Rose, "A Convention for Defining Traps for use with the SNMP", [RFC 1215](#), Performance Systems International, March 1991
- [5] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Structure of Management Information for Version 2 of the Simple Network Management Protocol (SNMPv2)", [RFC 1902](#), SNMP Research, Inc., Cisco Systems, Inc., Dover Beach Consulting, Inc., International Network Services, January 1996.
- [6] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Textual Conventions for Version 2 of the Simple Network Management Protocol (SNMPv2)", [RFC 1903](#), SNMP Research, Inc., Cisco Systems, Inc., Dover Beach Consulting, Inc., International Network Services, January 1996.
- [7] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Conformance Statements for Version 2 of the Simple Network Management Protocol (SNMPv2)", [RFC 1904](#), SNMP Research, Inc., Cisco Systems, Inc., Dover Beach Consulting, Inc., International Network Services, January 1996.
- [8] Case, J., Fedor, M., Schoffstall, M., and J. Davin, "Simple Network Management Protocol", [RFC 1157](#), SNMP Research, Performance Systems International, Performance Systems International, MIT Laboratory for Computer Science, May 1990.
- [9] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Introduction to Community-based SNMPv2", [RFC 1901](#), SNMP Research, Inc., Cisco Systems, Inc., Dover Beach Consulting, Inc., International Network Services, January 1996.
- [10] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Transport Mappings for Version 2 of the Simple Network Management Protocol

Dover Beach Consulting, Inc., International Network Services,
January 1996.

- [11] Case, J., Harrington D., Presuhn R., and B. Wijnen, "Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)", [RFC 2272](#), SNMP Research, Inc., Cabletron Systems, Inc., BMC Software, Inc., IBM T. J. Watson Research, January 1998.
- [12] Blumenthal, U., and B. Wijnen, "User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)", [RFC 2274](#), IBM T. J. Watson Research, January 1998.
- [13] Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Protocol Operations for Version 2 of the Simple Network Management Protocol (SNMPv2)", [RFC 1905](#), SNMP Research, Inc., Cisco Systems, Inc., Dover Beach Consulting, Inc., International Network Services, January 1996.
- [14] Levi, D., Meyer, P., and B. Stewart, "SNMPv3 Applications", [RFC 2273](#), SNMP Research, Inc., Secure Computing Corporation, Cisco Systems, January 1998
- [15] Wijnen, B., Presuhn, R., and K. McCloghrie, "View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)", [RFC 2275](#), IBM T. J. Watson Research, BMC Software, Inc., Cisco Systems, Inc., January 1998
- [16] Hovey, R., and S. Bradner, "The Organizations Involved in the IETF Standards Process", [BCP 11](#), [RFC 2028](#), October 1996.
- [17] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), Harvard University, March 1997.
- [18] Berners-Lee, T., Fielding, R., and L. Masinter, "Uniform Resource Identifiers (URI): Generic Syntax", [RFC 2396](#), MIT/LC, U.C. Irvine, Xerox Corporation, August 1998.
- [19] Berners-Lee, T., Fielding, R., and H. Frystyk, "Hypertext Transfer Protocol -- HTTP/1.0", [RFC 1945](#), MIT/LCS, UC Irvine, MIT/LCS, May 1996.
- [20] Fielding, R., Gettys, J., Mogul, J., Frystyk, H., and T. Berners-Lee, "Hypertext Transfer Protocol -- HTTP/1.1", [RFC 2068](#), UC Irvine, DEC, DEC, MIT/LCS, January 1997.

-
- [21] Postel, J., and J.K. Reynolds, "File Transfer Protocol (FTP)", STD 9, [RFC 959](#), USC/ISI, October 1985.
 - [22] C. Kalbfleisch, "Applicability of Standards Track MIBs to Management of World Wide Web Servers", [RFC 2039](#), OnRamp Technologies, November 1996.
 - [23] Krupczak, C., and J. Saperia, "Definitions of System-Level Managed Objects for Applications", [RFC 2287](#), Empire Technologies, BGS Systems, February 1998.
 - [24] Kalbfleisch, C., Krupczak, C., Preshun, R., and J. Saperia, "Application Management MIB", [draft-ietf-applmib-mib-11.txt](#), Verio, Empire Technologies, BMC Software, BGS Systems, November 1998.
 - [25] Kantor, B., and P. Lapsley, "Network News Transfer Protocol: A Proposed Standard for the Stream-Based Transmission of News", [RFC 977](#), UC San Diego & UC Berkeley, February 1986.
 - [26] Callaghan, B., "WebNFS Client Specification", [RFC 2054](#), Sun Microsystems, October 1996
 - [27] Callaghan, B., "WebNFS Server Specification", [RFC 2055](#), Sun Microsystems, October 1996

Internet-Draft

WWW Service MIB

February 1999

[13.](#) Full Copyright Statement

Copyright (C) The Internet Society (1999). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

