

CCAMP Working Group
Internet-Draft
Intended status: Standards Track
Expires: January 13, 2022

H. Zheng
I. Busi
Huawei Technologies
X. Liu
Volta Networks
S. Belotti
Nokia
O. Gonzalez de Dios
Telefonica
July 12, 2021

A YANG Data Model for Optical Transport Network Topology draft-ietf-ccamp-otn-topo-yang-13

Abstract

This document describes a YANG data model to describe the topologies of an Optical Transport Network (OTN). It is independent of control plane protocols and captures topological and resource related information pertaining to OTN. This model enables clients, which interact with a transport domain controller, for OTN topology related operations such as obtaining the relevant topology resource information.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 13, 2022.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](https://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	Terminology and Notations	3
3.	YANG Data Model for OTN Topology	4
3.1.	OTN Topology Data Model Overview	4
3.2.	Attributes Augmentation	5
3.3.	Bandwidth Augmentation	6
3.4.	Label Augmentation	6
3.5.	YANG Tree for OTN topology	6
4.	The YANG Code	26
5.	IANA Considerations	68
6.	Security Considerations	68
7.	Acknowledgements	69
8.	Contributors	69
9.	References	70
9.1.	Normative References	70
9.2.	Informative References	72
	Authors' Addresses	73

[1.](#) Introduction

A transport network is a server-layer network designed to provide connectivity services for a client-layer network to carry the client traffic transparently across the server-layer network resources. A transport network can be constructed of equipments utilizing any of a number of different transport technologies such as the Optical Transport Networks (OTN) or packet transport such as provided by the MPLS-Transport Profile (MPLS-TP).

This document defines a data model of an OTN network topology, using YANG [RFC7950]. The model can be used by an application exposing to a transport controller. Furthermore, it can be used by an application for the following purposes (but not limited to):

- o To obtain a whole view of the network topology information of its interest;
- o To receive notifications with regard to the information change of the OTN topology;
- o To enforce the establishment and update of a network topology with the characteristic specified in the data model;

The YANG model defined in this document is independent of control plane protocols and captures topology related information pertaining to an Optical Transport Networks (OTN) electrical layer, as the scope specified by [RFC7062]. Furthermore, it is not a stand-alone model, but augmenting from the TE topology YANG model defined in [RFC8795], and importing from the generic Layer 1 types defined in [I-D.ietf-ccamp-layer1-types]. Following TE topology YANG model, the YANG model defined in this document is interface independent. The model is included in [I-D.ietf-teas-actn-yang], which indicates the typical usage of IETF YANG models in ACTN architecture specified by [RFC8453]. More specifically, the usage of this model between controllers is described in [I-D.ietf-ccamp-transport-nbi-app-statement].

2. Terminology and Notations

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in the YANG data tree presented later in this document is defined in [RFC8340]. They are provided below for reference.

- o Brackets "[" and "]" enclose list keys.
- o Abbreviations before data node names: "rw" means configuration (read-write) and "ro" state data (read-only).
- o Symbols after data node names: "?" means an optional node, "!" means a presence container, and "*" denotes a list and leaf-list.
- o Parentheses enclose choice and case nodes, and case nodes are also marked with a colon (":").
- o Ellipsis ("...") stands for contents of subtrees that are not shown.

- o Some of the key terms used in this document are listed as follow.
- o TS: Tributary Slot.
- o TSG: Tributary Slot Granularity.
- o TPN: Tributary Port Number.

3. YANG Data Model for OTN Topology

3.1. OTN Topology Data Model Overview

This document aims to describe the data model for OTN topology. As a classic Traffic-engineering (TE) technology, OTN provide TDM switching in transport network [[ITU-Tg709](#)]. Therefore the YANG module presented in this document augments from a more generic Traffic Engineered (TE) network topology data model, i.e., the ietf-te-topology, as specified in [[RFC8795](#)]. In [section 6 of \[RFC8795\]](#), the guideline for augmenting TE topology model was provided, and in this draft we augment the TE topology model to describe the topology in OTN network. Common types, identities and groupings defined in [[I-D.ietf-ccamp-layer1-types](#)] are reused in this document. [[RFC8345](#)] describes a network topology model and provide the fundamental model for [[RFC8795](#)]. However, this work is not directly augmenting [[RFC8345](#)]. Figure 1 shows the augmentation relationship.

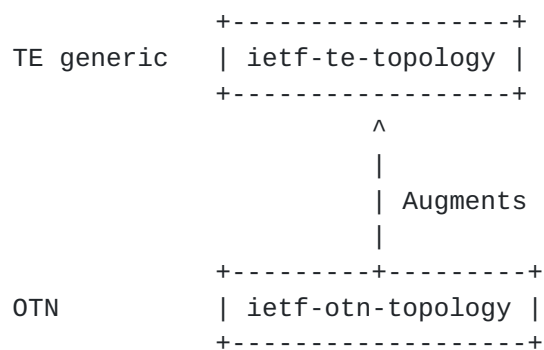


Figure 1 - Relationship between OTN and TE topology models

The entities and TE attributes, such as node, termination points and links, are still applicable for describing an OTN topology and the model presented in this document only specifies with technology-specific attributes/information. The OTN-specific attributes in [[RFC7139](#)], including the TPN, TS and TSG, can be used to represent the bandwidth and label information. These attributes have been specified in [[I-D.ietf-ccamp-layer1-types](#)], and used in this document for augmentation of the generic TE topology model.

The YANG module `ietf-otn-topology` defined in this document conforms to the Network Management Datastore Architecture (NMDA) defined in [\[RFC8342\]](#).

3.2. Attributes Augmentation

There are a few characteristics augmenting to the generic TE topology.

Following the guidelines in [\[RFC8795\]](#), a `otn-topology` network-type is specified as the indicator of OTN in the topology as follow.

```
augment /nw:networks/nw:network/nw:network-types/tet:te-topology:
  +--rw otn-topology!
```

Two OTN technology-specific parameters are specified to augment the generic TE link attributes.

```
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes:
    +--rw tsg?          identityref
    +--rw distance?    uint32
```

In OTN the resources is measured by the tributary slots (TS), as specified in [\[RFC7139\]](#). The tributary slot granularity (TSG) attribute defines the granularity, such as 1.25G, 2.5G and 5G, used by the TSs of a given OTN link. The distance attribute describes the geographical distance between a pair of OTN link termination points. This is usually measured by the length of the fibre.

The OTN topology model allows reporting also the access links which are capable of supporting the transparent client signals, defined in [\[I-D.ietf-ccamp-layer1-types\]](#). These links can also be multi-function access links that can support one or more transparent client signals as well as OTN.

A `client-svc` container is specified to augment the generic TE link termination point to describe if the point is capable of carrying client signal and what kind of signal can be carried as follow.


```
augment /nw:networks/nw:network/nw:node/nt:termination-point
  /tet:te:
  +--rw client-svc!
    +--rw client-facing?          boolean
    +--rw supported-client-signal* identityref
```

The client-facing is an indicator on whether the point is needed to carry client signal. A list of support-client-signal is used to provide the capabilities of client signal specified in [\[I-D.ietf-ccamp-layer1-types\]](#).

3.3. Bandwidth Augmentation

Following the guidelines in [\[RFC8795\]](#), the model augments all the occurrences of the te-bandwidth container with the OTN technology specific attributes using the otn-link-bandwidth and otn-path-bandwidth groupings defined in [\[I-D.ietf-ccamp-layer1-types\]](#).

3.4. Label Augmentation

The model augments all the occurrences of the label-restriction list with OTN technology specific attributes using the otn-label-range-info grouping defined in [\[I-D.ietf-ccamp-layer1-types\]](#).

Moreover, following the guidelines in [\[RFC8795\]](#), the model augments all the occurrences of the te-label container with the OTN technology specific attributes using the otn-label-start-end, otn-label-hop and otn-label-step groupings defined in [\[I-D.ietf-ccamp-layer1-types\]](#).

3.5. YANG Tree for OTN topology

```
module: ietf-otn-topology
```

```
augment /nw:networks/nw:network/nw:network-types/tet:te-topology:
  +--rw otn-topology!
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes:
  +--rw tsg?          identityref
  +--rw distance?     uint32
augment /nw:networks/nw:network/nw:node/nt:termination-point
  /tet:te:
  +--rw client-svc!
    +--rw client-facing?          boolean
    +--rw supported-client-signal* identityref
augment /nw:networks/nw:network/nw:node/nt:termination-point/tet:te
  /tet:interface-switching-capability/tet:max-lsp-bandwidth
```



```

        /tet:te-bandwidth/tet:technology:
+---:(otn)
  +--rw otn
    +--rw odu-type?                               identityref
    +--rw (oduflex-type)?
      +---:(generic)
        | +--rw nominal-bit-rate                   uint64
      +---:(cbr)
        | +--rw client-type                         identityref
      +---:(gfp-n-k)
        | +--rw gfp-n                               uint8
        | +--rw gfp-k?                             gfp-k
      +---:(flexe-client)
        | +--rw flexe-client                       flexe-client-rate
      +---:(flexe-aware)
        | +--rw flexe-aware-n                       uint16
      +---:(packet)
        +--rw opuflex-payload-rate                 uint64
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:path-constraints/tet:te-bandwidth/tet:technology:
+---:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type    identityref
    +--rw number?     uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:path-constraints
  /tet:te-bandwidth/tet:technology:
+---:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type    identityref
    +--rw number?     uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:path-constraints/tet:te-bandwidth/tet:technology:
+---:(otn)
  +--ro odulist* [odu-type]
    +--ro odu-type    identityref
    +--ro number?     uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:path-constraints
  /tet:te-bandwidth/tet:technology:
+---:(otn)
  +--ro odulist* [odu-type]
    +--ro odu-type    identityref
    +--ro number?     uint16

```



```

augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point/tet:client-layer-adaptation
  /tet:switching-capability/tet:te-bandwidth
  /tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type      identityref
    +--rw number?       uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:path-constraints
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type      identityref
    +--rw number?       uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:path-constraints
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type      identityref
    +--rw number?       uint16
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes
  /tet:interface-switching-capability/tet:max-lsp-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw otn
    +--rw odu-type?                  identityref
    +--rw (oduflex-type)?
      +--:(generic)
        | +--rw nominal-bit-rate      uint64
      +--:(cbr)
        | +--rw client-type            identityref
      +--:(gfp-n-k)
        | +--rw gfp-n                  uint8
        | +--rw gfp-k?                 gfp-k
      +--:(flexe-client)
        | +--rw flexe-client            flexe-client-rate
      +--:(flexe-aware)
        | +--rw flexe-aware-n          uint16
      +--:(packet)
        +--rw opuflex-payload-rate     uint64
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:max-link-bandwidth

```



```

        /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type    identityref
    +--rw number?     uint16
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:max-resv-link-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type    identityref
    +--rw number?     uint16
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:unreserved-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type    identityref
    +--rw number?     uint16
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:information-source-entry
  /tet:interface-switching-capability/tet:max-lsp-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--ro otn
    +--ro odu-type?          identityref
    +--ro (oduflex-type)?
      +--:(generic)
        | +--ro nominal-bit-rate    uint64
      +--:(cbr)
        | +--ro client-type          identityref
      +--:(gfp-n-k)
        | +--ro gfp-n                uint8
        | +--ro gfp-k?              gfp-k
      +--:(flexe-client)
        | +--ro flexe-client          flexe-client-rate
      +--:(flexe-aware)
        | +--ro flexe-aware-n        uint16
      +--:(packet)
        +--ro opuflex-payload-rate  uint64
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:information-source-entry/tet:max-link-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--ro odulist* [odu-type]
    +--ro odu-type    identityref
    +--ro number?     uint16
augment /nw:networks/nw:network/nt:link/tet:te

```



```

        /tet:information-source-entry/tet:max-resv-link-bandwidth
        /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--ro odulist* [odu-type]
    +--ro odu-type    identityref
    +--ro number?     uint16
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:information-source-entry/tet:unreserved-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--ro odulist* [odu-type]
    +--ro odu-type    identityref
    +--ro number?     uint16
augment /nw:networks/tet:te/tet:templates/tet:link-template
  /tet:te-link-attributes
  /tet:interface-switching-capability/tet:max-lsp-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw otn
    +--rw odu-type?                identityref
    +--rw (oduflex-type)?
      +--:(generic)
        | +--rw nominal-bit-rate    uint64
      +--:(cbr)
        | +--rw client-type          identityref
      +--:(gfp-n-k)
        | +--rw gfp-n                uint8
        | +--rw gfp-k?               gfp-k
      +--:(flexe-client)
        | +--rw flexe-client          flexe-client-rate
      +--:(flexe-aware)
        | +--rw flexe-aware-n         uint16
      +--:(packet)
        +--rw opuflex-payload-rate    uint64
augment /nw:networks/tet:te/tet:templates/tet:link-template
  /tet:te-link-attributes/tet:max-link-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type    identityref
    +--rw number?     uint16
augment /nw:networks/tet:te/tet:templates/tet:link-template
  /tet:te-link-attributes/tet:max-resv-link-bandwidth
  /tet:te-bandwidth/tet:technology:
+--:(otn)
  +--rw odulist* [odu-type]
    +--rw odu-type    identityref
    +--rw number?     uint16

```



```
augment /nw:networks/tet:te/tet:templates/tet:link-template
  /tet:te-link-attributes/tet:unreserved-bandwidth
  /tet:te-bandwidth/tet:technology:
  +--:(otn)
    +--rw odulist* [odu-type]
      +--rw odu-type    identityref
      +--rw number?     uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:label-restrictions/tet:label-restriction:
  +--rw range-type?    otn-label-range-type
  +--rw tsg?           identityref
  +--rw odu-type-list*  identityref
  +--rw priority?      uint8
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction:
  +--rw range-type?    otn-label-range-type
  +--rw tsg?           identityref
  +--rw odu-type-list*  identityref
  +--rw priority?      uint8
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction:
  +--rw range-type?    otn-label-range-type
  +--rw tsg?           identityref
  +--rw odu-type-list*  identityref
  +--rw priority?      uint8
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:label-restrictions/tet:label-restriction:
  +--ro range-type?    otn-label-range-type
  +--ro tsg?           identityref
  +--ro odu-type-list*  identityref
  +--ro priority?      uint8
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction:
  +--ro range-type?    otn-label-range-type
  +--ro tsg?           identityref
  +--ro odu-type-list*  identityref
  +--ro priority?      uint8
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
```



```
        /tet:label-restriction:
    +--ro range-type?      otn-label-range-type
    +--ro tsg?             identityref
    +--ro odu-type-list*   identityref
    +--ro priority?        uint8
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:tunnel-termination-point
    /tet:local-link-connectivities/tet:label-restrictions
    /tet:label-restriction:
    +--rw range-type?      otn-label-range-type
    +--rw tsg?             identityref
    +--rw odu-type-list*   identityref
    +--rw priority?        uint8
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:tunnel-termination-point
    /tet:local-link-connectivities
    /tet:local-link-connectivity/tet:label-restrictions
    /tet:label-restriction:
    +--rw range-type?      otn-label-range-type
    +--rw tsg?             identityref
    +--rw odu-type-list*   identityref
    +--rw priority?        uint8
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction:
    +--rw range-type?      otn-label-range-type
    +--rw tsg?             identityref
    +--rw odu-type-list*   identityref
    +--rw priority?        uint8
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:information-source-entry/tet:label-restrictions
    /tet:label-restriction:
    +--ro range-type?      otn-label-range-type
    +--ro tsg?             identityref
    +--ro odu-type-list*   identityref
    +--ro priority?        uint8
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction:
    +--rw range-type?      otn-label-range-type
    +--rw tsg?             identityref
    +--rw odu-type-list*   identityref
    +--rw priority?        uint8
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
    /tet:label-restrictions/tet:label-restriction
    /tet:label-start/tet:te-label/tet:technology:
+--:(otn)
```



```

    +--rw (range-type)?
      +--:(trib-port)
        | +--rw otn-tpn?    otn-tpn
      +--:(trib-slot)
        +--rw otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:label-restrictions/tet:label-restriction
  /tet:label-end/tet:te-label/tet:technology:
+--:(otn)
  +--rw (range-type)?
    +--:(trib-port)
      | +--rw otn-tpn?    otn-tpn
    +--:(trib-slot)
      +--rw otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:label-restrictions/tet:label-restriction
  /tet:label-step/tet:technology:
+--:(otn)
  +--rw (range-type)?
    +--:(trib-port)
      | +--rw otn-tpn?    otn-tpn
    +--:(trib-slot)
      +--rw otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:underlay/tet:primary-path/tet:path-element/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:underlay/tet:backup-path/tet:path-element/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:optimizations/tet:algorithm/tet:metric
  /tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:

```



```

+--:(otn)
  +--rw otn-tpn?   otn-tpn
  +--rw tsg?       identityref
  +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:optimizations/tet:algorithm/tet:metric
  /tet:optimization-metric
  /tet:explicit-route-include-objects
  /tet:route-object-include-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?   otn-tpn
  +--rw tsg?       identityref
  +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:path-properties/tet:path-route-objects
  /tet:path-route-object/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?   otn-tpn
  +--ro tsg?       identityref
  +--ro ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  | +--rw otn-tpn?   otn-tpn
  +--:(trib-slot)
  | +--rw otn-ts?    otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  | +--rw otn-tpn?   otn-tpn
  +--:(trib-slot)
  | +--rw otn-ts?    otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices

```



```

        /tet:connectivity-matrix/tet:from/tet:label-restrictions
        /tet:label-restriction/tet:label-step/tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  |   +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
  |   +--rw otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  |   +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
  |   +--rw otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  |   +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
  |   +--rw otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  |   +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
  |   +--rw otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:underlay/tet:primary-path
  /tet:path-element/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref

```



```
    +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:underlay/tet:backup-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
+--:(otn)
    +--rw otn-tpn?   otn-tpn
    +--rw tsg?       identityref
    +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:optimizations/tet:algorithm
    /tet:metric/tet:optimization-metric
    /tet:explicit-route-exclude-objects
    /tet:route-object-exclude-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
    +--rw otn-tpn?   otn-tpn
    +--rw tsg?       identityref
    +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:optimizations/tet:algorithm
    /tet:metric/tet:optimization-metric
    /tet:explicit-route-include-objects
    /tet:route-object-include-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
    +--rw otn-tpn?   otn-tpn
    +--rw tsg?       identityref
    +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:path-properties
    /tet:path-route-objects/tet:path-route-object/tet:type
    /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
    +--ro otn-tpn?   otn-tpn
    +--ro tsg?       identityref
    +--ro ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:label-restrictions/tet:label-restriction
    /tet:label-start/tet:te-label/tet:technology:
+--:(otn)
    +--ro (range-type)?
    +--:(trib-port)
```



```
    | +--ro otn-tpn?   otn-tpn
  +--:(trib-slot)
    +--ro otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:label-restrictions/tet:label-restriction
  /tet:label-end/tet:te-label/tet:technology:
+--:(otn)
  +--ro (range-type)?
  +--:(trib-port)
    | +--ro otn-tpn?   otn-tpn
  +--:(trib-slot)
    +--ro otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:label-restrictions/tet:label-restriction
  /tet:label-step/tet:technology:
+--:(otn)
  +--ro (range-type)?
  +--:(trib-port)
    | +--ro otn-tpn?   otn-tpn
  +--:(trib-slot)
    +--ro otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:underlay/tet:primary-path/tet:path-element/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?     otn-tpn
  +--ro tsg?         identityref
  +--ro ts-list?     string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:underlay/tet:backup-path/tet:path-element/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?     otn-tpn
  +--ro tsg?         identityref
  +--ro ts-list?     string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:optimizations/tet:algorithm/tet:metric
  /tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?     otn-tpn
```



```

    +--ro tsg?          identityref
    +--ro ts-list?      string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:optimizations/tet:algorithm/tet:metric
    /tet:optimization-metric
    /tet:explicit-route-include-objects
    /tet:route-object-include-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
    +--ro otn-tpn?      otn-tpn
    +--ro tsg?          identityref
    +--ro ts-list?      string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:path-properties/tet:path-route-objects
    /tet:path-route-object/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
+--:(otn)
    +--ro otn-tpn?      otn-tpn
    +--ro tsg?          identityref
    +--ro ts-list?      string
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:from/tet:label-restrictions
    /tet:label-restriction/tet:label-start/tet:te-label
    /tet:technology:
+--:(otn)
    +--ro (range-type)?
    +--:(trib-port)
    | +--ro otn-tpn?      otn-tpn
    +--:(trib-slot)
    | +--ro otn-ts?       otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:from/tet:label-restrictions
    /tet:label-restriction/tet:label-end/tet:te-label
    /tet:technology:
+--:(otn)
    +--ro (range-type)?
    +--:(trib-port)
    | +--ro otn-tpn?      otn-tpn
    +--:(trib-slot)
    | +--ro otn-ts?       otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:from/tet:label-restrictions
    /tet:label-restriction/tet:label-step/tet:technology:

```



```

+---:(otn)
  +--ro (range-type)?
  +---:(trib-port)
  | +--ro otn-tpn?    otn-tpn
  +---:(trib-slot)
  +--ro otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+---:(otn)
  +--ro (range-type)?
  +---:(trib-port)
  | +--ro otn-tpn?    otn-tpn
  +---:(trib-slot)
  +--ro otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+---:(otn)
  +--ro (range-type)?
  +---:(trib-port)
  | +--ro otn-tpn?    otn-tpn
  +---:(trib-slot)
  +--ro otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+---:(otn)
  +--ro (range-type)?
  +---:(trib-port)
  | +--ro otn-tpn?    otn-tpn
  +---:(trib-slot)
  +--ro otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:underlay/tet:primary-path
  /tet:path-element/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+---:(otn)
  +--ro otn-tpn?      otn-tpn
  +--ro tsg?          identityref
  +--ro ts-list?      string
augment /nw:networks/nw:network/nw:node/tet:te

```



```

        /tet:information-source-entry/tet:connectivity-matrices
        /tet:connectivity-matrix/tet:underlay/tet:backup-path
        /tet:path-element/tet:type/tet:label/tet:label-hop
        /tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?    otn-tpn
  +--ro tsg?        identityref
  +--ro ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:optimizations/tet:algorithm
  /tet:metric/tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?    otn-tpn
  +--ro tsg?        identityref
  +--ro ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:optimizations/tet:algorithm
  /tet:metric/tet:optimization-metric
  /tet:explicit-route-include-objects
  /tet:route-object-include-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?    otn-tpn
  +--ro tsg?        identityref
  +--ro ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:path-properties
  /tet:path-route-objects/tet:path-route-object/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?    otn-tpn
  +--ro tsg?        identityref
  +--ro ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
    +--:(trib-port)
      | +--rw otn-tpn?    otn-tpn

```



```
    +--:(trib-slot)
      +--rw otn-ts?    otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
    | +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
    +--rw otn-ts?    otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
    | +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
    +--rw otn-ts?    otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:underlay
  /tet:primary-path/tet:path-element/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:underlay
  /tet:backup-path/tet:path-element/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:optimizations
  /tet:algorithm/tet:metric/tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
```



```

+--:(otn)
  +--rw otn-tpn?   otn-tpn
  +--rw tsg?       identityref
  +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:optimizations
  /tet:algorithm/tet:metric/tet:optimization-metric
  /tet:explicit-route-include-objects
  /tet:route-object-include-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?   otn-tpn
  +--rw tsg?       identityref
  +--rw ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:path-properties
  /tet:path-route-objects/tet:path-route-object/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?   otn-tpn
  +--ro tsg?       identityref
  +--ro ts-list?   string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
    +--:(trib-port)
      | +--rw otn-tpn?   otn-tpn
    +--:(trib-slot)
      +--rw otn-ts?     otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
    +--:(trib-port)
      | +--rw otn-tpn?   otn-tpn
    +--:(trib-slot)
      +--rw otn-ts?     otn-ts

```



```
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  | +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
  +--rw otn-ts?      otn-ts
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:underlay
  /tet:primary-path/tet:path-element/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:underlay/tet:backup-path
  /tet:path-element/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:optimizations
  /tet:algorithm/tet:metric/tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:optimizations
  /tet:algorithm/tet:metric/tet:optimization-metric
```



```

        /tet:explicit-route-include-objects
        /tet:route-object-include-object/tet:type/tet:label
        /tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:path-properties
  /tet:path-route-objects/tet:path-route-object/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(otn)
  +--ro otn-tpn?    otn-tpn
  +--ro tsg?        identityref
  +--ro ts-list?    string
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:underlay/tet:primary-path
  /tet:path-element/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:underlay/tet:backup-path
  /tet:path-element/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+--:(otn)
  +--rw otn-tpn?    otn-tpn
  +--rw tsg?        identityref
  +--rw ts-list?    string
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(otn)
  +--rw (range-type)?
  +--:(trib-port)
  | +--rw otn-tpn?    otn-tpn
  +--:(trib-slot)
  | +--rw otn-ts?     otn-ts
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(otn)

```



```

    +--rw (range-type)?
      +--:(trib-port)
        | +--rw otn-tpn?    otn-tpn
      +--:(trib-slot)
        +--rw otn-ts?      otn-ts
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+--:(otn)
  +--rw (range-type)?
    +--:(trib-port)
      | +--rw otn-tpn?    otn-tpn
    +--:(trib-slot)
      +--rw otn-ts?      otn-ts
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:information-source-entry/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(otn)
  +--ro (range-type)?
    +--:(trib-port)
      | +--ro otn-tpn?    otn-tpn
    +--:(trib-slot)
      +--ro otn-ts?      otn-ts
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:information-source-entry/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(otn)
  +--ro (range-type)?
    +--:(trib-port)
      | +--ro otn-tpn?    otn-tpn
    +--:(trib-slot)
      +--ro otn-ts?      otn-ts
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:information-source-entry/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+--:(otn)
  +--ro (range-type)?
    +--:(trib-port)
      | +--ro otn-tpn?    otn-tpn
    +--:(trib-slot)
      +--ro otn-ts?      otn-ts
augment /nw:networks/tet:te/tet:templates/tet:link-template
  /tet:te-link-attributes/tet:underlay/tet:primary-path
  /tet:path-element/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+--:(otn)

```



```

    +--rw otn-tpn?    otn-tpn
    +--rw tsg?        identityref
    +--rw ts-list?    string
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:underlay/tet:backup-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
+--:(otn)
    +--rw otn-tpn?    otn-tpn
    +--rw tsg?        identityref
    +--rw ts-list?    string
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-start/tet:te-label
    /tet:technology:
+--:(otn)
    +--rw (range-type)?
    +--:(trib-port)
    |   +--rw otn-tpn?    otn-tpn
    +--:(trib-slot)
    |   +--rw otn-ts?     otn-ts
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-end/tet:te-label
    /tet:technology:
+--:(otn)
    +--rw (range-type)?
    +--:(trib-port)
    |   +--rw otn-tpn?    otn-tpn
    +--:(trib-slot)
    |   +--rw otn-ts?     otn-ts
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-step/tet:technology:
+--:(otn)
    +--rw (range-type)?
    +--:(trib-port)
    |   +--rw otn-tpn?    otn-tpn
    +--:(trib-slot)
    |   +--rw otn-ts?     otn-ts

```

4. The YANG Code

```

<CODE BEGINS> file "ietf-otn-topology@2021-07-08.yang"
module ietf-otn-topology {

```



```
yang-version 1.1;
namespace "urn:ietf:params:xml:ns:yang:ietf-otn-topology";
prefix "otnt";

import ietf-network {
  prefix "nw";
  reference "RFC 8345: A YANG Data Model for Network Topologies";
}

import ietf-network-topology {
  prefix "nt";
  reference "RFC 8345: A YANG Data Model for Network Topologies";
}

import ietf-te-topology {
  prefix "tet";
  reference
    "RFC 8795: YANG Data Model for Traffic Engineering
    (TE) Topologies";
}

import ietf-layer1-types {
  prefix "l1-types";
  reference
    "I-D.ietf-ccamp-layer1-types: A YANG Data Model
    for Layer 1 Types";
}

organization
  "IETF CCAMP Working Group";
contact
  "WG Web: <http://tools.ietf.org/wg/ccamp/>
  WG List: <mailto:ccamp@ietf.org>

  Editor: Haomian Zheng
        <mailto:zhenghaomian@huawei.com>

  Editor: Italo Busi
        <mailto:italo.busi@huawei.com>

  Editor: Xufeng Liu
        <mailto:xufeng.liu.ietf@gmail.com>

  Editor: Sergio Belotti
        <mailto:sergio.belotti@nokia.com>

  Editor: Oscar Gonzalez de Dios
        <mailto:oscar.gonzalezdedios@telefonica.com>;
```


description

"This module defines a protocol independent Layer 1/ODU topology data model. The model fully conforms to the Network Management Datastore Architecture (NMDA).

Copyright (c) 2021 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Simplified BSD License set forth in [Section 4.c](#) of the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

```
revision 2021-07-08 {
  description
    "Initial Revision";
  reference
    "RFC XXXX: A YANG Data Model for Optical Transport Network
    Topology";
  // RFC Ed.: replace XXXX with actual RFC number, update date
  // information and remove this note
}

/*
 * Data nodes
 */

augment "/nw:networks/nw:network/nw:network-types/"
  + "tet:te-topology" {
  container otn-topology {
    presence "indicates a topology type of Optical Transport
    Network (OTN)-electrical layer.";
    description "otn topology type";
  }
  description "augment network types to include otn newtork";
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
  + "tet:te-link-attributes" {
  when "../..../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description "Augment only for otn network.";
  }
  description "Augment link configuration";
```



```
leaf tsg {
  type identityref {
    base l1-types:tributary-slot-granularity;
  }
  description "Tributary slot granularity.";
  reference
    "G.709/Y.1331, February 2016: Interfaces for the
    Optical Transport Network (OTN)";
}
leaf distance {
  type uint32;
  description "distance in the unit of kilometers";
}
}

augment "/nw:networks/nw:network/nw:node/nt:termination-point/"
  + "tet:te" {
  when "../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description "Augment only for otn network";
  }
  description "OTN TP attributes config in ODU topology.";

  container client-svc {
    presence "client-facing LTP.";
    description
      "OTN LTP Service attributes.";

    leaf client-facing {
      type boolean;
      default 'false';
      description
        "Indicates whether this LTP is a client-facing LTP.";
    }
    leaf-list supported-client-signal {
      type identityref {
        base l1-types:client-signal;
      }
      description
        "List of client signal types supported by the LTP.";
    }
  }
}

/*
 * Augment TE bandwidth
 */
```



```
augment "/nw:networks/nw:network/nw:node/nt:termination-point/"
  + "tet:te/"
  + "tet:interface-switching-capability/tet:max-lsp-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
when "../../../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment maximum LSP TE bandwidth for the link termination
  point (LTP).";
case otn {
  uses l1-types:otn-path-bandwidth;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:path-constraints/tet:te-bandwidth/tet:technology" {
when "../../../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE bandwidth path constraints of the TE node
  connectivity matrices.";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:path-constraints/tet:te-bandwidth/tet:technology" {
when "../../../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE bandwidth path constraints of the
  connectivity matrix entry.";
```



```

    case otn {
      uses l1-types:otn-link-bandwidth;
    }
  }

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:path-constraints/tet:te-bandwidth/tet:technology" {
    when "../..../nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
      "Augment TE bandwidth path constraints of the TE node
      connectivity matrices information source.";
    case otn {
      uses l1-types:otn-link-bandwidth;
    }
  }

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:path-constraints/tet:te-bandwidth/tet:technology" {
    when "../..../nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
      "Augment TE bandwidth path constraints of the
      connectivity matrix entry information source";
    case otn {
      uses l1-types:otn-link-bandwidth;
    }
  }

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:client-layer-adaptation/tet:switching-capability/"
  + "tet:te-bandwidth/tet:technology" {
    when "../..../nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with

```



```
        OTN topology type.";
    }
    description
        "Augment client TE bandwidth of the tunnel termination point
        (TTP)";
    case otn {
        uses l1-types:otn-link-bandwidth;
    }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/tet:path-constraints/"
    + "tet:te-bandwidth/tet:technology" {
    when "../../../../../../../nw:network-types/tet:te-topology/"
        + "otnt:otn-topology" {
        description
            "Augmentation parameters apply only for networks with
            OTN topology type.";
    }
    description
        "Augment TE bandwidth path constraints for the TTP
        Local Link Connectivities.";
    case otn {
        uses l1-types:otn-link-bandwidth;
    }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:local-link-connectivity/tet:path-constraints/"
    + "tet:te-bandwidth/tet:technology" {
    when "../../../../../../../nw:network-types/tet:te-topology/"
        + "otnt:otn-topology" {
        description
            "Augmentation parameters apply only for networks with
            OTN topology type.";
    }
    description
        "Augment TE bandwidth path constraints for the TTP
        Local Link Connectivity entry.";
    case otn {
        uses l1-types:otn-link-bandwidth;
    }
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
```



```
    + "tet:te-link-attributes/"
    + "tet:interface-switching-capability/tet:max-lsp-bandwidth/"
    + "tet:te-bandwidth/tet:technology" {
when "../.../.../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment maximum LSP TE bandwidth for the TE link.";
case otn {
    uses l1-types:otn-path-bandwidth;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:max-link-bandwidth/"
    + "tet:te-bandwidth/tet:technology" {
when "../.../.../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment maximum TE bandwidth for the TE link";
case otn {
    uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:max-resv-link-bandwidth/"
    + "tet:te-bandwidth/tet:technology" {
when "../.../.../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment maximum reservable TE bandwidth for the TE link";
case otn {
    uses l1-types:otn-link-bandwidth;
}
}
```



```
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
  + "tet:te-link-attributes/"
  + "tet:unreserved-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
when "../.../.../.../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment unreserved TE bandwidth for the TE Link";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
  + "tet:information-source-entry/"
  + "tet:interface-switching-capability/"
  + "tet:max-lsp-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
when "../.../.../.../.../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment maximum LSP TE bandwidth for the TE link
  information source";
case otn {
  uses l1-types:otn-path-bandwidth;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
  + "tet:information-source-entry/"
  + "tet:max-link-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
when "../.../.../.../.../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
}
```



```
description
  "Augment maximum TE bandwidth for the TE link
  information source";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
  + "tet:information-source-entry/"
  + "tet:max-resv-link-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
when "../..//../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment maximum reservable TE bandwidth for the TE link
  information-source";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
  + "tet:information-source-entry/"
  + "tet:unreserved-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
when "../..//../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment unreserved TE bandwidth of the TE link
  information source";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:interface-switching-capability/"
  + "tet:max-lsp-bandwidth/"
```



```
        + "tet:te-bandwidth/tet:technology" {
description
  "Augment maximum LSP TE bandwidth of the TE link
  template";
case otn {
  uses l1-types:otn-path-bandwidth;
}
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:max-link-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
description
  "Augment maximum TE bandwidth the TE link template";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:max-resv-link-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
description
  "Augment maximum reservable TE bandwidth for the TE link
  template.";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:unreserved-bandwidth/"
  + "tet:te-bandwidth/tet:technology" {
description
  "Augment unreserved TE bandwidth the TE link template";
case otn {
  uses l1-types:otn-link-bandwidth;
}
}

/*
 * Augment TE label range information
 */

augment "/nw:networks/nw:network/nw:node/tet:te/"
```



```

    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:label-restrictions/tet:label-restriction" {
when "../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
        "Augment TE label range information for the TE node
        connectivity matrices.";
    uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:from/"
    + "tet:label-restrictions/tet:label-restriction" {
when "../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
        "Augment TE label range information for the source LTP
        of the connectivity matrix entry.";
    uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:to/"
    + "tet:label-restrictions/tet:label-restriction" {
when "../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
        "Augment TE label range information for the destination LTP
        of the connectivity matrix entry.";
    uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/"

```



```
+ "tet:connectivity-matrices/tet:label-restrictions/"
+ "tet:label-restriction" {
when "../.../../nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label range information for the TE node
    connectivity matrices information source.";
uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:information-source-entry/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/"
+ "tet:from/tet:label-restrictions/tet:label-restriction" {
when "../.../../nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label range information for the source LTP
    of the connectivity matrix entry information source.";
uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:information-source-entry/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/"
+ "tet:to/tet:label-restrictions/tet:label-restriction" {
when "../.../../nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label range information for the destination LTP
    of the connectivity matrix entry information source.";
uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
```



```
    + "tet:local-link-connectivities/"
    + "tet:label-restrictions/tet:label-restriction" {
when "../.../.../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment TE label range information for the TTP
    Local Link Connectivities.";
uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:local-link-connectivity/"
    + "tet:label-restrictions/tet:label-restriction" {
when "../.../.../.../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment TE label range information for the TTP
    Local Link Connectivity entry.";
uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction" {
when "../.../.../.../.../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment TE label range information for the TE link.";
uses l1-types:otn-label-range-info;
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:information-source-entry/"
    + "tet:label-restrictions/tet:label-restriction" {
```



```
when "../../../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range information for the TE link
  information source.";
uses l1-types:otn-label-range-info;
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:label-restrictions/tet:label-restriction" {
  description
    "Augment TE label range information for the TE link template.";
  uses l1-types:otn-label-range-info;
}

/*
 * Augment TE label
 */

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-start/"
  + "tet:te-label/tet:technology" {
  when "../../../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label range start for the TE node
    connectivity matrices";
  case otn {
    uses l1-types:otn-label-start-end;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:label-restrictions/"
  + "tet:label-restriction/tet:label-end/"
  + "tet:te-label/tet:technology" {
```



```
when "../../../../../../../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range end for the TE node
  connectivity matrices";
case otn {
  uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:label-restrictions/"
  + "tet:label-restriction/tet:label-step/"
  + "tet:technology" {
when "../../../../../../../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range step for the TE node
  connectivity matrices";
case otn {
  uses l1-types:otn-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:underlay/tet:primary-path/tet:path-element/"
  + "tet:type/tet:label/tet:label-hop/"
  + "tet:te-label/tet:technology" {
when "../../../../../../../nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the underlay primary path of the
  TE node connectivity matrices";
```



```
    case otn {
      uses l1-types:otn-label-hop;
    }
  }

  augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:underlay/tet:backup-path/tet:path-element/"
    + "tet:type/tet:label/tet:label-hop/"
    + "tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../..."
      + "nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
      "Augment TE label hop for the underlay backup path of the
      TE node connectivity matrices";
    case otn {
      uses l1-types:otn-label-hop;
    }
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-exclude-objects/"
  + "tet:route-object-exclude-object/"
  + "tet:type/tet:label/tet:label-hop/"
  + "tet:te-label/tet:technology" {
  when "../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the TE node connectivity
    matrices";
  case otn {
    uses l1-types:otn-label-hop;
  }
}
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-include-objects/"
  + "tet:route-object-include-object/"
  + "tet:type/tet:label/tet:label-hop/"
  + "tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the explicit route objects included
  by the path computation of the TE node connectivity
  matrices";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:path-properties/tet:path-route-objects/"
  + "tet:path-route-object/tet:type/tet:label/tet:label-hop/"
  + "tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the computed path route objects
  of the TE node connectivity matrices";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/tet:from/"
  + "tet:label-restrictions/tet:label-restriction/"
```



```

    + "tet:label-start/"
    + "tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label range start for the source LTP
    of the connectivity matrix entry.";
case otn {
    uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:from/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/"
    + "tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label range end for the source LTP
    of the connectivity matrix entry.";
case otn {
    uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:from/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/"
    + "tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description

```



```
        "Augmentation parameters apply only for networks with
          OTN topology type.";
    }
    description
      "Augment TE label range step for the source LTP
        of the connectivity matrix entry.";
    case otn {
      uses l1-types:otn-label-step;
    }
  }

  augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:to/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-start/"
    + "tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../.../..."
      + "nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with
          OTN topology type.";
    }
    description
      "Augment TE label range start for the destination LTP
        of the connectivity matrix entry.";
    case otn {
      uses l1-types:otn-label-start-end;
    }
  }

  augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:to/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/"
    + "tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../.../..."
      + "nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with
          OTN topology type.";
    }
    description
      "Augment TE label range end for the destination LTP
        of the connectivity matrix entry.";
```



```
    case otn {
      uses l1-types:otn-label-start-end;
    }
  }

  augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:to/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/"
    + "tet:technology" {
    when "../.../.../.../.../.../.../.../.../..."
      + "nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
      "Augment TE label range step for the destination LTP
      of the connectivity matrix entry.";
    case otn {
      uses l1-types:otn-label-step;
    }
  }

  augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:underlay/tet:primary-path/tet:path-element/"
    + "tet:type/tet:label/tet:label-hop/"
    + "tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../.../..."
      + "nw:network-types/tet:te-topology/"
      + "otnt:otn-topology" {
      description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
    }
    description
      "Augment TE label hop for the underlay primary path
      of the connectivity matrix entry.";
    case otn {
      uses l1-types:otn-label-hop;
    }
  }

  augment "/nw:networks/nw:network/nw:node/tet:te/"
```



```

    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:underlay/tet:backup-path/tet:path-element/"
    + "tet:type/tet:label/tet:label-hop/"
    + "tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label hop for the underlay backup path
    of the connectivity matrix entry.";
case otn {
    uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:optimizations/"
    + "tet:algorithm/tet:metric/tet:optimization-metric/"
    + "tet:explicit-route-exclude-objects/"
    + "tet:route-object-exclude-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the connectivity matrix entry.";
case otn {
    uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:optimizations/"
    + "tet:algorithm/tet:metric/tet:optimization-metric/"
    + "tet:explicit-route-include-objects/"
    + "tet:route-object-include-object/tet:type/"

```



```

    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label hop for the explicit route objects included
    by the path computation of the connectivity matrix entry.";
case otn {
    uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:path-properties/tet:path-route-objects/"
    + "tet:path-route-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label hop for the computed path route objects
    of the connectivity matrix entry.";
case otn {
    uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/"
    + "tet:connectivity-matrices/tet:label-restrictions/"
    + "tet:label-restriction/"
    + "tet:label-start/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
}

```



```
}
description
  "Augment TE label range start for the TE node connectivity
  matrices information source.";
case otn {
  uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/"
  + "tet:connectivity-matrices/tet:label-restrictions/"
  + "tet:label-restriction/"
  + "tet:label-end/tet:te-label/tet:technology" {
when "../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range end for the TE node connectivity
  matrices information source.";
case otn {
  uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/"
  + "tet:connectivity-matrices/tet:label-restrictions/"
  + "tet:label-restriction/"
  + "tet:label-step/tet:technology" {
when "../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range step for the TE node connectivity
  matrices information source.";
case otn {
  uses l1-types:otn-label-step;
}
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the underlay primary path
  of the TE node connectivity matrices of the information
  source entry.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the underlay backup path
  of the TE node connectivity matrices of the information
  source entry.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-exclude-objects/"
  + "tet:route-object-exclude-object/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
```



```
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the TE node connectivity matrices
    information source.";
case otn {
    uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:optimizations/tet:algorithm/tet:metric/"
    + "tet:optimization-metric/"
    + "tet:explicit-route-include-objects/"
    + "tet:route-object-include-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label hop for the explicit route objects included
    by the path computation of the TE node connectivity matrices
    information source.";
case otn {
    uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:path-properties/tet:path-route-objects/"
    + "tet:path-route-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
```



```
        OTN topology type.";
    }
    description
        "Augment TE label hop for the computed path route objects
        of the TE node connectivity matrices information source.";
    case otn {
        uses l1-types:otn-label-hop;
    }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:from/tet:label-restrictions/"
    + "tet:label-restriction/"
    + "tet:label-start/tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../.../..."
        + "nw:network-types/tet:te-topology/"
        + "otnt:otn-topology" {
        description
            "Augmentation parameters apply only for networks with
            OTN topology type.";
    }
    description
        "Augment TE label range start for the source LTP
        of the connectivity matrix entry information source.";
    case otn {
        uses l1-types:otn-label-start-end;
    }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:from/tet:label-restrictions/"
    + "tet:label-restriction/"
    + "tet:label-end/tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../.../..."
        + "nw:network-types/tet:te-topology/"
        + "otnt:otn-topology" {
        description
            "Augmentation parameters apply only for networks with
            OTN topology type.";
    }
    description
        "Augment TE label range end for the source LTP
        of the connectivity matrix entry information source.";
    case otn {
        uses l1-types:otn-label-start-end;
```



```
    }
  }

  augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:from/tet:label-restrictions/"
    + "tet:label-restriction/"
    + "tet:label-step/tet:technology" {
  when "../../../../../../../../../../../"
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label range step for the source LTP
    of the connectivity matrix entry information source.";
  case otn {
    uses l1-types:otn-label-step;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:to/tet:label-restrictions/tet:label-restriction/"
  + "tet:label-start/tet:te-label/tet:technology" {
  when "../../../../../../../../../../../"
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label range start for the destination LTP
    of the connectivity matrix entry information source.";
  case otn {
    uses l1-types:otn-label-start-end;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:to/tet:label-restrictions/tet:label-restriction/"
```



```
    + "tet:label-end/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label range end for the destination LTP
    of the connectivity matrix entry information source.";
case otn {
    uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:to/tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/tet:technology" {
when "../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
    "Augment TE label range step for the destination LTP
    of the connectivity matrix entry information source.";
case otn {
    uses l1-types:otn-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
```



```
description
  "Augment TE label hop for the underlay primary path
  of the connectivity matrix entry information source.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:information-source-entry/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/"
+ "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
+ "nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
description
  "Augmentation parameters apply only for networks with
  OTN topology type.";
}
description
  "Augment TE label hop for the underlay backup path
  of the connectivity matrix entry information source.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:information-source-entry/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/"
+ "tet:optimizations/tet:algorithm/tet:metric/"
+ "tet:optimization-metric/"
+ "tet:explicit-route-exclude-objects/"
+ "tet:route-object-exclude-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
+ "nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
description
  "Augmentation parameters apply only for networks with
  OTN topology type.";
}
description
  "Augment TE label hop for the explicit route objects excluded
  by the path computation of the connectivity matrix entry
  information source.";
case otn {
```



```
    uses l1-types:otn-label-hop;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-include-objects/"
  + "tet:route-object-include-object/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the explicit route objects included
  by the path computation of the connectivity matrix entry
  information source.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:path-properties/tet:path-route-objects/"
  + "tet:path-route-object/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the computed path route objects
  of the connectivity matrix entry information source.";
case otn {
  uses l1-types:otn-label-hop;
}
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-start/"
  + "tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range start for the TTP
  Local Link Connectivities.";
case otn {
  uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-end/"
  + "tet:te-label/tet:technology"{
when "../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range end for the TTP
  Local Link Connectivities.";
case otn {
  uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-step/"
  + "tet:technology"{
```



```
when "../../../.."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range step for the TTP
  Local Link Connectivities.";
case otn {
  uses l1-types:otn-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../.."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the underlay primary path
  of the TTP Local Link Connectivities.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../.."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
```



```
    "Augment TE label hop for the underlay backup path
    of the TTP Local Link Connectivities.";
  case otn {
    uses l1-types:otn-label-hop;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:optimizations/tet:algorithm/tet:metric/"
+ "tet:optimization-metric/"
+ "tet:explicit-route-exclude-objects/"
+ "tet:route-object-exclude-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
  when "../.../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the TTP Local Link
    Connectivities.";
  case otn {
    uses l1-types:otn-label-hop;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:optimizations/tet:algorithm/tet:metric/"
+ "tet:optimization-metric/"
+ "tet:explicit-route-include-objects/"
+ "tet:route-object-include-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
  when "../.../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label hop for the explicit route objects included
```



```
        by the path computation of the TTP Local Link
        Connectivities.";
    case otn {
        uses l1-types:otn-label-hop;
    }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:path-properties/tet:path-route-objects/"
+ "tet:path-route-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
+ "nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment TE label hop for the computed path route objects
    of the TTP Local Link Connectivities.";
case otn {
    uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:local-link-connectivity/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-start/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
+ "nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
    description
        "Augmentation parameters apply only for networks with
        OTN topology type.";
}
description
    "Augment TE label range start for the TTP
    Local Link Connectivity entry.";
case otn {
    uses l1-types:otn-label-start-end;
}
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:local-link-connectivity/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-end/tet:te-label/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range end for the TTP
  Local Link Connectivity entry.";
case otn {
  uses l1-types:otn-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:local-link-connectivity/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-step/tet:technology" {
when "../.../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label range step for the TTP
  Local Link Connectivity entry.";
case otn {
  uses l1-types:otn-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:local-link-connectivity/"
  + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
```



```
when "../../../../../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the underlay primary path
  of the TTP Local Link Connectivity entry.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:local-link-connectivity/"
  + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the underlay backup path
  of the TTP Local Link Connectivity entry.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:local-link-connectivity/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-exclude-objects/"
  + "tet:route-object-exclude-object/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../"
  + "nw:network-types/tet:te-topology/"
  + "otnt:otn-topology" {
```



```
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the TTP Local Link
    Connectivity entry.";
  case otn {
    uses l1-types:otn-label-hop;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:local-link-connectivity/"
+ "tet:optimizations/tet:algorithm/tet:metric/"
+ "tet:optimization-metric/"
+ "tet:explicit-route-include-objects/"
+ "tet:route-object-include-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../../../../../"
+ "nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
  description
    "Augmentation parameters apply only for networks with
    OTN topology type.";
}
description
  "Augment TE label hop for the explicit route objects included
  by the path computation of the TTP Local Link
  Connectivity entry.";
case otn {
  uses l1-types:otn-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:local-link-connectivity/"
+ "tet:path-properties/tet:path-route-objects/"
+ "tet:path-route-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when "../../../../../../../../../../../../../../../"
+ "nw:network-types/tet:te-topology/"
+ "otnt:otn-topology" {
```



```
        description
            "Augmentation parameters apply only for networks with
            OTN topology type.";
    }
    description
        "Augment TE label hop for the computed path route objects
        of the TTP Local Link Connectivity entry.";
    case otn {
        uses l1-types:otn-label-hop;
    }
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../..."
        + "nw:network-types/tet:te-topology/"
        + "otnt:otn-topology" {
        description
            "Augmentation parameters apply only for networks with
            OTN topology type.";
    }
    description
        "Augment TE label hop for the underlay primary path
        of the TE link.";
    case otn {
        uses l1-types:otn-label-hop;
    }
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
    when "../.../.../.../.../.../.../.../..."
        + "nw:network-types/tet:te-topology/"
        + "otnt:otn-topology" {
        description
            "Augmentation parameters apply only for networks with
            OTN topology type.";
    }
    description
        "Augment TE label hop for the underlay backup path
        of the TE link.";
    case otn {
        uses l1-types:otn-label-hop;
    }
}
}
```



```
    }
  }

  augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:information-source-entry/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-start/tet:te-label/tet:technology" {
  when "../../../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label range start for the TE link
    information source.";
  case otn {
    uses l1-types:otn-label-start-end;
  }
}

  augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:information-source-entry/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/tet:te-label/tet:technology" {
  when "../../../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
  }
  description
    "Augment TE label range end for the TE link
    information source.";
  case otn {
    uses l1-types:otn-label-start-end;
  }
}

  augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:information-source-entry/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/tet:technology" {
  when "../../../nw:network-types/tet:te-topology/"
    + "otnt:otn-topology" {
    description
      "Augmentation parameters apply only for networks with
      OTN topology type.";
```



```
    }
    description
      "Augment TE label range step for the TE link
      information source.";
    case otn {
      uses l1-types:otn-label-step;
    }
  }

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
  description
    "Augment TE label hop for the underlay primary path
    of the TE link template.";
  case otn {
    uses l1-types:otn-label-hop;
  }
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
  description
    "Augment TE label hop for the underlay backup path
    of the TE link template.";
  case otn {
    uses l1-types:otn-label-hop;
  }
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-start/tet:te-label/tet:technology" {
  description
    "Augment TE label range start for the TE link template.";
  case otn {
    uses l1-types:otn-label-start-end;
  }
}

augment "/nw:networks/tet:te/tet:templates/"
  + "tet:link-template/tet:te-link-attributes/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-end/tet:te-label/tet:technology" {
```



```
    description
      "Augment TE label range end for the TE link template.";
    case otn {
      uses l1-types:otn-label-start-end;
    }
  }

  augment "/nw:networks/tet:te/tet:templates/"
    + "tet:link-template/tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/tet:technology" {
    description
      "Augment TE label range step for the TE link template.";
    case otn {
      uses l1-types:otn-label-step;
    }
  }
}
```

<CODE ENDS>

5. IANA Considerations

It is proposed to IANA to assign new URIs from the "IETF XML Registry" [[RFC3688](#)] as follows:

URI: urn:ietf:params:xml:ns:yang:ietf-otn-topology
Registrant Contact: The IESG
XML: N/A; the requested URI is an XML namespace.

This document registers a YANG module in the YANG Module Names registry [[RFC7950](#)].

name:	ietf-otn-topology
namespace:	urn:ietf:params:xml:ns:yang:ietf-otn-topology
prefix:	otnt
reference:	RFC XXXX

6. Security Considerations

The YANG module specified in this document defines a schema for data that is designed to be accessed via network management protocols such as NETCONF [[RFC6241](#)] or RESTCONF [[RFC8040](#)]. The lowest NETCONF layer

is the secure transport layer, and the mandatory-to-implement secure transport is Secure Shell (SSH) [[RFC6242](#)]. The lowest RESTCONF layer is HTTPS, and the mandatory-to-implement secure transport is TLS [[RFC8446](#)].

The NETCONF access control model [[RFC8341](#)] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.

There are a number of data nodes defined in this YANG module that are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., edit-config) to these data nodes without proper protection can have a negative effect on network operations. Considerations in [Section 8 of \[RFC8795\]](#) are also applicable to their subtrees in the module defined in this document.

Some of the readable data nodes in this YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via get, get-config, or notification) to these data nodes. Considerations in [Section 8 of \[RFC8795\]](#) are also applicable to their subtrees in the module defined in this document.

7. Acknowledgements

We would like to thank Igor Bryskin, Zhe Liu, Zheyu Fan and Daniele Ceccarelli for their comments and discussions.

8. Contributors

Aihua Guo
Futurewei
Email: aihuaguo.ietf@gmail.com

Anurag Sharma
Google
Email: ansha@google.com

Yunbin Xu
CAICT
Email: xuyunbin@caict.ac.cn

Lei Wang
China Mobile
Email: wangleiyj@chinamobile.com

Baoquan Rao
Huawei Technologies
Email: raobaoquan@huawei.com

Xian Zhang
Huawei Technologies
Email: zhang.xian@huawei.com

Huub van Helvoort
Hai Gaoming BV
the Netherlands
Email: huubatwork@gmail.com

Victor Lopez
Nokia
Email: victor.lopez@nokia.com

Yunbo Li
China Mobile
Email: liyunbo@chinamobile.com

Dieter Beller
Nokia
Email: dieter.beller@nokia.com

Yanlei Zheng
China Unicom
Email: zhengyanlei@chinaunicom.cn

9. References

9.1. Normative References

- [I-D.ietf-ccamp-layer1-types]
Zheng, H. and I. Busi, "A YANG Data Model for Layer 1 Types", [draft-ietf-ccamp-layer1-types-10](#) (work in progress), February 2021.
- [I-D.ietf-ccamp-otn-tunnel-model]
Zheng, H., Busi, I., Belotti, S., Lopez, V., and Y. Xu, "OTN Tunnel YANG Model", [draft-ietf-ccamp-otn-tunnel-model-13](#) (work in progress), April 2021.
- [ITU-Tg709]
ITU-, T., "SERIES G: TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS; Digital networks; Interfaces for the optical transport network", ITU-T Rec. G.709 , March 2020.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC4203] Kompella, K., Ed. and Y. Rekhter, Ed., "OSPF Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4203](#), DOI 10.17487/RFC4203, October 2005, <<https://www.rfc-editor.org/info/rfc4203>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.
- [RFC7138] Ceccarelli, D., Ed., Zhang, F., Belotti, S., Rao, R., and J. Drake, "Traffic Engineering Extensions to OSPF for GMPLS Control of Evolving G.709 Optical Transport Networks", [RFC 7138](#), DOI 10.17487/RFC7138, March 2014, <<https://www.rfc-editor.org/info/rfc7138>>.
- [RFC7139] Zhang, F., Ed., Zhang, G., Belotti, S., Ceccarelli, D., and K. Pithewan, "GMPLS Signaling Extensions for Control of Evolving G.709 Optical Transport Networks", [RFC 7139](#), DOI 10.17487/RFC7139, March 2014, <<https://www.rfc-editor.org/info/rfc7139>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", [RFC 7950](#), DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [RFC 8040](#), DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, [RFC 8341](#), DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/info/rfc8341>>.
- [RFC8342] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture (NMDA)", [RFC 8342](#), DOI 10.17487/RFC8342, March 2018, <<https://www.rfc-editor.org/info/rfc8342>>.
- [RFC8345] Clemm, A., Medved, J., Varga, R., Bahadur, N., Ananthakrishnan, H., and X. Liu, "A YANG Data Model for Network Topologies", [RFC 8345](#), DOI 10.17487/RFC8345, March 2018, <<https://www.rfc-editor.org/info/rfc8345>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", [RFC 8446](#), DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [RFC8795] Liu, X., Bryskin, I., Beeram, V., Saad, T., Shah, H., and O. Gonzalez de Dios, "YANG Data Model for Traffic Engineering (TE) Topologies", [RFC 8795](#), DOI 10.17487/RFC8795, August 2020, <<https://www.rfc-editor.org/info/rfc8795>>.

9.2. Informative References

- [I-D.ietf-ccamp-transport-nbi-app-statement] Busi, I., King, D., Zheng, H., and Y. Xu, "Transport Northbound Interface Applicability Statement", [draft-ietf-ccamp-transport-nbi-app-statement-12](#) (work in progress), January 2021.
- [I-D.ietf-teas-actn-yang] Lee, Y., Zheng, H., Ceccarelli, D., Yoon, B. Y., and S. Belotti, "Applicability of YANG models for Abstraction and Control of Traffic Engineered Networks", [draft-ietf-teas-actn-yang-07](#) (work in progress), February 2021.
- [RFC7062] Zhang, F., Ed., Li, D., Li, H., Belotti, S., and D. Ceccarelli, "Framework for GMPLS and PCE Control of G.709 Optical Transport Networks", [RFC 7062](#), DOI 10.17487/RFC7062, November 2013, <<https://www.rfc-editor.org/info/rfc7062>>.
- [RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", [BCP 215](#), [RFC 8340](#), DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/info/rfc8340>>.

[RFC8453] Ceccarelli, D., Ed. and Y. Lee, Ed., "Framework for Abstraction and Control of TE Networks (ACTN)", [RFC 8453](#), DOI 10.17487/RFC8453, August 2018, <<https://www.rfc-editor.org/info/rfc8453>>.

Authors' Addresses

Haomian Zheng
Huawei Technologies
H1, Huawei Industrial Base, Songshan Lake
Dongguan, Guangdong 523808
China

Email: zhenghaomian@huawei.com

Italo Busi
Huawei Technologies
HUAWEI TECHNOLOGIES ITALIA Srl Centro Direzionale Milano 2
Milan, Milan 20090
Italy

Email: Italo.Busi@huawei.com

Xufeng Liu
Volta Networks

Email: xufeng.liu.ietf@gmail.com

Sergio Belotti
Nokia

Email: sergio.belotti@nokia.com

Oscar Gonzalez de Dios
Telefonica

Email: oscar.gonzalezdedios@telefonica.com

