

Host Identity Protocol

Heer

Internet-Draft

RWTH

Intended status: Informational

University

Expires: April 24, 2009

Varjonen

Distributed Systems Group,

Aachen

Helsinki Institute for

Information

Technology

October 21,

2008

**HIP Certificates
draft-ietf-hip-cert-00**

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

This document may not be modified, and derivative works of it may not

be created, except to publish it as an RFC and to translate it into languages other than English.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months

and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on April 24, 2009.

Abstract

This document specifies a certificate parameter called CERT for the Host Identity Protocol (HIP). The CERT parameter is a container for Simple Public Key Infrastructure (SPKI) and X.509.v3 certificates. It is used for carrying these certificates in HIP control messages. Additionally, this document specifies the representations of Host

Identity Tags in SPKI and X.509.v3 certificates.

Heer & Varjonen
1]

Expires April 24, 2009

[Page

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

1. Introduction

Digital certificates bind a piece of information to a public key by means of a digital signature, and thus, enable the holder of a private key to generate cryptographically verifiable statements.

The

Host Identity Protocol (HIP)[[RFC5201](#)] defines a new cryptographic namespace based on asymmetric cryptography. Each host's identity is derived from a public key, allowing hosts to digitally sign data

with

their private key. This document specifies the CERT parameter that is used to transmit digital signatures in HIP. It corresponds to

the

placeholder specified in [Section 2 of \[RFC5201\]](#).

2. CERT Parameter

The CERT parameter is a container for a certain types of digital certificates. It may either carry SPKI certificates or X.509.v3 certificates. It does not specify any certificate semantics. However, it defines some organizational parameters that help HIP hosts to transmit semantically grouped parameters in a more systematic way.

The CERT parameter may be covered by the HIP SIGNATURE field and is a non-critical parameter.

Each HIP packet may contain multiple CERT parameters. If these parameters must be handled in certain sequence, the Cert group and the Cert count field must be set. Ungrouped certificates exhibit a unique Cert group field and set the Cert count to 1. CERT

parameters

with the same Cert group number in the group field indicate a

logical

grouping. The Cert count field indicates the number of grouped CERT parameters.

CERT parameters that belong to the same CERT group may be contained in multiple sequential packets. This is indicated by a higher Cert count than the amount of CERT parameters with matching Cert group fields in a packet. Within a HIP packet, CERT parameters must be placed in ascending order according to their Cert group field. Cert groups may only span multiple packets if the Cert group does not fit

the packet. Only one Cert group may span two subsequent packets.

Heer & Varjonen
2]


Expires April 24, 2009

[Page

The Cert ID acts as a sequence number to identify the certificates in a Cert group. The numbers in the Cert ID field must start from 1 up to Cert count.

The CERT parameter can be used in R1, I2, R2, UPDATE and NOTIFY messages. When CERT parameter is used in R1 message it is NOT recommended to use grouping or hash and URL encodings. Initiator and

Responder can detect middleboxes on the path after R1 message is sent by checking if control packets contain ECHO_REQUEST_M parameters as defined in [[HIP.middle_auth](#)].

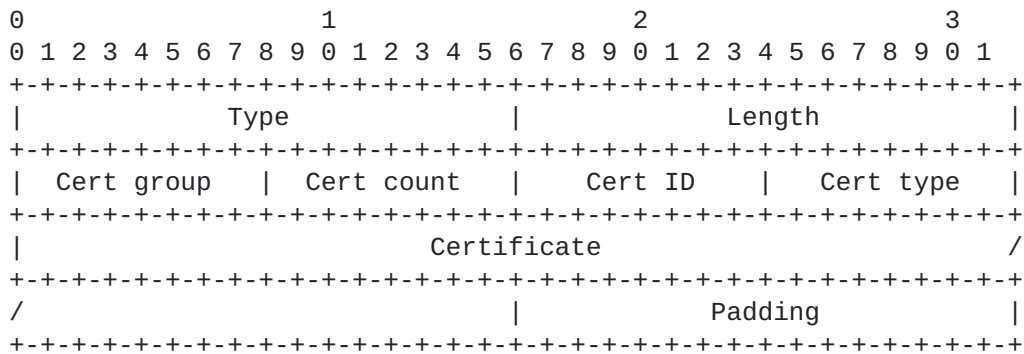

Type	768
Length	Length in octets, excluding Type, Length, and
Padding	
Cert group	Group ID grouping multiple related CERT parameters
Cert count	Total count of certificates that are sent, possibly in several consecutive HIP control packets.
Cert ID	The sequence number for this certificate
Cert Type	Describes the type of the certificate
Padding	Any Padding, if necessary, to make the TLV a
multiple	of 8 bytes.

The following certificate types are defined:

Heer & Varjonen
3]

Expires April 24, 2009

[Page

Cert format	Type number
SPKI	1
X.509.v3	2
Hash and URL of SPKI	3
Hash and URL of X.509.v3	4

All implementations MUST support SPKI. The next section outlines the use of HITs in SPKI. The SPKI and its formats are defined in [RFC2693]. X.509.v3 certificates are defined in [RFC3280]. Wire format for X.509.v3 is Distinguished Encoding Rules format as defined in [X.690].

Hash and URL encodings (3 and 4) are used as defined in [RFC4306]. Using hash and URL encodings results in smaller HIP control packets, but requires the receiver to resolve the URL or check local cache against the hash.

It is not recommended to use hash and URL encodings when HIP-aware middleboxes are present on the communication path between peers because fetching remote certificates requires the middlebox to buffer the packets and to request remote data. This makes these devices prone to denial of service (DoS) attacks. Moreover, middleboxes and responders that request remote certificates can be used as deflectors for distributed denial of service attacks.

3. SPKI Cert Object and Host Identities

When using SPKI certificates to transmit information related to HIP hosts, HITs need to be enclosed within the certificates. In the following we define the representation of those identifiers for SPKI given as S-expressions. Note that the S-expressions are only the human-readable representation of SPKI certificates.

As an example the Host Identity Tag of a host is expressed as follows:

Format: (hash hit hit-of-host)

Example: (hash hit 2001:13:724d:f3c0:6ff0:33c2:15d8:5f50)

[Appendix A](#) shows a full example SPKI certificate with HIP content.

4. X.509.v3 Certificate Object and Host Identities

When using X.509.v3 certificates to transmit information related to HIP hosts, HITs need to be enclosed within the certificates. HITs are represented as issuer and subject alternative name X.509.v3 extensions as defined in [\[RFC2459\]](#). Because the Distinguished Name (DN) in X.509.v3 certificate cannot be empty HITs are also placed into the Common Name (CN) in a colon delimited presentation format.

As an example the HIT of a host is expressed as follows:

Format:

Issuer: CN=hit-of-host
Subject: CN=hit-of-host

X509v3 extensions:

X509v3 Issuer Alternative Name:
IP Address:HIT-OF-HOST
X509v3 Subject Alternative Name:
IP Address:HIT-OF-HOST

Example:

Issuer: CN=2001:14:6cf:fae7:bb79:bf78:7d64:c056
Subject: CN=2001:14:6cf:fae7:bb79:bf78:7d64:c056

X509v3 extensions:

X509v3 Issuer Alternative Name:
IP Address:2001:14:6CF:FAE7:BB79:BF78:7D64:C056
X509v3 Subject Alternative Name:
IP Address:2001:14:6CF:FAE7:BB79:BF78:7D64:C056

[Appendix B](#) shows a full example X.509.v3 certificate with HIP content.

5. Revocation of Certificates

Revocation of SPKI certificates is handled as defined in [Section 5. in \[RFC2693\]](#) Revocation of X.509.v3 certificates is handled as defined in [Section 5 in \[RFC2459\]](#).

6. IANA Considerations

This document defines the CERT parameter for the Host Identity Protocol [\[RFC5201\]](#). This parameter is defined in [Section 2](#) with type

768. The parameter type number is also defined in [\[RFC5201\]](#). The

Cert Group and Cert ID namespaces are managed locally by each peer that sends CERT parameters in HIP packets.

7. Security Considerations

Certificate grouping allows the certificates to be sent in multiple consecutive packets. This might allow similar attacks as IP-layer fragmentation allows, i.e. sending of fragments in wrong order and skipping some fragments to delay or stall packet processing by the victim in order to use resources (e.g. CPU or memory).

8. Acknowledgements

The authors would like to thank M. Komu and T. Henderson of fruitful conversations on the subject.

9. References

9.1. Normative References

- [HIP.middle_auth]
Heer, T., "End-Host Authentication for HIP Middleboxes",
<[draft-heer-hip-middle-auth-00.txt](#)>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2459] Housley, R., Ford, W., Polk, T., and D. Solo, "Internet X.509 Public Key Infrastructure Certificate and CRL Profile", [RFC 2459](#), January 1999.
- [RFC2693] Ellison, C., Frantz, B., Lampson, B., Rivest, R., Thomas, B., and T. Ylonen, "SPKI Certificate Theory", [RFC 2693](#), September 1999.
- [RFC3280] Housley, R., Polk, W., Ford, W., and D. Solo, "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile", [RFC 3280](#), April 2002.
- [RFC4306] Kaufman, C., "Internet Key Exchange (IKEv2) Protocol", [RFC 4306](#), December 2005.
- [RFC5201] Moskowitz, R., Nikander, P., Jokela, P., and T. Henderson,
"Host Identity Protocol", [RFC 5201](#), April 2008.

9.2. Informative References

- [X.690] ITU-T, "Recommendation X.690 Information Technology - ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)", July 2002, <<http://www.itu.int/ITU-T/studygroups/com17/languages/X.690-0207.pdf>>.

Appendix A. SPKI certificate example

This section shows a self-signed SPKI certificate of HIT 2001:14:6cf:fae7:bb79:bf78:7d64:c056. The example has been indented for readability.

```
(sequence
  (public_key
    (rsa-pkcs1-sha1
      (e #010001#)
      (n |n1CheoELqYRSkHYMQddub2TpILl+6H9wC/as6zFCZq0Y43hsZgAjG0F
        GoQwtY0yQjz02Ykb2TmUCZemTYui/sR0zIbdwg1xafKl7ggZDkhk5an
        PtGDxJxFalTYo6/A5ZQv8uatbaJgB/G7VM8G+09HLucadad2zQUXpQf
        gbK3S8=|
      )
    )
  )
)
(cert
  (issuer
    (hash hit 2001:0014:06cf:fae7:bb79:bf78:7d64:c056)
  )
  (subject
    (hash hit 2001:0014:06cf:fae7:bb79:bf78:7d64:c056)
  )
  (not-before "2008-07-12_22:11:07")
  (not-after "2008-07-22_22:11:07")
)
(signature
  (hash sha1 |kfElDhagiK0Bsqtj32Gq3t/1mxgA|)
  |HiIqjjZIUzypvoxQy00UovPm5uC4Xte0scEcBnENDIfn2DNy/bAtxGEdKq40
  dw80vTCmkF8/HXclgXLLVch3DxRNdSbYiiks000HpQt/OKq1TH+uUHBcH0Ao
  E42LmDskM9T5KQJoC/CH7871zfvojPnpkl2dUng0Wv4q0r/wSJ0=|
)
)
```


[Appendix B](#). X.509.v3 certificate example

This section shows a self-signed X.509.v3 certificate of HIT
2001:14:

6cf:fae7:bb79:bf78:7d64:c056.

Certificate:

Data:

Version: 3 (0x2)
Serial Number: 0 (0x0)
Signature Algorithm: sha1WithRSAEncryption
Issuer: CN=2001:14:6cf:fae7:bb79:bf78:7d64:c056
Validity
Not Before: Jul 12 18:58:38 2008 GMT
Not After : Jul 22 18:58:38 2008 GMT
Subject: CN=2001:14:6cf:fae7:bb79:bf78:7d64:c056
Subject Public Key Info:
Public Key Algorithm: rsaEncryption
RSA Public Key: (1024 bit)
Modulus (1024 bit):
00:9f:50:a1:7a:81:0b:a9:84:52:90:76:0c:41:d7:
6e:6f:64:e9:20:b9:7e:e8:7f:70:0b:f6:ac:eb:31:
42:66:a3:98:e3:78:6c:66:00:23:1b:41:46:a1:0c:
2d:c8:ec:90:8f:33:b6:62:46:f6:4e:65:02:65:e9:
93:62:e8:bf:b1:1d:33:21:b7:70:83:5c:5a:7c:a9:
7b:82:06:43:92:19:39:6a:73:ed:18:3c:49:c4:56:
a5:4d:8a:3a:fc:0e:59:42:ff:2e:6a:d6:da:26:00:
7f:1b:b5:4c:f0:6f:8e:f4:72:ee:71:a7:5a:77:6c:
d0:51:7a:50:7e:06:ca:dd:2f
Exponent: 65537 (0x10001)
X509v3 extensions:
X509v3 Basic Constraints:
CA:TRUE
X509v3 Issuer Alternative Name:
IP Address:2001:14:6CF:FAE7:BB79:BF78:7D64:C056
X509v3 Subject Alternative Name:
IP Address:2001:14:6CF:FAE7:BB79:BF78:7D64:C056
Signature Algorithm: sha1WithRSAEncryption
19:32:0b:72:a8:6c:f9:65:20:5b:1d:9a:e1:c7:39:97:c7:8a:
4d:d1:01:f9:7d:0b:0d:6f:61:a2:e3:2c:62:30:28:f6:36:db:
62:bc:7f:d1:9b:6d:cc:da:e3:9b:90:e7:53:9e:55:28:51:7e:
39:de:23:24:f5:a9:97:7a:ba:ce:54:3e:cf:8b:68:04:f6:be:
78:94:9f:d3:20:62:96:14:84:51:af:c7:ba:30:ae:b1:d6:7e:
7f:32:42:9c:f6:f5:76:27:0a:28:58:8b:b5:85:e7:e9:5a:ff:
aa:4c:57:55:95:09:33:ac:0b:8c:fd:05:4a:5e:60:e7:7f:d7:
42:f0

Authors' Addresses

Tobias Heer
Distributed Systems Group, RWTH Aachen University
Ahornstrasse 55
Aachen
Germany

Phone: +49 241 80 214 36
Email: heer@cs.rwth-aachen.de
URI: <http://ds.cs.rwth-aachen.de/members/heer>

Samu Varjonen
Helsinki Institute for Information Technology
Metsnneidonkuja 4
Helsinki
Finland

Fax: +35896949768
Email: samu.varjonen@hiit.fi
URI: <http://www.hiit.fi>

Full Copyright Statement

Copyright (C) The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an

"AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS

OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND

THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF

THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to

pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights.

Information

on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use

of

such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository

at

<http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

