

NTP Working Group  
Internet Draft  
Intended status: Standards Track  
Updates: [5905](#)  
Expires: July 2014

T. Mizrahi  
Marvell  
D. Mayer  
Network Time Foundation  
January 3, 2014

**Using NTP Extension Fields without Authentication**  
**draft-ietf-ntp-extension-field-00.txt**

Abstract

The Network Time Protocol Version 4 (NTPv4) defines the optional usage of extension fields. An extension field is an optional field that resides at the end of the NTP header, and can be used to add optional capabilities or additional information that is not conveyed in the standard NTP header. The current definition of extension fields in NTPv4 is somewhat ambiguous regarding the connection between extension fields and the presence of a Message Authentication Code (MAC). This draft clarifies the usage of extension fields in the presence and in the absence of a MAC, while maintaining interoperability with existing implementations.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on July 3, 2014.

## Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction .....	<a href="#">3</a>
<a href="#">2.</a>	Conventions Used in this Document .....	<a href="#">4</a>
<a href="#">2.1.</a>	Terminology .....	<a href="#">4</a>
<a href="#">2.2.</a>	Terms & Abbreviations .....	<a href="#">4</a>
3.	NTP Extension Fields with and without a MAC - Clarifications .	4
<a href="#">3.1.</a>	Extension Field Format .....	<a href="#">4</a>
<a href="#">3.2.</a>	Extension Fields in the Absence of a MAC .....	<a href="#">4</a>
<a href="#">3.3.</a>	Unknown Extension Fields .....	<a href="#">5</a>
<a href="#">3.4.</a>	Interoperability with Current Implementations .....	<a href="#">5</a>
4.	NTP Extension Field Usage with and without a MAC - Extensions	5
<a href="#">4.1.</a>	Extension Fields in the Presence of a MAC .....	<a href="#">5</a>
<a href="#">4.2.</a>	Extension Fields in the Absence of a MAC .....	<a href="#">5</a>
<a href="#">4.3.</a>	Multiple Extension fields in an NTP packet .....	<a href="#">6</a>
<a href="#">4.4.</a>	MAC in the absence of an Extension field .....	<a href="#">6</a>
<a href="#">5.</a>	Security Considerations .....	<a href="#">6</a>
<a href="#">6.</a>	IANA Considerations .....	<a href="#">6</a>
<a href="#">7.</a>	Acknowledgments .....	<a href="#">6</a>
<a href="#">8.</a>	References .....	<a href="#">6</a>
<a href="#">8.1.</a>	Normative References .....	<a href="#">6</a>
<a href="#">8.2.</a>	Informative References .....	<a href="#">7</a>
<a href="#">Appendix A.</a>	Requirements from NTPv4 and Autokey .....	<a href="#">7</a>
<a href="#">A.1.</a>	NTP Extension Field for Future Extensions .....	<a href="#">7</a>
<a href="#">A.2.</a>	NTP Extension Field in the Presence of a MAC .....	<a href="#">7</a>
<a href="#">A.3.</a>	The NTP Extension Field Format .....	<a href="#">7</a>
<a href="#">A.4.</a>	NTP Extension Field in Autokey .....	<a href="#">8</a>



## 1. Introduction

The NTP header format consists of a set of fixed fields that may be followed by some optional fields. Two types of optional fields are defined, Message Authentication Codes (MAC), and extension fields.

If a MAC is used, it resides at the end of the packet. This field can be either 24 octets long, 20 octets long, or a 4-octet crypto-NAK.

NTP extension fields were defined in [\[RFC5905\]](#) as a generic mechanism that allows to add future extensions and features without modifying the NTP header format.

The only currently defined extension field is the one used by the AutoKey protocol [\[RFC5906\]](#).

The NTP specification is somewhat ambiguous with regards to the connection between using extension fields and the presence of a MAC.

- o The definition of the NTP extension field implies that it was intended to be a generic mechanism that can be used for various future features of the protocol (see Section A.1.).
- o On the other hand, the NTP extension field description in [\[RFC5905\]](#) states that a MAC is always present when an extension field is present (see Section A.2.).

The last two quotes seem to be in contradiction; since the extension field was defined as a generic future-compatible building block, it seems unlikely to bind it to a specific feature in the protocol.

Moreover, the extension field parsing rules presented in [\[RFC5906\]](#) imply that an extension field can be present without a MAC, provided that the extension field is at least 28 Octets long.

This document attempts to resolve the ambiguity with regards to the connection between NTP extension fields and MACs, updating [Section 7.5 of \[RFC5905\]](#), and describes the usage of extension fields in the absence of a MAC in a way that is interoperable with current implementations.

## **2. Conventions Used in this Document**

### **2.1. Terminology**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[KEYWORDS](#)].

### **2.2. Terms & Abbreviations**

NTPv4                Network Time Protocol Version 4

MAC                Message Authentication Code

## **3. NTP Extension Fields with and without a MAC - Clarifications**

This section clarifies the usage of extension fields in the absence of a MAC, in accordance with the definitions in [[RFC5905](#)] and [[RFC5906](#)]. [Section 4](#). defines a more generic and flexible usage of extension fields.

### **3.1. Extension Field Format**

The NTP extension field is defined in [Section 7.5 of \[\[RFC5905\]\(#\)\]](#). The extension field format is quoted here in Section A.3.

The minimal length of an extension field, as defined in [Section 7.5 of \[\[RFC5905\]\(#\)\]](#), is 16 octets.

### **3.2. Extension Fields in the Absence of a MAC**

Extension fields can be used when a MAC is not present in the NTP packet. In this case, the extension fields must comply with the parsing rules in Section A.4. Specifically:

- o If the packet includes a single extension field, the length of the extension field MUST be at least 7 words, i.e., at least 28 octets.
- o If the packet includes more than one extension field, the length of the last extension field MUST be at least 28 octets. The length of the other extension fields in this case MUST be at least 16 octets each, as defined in [[RFC5905](#)].

A host that supports NTP extension fields MUST parse NTP extension fields as described in Section A.4.

### **3.3. Unknown Extension Fields**

If an extension field is unknown to the receiving server the server should ignore the extension field and may optionally drop the packet altogether if policy requires it. Note that in the presence of an unknown extension field any MAC that may be present may be misinterpreted as an unknown extension though in this case the apparent extension length will be totally inconsistent with the total length of the rest of the packet.

### **3.4. Interoperability with Current Implementations**

The behavior described in [Section 3.2.](#) is compliant to [\[RFC5906\]](#), and thus should be compatible with existing implementations that support NTP extension fields.

## **4. NTP Extension Field Usage with and without a MAC - Extensions**

This section updates [\[RFC5905\]](#) and [\[RFC5906\]](#) with respect to the usage of extension fields, allowing a more flexible and unambiguous usage.

### **4.1. Extension Fields in the Presence of a MAC**

The usage of extension fields in the presence of a MAC is specified in [\[RFC5905\]](#) and in [\[RFC5906\]](#). The requirement for a MAC MUST be specified by the specification for the extension field and the specification MUST include both the algorithm to be used to create the MAC and the length of the MAC thus created. An extension field may allow for more than one algorithm to be used in which case the information about which one was used MUST be included in the extension field itself.

### **4.2. Extension Fields in the Absence of a MAC**

Extension fields can be used when a MAC is not present in the NTP packet. In this case, the extension fields must comply with the following:

- o If the packet includes a single extension field, the length of the extension field MUST be at least 16 octets. The extension length is specified in the length field of the extension and is the number of octets in the extension field.



- o If the packet includes more than one extension field, the length of the last extension field MUST be at least 28 octets. The length of the other extension fields in this case MUST be at least 16 octets each, as defined in [[RFC5905](#)].

#### **[4.3.](#) Multiple Extension fields in an NTP packet**

If there are multiple extension fields that require a MAC they MUST all require use of the same algorithm and MAC length. Extension fields that do not require a MAC can be included with extension fields that do require a MAC.

#### **[4.4.](#) MAC in the absence of an Extension field**

A MAC must not be any longer than 24 octets if there is no extension field present unless through a previous exchange of packets with an extension field which defines the size and algorithm of the MAC transmitted in the packet and is agreed upon by both client and server.

### **[5.](#) Security Considerations**

The security considerations of the network time protocol are discussed in [[RFC5905](#)]. This document clarifies some ambiguity with regards to the usage of the NTP extension field, and thus the behavior described in this document does not introduce new security considerations.

### **[6.](#) IANA Considerations**

There are no new IANA considerations implied by this document.

### **[7.](#) Acknowledgments**

The authors thank Dave Mills for his insightful comments.

This document was prepared using 2-Word-v2.0.template.dot.

### **[8.](#) References**

#### **[8.1.](#) Normative References**

[KEYWORDS] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.



- [RFC5905] Mills, D., Martin, J., Burbank, J., Kasch, W., "Network Time Protocol Version 4: Protocol and Algorithms Specification", [RFC 5905](#), June 2010.

## **[8.2. Informative References](#)**

- [RFC5906] Haberman, B., Mills, D., "Network Time Protocol Version 4: Autokey Specification", [RFC 5906](#), June 2010.

## **[Appendix A.](#) Requirements from NTPv4 and Autokey**

### **[A.1. NTP Extension Field for Future Extensions](#)**

The following paragraph is quoted from [Section 16 of \[RFC5905\]](#).

This document introduces NTP extension fields allowing for the development of future extensions to the protocol, where a particular extension is to be identified by the Field Type sub-field within the extension field.

### **[A.2. NTP Extension Field in the Presence of a MAC](#)**

The following paragraph is quoted from [Section 7.5 of \[RFC5905\]](#).

In NTPv4, one or more extension fields can be inserted after the header and before the MAC, which is always present when an extension field is present.

### **[A.3. The NTP Extension Field Format](#)**

Figure 1 specifies the NTP extension field format, and is quoted from [\[RFC5905\]](#). For further details refer to [\[RFC5905\]](#).

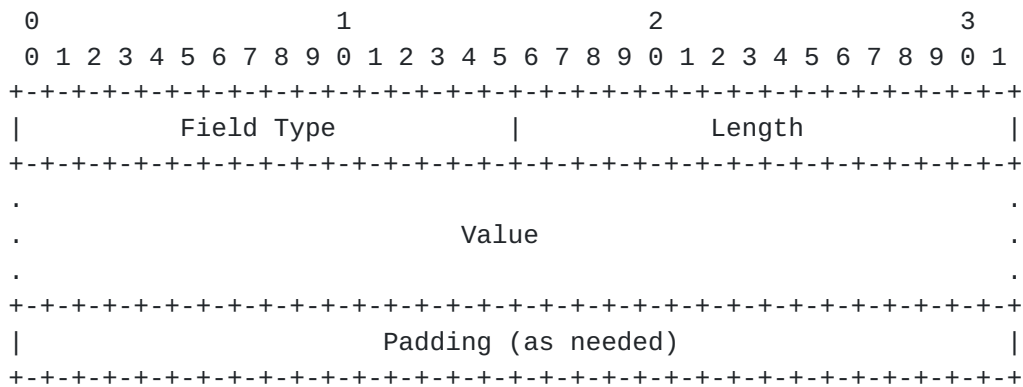


Figure 1 The NTP Extension Field Format

#### A.4. NTP Extension Field in Autokey

The following paragraph is quoted from [Section 10 of \[RFC5906\]](#).

One or more extension fields follow the NTP packet header and the last followed by the MAC. The extension field parser initializes a pointer to the first octet beyond the NTP packet header and calculates the number of octets remaining to the end of the packet. If the remaining length is 20 (128-bit digest plus 4-octet key ID) or 22 (160-bit digest plus 4-octet key ID), the remaining data are the MAC and parsing is complete. If the remaining length is greater than 22, an extension field is present. If the remaining length is less than 8 or not a multiple of 4, a format error has occurred and the packet is discarded; otherwise, the parser increments the pointer by the extension field length and then uses the same rules as above to determine whether a MAC is present or another extension field.

#### Authors' Addresses

Tal Mizrahi  
 Marvell  
 6 Hamada St.  
 Yokneam, 20692 Israel  
  
 Email: talmi@marvell.com

Danny Mayer  
Network Time Foundation  
PO Box 918  
Talent OR 97540

Email: [mayer@ntp.org](mailto:mayer@ntp.org)