

PCE Working Group
Internet-Draft
Intended status: Standards Track
Expires: July 9, 2018

D. Dhody, Ed.
Huawei Technologies
J. Hardwick
Metaswitch
V. Beeram
Juniper Networks
J. Tantsura
January 5, 2018

**A YANG Data Model for Path Computation Element Communications Protocol
(PCEP)
draft-ietf-pce-pcep-yang-06**

Abstract

This document defines a YANG data model for the management of Path Computation Element communications Protocol (PCEP) for communications between a Path Computation Client (PCC) and a Path Computation Element (PCE), or between two PCEs. The data model includes configuration data and state data (status information and counters for the collection of statistics).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on July 9, 2018.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	Requirements Language	3
3.	Terminology and Notation	3
3.1.	Tree Diagrams	4
3.2.	Prefixes in Data Node Names	4
4.	Objectives	5
5.	The Design of PCEP Data Model	5
5.1.	The Overview of PCEP Data Model	6
5.2.	The Full PCEP Data Model	7
5.3.	The Entity	17
5.4.	The Peer Lists	18
5.5.	The Session Lists	18
5.6.	Notifications	19
5.7.	RPC	19
6.	The Design of PCEP Statistics Data Model	19
7.	Advanced PCE Features	22
7.1.	Stateful PCE's LSP-DB	22
8.	Open Issues and Next Step	23
8.1.	The PCE-Initiated LSP	23
9.	Other Considerations	23
9.1.	PCEP over TLS (PCEPS)	23
10.	PCEP YANG Modules	23
10.1.	ietf-pcep module	23
10.2.	ietf-pcep-stats module	79
11.	Security Considerations	99
12.	IANA Considerations	100
13.	Acknowledgements	101
14.	References	101
14.1.	Normative References	101
14.2.	Informative References	103
Appendix A.	Example	104
Appendix B.	Contributor Addresses	106
	Authors' Addresses	107

[1.](#) Introduction

The Path Computation Element (PCE) defined in [[RFC4655](#)] is an entity that is capable of computing a network path or route based on a network graph, and applying computational constraints. A Path

Computation Client (PCC) may make requests to a PCE for paths to be computed.

PCEP is the communication protocol between a PCC and PCE and is defined in [RFC5440]. PCEP interactions include path computation requests and path computation replies as well as notifications of specific states related to the use of a PCE in the context of Multiprotocol Label Switching (MPLS) and Generalized MPLS (GMPLS) Traffic Engineering (TE). [RFC8231] specifies extensions to PCEP to enable stateful control of MPLS TE LSPs.

This document defines a YANG [RFC6020] data model for the management of PCEP speakers. It is important to establish a common data model for how PCEP speakers are identified, configured, and monitored. The data model includes configuration data and state data (status information and counters for the collection of statistics).

This document contains a specification of the PCEP YANG module, "ietf-pcep" which provides the PCEP [RFC5440] data model.

The PCEP operational state is included in the same tree as the PCEP configuration consistent with Network Management Datastore Architecture [I-D.ietf-netmod-revised-datastores]. The origin of the data is indicated as per the origin metadata annotation.

2. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

3. Terminology and Notation

This document uses the terminology defined in [RFC4655] and [RFC5440]. In particular, it uses the following acronyms.

- o Path Computation Request message (PCReq).
- o Path Computation Reply message (PCRep).
- o Notification message (PCNtf).
- o Error message (PCErr).
- o Request Parameters object (RP).
- o Synchronization Vector object (SVEC).

- o Explicit Route object (ERO).

This document also uses the following terms defined in [[RFC7420](#)]:

- o PCEP entity: a local PCEP speaker.
- o PCEP peer: to refer to a remote PCEP speaker.
- o PCEP speaker: where it is not necessary to distinguish between local and remote.

Further, this document also uses the following terms defined in [[RFC8231](#)] :

- o Stateful PCE, Passive Stateful PCE, Active Stateful PCE
- o Delegation, Revocation, Redefinition
- o LSP State Report, Path Computation Report message (PCRpt).
- o LSP State Update, Path Computation Update message (PCUpd).

[RFC8281] :

- o PCE-initiated LSP, Path Computation LSP Initiate Message (PCInitiate).

[I-D.ietf-pce-lsp-setup-type] :

- o Path Setup Type (PST).

[I-D.ietf-pce-segment-routing] :

- o Segment Routing (SR).

[3.1.](#) Tree Diagrams

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams is defined in [[I-D.ietf-netmod-yang-tree-diagrams](#)].

[3.2.](#) Prefixes in Data Node Names

In this document, names of data nodes and other data model objects are often used without a prefix, as long as it is clear from the context in which YANG module each name is defined. Otherwise, names are prefixed using the standard prefix associated with the corresponding YANG module, as shown in Table 1.

Prefix	YANG module	Reference
yang	ietf-yang-types	[RFC6991]
inet	ietf-inet-types	[RFC6991]
te	ietf-te	[I-D.ietf-teas-yang-te]
te-types	ietf-te-types	[I-D.ietf-teas-yang-te]
key-chain	ietf-key-chain	[RFC8177]
nacm	ietf-netconf-	[RFC6536]
	acm	
tls-	ietf-tls-server	[I-D.ietf-netconf-tls-client-server
server]
tls-	ietf-tls-client	[I-D.ietf-netconf-tls-client-server
client]

Table 1: Prefixes and corresponding YANG modules

4. Objectives

This section describes some of the design objectives for the model:

- o In case of existing implementations, it needs to map the data model defined in this document to their proprietary native data model. To facilitate such mappings, the data model should be simple.
- o The data model should be suitable for new implementations to use as is.
- o Mapping to the PCEP MIB Module should be clear.
- o The data model should allow for static configurations of peers.
- o The data model should include read-only counters in order to gather statistics for sent and received PCEP messages, received messages with errors, and messages that could not be sent due to errors. This could be in a separate model which augments the base data model.
- o It should be fairly straightforward to augment the base data model for advanced PCE features.

5. The Design of PCEP Data Model

5.1. The Overview of PCEP Data Model

The PCEP YANG module defined in this document has all the common building blocks for the PCEP protocol.

```

module: ietf-pcep
  +--rw pcep!
    +--rw entity
      +--rw addr inet:ip-address
      +--rw enabled? boolean
      +--rw role pcep-role
      +--rw description? string
      +--rw speaker-entity-id? string
      | {stateful-sync-opt}?
      +--rw admin-status? pcep-admin-status
      +--ro index? uint32
      +--ro oper-status? pcep-oper-status
      +--rw domain
      | +--rw domain* [domain-type domain]
      | ...
      +--rw capability
      | ...
      +--rw pce-info
      | +--rw scope
      | | ...
      | +--rw neigh-domains
      | | ...
      | +--rw path-key {path-key}?
      | ...
      +--ro lsp-db {stateful}?
      | +--ro db-ver? uint64
      | | {stateful-sync-opt}?
      | +--ro association-list*
      | | [id source global-source extended-id]
      | | ...
      | +--ro lsp* [plsp-id pcc-id]
      | ...
      +--ro path-keys {path-key}?
      | +--ro path-keys* [path-key]
      | ...
      +--rw peers
        +--rw peer* [addr]

        +--ro sessions
          +--ro session* [initiator]
          ...

```



```

rpcs:
  +---x trigger-resync {stateful,stateful-sync-opt}?
    +---w input
      +---w pcc?    -> /pcep/entity/peers/peer/addr

notifications:
  +---n pcep-session-up
    | ...
  +---n pcep-session-down
    | ...
  +---n pcep-session-local-overload
    | ...
  +---n pcep-session-local-overload-clear
    | ...
  +---n pcep-session-peer-overload
    | ...
  +---n pcep-session-peer-overload-clear
    ...

```

5.2. The Full PCEP Data Model

The module, "ietf-pcep", defines the basic components of a PCE speaker.

```

module: ietf-pcep
  +--rw pcep!
    +--rw entity
      +--rw addr
        | inet:ip-address
      +--rw enabled?                boolean
      +--rw role
        | pcep-role
      +--rw description?            string
      +--rw speaker-entity-id?      string
        | {stateful-sync-opt}?
      +--rw admin-status?
        | pcep-admin-status
      +--ro index?                  uint32
      +--ro oper-status?
        | pcep-oper-status
      +--rw domain
        | +--rw domain* [domain-type domain]
        |   +--rw domain-type      domain-type
        |   +--rw domain            domain
      +--rw capability
        | +--rw gmpls?              boolean
        | | {gmpls}?
        | +--rw bi-dir?              boolean

```



```

|   +--rw diverse?                boolean
|   +--rw load-balance?           boolean
|   +--rw synchronize?           boolean
|   |       {svec}?
|   +--rw objective-function?     boolean
|   |       {objective-function}?
|   +--rw add-path-constraint?    boolean
|   +--rw prioritization?         boolean
|   +--rw multi-request?          boolean
|   +--rw gco?                   boolean
|   |       {gco}?
|   +--rw p2mp?                  boolean
|   |       {p2mp}?
|   +--rw stateful {stateful}?
|   |   +--rw enabled?            boolean
|   |   +--rw active?            boolean
|   |   +--rw pce-initiated?      boolean
|   |   |       {pce-initiated}?
|   |   +--rw include-db-ver?     boolean
|   |   |       {stateful-sync-opt}?
|   |   +--rw trigger-resync?     boolean
|   |   |       {stateful-sync-opt}?
|   |   +--rw trigger-initial-sync? boolean
|   |   |       {stateful-sync-opt}?
|   |   +--rw incremental-sync?   boolean
|   |   |       {stateful-sync-opt}?
|   +--rw sr {sr}?
|       +--rw enabled?           boolean
+--rw pce-info
|   +--rw scope
|   |   +--rw intra-area-scope?
|   |   |       boolean
|   |   +--rw intra-area-pref?
|   |   |       uint8
|   |   +--rw inter-area-scope?
|   |   |       boolean
|   |   +--rw inter-area-scope-default?
|   |   |       boolean
|   |   +--rw inter-area-pref?
|   |   |       uint8
|   |   +--rw inter-as-scope?
|   |   |       boolean
|   |   +--rw inter-as-scope-default?
|   |   |       boolean
|   |   +--rw inter-as-pref?
|   |   |       uint8
|   |   +--rw inter-layer-scope?
|   |   |       boolean

```



```
| | +--rw inter-layer-pref?
| |     uint8
| +--rw neigh-domains
| | +--rw domain* [domain-type domain]
| |     +--rw domain-type    domain-type
| |     +--rw domain         domain
| +--rw path-key {path-key}?
|     +--rw enabled?         boolean
|     +--rw discard-timer?   uint32
|     +--rw reuse-time?      uint32
|     +--rw pce-id?          inet:ip-address
+--rw connect-timer?         uint32
+--rw connect-max-retry?     uint32
+--rw init-backoff-timer?    uint32
+--rw max-backoff-timer?     uint32
+--rw open-wait-timer?       uint32
+--rw keep-wait-timer?       uint32
+--rw keep-alive-timer?      uint32
+--rw dead-timer?            uint32
+--rw allow-negotiation?     boolean
+--rw max-keep-alive-timer?   uint32
+--rw max-dead-timer?        uint32
+--rw min-keep-alive-timer?   uint32
+--rw min-dead-timer?        uint32
+--rw sync-timer?            uint32
|     {svec}?
+--rw request-timer?         uint32
+--rw max-sessions?          uint32
+--rw max-unknown-reqs?      uint32
+--rw max-unknown-msgs?      uint32
+--rw pcep-notification-max-rate  uint32
+--rw stateful-parameter {stateful}?
| +--rw state-timeout?        uint32
| +--rw redelegation-timeout?  uint32
| +--rw rpt-non-pcep-lsp?     boolean
+--rw of-list {objective-function}?
| +--rw objective-function* [of]
|     +--rw of                objective-function
+--ro lsp-db {stateful}?
| +--ro db-ver?               uint64
| |     {stateful-sync-opt}?
| +--ro association-list*
| |     [id source global-source extended-id]
| |     +--ro type?           assoc-type
| |     +--ro id              uint16
| |     +--ro source          inet:ip-address
| |     +--ro global-source    uint32
| |     +--ro extended-id     string
```



```

| | +--ro lsp* [plsp-id pcc-id]
| |   +--ro plsp-id   leafref
| |   +--ro pcc-id    leafref
| +--ro lsp* [plsp-id pcc-id]
|   +--ro plsp-id          uint32
|   +--ro pcc-id
|   |   inet:ip-address
|   +--ro lsp-ref
|   |   +--ro source?      leafref
|   |   +--ro destination? leafref
|   |   +--ro tunnel-id?   leafref
|   |   +--ro lsp-id?      leafref
|   |   +--ro extended-tunnel-id? leafref
|   +--ro admin-state?     boolean
|   +--ro operational-state?
|   |   operational-state
|   +--ro delegated
|   |   +--ro enabled?     boolean
|   |   +--ro peer?       leafref
|   |   +--ro srp-id?     uint32
|   +--ro initiation {pce-initiated}?
|   |   +--ro enabled?     boolean
|   |   +--ro peer?       leafref
|   +--ro symbolic-path-name? string
|   +--ro last-error?      lsp-error
|   +--ro pst?             pst
|   +--ro association-list*
|   |   [id source global-source extended-id]
|   |   +--ro id           leafref
|   |   +--ro source       leafref
|   |   +--ro global-source leafref
|   |   +--ro extended-id  leafref
+--ro path-keys {path-key}?
| +--ro path-keys* [path-key]
|   +--ro path-key      uint16
|   +--ro cps
|   |   +--ro explicit-route-objects*
|   |   |   [index]
|   |   |   +--ro explicit-route-usage?
|   |   |   |   identityref
|   |   |   +--ro index
|   |   |   |   uint32
|   |   |   +--ro (type)?
|   |   |   |   +--:(numbered)
|   |   |   |   |   +--ro numbered-hop
|   |   |   |   |   +--ro address?
|   |   |   |   |   |   te-types:te-tp-id
|   |   |   |   |   +--ro hop-type?

```



```

|         |         | te-hop-type
|         |         | +---:(as-number)
|         |         | |   +--ro as-number-hop
|         |         | |     +--ro as-number?
|         |         | |       | binary
|         |         | |     +--ro hop-type?
|         |         | |       te-hop-type
|         |         | +---:(unnumbered)
|         |         | |   +--ro unnumbered-hop
|         |         | |     +--ro node-id?
|         |         | |       | te-types:te-node-id
|         |         | |     +--ro link-tp-id?
|         |         | |       | te-types:te-tp-id
|         |         | |     +--ro hop-type?
|         |         | |       te-hop-type
|         |         | +---:(label)
|         |         | |   +--ro label-hop
|         |         | |     +--ro value?
|         |         | |       rt-types:generalized-label
|         |         | +---:(sid)
|         |         | |   +--ro sid-hop
|         |         | |     +--ro sid?
|         |         | |       rt-types:generalized-label
+--ro pcc-original? leafref
+--ro req-id?      uint32
+--ro retrieved?   boolean
+--ro pcc-retrieved? leafref
+--ro creation-time? yang:timestamp
+--ro discard-time?  uint32
+--ro reuse-time?    uint32
+--rw peers
+--rw peer* [addr]
+--rw addr
| inet:ip-address
+--rw role
| pcep-role
+--rw description? string
+--rw domain
| +--rw domain*
| [domain-type domain]
| +--rw domain-type domain-type
| +--rw domain domain
+--rw capability
| +--rw gmpls?
| | boolean {gmpls}?
| +--rw bi-dir?
| | boolean
| +--rw diverse?
```



```

| |         boolean
| +--rw load-balance?
| |         boolean
| +--rw synchronize?
| |         boolean {svec}?
| +--rw objective-function?
| |         boolean
| |         {objective-function}?
| +--rw add-path-constraint?
| |         boolean
| +--rw prioritization?
| |         boolean
| +--rw multi-request?
| |         boolean
| +--rw gco?
| |         boolean {gco}?
| +--rw p2mp?
| |         boolean {p2mp}?
| +--rw stateful {stateful}?
| |   +--rw enabled?
| | |     boolean
| | +--rw active?
| | |     boolean
| | +--rw pce-initiated?
| | |     boolean
| | |     {pce-initiated}?
| | +--rw include-db-ver?
| | |     boolean
| | |     {stateful-sync-opt}?
| | +--rw trigger-resync?
| | |     boolean
| | |     {stateful-sync-opt}?
| | +--rw trigger-initial-sync?
| | |     boolean
| | |     {stateful-sync-opt}?
| | +--rw incremental-sync?
| | |     boolean
| | |     {stateful-sync-opt}?
| +--rw sr {sr}?
|   +--rw enabled?    boolean
+--rw pce-info
| +--rw scope
| |   +--rw intra-area-scope?
| | |     boolean
| | +--rw intra-area-pref?
| | |     uint8
| | +--rw inter-area-scope?
| | |     boolean

```



```

| | +--rw inter-area-scope-default?
| | |   boolean
| | +--rw inter-area-pref?
| | |   uint8
| | +--rw inter-as-scope?
| | |   boolean
| | +--rw inter-as-scope-default?
| | |   boolean
| | +--rw inter-as-pref?
| | |   uint8
| | +--rw inter-layer-scope?
| | |   boolean
| | +--rw inter-layer-pref?
| | |   uint8
| +--rw neigh-domains
|   +--rw domain*
|     [domain-type domain]
|     +--rw domain-type
|     |   domain-type
|     +--rw domain          domain
+--rw delegation-pref?      uint8
|   {stateful}?
+--rw auth
|   +--rw (auth-type-selection)?
|     +--:(auth-key-chain)
|       | +--rw key-chain?
|       |   key-chain:key-chain-ref
|     +--:(auth-key)
|       | +--rw crypto-algorithm
|       | |   identityref
|       | +--rw key-string
|       |   +--rw (key-string-style)?
|       |   +--:(keystring)
|       |   | +--rw keystring?
|       |   |   string
|       |   +--:(hexadecimal)
|       |   {key-chain:hex-key-string}?
|       |   +--rw hexadecimal-string?
|       |   yang:hex-string
|     +--:(auth-tls) {tls}?
|       +--rw (role)?
|         +--:(server)
|           | +--rw tls-server
|           |   +--rw server-identity
|           |   | +--rw algorithm?
|           |   | |   identityref
|           |   | +--rw private-key?
|           |   | |   union

```



```

|         |         | +--rw public-key?
|         |         | |         binary
|         |         | +---x generate-private-key
|         |         | |   +---w input
|         |         | |     +---w algorithm
|         |         | |       identityref
|         |         | +--rw certificates
|         |         | |   +--rw certificate*
|         |         | |     [name]
|         |         | |       +--rw name
|         |         | |         |         string
|         |         | |       +--rw value?
|         |         | |         |         binary
|         |         | +---x generate-certificate-signing-request
|         |         | |   +---w input
|         |         | |     |   +---w subject
|         |         | |     | |     binary
|         |         | |     |   +---w attributes?
|         |         | |     | |     binary
|         |         | |   +--ro output
|         |         | |     +--ro certificate-signing-request
|         |         | |       binary
|         |         +--rw client-auth
|         |         |   +--rw pinned-ca-certs?
|         |         | |     ks:pinned-certificates
|         |         | +--rw pinned-client-certs?
|         |         | |     ks:pinned-certificates
|         |         +--rw hello-params
|         |         |   {tls-server-hello-params-config}?
|         |         |   +--rw tls-versions
|         |         | |   +--rw tls-version*
|         |         | |     identityref
|         |         | +--rw cipher-suites
|         |         | |   +--rw cipher-suite*
|         |         | |     identityref
|         +---:(client)
|         +--rw tls-client
|         +--rw client-identity
|         |   +--rw (auth-type)?
|         | |   +---:(certificate)
|         | |   +--rw certificate
|         | |   |   +--rw algorithm?
|         | |   | |     identityref
|         | |   +--rw private-key?
|         | |   |   union
|         | |   +--rw public-key?
|         | |   |   binary
|         | |   +---x generate-private-key

```



```

|
|
|      +---w input
|      |      +---w algorithm
|      |      |      identityref
|      +--rw certificates
|      |      +--rw certificate*
|      |      |      [name]
|      |      |      +--rw name
|      |      |      |      string
|      |      |      +--rw value?
|      |      |      |      binary
|      +---x generate-certificate-
signing-request
|
|      +---w input
|      |      +---w subject
|      |      |      binary
|      |      +---w attributes?
|      |      |      binary
|      +--ro output
|      |      +--ro certificate-signing-
request
|      |      |      binary
|      +--rw server-auth
|      |      +--rw pinned-ca-certs?
|      |      |      ks:pinned-certificates
|      |      +--rw pinned-server-certs?
|      |      |      ks:pinned-certificates
|      +--rw hello-params
|      |      {tls-client-hello-params-config}?
|      +--rw tls-versions
|      |      +--rw tls-version*
|      |      |      identityref
|      +--rw cipher-suites
|      |      +--rw cipher-suite*
|      |      |      identityref
+--ro discontinuity-time?
|      yang:timestamp
+--ro initiate-session?      boolean
+--ro session-exists?      boolean
+--ro session-up-time?
|      yang:timestamp
+--ro session-fail-time?
|      yang:timestamp
+--ro session-fail-up-time?
|      yang:timestamp
+--ro sessions
|      +--ro session* [initiator]
|      |      +--ro initiator
|      |      |      pcep-initiator

```

```
+--ro role?  
|      -> /pcep/entity/role
```

```
+--ro state-last-change?
|   yang:timestamp
+--ro state?
|   pcep-sess-state
+--ro session-creation?
|   yang:timestamp
+--ro connect-retry?
|   yang:counter32
+--ro local-id?
|   uint32
+--ro remote-id?
|   uint32
+--ro keepalive-timer?
|   uint32
+--ro peer-keepalive-timer?
|   uint32
+--ro dead-timer?
|   uint32
+--ro peer-dead-timer?
|   uint32
+--ro ka-hold-time-rem?
|   uint32
+--ro overloaded?
|   boolean
+--ro overload-time?
|   uint32
+--ro peer-overloaded?
|   boolean
+--ro peer-overload-time?
|   uint32
+--ro lspdb-sync?
|   sync-state
|   {stateful}?
+--ro recv-db-ver?
|   uint64
|   {stateful, stateful-sync-opt}?
+--ro of-list
|   {objective-function}?
|   +--ro objective-function*
|       [of]
|       +--ro of
|           objective-function
+--ro speaker-entity-id?
|   string
|   {stateful-sync-opt}?
+--ro discontinuity-time?
|   yang:timestamp
```



```
rpcs:
  +---x trigger-resync
    {stateful, stateful-sync-opt}?
  +---w input
    +---w pcc?    -> /pcep/entity/peers/peer/addr
```

```
notifications:
  +---n pcep-session-up
  | +--ro peer-addr?
  | |           -> /pcep/entity/peers/peer/addr
  | +--ro session-initiator?  leafref
  | +--ro state-last-change?  yang:timestamp
  | +--ro state?              pcep-sess-state
  +---n pcep-session-down
  | +--ro peer-addr?
  | |           -> /pcep/entity/peers/peer/addr
  | +--ro session-initiator?  pcep-initiator
  | +--ro state-last-change?  yang:timestamp
  | +--ro state?              pcep-sess-state
  +---n pcep-session-local-overload
  | +--ro peer-addr?
  | |           -> /pcep/entity/peers/peer/addr
  | +--ro session-initiator?  leafref
  | +--ro overloaded?         boolean
  | +--ro overload-time?      uint32
  +---n pcep-session-local-overload-clear
  | +--ro peer-addr?
  | |           -> /pcep/entity/peers/peer/addr
  | +--ro overloaded?         boolean
  +---n pcep-session-peer-overload
  | +--ro peer-addr?
  | |           -> /pcep/entity/peers/peer/addr
  | +--ro session-initiator?  leafref
  | +--ro peer-overloaded?    boolean
  | +--ro peer-overload-time? uint32
  +---n pcep-session-peer-overload-clear
  | +--ro peer-addr?
  | |           -> /pcep/entity/peers/peer/addr
  | +--ro peer-overloaded?    boolean
```

5.3. The Entity

The PCEP yang module may contain status information for the local PCEP entity.

The entity has an IP address (using ietf-inet-types [[RFC6991](#)]) and a "role" leaf (the local entity PCEP role) as mandatory.

Note that, the PCEP MIB module [[RFC7420](#)] uses an entity list and a system generated entity index as a primary index to the read only entity table. If the device implements the PCEP MIB, the "index" leaf MUST contain the value of the corresponding pcePcepEntityIndex and only one entity is assumed.

5.4. The Peer Lists

The peer list contains peer(s) that the local PCEP entity knows about. A PCEP speaker is identified by its IP address. If there is a PCEP speaker in the network that uses multiple IP addresses then it looks like multiple distinct peers to the other PCEP speakers in the network.

Since PCEP sessions can be ephemeral, the peer list tracks a peer even when no PCEP session currently exists to that peer. The statistics contained are an aggregate of the statistics for all successive sessions to that peer.

To limit the quantity of information that is stored, an implementation MAY choose to discard this information if and only if no PCEP session exists to the corresponding peer.

The data model for PCEP peer presented in this document uses a flat list of peers. Each peer in the list is identified by its IP address (addr-type, addr).

There is a list for static peer configuration and operational state of all peers (i.e. static as well as discovered)("/pcep/entity/peers"). The list is used to enable remote PCE configuration at PCC (or PCE) and has the operational state of these peers as well as the remote PCE peer which were discovered and PCC peers that have initiated session.

5.5. The Session Lists

The session list contains PCEP session that the PCEP entity (PCE or PCC) is currently participating in. The statistics in session are semantically different from those in peer since the former applies to the current session only, whereas the latter is the aggregate for all sessions that have existed to that peer.

Although [[RFC5440](#)] forbids more than one active PCEP session between a given pair of PCEP entities at any given time, there is a window during session establishment where two sessions may exist for a given pair, one representing a session initiated by the local PCEP entity and the other representing a session initiated by the peer. If

either of these sessions reaches active state first, then the other is discarded.

The data model for PCEP session presented in this document uses a flat list of sessions. Each session in the list is identified by its initiator. This index allows two sessions to exist transiently for a given peer, as discussed above.

5.6. Notifications

This YANG model defines a list of notifications to inform client of important events detected during the protocol operation. The notifications defined cover the PCEP MIB notifications.

5.7. RPC

This YANG model defines a RPC to trigger state resynchronization to a particular PCEP peer.

6. The Design of PCEP Statistics Data Model

The module, "ietf-pcep-stats", augments the ietf-pcep module to include statistics at the PCEP peer and session level.

```
module: ietf-pcep-stats
  augment /p:pcep/p:entity/p:peers/p:peer:
    +--ro num-sess-setup-ok?      yang:counter32
    +--ro num-sess-setup-fail?    yang:counter32
    +--ro pcep-stats
      +--ro avg-rsp-time?         uint32
      +--ro lwm-rsp-time?         uint32
      +--ro hwm-rsp-time?         uint32
      +--ro num-pcreq-sent?        yang:counter32
      +--ro num-pcreq-rcvd?        yang:counter32
      +--ro num-pcrep-sent?        yang:counter32
      +--ro num-pcrep-rcvd?        yang:counter32
      +--ro num-pcerr-sent?        yang:counter32
      +--ro num-pcerr-rcvd?        yang:counter32
      +--ro num-pcntf-sent?        yang:counter32
      +--ro num-pcntf-rcvd?        yang:counter32
      +--ro num-keepalive-sent?    yang:counter32
      +--ro num-keepalive-rcvd?    yang:counter32
      +--ro num-unknown-rcvd?      yang:counter32
      +--ro num-corrupt-rcvd?      yang:counter32
      +--ro num-req-sent?          yang:counter32
      +--ro num-req-sent-pend-rep? yang:counter32
      +--ro num-req-sent-ero-rcvd? yang:counter32
      +--ro num-req-sent-nopath-rcvd? yang:counter32
```



```

+--ro num-req-sent-cancel-rcvd?    yang:counter32
+--ro num-req-sent-error-rcvd?     yang:counter32
+--ro num-req-sent-timeout?         yang:counter32
+--ro num-req-sent-cancel-sent?     yang:counter32
+--ro num-req-rcvd?                 yang:counter32
+--ro num-req-rcvd-pend-rep?        yang:counter32
+--ro num-req-rcvd-ero-sent?        yang:counter32
+--ro num-req-rcvd-nopath-sent?     yang:counter32
+--ro num-req-rcvd-cancel-sent?     yang:counter32
+--ro num-req-rcvd-error-sent?      yang:counter32
+--ro num-req-rcvd-cancel-rcvd?     yang:counter32
+--ro num-rep-rcvd-unknown?         yang:counter32
+--ro num-req-rcvd-unknown?         yang:counter32
+--ro svec {p:svec}?
| +--ro num-svec-sent?              yang:counter32
| +--ro num-svec-req-sent?          yang:counter32
| +--ro num-svec-rcvd?              yang:counter32
| +--ro num-svec-req-rcvd?          yang:counter32
+--ro stateful {p:stateful}?
| +--ro num-pcrpt-sent?              yang:counter32
| +--ro num-pcrpt-rcvd?              yang:counter32
| +--ro num-pcupd-sent?              yang:counter32
| +--ro num-pcupd-rcvd?              yang:counter32
| +--ro num-rpt-sent?                yang:counter32
| +--ro num-rpt-rcvd?                yang:counter32
| +--ro num-rpt-rcvd-error-sent?     yang:counter32
| +--ro num-upd-sent?                yang:counter32
| +--ro num-upd-rcvd?                yang:counter32
| +--ro num-upd-rcvd-unknown?        yang:counter32
| +--ro num-upd-rcvd-undelimited?    yang:counter32
| +--ro num-upd-rcvd-error-sent?     yang:counter32
| +--ro initiation {p:pce-initiated}?
|   +--ro num-pcinitiate-sent?        yang:counter32
|   +--ro num-pcinitiate-rcvd?        yang:counter32
|   +--ro num-initiate-sent?          yang:counter32
|   +--ro num-initiate-rcvd?          yang:counter32
|   +--ro num-initiate-rcvd-error-sent? yang:counter32
+--ro path-key {p:path-key}?
| +--ro num-unknown-path-key?        yang:counter32
| +--ro num-exp-path-key?            yang:counter32
| +--ro num-dup-path-key?            yang:counter32
| +--ro num-path-key-no-attempt?     yang:counter32
+--ro num-req-sent-closed?           yang:counter32
+--ro num-req-rcvd-closed?           yang:counter32
augment /p:pcep/p:entity/p:peers/p:peer/p:sessions/p:session:
+--ro pcep-stats
  +--ro avg-rsp-time?                uint32
  +--ro lwm-rsp-time?                uint32

```



```

+--ro hwm-rsp-time?          uint32
+--ro num-pcreq-sent?        yang:counter32
+--ro num-pcreq-rcvd?       yang:counter32
+--ro num-pcrep-sent?       yang:counter32
+--ro num-pcrep-rcvd?       yang:counter32
+--ro num-pcerr-sent?       yang:counter32
+--ro num-pcerr-rcvd?       yang:counter32
+--ro num-pcntf-sent?       yang:counter32
+--ro num-pcntf-rcvd?       yang:counter32
+--ro num-keepalive-sent?    yang:counter32
+--ro num-keepalive-rcvd?    yang:counter32
+--ro num-unknown-rcvd?     yang:counter32
+--ro num-corrupt-rcvd?     yang:counter32
+--ro num-req-sent?         yang:counter32
+--ro num-req-sent-pend-rep? yang:counter32
+--ro num-req-sent-ero-rcvd? yang:counter32
+--ro num-req-sent-nopath-rcvd? yang:counter32
+--ro num-req-sent-cancel-rcvd? yang:counter32
+--ro num-req-sent-error-rcvd? yang:counter32
+--ro num-req-sent-timeout?  yang:counter32
+--ro num-req-sent-cancel-sent? yang:counter32
+--ro num-req-rcvd?         yang:counter32
+--ro num-req-rcvd-pend-rep? yang:counter32
+--ro num-req-rcvd-ero-sent? yang:counter32
+--ro num-req-rcvd-nopath-sent? yang:counter32
+--ro num-req-rcvd-cancel-sent? yang:counter32
+--ro num-req-rcvd-error-sent? yang:counter32
+--ro num-req-rcvd-cancel-rcvd? yang:counter32
+--ro num-rep-rcvd-unknown?  yang:counter32
+--ro num-req-rcvd-unknown?  yang:counter32
+--ro svec {p:svec}?
|  +--ro num-svec-sent?      yang:counter32
|  +--ro num-svec-req-sent?  yang:counter32
|  +--ro num-svec-rcvd?     yang:counter32
|  +--ro num-svec-req-rcvd?  yang:counter32
+--ro stateful {p:stateful}?
|  +--ro num-pcrpt-sent?     yang:counter32
|  +--ro num-pcrpt-rcvd?     yang:counter32
|  +--ro num-pcupd-sent?     yang:counter32
|  +--ro num-pcupd-rcvd?     yang:counter32
|  +--ro num-rpt-sent?       yang:counter32
|  +--ro num-rpt-rcvd?       yang:counter32
|  +--ro num-rpt-rcvd-error-sent? yang:counter32
|  +--ro num-upd-sent?       yang:counter32
|  +--ro num-upd-rcvd?       yang:counter32
|  +--ro num-upd-rcvd-unknown? yang:counter32
|  +--ro num-upd-rcvd-undelagated? yang:counter32
|  +--ro num-upd-rcvd-error-sent? yang:counter32
```



```
|  +--ro initiation {p:pce-initiated}?
|    +--ro num-pcinitiate-sent?          yang:counter32
|    +--ro num-pcinitiate-rcvd?         yang:counter32
|    +--ro num-initiate-sent?           yang:counter32
|    +--ro num-initiate-rcvd?           yang:counter32
|    +--ro num-initiate-rcvd-error-sent? yang:counter32
+--ro path-key {p:path-key}?
  +--ro num-unknown-path-key?          yang:counter32
  +--ro num-exp-path-key?              yang:counter32
  +--ro num-dup-path-key?              yang:counter32
  +--ro num-path-key-no-attempt?       yang:counter32
```

7. Advanced PCE Features

This document contains a specification of the base PCEP YANG module, "ietf-pcep" which provides the basic PCEP [[RFC5440](#)] data model.

This document further handles advanced PCE features like -

- o Capability and Scope
- o Domain information (local/neighbour)
- o Path-Key
- o OF
- o GCO
- o P2MP
- o GMPLS
- o Inter-Layer
- o Stateful PCE
- o Segment Routing
- o Authentication including PCEPS (TLS)

7.1. Stateful PCE's LSP-DB

In the operational state of PCEP which supports stateful PCE mode, the list of LSP state are maintained in LSP-DB. The key is the PLSP-ID and the PCC IP address.

The PCEP data model contains the operational state of LSPs (/pcep/entity/lsp-db/lsp/) with PCEP specific attributes. The generic TE attributes of the LSP are defined in [\[I-D.ietf-teas-yang-te\]](#). A reference to LSP state in TE model is maintained.

8. Open Issues and Next Step

This section is added so that open issues can be tracked. This section would be removed when the document is ready for publication.

8.1. The PCE-Initiated LSP

The TE Model at [\[I-D.ietf-teas-yang-te\]](#) should support creating of tunnels at the controller (PCE) and marking them as PCE-Initiated. The LSP-DB in the PCEP Yang (/pcep/entity/lsp-db/lsp/initiation) also marks the LSPs which are PCE-initiated.

9. Other Considerations

9.1. PCEP over TLS (PCEPS)

[RFC8253] describe the use of TLS in PCEP. The peer acting as the PCEP client MUST act as the TLS client. The TLS client actively opens the TLS connection and the TLS server passively listens for the incoming TLS connections. The well-known TCP port number 4189 is used by PCEP servers to listen for TCP connections established by PCEP over TLS clients. The TLS client MUST send the TLS ClientHello message to begin the TLS handshake. The TLS server MUST send a CertificateRequest in order to request a certificate from the TLS client. Once the TLS handshake has finished, the client and the server MAY begin to exchange PCEP messages. Client and server identity verification is done before the PCEP open message is sent. This means that the identity verification is completed before the PCEP session is started..

10. PCEP YANG Modules

10.1. ietf-pcep module

RFC Ed.: In this section, replace all occurrences of 'XXXX' with the actual RFC number and all occurrences of the revision date below with the date of RFC publication (and remove this note).

```
<CODE BEGINS> file "ietf-pcep@2018-01-05.yang"
module ietf-pcep {
```



```
yang-version 1.1;

namespace "urn:ietf:params:xml:ns:yang:ietf-pcep";
prefix pcep;

import ietf-inet-types {
    prefix "inet";
}

import ietf-yang-types {
    prefix "yang";
}

import ietf-te {
    prefix "te";
}

import ietf-te-types {
    prefix "te-types";
}

import ietf-key-chain {
    prefix "key-chain";
}

import ietf-netconf-acm {
    prefix "nacm";
}

import ietf-tls-server {
    prefix "tls-server";
}

import ietf-tls-client {
    prefix "tls-client";
}

organization
    "IETF PCE (Path Computation Element) Working Group";

contact
    "WG Web:  <http://tools.ietf.org/wg/pcep/>
    WG List:  <mailto:pce@ietf.org>
    WG Chair: JP Vasseur
               <mailto:jpv@cisco.com>
    WG Chair: Julien Meuric
               <mailto:julien.meuric@orange.com>
    WG Chair: Jonathan Hardwick
```


Editor: <mailto:Jonathan.Hardwick@metaswitch.com>
Dhruv Dhody
<mailto:dhruv.ietf@gmail.com>;

description

"The YANG module defines a generic configuration and operational model for PCEP common across all of the vendor implementations.";

revision 2018-01-05 {

description "Initial revision.";

reference

"RFC XXXX: A YANG Data Model for Path Computation
Element Communications Protocol
(PCEP)";

}

/*

* Identities

*/

identity pcep {

description "Identity for the PCEP protocol.";

}

/*

* Typedefs

*/

typedef pcep-role {

type enumeration {

enum unknown {

value "0";

description

"An unknown role";

}

enum pcc {

value "1";

description

"The role of a Path Computation Client";

}

enum pce {

value "2";

description

"The role of Path Computation Element";

}

enum pcc-and-pce {

value "3";


```
        description
        "The role of both Path Computation Client and
        Path Computation Element";
    }
}

description
    "The role of a PCEP speaker.
    Takes one of the following values
    - unknown(0): the role is not known.
    - pcc(1): the role is of a Path Computation
      Client (PCC).
    - pce(2): the role is of a Path Computation
      Server (PCE).
    - pccAndPce(3): the role is of both a PCC and
      a PCE.";
}

typedef pcep-admin-status {
    type enumeration {
        enum admin-status-up {
            value "1";
            description
            "Admin Status is Up";
        }
        enum admin-status-down {
            value "2";
            description
            "Admin Status is Down";
        }
    }
}

description
    "The Admin Status of the PCEP entity.
    Takes one of the following values
    - admin-status-up(1): Admin Status is Up.
    - admin-status-down(2): Admin Status is Down";
}

typedef pcep-oper-status {
    type enumeration {
        enum oper-status-up {
            value "1";
            description
            "The PCEP entity is active";
        }
        enum oper-status-down {
```



```
        value "2";
        description
        "The PCEP entity is inactive";
    }
    enum oper-status-going-up {
        value "3";
        description
        "The PCEP entity is activating";
    }
    enum oper-status-going-down {
        value "4";
        description
        "The PCEP entity is deactivating";
    }
    enum oper-status-failed {
        value "5";
        description
        "The PCEP entity has failed and will recover
        when possible.";
    }
    enum oper-status-failed-perm {
        value "6";
        description
        "The PCEP entity has failed and will not recover
        without operator intervention";
    }
}
description
"The operational status of the PCEP entity.
Takes one of the following values
- oper-status-up(1): Active
- oper-status-down(2): Inactive
- oper-status-going-up(3): Activating
- oper-status-going-down(4): Deactivating
- oper-status-failed(5): Failed
- oper-status-failed-perm(6): Failed Permanantly";
}

typedef pcep-initiator {
    type enumeration {
        enum local {
            value "1";
            description
            "The local PCEP entity initiated the session";
        }

        enum remote {
            value "2";
```



```
        description
        "The remote PCEP peer initiated the session";
    }
}
description
"The initiator of the session, that is, whether the TCP
connection was initiated by the local PCEP entity or
the remote peer.
Takes one of the following values
    - local(1): Initiated locally
    - remote(2): Initiated remotely";
}

typedef pcep-sess-state {
    type enumeration {
        enum tcp-pending {
            value "1";
            description
                "The tcp-pending state of PCEP session.";
        }

        enum open-wait {
            value "2";
            description
                "The open-wait state of PCEP session.";
        }

        enum keep-wait {
            value "3";
            description
                "The keep-wait state of PCEP session.";
        }

        enum session-up {
            value "4";
            description
                "The session-up state of PCEP session.";
        }
    }
}
description
"The current state of the session.
The set of possible states excludes the idle state
since entries do not exist in the idle state.
Takes one of the following values
    - tcp-pending(1): PCEP TCP Pending state
    - open-wait(2): PCEP Open Wait state
    - keep-wait(3): PCEP Keep Wait state
    - session-up(4): PCEP Session Up state";
```



```
}

typedef domain-type {
  type enumeration {
    enum ospf-area {
      value "1";
      description
        "The OSPF area.";
    }
    enum isis-area {
      value "2";
      description
        "The IS-IS area.";
    }
    enum as {
      value "3";
      description
        "The Autonomous System (AS).";
    }
  }
  description
    "The PCE Domain Type";
}

typedef domain-ospf-area {
  type union {
    type uint32;
    type yang:dotted-quad;
  }
  description
    "OSPF Area ID.";
}

typedef domain-isis-area {
  type string {
    pattern '[0-9A-Fa-f]{2}\.([0-9A-Fa-f]{4}\.){0,3}';
  }
  description
    "IS-IS Area ID.";
}

typedef domain-as {
  type uint32;
  description
    "Autonomous System number.";
}
```



```
typedef domain {
  type union {
    type domain-ospf-area;
    type domain-isis-area;
    type domain-as;
  }
  description
    "The Domain Information";
}

typedef operational-state {
  type enumeration {
    enum down {
      value "0";
      description
        "not active.";
    }
    enum up {
      value "1";
      description
        "signalled.";
    }
    enum active {
      value "2";
      description
        "up and carrying traffic.";
    }
    enum going-down {
      value "3";
      description
        "LSP is being torn down, resources are
        being released.";
    }
    enum going-up {
      value "4";
      description
        "LSP is being signalled.";
    }
  }
  description
    "The operational status of the LSP";
}

typedef lsp-error {
  type enumeration {
    enum no-error {
      value "0";
      description
```



```
        "No error, LSP is fine.";
    }
    enum unknown {
        value "1";
        description
            "Unknown reason.";
    }
    enum limit {
        value "2";
        description
            "Limit reached for PCE-controlled LSPs.";
    }
    enum pending {
        value "3";
        description
            "Too many pending LSP update requests.";
    }
    enum unacceptable {
        value "4";
        description
            "Unacceptable parameters.";
    }
    enum internal {
        value "5";
        description
            "Internal error.";
    }
    enum admin {
        value "6";
        description
            "LSP administratively brought down.";
    }
    enum preempted {
        value "7";
        description
            "LSP preempted.";
    }
    enum rsvp {
        value "8";
        description
            "RSVP signaling error.";
    }
}
description
    "The LSP Error Codes.";
}

typedef sync-state {
```



```
    type enumeration {
      enum pending {
        value "0";
        description
          "The state synchronization
           has not started.";
      }
      enum ongoing {
        value "1";
        description
          "The state synchronization
           is ongoing.";
      }
      enum finished {
        value "2";
        description
          "The state synchronization
           is finished.";
      }
    }
    description
      "The LSP-DB state synchronization operational
       status.";
  }

typedef pst{
  type enumeration{
    enum rsvp-te{
      value "0";
      description
        "RSVP-TE signaling protocol";
    }
    enum sr{
      value "1";
      description
        "Segment Routing Traffic Engineering";
    }
  }
  description
    "The Path Setup Type";
}

typedef assoc-type{
  type enumeration{
    enum protection{
      value "1";
      description
        "Path Protection Association Type";
    }
  }
}
```



```
    }
    enum policy{
        value "2";
        description
            "Policy Association Type";
    }
    enum diversity{
        value "3";
        description
            "Diversity Association Type";
    }
}
description
    "The PCEP Association Type";
}

typedef objective-function{
    type enumeration{
        enum mcp{
            value "1";
            description
                "Minimum Cost Path (MCP)";
        }
        enum mlp{
            value "2";
            description
                "Minimum Load Path (MLP)";
        }
        enum mbp{
            value "3";
            description
                "Maximum residual Bandwidth Path (MBP)";
        }
        enum mbc{
            value "4";
            description
                "Minimize aggregate Bandwidth Consumption
                (MBC)";
        }
        enum mll{
            value "5";
            description
                "Minimize the Load of the most loaded Link
                (MLL)";
        }
        enum mcc{
            value "6";
            description
```



```
        "Minimize the Cumulative Cost of a set of
        paths (MCC)";
    }
    enum spt{
        value "7";
        description
            "Shortest Path Tree (SPT)";
    }
    enum mct{
        value "8";
        description
            "Minimum Cost Tree (MCT)";
    }
    enum mplp{
        value "9";
        description
            "Minimum Packet Loss Path (MPLP)";
    }
    enum mup{
        value "10";
        description
            "Maximum Under-Utilized Path (MUP)";
    }
    enum mrup{
        value "11";
        description
            "Maximum Reserved Under-Utilized Path
            (MRUP)";
    }
}
description
    "The PCEP Objective functions";
}

/*
 * Features
 */

feature svec {
    description
        "Support synchronized path computation.";
}

feature gmpls {
    description
        "Support GMPLS.";
}
```



```
feature objective-function {
  description
    "Support OF as per RFC 5541.";
}

feature gco {
  description
    "Support GCO as per RFC 5557.";
}

feature path-key {
  description
    "Support path-key as per RFC 5520.";
}

feature p2mp {
  description
    "Support P2MP as per RFC 6006.";
}

feature stateful {
  description
    "Support stateful PCE.";
}

feature stateful-sync-opt {
  description
    "Support stateful sync optimization";
}

feature pce-initiated {
  description
    "Support PCE-Initiated LSP.";
}

feature tls {
  description
    "Support PCEP over TLS.";
}

feature sr {
  description
    "Support Segment Routing for PCE.";
}

/*
 * Groupings
 */
```



```
grouping pcep-entity-info{
  description
    "This grouping defines the attributes for PCEP entity.";
  leaf connect-timer {
    type uint32 {
      range "1..65535";
    }
    units "seconds";
    default 60;
    description
      "The time in seconds that the PCEP entity will wait
      to establish a TCP connection with a peer.  If a
      TCP connection is not established within this time
      then PCEP aborts the session setup attempt.";
    reference
      "RFC 5440: Path Computation Element (PCE)
      Communication Protocol (PCEP)";
  }

  leaf connect-max-retry {
    type uint32;
    default 5;
    description
      "The maximum number of times the system tries to
      establish a TCP connection to a peer before the
      session with the peer transitions to the idle
      state.";
    reference
      "RFC 5440: Path Computation Element (PCE)
      Communication Protocol (PCEP)";
  }

  leaf init-backoff-timer {
    type uint32 {
      range "1..65535";
    }
    units "seconds";
    description
      "The initial back-off time in seconds for retrying
      a failed session setup attempt to a peer.
      The back-off time increases for each failed
      session setup attempt, until a maximum back-off
      time is reached.  The maximum back-off time is
      max-backoff-timer.";
  }

  leaf max-backoff-timer {
    type uint32;
```



```
    units "seconds";
    description
        "The maximum back-off time in seconds for retrying
        a failed session setup attempt to a peer.
        The back-off time increases for each failed session
        setup attempt, until this maximum value is reached.
        Session setup attempts then repeat periodically
        without any further increase in back-off time.";
}

leaf open-wait-timer {
    type uint32 {
        range "1..65535";
    }
    units "seconds";
    default 60;
    description
        "The time in seconds that the PCEP entity will wait
        to receive an Open message from a peer after the
        TCP connection has come up.
        If no Open message is received within this time then
        PCEP terminates the TCP connection and deletes the
        associated sessions.";
    reference
        "RFC 5440: Path Computation Element (PCE)
        Communication Protocol (PCEP)";
}

leaf keep-wait-timer {
    type uint32 {
        range "1..65535";
    }
    units "seconds";
    default 60;
    description
        "The time in seconds that the PCEP entity will wait
        to receive a Keepalive or PCErr message from a peer
        during session initialization after receiving an
        Open message. If no Keepalive or PCErr message is
        received within this time then PCEP terminates the
        TCP connection and deletes the associated
        sessions.";
    reference
        "RFC 5440: Path Computation Element (PCE)
        Communication Protocol (PCEP)";
}

leaf keep-alive-timer {
```



```
    type uint32 {
        range "0..255";
    }
    units "seconds";
    default 30;
    description
        "The keep alive transmission timer that this PCEP
        entity will propose in the initial OPEN message of
        each session it is involved in. This is the
        maximum time between two consecutive messages sent
        to a peer. Zero means that the PCEP entity prefers
        not to send Keepalives at all.
        Note that the actual Keepalive transmission
        intervals, in either direction of an active PCEP
        session, are determined by negotiation between the
        peers as specified by RFC 5440, and so may differ
        from this configured value.";
    reference
        "RFC 5440: Path Computation Element (PCE)
        Communication Protocol (PCEP)";
}

leaf dead-timer {
    type uint32 {
        range "0..255";
    }
    units "seconds";
    must "(. > ../keep-alive-timer)" {
        error-message "The dead timer must be "
            + "larger than the keep alive timer";
        description
            "This value MUST be greater than
            keep-alive-timer.";
    }
    default 120;
    description
        "The dead timer that this PCEP entity will propose
        in the initial OPEN message of each session it is
        involved in. This is the time after which a peer
        should declare a session down if it does not
        receive any PCEP messages. Zero suggests that the
        peer does not run a dead timer at all." ;
    reference
        "RFC 5440: Path Computation Element (PCE)
        Communication Protocol (PCEP)";
}
```



```
leaf allow-negotiation{
    type boolean;
    description
        "Whether the PCEP entity will permit negotiation of
        session parameters.";
}

leaf max-keep-alive-timer{
    type uint32 {
        range "0..255";
    }
    units "seconds";
    description
        "In PCEP session parameter negotiation in seconds,
        the maximum value that this PCEP entity will
        accept from a peer for the interval between
        Keepalive transmissions. Zero means that the PCEP
        entity will allow no Keepalive transmission at
        all." ;
}

leaf max-dead-timer{
    type uint32 {
        range "0..255";
    }
    units "seconds";
    description
        "In PCEP session parameter negotiation in seconds,
        the maximum value that this PCEP entity will accept
        from a peer for the Dead timer. Zero means that
        the PCEP entity will allow not running a Dead
        timer.";
}

leaf min-keep-alive-timer{
    type uint32 {
        range "0..255";
    }
    units "seconds";
    description
        "In PCEP session parameter negotiation in seconds,
        the minimum value that this PCEP entity will
        accept for the interval between Keepalive
        transmissions. Zero means that the PCEP entity
        insists on no Keepalive transmission at all.";
}

leaf min-dead-timer{
```



```
    type uint32 {
        range "0..255";
    }
    units "seconds";
    description
        "In PCEP session parameter negotiation in
        seconds, the minimum value that this PCEP entity
        will accept for the Dead timer. Zero means that
        the PCEP entity insists on not running a Dead
        timer.";
}

leaf sync-timer{
    if-feature svec;
    type uint32 {
        range "0..65535";
    }
    units "seconds";
    default 60;
    description
        "The value of SyncTimer in seconds is used in the
        case of synchronized path computation request
        using the SVEC object. Consider the case where a
        PCReq message is received by a PCE that contains
        the SVEC object referring to M synchronized path
        computation requests. If after the expiration of
        the SyncTimer all the M path computation requests
        have not been, received a protocol error is
        triggered and the PCE MUST cancel the whole set
        of path computation requests.
        The aim of the SyncTimer is to avoid the storage
        of unused synchronized requests should one of
        them get lost for some reasons (for example, a
        misbehaving PCC).
        Zero means that the PCEP entity does not use the
        SyncTimer.";
    reference
        "RFC 5440: Path Computation Element (PCE)
        Communication Protocol (PCEP)";
}

leaf request-timer{
    type uint32 {
        range "1..65535";
    }
    units "seconds";
    description
```



```
        "The maximum time that the PCEP entity will wait
        for a response to a PCReq message.";
    }

    leaf max-sessions{
        type uint32;
        description
            "Maximum number of sessions involving this PCEP
            entity that can exist at any time.";
    }

    leaf max-unknown-reqs{
        type uint32;
        default 5;
        description
            "The maximum number of unrecognized requests and
            replies that any session on this PCEP entity is
            willing to accept per minute before terminating
            the session.
            A PCRep message contains an unrecognized reply
            if it contains an RP object whose request ID
            does not correspond to any in-progress request
            sent by this PCEP entity.
            A PCReq message contains an unrecognized request
            if it contains an RP object whose request ID is
            zero.";
        reference
            "RFC 5440: Path Computation Element (PCE)
            Communication Protocol (PCEP)";
    }

    leaf max-unknown-msgs{
        type uint32;
        default 5;
        description
            "The maximum number of unknown messages that any
            session on this PCEP entity is willing to accept
            per minute before terminating the session.";
        reference
            "RFC 5440: Path Computation Element (PCE)
            Communication Protocol (PCEP)";
    }

} // pcep-entity-info

grouping pce-scope{
    description
        "This grouping defines PCE path computation scope
```



```
        information which maybe relevant to PCE selection.
        This information corresponds to PCE auto-discovery
        information.";
reference
    "RFC 5088: OSPF Protocol Extensions for Path
        Computation Element (PCE)
        Discovery
    RFC 5089: IS-IS Protocol Extensions for Path
        Computation Element (PCE)
        Discovery";
leaf intra-area-scope{
    type boolean;
    default true;
    description
        "PCE can compute intra-area paths.";
}
leaf intra-area-pref{
    type uint8{
        range "0..7";
    }
    description
        "The PCE's preference for intra-area TE LSP
        computation.";
}
leaf inter-area-scope{
    type boolean;
    default false;
    description
        "PCE can compute inter-area paths.";
}
leaf inter-area-scope-default{
    type boolean;
    default false;
    description
        "PCE can act as a default PCE for inter-area
        path computation.";
}
leaf inter-area-pref{
    type uint8{
        range "0..7";
    }
    description
        "The PCE's preference for inter-area TE LSP
        computation.";
}
leaf inter-as-scope{
    type boolean;
    default false;
```



```
        description
            "PCE can compute inter-AS paths.";
    }
    leaf inter-as-scope-default{
        type boolean;
        default false;
        description
            "PCE can act as a default PCE for inter-AS
            path computation.";
    }
    leaf inter-as-pref{
        type uint8{
            range "0..7";
        }
        description
            "The PCE's preference for inter-AS TE LSP
            computation.";
    }
    leaf inter-layer-scope{
        type boolean;
        default false;
        description
            "PCE can compute inter-layer paths.";
    }
    leaf inter-layer-pref{
        type uint8{
            range "0..7";
        }
        description
            "The PCE's preference for inter-layer TE LSP
            computation.";
    }
} //pce-scope

grouping domain{
    description
        "This grouping specifies a Domain where the
        PCEP speaker has topology visibility.";
    leaf domain-type{
        type domain-type;
        description
            "The domain type.";
    }
    leaf domain{
        type domain;
        description
            "The domain Information.";
    }
}
```



```
//domain

grouping capability{
  description
    "This grouping specifies a capability
    information of local PCEP entity. This maybe
    relevant to PCE selection as well. This
    information corresponds to PCE auto-discovery
    information.";
  reference
    "RFC 5088: OSPF Protocol Extensions for Path
    Computation Element (PCE)
    Discovery
    RFC 5089: IS-IS Protocol Extensions for Path
    Computation Element (PCE)
    Discovery";
  leaf gmpls{
    if-feature gmpls;
    type boolean;
    description
      "Path computation with GMPLS link
      constraints.";
  }
  leaf bi-dir{
    type boolean;
    description
      "Bidirectional path computation.";
  }
  leaf diverse{
    type boolean;
    description
      "Diverse path computation.";
  }
  leaf load-balance{
    type boolean;
    description
      "Load-balanced path computation.";
  }
  leaf synchronize{
    if-feature svec;
    type boolean;
    description
      "Synchronized paths computation.";
  }
  leaf objective-function{
    if-feature objective-function;
    type boolean;
    description
```



```
        "Support for multiple objective functions.";
    }
    leaf add-path-constraint{
        type boolean;
        description
            "Support for additive path constraints (max
            hop count, etc.).";
    }
    leaf prioritization{
        type boolean;
        description
            "Support for request prioritization.";
    }
    leaf multi-request{
        type boolean;
        description
            "Support for multiple requests per message.";
    }
    leaf gco{
        if-feature gco;
        type boolean;
        description
            "Support for Global Concurrent Optimization
            (GCO).";
    }
    leaf p2mp{
        if-feature p2mp;
        type boolean;
        description
            "Support for P2MP path computation.";
    }
}

container stateful{
    if-feature stateful;
    description
        "If stateful PCE feature is present";
    leaf enabled{
        type boolean;
        description
            "Enabled or Disabled";
    }
    leaf active{
        type boolean;
        description
            "Support for active stateful PCE.";
    }
    leaf pce-initiated{
        if-feature pce-initiated;
```



```
        type boolean;
        description
            "Support for PCE-initiated LSP.";
    }
    leaf include-db-ver{
        if-feature stateful-sync-opt;
        type boolean;
        description
            "Support inclusion of LSP-DB-VERSION
            in LSP object";
    }
    leaf trigger-resync{
        if-feature stateful-sync-opt;
        type boolean;
        description
            "Support PCE triggered re-synchronization";
    }
    leaf trigger-initial-sync{
        if-feature stateful-sync-opt;
        type boolean;
        description
            "PCE triggered initial synchronization";
    }
    leaf incremental-sync{
        if-feature stateful-sync-opt;
        type boolean;
        description
            "Support incremental (delta) sync";
    }
}
container sr{
    if-feature sr;
    description
        "If segment routing is supported";
    leaf enabled{
        type boolean;
        description
            "Enabled or Disabled";
    }
}
}
} //capability

grouping info{
    description
        "This grouping specifies all information which
        maybe relevant to both PCC and PCE.
        This information corresponds to PCE auto-discovery
```



```
        information.";
    container domain{
        description
            "The local domain for the PCEP entity";
        list domain{
            key "domain-type domain";
            description
                "The local domain.";
            uses domain{
                description
                    "The local domain for the PCEP entity.";
            }
        }
    }
}
container capability{
    description
        "The PCEP entity capability";
    uses capability{
        description
            "The PCEP entity supported
            capabilities.";
    }
}

} //info

grouping pce-info{
    description
        "This grouping specifies all PCE information
        which maybe relevant to the PCE selection.
        This information corresponds to PCE auto-discovery
        information.";
    container scope{
        description
            "The path computation scope";
        uses pce-scope;
    }

    container neigh-domains{
        description
            "The list of neighbour PCE-Domain
            toward which a PCE can compute
            paths";
        list domain{
            key "domain-type domain";

            description
```



```
        "The neighbour domain.";
    uses domain{
        description
            "The PCE neighbour domain.";
    }
}
}
} //pce-info

grouping lsp-state{
    description
        "This grouping defines the attributes for LSP in LSP-DB.
        These are the attributes specifically from the PCEP
        perspective";
    leaf plsp-id{
        type uint32{
            range "1..1048575";
        }
        description
            "A PCEP-specific identifier for the LSP. A PCC
            creates a unique PLSP-ID for each LSP that is
            constant for the lifetime of a PCEP session.
            PLSP-ID is 20 bits with 0 and 0xFFFFF are
            reserved";
    }
    leaf pcc-id{
        type inet:ip-address;
        description
            "The local internet address of the PCC, that
            generated the PLSP-ID.";
    }
}

container lsp-ref{
    description
        "reference to ietf-te lsp state";

    leaf source {
        type leafref {
            path "/te:te/te:lsps-state/te:lsp/te:source";
        }
        description
            "Tunnel sender address extracted from
            SENDER_TEMPLATE object";
        reference "RFC3209";
    }
    leaf destination {
        type leafref {
            path "/te:te/te:lsps-state/te:lsp/te:"

```



```
        + "destination";
    }
    description
        "Tunnel endpoint address extracted from
        SESSION object";
    reference "RFC3209";
}
leaf tunnel-id {
    type leafref {
        path "/te:te/te:lsps-state/te:lsp/te:tunnel-id";
    }
    description
        "Tunnel identifier used in the SESSION
        that remains constant over the life
        of the tunnel.";
    reference "RFC3209";
}
leaf lsp-id {
    type leafref {
        path "/te:te/te:lsps-state/te:lsp/te:lsp-id";
    }
    description
        "Identifier used in the SENDER_TEMPLATE
        and the FILTER_SPEC that can be changed
        to allow a sender to share resources with
        itself.";
    reference "RFC3209";
}
leaf extended-tunnel-id {
    type leafref {
        path "/te:te/te:lsps-state/te:lsp/te:"
        + "extended-tunnel-id";
    }
    description
        "Extended Tunnel ID of the LSP.";
    reference "RFC3209";
}
}

leaf admin-state{
    type boolean;
    description
        "The desired operational state";
}
leaf operational-state{
    type operational-state;
    description
        "The operational status of the LSP";
```



```
}
container delegated{
  description
    "The delegation related parameters";
  leaf enabled{
    type boolean;
    description
      "LSP is delegated or not";
  }
  leaf peer{
    type leafref {
      path "/pcep/entity/peers/peer/addr";
    }
    must "(../enabled = true())"
    {
      error-message
        "The LSP must be delegated";
      description
        "When LSP is a delegated LSP";
    }
    description
      "At the PCC, the reference to the PCEP peer to
      which LSP is delegated; At the PCE, the
      reference to the PCEP peer which delegated this
      LSP";
  }
  leaf srp-id{
    type uint32;
    description
      "The last SRP-ID-number associated with this
      LSP.";
  }
}
container initiation {
  if-feature pce-initiated;
  description
    "The PCE initiation related parameters";
  leaf enabled{
    type boolean;
    description
      "LSP is PCE-initiated or not";
  }
  leaf peer{
    type leafref {
      path "/pcep/entity/peers/peer/addr";
    }
    must "(../enabled = true())"
    {

```



```
        error-message
          "The LSP must be PCE-Initiated";
        description
          "When the LSP must be PCE-Initiated";
      }
    description
      "At the PCC, the reference to the PCEP peer
       that initiated this LSP; At the PCE, the
       reference to the PCEP peer where the LSP
       is initiated";
  }
}
leaf symbolic-path-name{
  type string;
  description
    "The symbolic path name associated with the LSP.";
}
leaf last-error{
  type lsp-error;
  description
    "The last error for the LSP.";
}
leaf pst{
  type pst;
  default "rsvp-te";
  description
    "The Path Setup Type";
}
}

} //lsp-state

grouping notification-instance-hdr {
  description
    "This group describes common instance specific data
     for notifications.";

  leaf peer-addr {
    type leafref {
      path "/pcep/entity/peers/peer/addr";
    }
    description
      "Reference to peer address";
  }
}

} // notification-instance-hdr

grouping notification-session-hdr {
```



```
description
"This group describes common session instance specific
data for notifications.";

leaf session-initiator {
  type leafref {
    path "/pcep/entity/peers/peer/sessions/" +
      "session/initiator";
  }
  description
    "Reference to pcep session initiator leaf";
}
} // notification-session-hdr

grouping stateful-pce-parameter {
  description
    "This group describes stateful PCE specific
parameters.";
  leaf state-timeout{
    type uint32;
    units "seconds";
    description
      "When a PCEP session is terminated, a PCC
      waits for this time period before flushing
      LSP state associated with that PCEP session
      and reverting to operator-defined default
      parameters or behaviours.";
  }
  leaf redelegation-timeout{
    when "../role = 'pcc'" +
      "or " +
      "../role = 'pcc-and-pce'"
    {
      description
        "Valid at PCC";
    }
    type uint32;
    units "seconds";
    description
      "When a PCEP session is terminated, a PCC
      waits for this time period before revoking
      LSP delegation to a PCE and attempting to
      redelegate LSPs associated with the
      terminated PCEP session to an alternate
      PCE.";
  }
}
leaf rpt-non-pcep-lsp{
  when "../role = 'pcc'" +
```



```
        "or " +
        ".../role = 'pcc-and-pce'"
    {
        description
            "Valid at PCC";
    }
    type boolean;
    default true;
    description
        "If set, a PCC reports LSPs that are not
        controlled by any PCE (for example, LSPs
        that are statically configured at the
        PCC). ";
}

}

grouping authentication {
    description "Authentication Information";
    container auth {
        description
            "The Authentication options";
        choice auth-type-selection {
            description
                "Options for expressing authentication setting.";
            case auth-key-chain {
                leaf key-chain {
                    type key-chain:key-chain-ref;
                    description
                        "key-chain name.";
                }
            }
            case auth-key {
                leaf crypto-algorithm {
                    type identityref {
                        base key-chain:crypto-algorithm;
                    }
                    mandatory true;
                    description
                        "Cryptographic algorithm associated with key.";
                }
            }
            container key-string {
                description
                    "The key string.";
                nacm:default-deny-all;
                choice key-string-style {
                    description
                        "Key string styles";
                }
            }
        }
    }
}
```



```

    case keystore {
      leaf keystore {
        type string;
        description
          "Key string in ASCII format.";
      }
    }
  case hexadecimal {
    if-feature "key-chain:hex-key-string";
    leaf hexadecimal-string {
      type yang:hex-string;
      description
        "Key in hexadecimal string format. When
        compared to ASCII, specification in
        hexadecimal affords greater key
        entropy with the same number of
        octets. Additionally, it discourages
        usage of well-known words or
        numbers.";
    }
  }
}

case auth-tls {
  if-feature tls;
  choice role {
    description
      "The role of the local entity";
    case server {
      container tls-server {
        uses tls-server:tls-server-grouping {
          description
            "Server TLS information.";
        }
        description
          "TLS related information";
      }
    }
    case client {
      container tls-client {
        uses tls-client:tls-client-grouping {
          description
            "Client TLS information.";
        }
        description
          "TLS related information";
      }
    }
  }
}

```



```
    }
  }
}

grouping path-key {
  description "Path-key related information";
  leaf enabled{
    type boolean;
    description
      "Enabled or Disabled";
  }
  leaf discard-timer {
    type uint32;
    units "minutes";
    default 10;
    description
      "A timer to discard unwanted path-keys";
  }
  leaf reuse-time {
    type uint32;
    units "minutes";
    default 30;
    description
      "A time after which the path-keys could be reused";
  }
  leaf pce-id {
    type inet:ip-address;
    description
      "PCE Address to be used in each Path-Key Subobject
      (PKS)";
  }
}

grouping path-key-state {
  description "Table to allow inspection of path-keys";
  list path-keys{
    key "path-key";

    description
      "The list of path-keys generated by the PCE";

    leaf path-key {
      type uint16;
      description
        "The identifier, or token used to represent
```



```
        the Confidential Path Segment (CPS) within
        the context of the PCE";
    }
    container cps {
        description
            "The Confidential Path Segment (CPS)";
        list explicit-route-objects {
            key "index";
            description
                "List of explicit route objects";

            leaf explicit-route-usage {
                type identityref {
                    base te-types:route-usage-type;
                }
                description
                    "An explicit-route hop action.";
            }

            uses te-types:explicit-route-hop_config;
        }
    }
    leaf pcc-original {
        type leafref {
            path "/pcep/entity/peers/peer/addr";
        }
        description
            "Reference to PCC peer address of
            the original request";
    }
    leaf req-id {
        type uint32;
        description
            "The request ID of the original PCReq.";
    }
    leaf retrieved {
        type boolean;
        description
            "If path-key has been retrieved yet";
    }
    leaf pcc-retrieved {
        type leafref {
            path "/pcep/entity/peers/peer/addr";
        }
        must "(../retrieved = true())"
        {
            error-message
                "The Path-key should be retrieved";
        }
    }
}
```



```
        description
            "When Path-Key has been retrieved";
    }
    description
        "Reference to PCC peer address which
        retrieved the path-key";
}
leaf creation-time {
    type yang:timestamp;
    description
        "The timestamp value at the time this Path-Key
        was created.";
}
leaf discard-time {
    type uint32;
    units "minutes";
    description
        "A time after which this path-keys will be
        discarded";
}
leaf reuse-time {
    type uint32;
    units "minutes";
    description
        "A time after which this path-keys could be
        reused";
}
}
}

grouping of-list {
    description "List of OF";
    list objective-function{
        key "of";

        description
            "The list of authorized OF";

        leaf of {
            type objective-function;
            description
                "The OF authorized";
        }
    }
}

grouping association {
    description
        "Generic Association parameters";
```



```
    leaf type {
      type "assoc-type";
      description
        "The PCEP association type";
    }
    leaf id {
      type uint16;
      description
        "PCEP Association ID";
    }
    leaf source {
      type inet:ip-address;
      description
        "PCEP Association Source.";
    }
    leaf global-source {
      type uint32;
      description
        "PCEP Association Global
        Source.";
    }
    leaf extended-id{
      type string;
      description
        "Additional information to
        support unique identification.";
    }
  }
  grouping association-ref {
    description
      "Generic Association parameters";
    leaf id {
      type leafref {
        path "/pcep/entity/lsp-db/"
          + "association-list/id";
      }
      description
        "PCEP Association ID";
    }
    leaf source {
      type leafref {
        path "/pcep/entity/lsp-db/"
          + "association-list/source";
      }
      description
        "PCEP Association Source.";
    }
    leaf global-source {
```



```

    type leafref {
      path "/pcep/entity/lsp-db/"
      + "association-list/global-source";
    }
    description
      "PCEP Association Global
      Source.";
  }
  leaf extended-id{
    type leafref {
      path "/pcep/entity/lsp-db/"
      + "association-list/extended-id";
    }
    description
      "Additional information to
      support unique identification.";
  }
}

grouping session-grouping {
  description
    "Session grouping";
  container sessions {
    config false;
    description
      "This entry represents a single PCEP
      session in which the local PCEP entity participates.
      This entry exists only if the corresponding PCEP
      session has been initialized by some event, such as
      manual user configuration, auto-discovery of a peer,
      or an incoming TCP connection.";

    list session {
      key "initiator";
      description
        "The list of sessions, note that
        for a time being two sessions
        may exist for a peer";

      leaf initiator {
        type pcep-initiator;
        description
          "The initiator of the session,that is, whether
          the TCP connection was initiated by the local
          PCEP entity or the peer.
          There is a window during session
          initialization where two sessions can exist
          between a pair of PCEP speakers, each

```



```
        initiated by one of the speakers. One of
        these sessions is always discarded before it
        leaves OpenWait state. However, before it is
        discarded, two sessions to the given peer
        appear transiently in this yang module. The
        sessions are distinguished by who initiated
        them, and so this field is the key.";
    }

    leaf role {
        type leafref {
            path "/pcep/entity/role";
        }
        description
            "The reference to peer role .";
    }

    leaf state-last-change {
        type yang:timestamp;
        description
            "The timestamp value at the time this
            session entered its current state as
            denoted by the state leaf.";
    }

    leaf state {
        type pcep-sess-state;
        description
            "The current state of the session.
            The set of possible states excludes the
            idle state since entries do not exist
            in the idle state.";
    }

    leaf session-creation {
        type yang:timestamp;
        description
            "The timestamp value at the time this
            session was created.";
    }

    leaf connect-retry {
        type yang:counter32;
        description
            "The number of times that the local PCEP
            entity has attempted to establish a TCP
            connection for this session without
            success. The PCEP entity gives up when
```



```
        this reaches connect-max-retry.";
    }

    leaf local-id {
        type uint32 {
            range "0..255";
        }
        description
            "The value of the PCEP session ID used by
            the local PCEP entity in the Open message
            for this session. If state is tcp-pending
            then this is the session ID that will be
            used in the Open message. Otherwise, this
            is the session ID that was sent in the
            Open message.";
    }

    leaf remote-id {
        type uint32 {
            range "0..255";
        }
        must "((../state != 'tcp-pending'" +
            "and " +
            "../state != 'open-wait' )" +
            "or " +
            "((../state = 'tcp-pending'" +
            " or " +
            "../state = 'open-wait' )" +
            "and (. = 0)))" {
            error-message
                "Invalid remote-id";
            description
                "If state is tcp-
                pending or open-wait
                then this leaf is not
                used and MUST be set
                to zero.";
        }
        description
            "The value of the PCEP session
            ID used by the peer in its
            Open message for this
            session.";
    }

    leaf keepalive-timer {
        type uint32 {
            range "0..255";
```



```
    }
    units "seconds";
    must "(../state = 'session-up'" +
        "or " +
        "(../state != 'session-up'" +
        "and (. = 0)))" {
        error-message
            "Invalid keepalive
             timer";
        description
            "This field is used if
             and only if state is
             session-up. Otherwise,
             it is not used and
             MUST be set to
             zero.";
    }
    description
        "The agreed maximum interval at
         which the local PCEP entity
         transmits PCEP messages on
         this PCEP session. Zero means
         that the local PCEP entity
         never sends Keepalives on this
         session.";
}

leaf peer-keepalive-timer {
    type uint32 {
        range "0..255";
    }
    units "seconds";
    must "(../state = 'session-up'" +
        "or " +
        "(../state != 'session-up'" +
        "and " +
        "(. = 0)))" {
        error-message
            "Invalid Peer keepalive
             timer";
        description
            "This field is used if
             and only if state is
             session-up. Otherwise,
             it is not used and MUST
             be set to zero.";
    }
    description
```



```
        "The agreed maximum interval at
        which the peer transmits PCEP
        messages on this PCEP session.
        Zero means that the peer never
        sends Keepalives on this
        session.";
    }

    leaf dead-timer {
        type uint32 {
            range "0..255";
        }
        units "seconds";
        description
            "The dead timer interval for
            this PCEP session.";
    }

    leaf peer-dead-timer {
        type uint32 {
            range "0..255";
        }
        units "seconds";
        must "((../state != 'tcp-pending'" +
            "and " +
            "../state != 'open-wait' )" +
            "or " +
            "((../state = 'tcp-pending'" +
            " or " +
            "../state = 'open-wait' )" +
            "and " +
            "(. = 0)))" {
            error-message
                "Invalid Peer Dead
                timer";
            description
                "If state is tcp-
                pending or open-wait
                then this leaf is not
                used and MUST be set to
                zero.";
        }
        description
            "The peer's dead-timer interval
            for this PCEP session.";
    }

    leaf ka-hold-time-rem {
```



```
    type uint32 {
        range "0..255";
    }
    units "seconds";
    must "((../state != 'tcp-pending' " +
        "and " +
        "../state != 'open-wait' ) " +
        "or " +
        "((../state = 'tcp-pending' " +
        "or " +
        "../state = 'open-wait' )" +
        "and " +
        "(. = 0)))" {
        error-message
            "Invalid Keepalive hold
             time remaining";
        description
            "If state is tcp-pending
             or open-wait then this
             field is not used and
             MUST be set to zero.";
    }
    description
        "The keep alive hold time
         remaining for this session.";
}
leaf overloaded {
    type boolean;
    description
        "If the local PCEP entity has
         informed the peer that it is
         currently overloaded, then
         this is set to true.
         Otherwise, it is set to
         false.";
}
leaf overload-time {
    type uint32;
    units "seconds";
    must "((../overloaded = true()) " +
        "or ((../overloaded != true()) " +
        "and (. = 0)))" {
        error-message
            "Invalid overload-time";
        description
            "This field is only used
             if overloaded is set to
             true. Otherwise, it is
```



```

        not used and MUST be
        set to zero.";
    }
    description
        "The interval of time that is
        remaining until the local PCEP
        entity will cease to be
        overloaded on this session.";
}

leaf peer-overloaded {
    type boolean;
    description
        "If the peer has informed the
        local PCEP entity that it is
        currently overloaded, then
        this is set to true.
        Otherwise, it is set to
        false.";
}

leaf peer-overload-time {
    type uint32;
    units "seconds";
    must "((../peer-overloaded = " +
        "true()) or " +
        "((../peer-overloaded != " +
        "true())" +
        " and " +
        "(. = 0)))" {
        error-message
            "Invalid peer overload
            time";
        description
            "This field is only used
            if peer-overloaded is
            set to true. Otherwise,
            it is not used and MUST
            be set to zero.";
    }
    description
        "The interval of time that is
        remaining until the peer will
        cease to be overloaded. If it
        is not known how long the peer
        will stay in overloaded state,
        this leaf is set to zero.";
}
```



```
leaf lspdb-sync {
    if-feature stateful;
    type sync-state;
    description
        "The LSP-DB state
        synchronization status.";
}

leaf recv-db-ver{
    when "../role = 'pcc'" +
        "or " +
        "../role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as
            PCC";
    }

    if-feature stateful;
    if-feature stateful-sync-opt;

    type uint64;

    description
        "The last received LSP State
        Database Version Number";
}

container of-list{
    when "../role = 'pce'" +
        "or " +
        "../role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as
            PCE";
    }
    if-feature objective-function;

    uses of-list;

    description
        "Indicate the list of supported
        OF on this session";
}

leaf speaker-entity-id{
```



```
        if-feature stateful-sync-opt;
        type string;
        description
            "The Speaker Entity Identifier";
    }

    leaf discontinuity-time {
        type yang:timestamp;
        description
            "The timestamp value of the
             time when the statistics were
             last reset.";
    }
} // session
} // sessions
}
/*
 * Configuration data nodes
 */
container pcep{

    presence
        "The PCEP is enabled";

    description
        "Parameters for list of configured PCEP entities
         on the device.";

    container entity {

        description
            "The configured PCEP entity on the device.";

        leaf addr {
            type inet:ip-address;
            mandatory true;
            description
                "The local Internet address of this PCEP
                 entity.
                 If operating as a PCE server, the PCEP
                 entity listens on this address.
                 If operating as a PCC, the PCEP entity
                 binds outgoing TCP connections to this
                 address.
                 It is possible for the PCEP entity to
                 operate both as a PCC and a PCE Server, in
                 which case it uses this address both to
                 listen for incoming TCP connections and to
```



```
        bind outgoing TCP connections.";
    }

    leaf enabled {
        type boolean;
        default true;
        description
            "The administrative status of this PCEP
            Entity.";
    }

    leaf role {
        type pcep-role;
        mandatory true;
        description
            "The role that this entity can play.
            Takes one of the following values.
            - unknown(0): this PCEP Entity role is not
              known.
            - pcc(1): this PCEP Entity is a PCC.
            - pce(2): this PCEP Entity is a PCE.
            - pcc-and-pce(3): this PCEP Entity is both
              a PCC and a PCE.";
    }

    leaf description {
        type string;
        description
            "Description of the PCEP entity configured
            by the user";
    }

    leaf speaker-entity-id{
        if-feature stateful-sync-opt;
        type string;
        description
            "The Speaker Entity Identifier";
    }

    leaf admin-status {
        type pcep-admin-status;
        description
            "The administrative status of this PCEP Entity.
            This is the desired operational status as
            currently set by an operator or by default in
            the implementation. The value of enabled
            represents the current status of an attempt
            to reach this desired status.";
```



```
}

leaf index{
    type uint32;
    config "false";
    description
        "The index of the operational PCEP entity";
}

leaf oper-status {
    type pcep-oper-status;
    config "false";
    description
        "The operational status of the PCEP entity.
        Takes one of the following values.
        - oper-status-up(1): the PCEP entity is active.
        - oper-status-down(2): the PCEP entity is inactive.
        - oper-status-going-up(3): the PCEP entity is
          activating.
        - oper-status-going-down(4): the PCEP entity is
          deactivating.
        - oper-status-failed(5): the PCEP entity has
          failed and will recover when possible.
        - oper-status-failed-perm(6): the PCEP entity
          has failed and will not recover without
          operator intervention.";
}

uses info {
    description
        "Local PCEP entity information";
}

container pce-info {
    when "../role = 'pce'" +
        "or " +
        "../role = 'pcc-and-pce'"
    {
        description
            "Valid at PCE";
    }
    uses pce-info {
        description
            "Local PCE information";
    }
    container path-key {
        if-feature path-key;
```



```
        uses path-key {
            description
                "Path-Key Configuration";
        }
        description
            "Path-Key Configuration";
    }

    description
        "The Local PCE Entity PCE information";
}

uses pcep-entity-info {
    description
        "The configuration related to the PCEP
        entity.";
}

leaf pcep-notification-max-rate {
    type uint32;
    mandatory true;
    description
        "This variable indicates the maximum number of
        notifications issued per second. If events
        occur more rapidly, the implementation may
        simply fail to emit these notifications during
        that period, or may queue them until an
        appropriate time. A value of 0 means no
        notifications are emitted and all should be
        discarded (that is, not queued).";
}

container stateful-parameter{
    if-feature stateful;
    must "(/pcep/entity/capability/stateful/enabled" +
        " = true())"
    {
        error-message
            "The Stateful PCE must be enabled";
        description
            "When PCEP entity is stateful
            enabled";
    }
    uses stateful-pce-parameter;

    description
        "The configured stateful parameters";
}
```



```
container of-list{
  when "../role = 'pce'" +
    "or " +
    "../role = 'pcc-and-pce'"
  {
    description
      "Valid at PCE";
  }
  if-feature objective-function;

  uses of-list;

  description
    "The authorized OF-List at PCE for all peers";
}

container lsp-db{
  if-feature stateful;
  config false;
  description
    "The LSP-DB";
  leaf db-ver{
    when "../..../role = 'pcc'" +
      "or " +
      "../..../role = 'pcc-and-pce'"
    {
      description
        "Valid at PCC";
    }
    if-feature stateful-sync-opt;
    type uint64;
    description
      "The LSP State Database Version Number";
  }
  list association-list {
    key "id source global-source extended-id";
    description
      "List of all PCEP associations";
    uses association {
      description
        "The Association attributes";
    }
  }
  list lsp {
    key "plsp-id pcc-id";
    description
      "List of all LSP in this association";
    leaf plsp-id {
      type leafref {
```



```
        path "/pcep/entity/lsp-db/"
        + "lsp/plsp-id";
    }
    description
        "Reference to PLSP-ID in LSP-DB";
}
leaf pcc-id {
    type leafref {
        path "/pcep/entity/lsp-db/"
        + "lsp/pcc-id";
    }
    description
        "Reference to PCC-ID in LSP-DB";
}
}
list lsp {
    key "plsp-id pcc-id";
    description
        "List of all LSPs in LSP-DB";
    uses lsp-state {
        description
            "The PCEP specific attributes for
            LSP-DB.";
    }
    list association-list {
        key "id source global-source extended-id";
        description
            "List of all PCEP associations";
        uses association-ref {
            description
                "Reference to the Association
                attributes";
        }
    }
}
}

container path-keys {
    when "../role = 'pce' or ../role = 'pcc-and-pce'" {
        description
            "Valid at PCE";
    }
    if-feature path-key;
    config false;
    uses path-key-state;
    description
```



```
        "The path-keys generated by the PCE";
    }

    container peers{
        description
            "The list of configured peers for the
            entity (remote PCE)";
        list peer{
            key "addr";

            description
                "The peer configured for the entity.
                (remote PCE)";

            leaf addr {
                type inet:ip-address;
                description
                    "The local Internet address of this
                    PCEP peer.";
            }

            leaf role {
                type pcep-role;
                mandatory true;
                description
                    "The role of the PCEP Peer.
                    Takes one of the following values.
                    - unknown(0): this PCEP peer role is not
                      known.
                    - pcc(1): this PCEP peer is a PCC.
                    - pce(2): this PCEP peer is a PCE.
                    - pcc-and-pce(3): this PCEP peer
                      is both a PCC and a PCE.";
            }

            leaf description {
                type string;
                description
                    "Description of the PCEP peer
                    configured by the user";
            }

            uses info {
                description
                    "PCE Peer information";
            }
        }

        container pce-info {
            uses pce-info {
```



```
        description
            "PCE Peer information";
    }
    description
        "The PCE Peer information";
}

leaf delegation-pref{
    if-feature stateful;
    type uint8{
        range "0..7";
    }
    must "(/pcep/entity/capability/stateful" +
        "/active = true())"
    {
        error-message
            "The Active Stateful PCE must be
            enabled";
        description
            "When PCEP entity is active stateful
            enabled";
    }
    description
        "The PCE peer delegation preference.";
}

uses authentication {
    description
        "PCE Peer authentication";
}

leaf discontinuity-time {
    type yang:timestamp;
    config false;
    description
        "The timestamp of the time when the
        information and statistics were last
        reset.";
}

leaf initiate-session {
    type boolean;
    config false;
    description
        "Indicates whether the local PCEP
        entity initiates sessions to this peer,
        or waits for the peer to initiate a
        session.";
}
```



```
    leaf session-exists{
        type boolean;
        config false;
        description
            "Indicates whether a session with
             this peer currently exists.";
    }

    leaf session-up-time{
        type yang:timestamp;
        config false;
        description
            "The timestamp value of the last time a
             session with this peer was successfully
             established.";
    }

    leaf session-fail-time{
        type yang:timestamp;
        config false;
        description
            "The timestamp value of the last time a
             session with this peer failed to be
             established.";
    }

    leaf session-fail-up-time{
        type yang:timestamp;
        config false;
        description
            "The timestamp value of the last time a
             session with this peer failed from
             active.";
    }

    uses session-grouping {
        description
            "session information";
    }
} //peer
} //peers
} //entity
} //pcep

/*
 * Notifications
 */
notification pcep-session-up {
```



```
    description
      "This notification is sent when the value of
        '/pcep/peers/peer/sessions/session/state'
        enters the 'session-up' state.";

    uses notification-instance-hdr;

    uses notification-session-hdr;

    leaf state-last-change {
      type yang:timestamp;
      description
        "The timestamp value at the time this session
          entered its current state as denoted by the state
          leaf.";
    }

    leaf state {
      type pcep-sess-state;
      description
        "The current state of the session.
          The set of possible states excludes the idle state
          since entries do not exist in the idle state.";
    }
  } //notification

notification pcep-session-down {
  description
    "This notification is sent when the value of
      '/pcep/peers/peer/sessions/session/state'
      leaves the 'session-up' state.";

  uses notification-instance-hdr;

  leaf session-initiator {
    type pcep-initiator;
    description
      "The initiator of the session.";
  }

  leaf state-last-change {
    type yang:timestamp;
    description
      "The timestamp value at the time this session
        entered its current state as denoted by the state
        leaf.";
  }
}
```



```
    leaf state {
      type pcep-sess-state;
      description
        "The current state of the session.
        The set of possible states excludes the idle state
        since entries do not exist in the idle state.";
    }
  } //notification

notification pcep-session-local-overload {
  description
    "This notification is sent when the local PCEP entity
    enters overload state for a peer.";

  uses notification-instance-hdr;

  uses notification-session-hdr;

  leaf overloaded {
    type boolean;
    description
      "If the local PCEP entity has informed the peer
      that it is currently overloaded, then this is set
      to true. Otherwise, it is set to false.";
  }

  leaf overload-time {
    type uint32;
    units "seconds";
    description
      "The interval of time that is remaining until the
      local PCEP entity will cease to be overloaded on
      this session.";
  }
} //notification

notification pcep-session-local-overload-clear {
  description
    "This notification is sent when the local PCEP entity
    leaves overload state for a peer.";

  uses notification-instance-hdr;

  leaf overloaded {
    type boolean;
    description
      "If the local PCEP entity has informed the peer
      that it is currently overloaded, then this is set
```



```
        to true. Otherwise, it is set to false.";
    }
} //notification

notification pcep-session-peer-overload {
    description
        "This notification is sent when a peer enters overload
        state.";

    uses notification-instance-hdr;

    uses notification-session-hdr;

    leaf peer-overloaded {
        type boolean;
        description
            "If the peer has informed the local PCEP entity that
            it is currently overloaded, then this is set to
            true. Otherwise, it is set to false.";
    }

    leaf peer-overload-time {
        type uint32;
        units "seconds";
        description
            "The interval of time that is remaining until the
            peer will cease to be overloaded. If it is not
            known how long the peer will stay in overloaded
            state, this leaf is set to zero.";
    }
} //notification

notification pcep-session-peer-overload-clear {
    description
        "This notification is sent when a peer leaves overload
        state.";

    uses notification-instance-hdr;

    leaf peer-overloaded {
        type boolean;
        description
            "If the peer has informed the local PCEP entity that
            it is currently overloaded, then this is set to
            true. Otherwise, it is set to false.";
    }
} //notification
```



```
/*
 * RPC
 */

rpc trigger-resync {
    if-feature stateful;
    if-feature stateful-sync-opt;
    description
        "Trigger the resynchroninization at the PCE";
    input {
        leaf pcc {
            type leafref {
                path "/pcep/entity/peers/peer/addr";
            }
            description
                "The IP address to identify the PCC. The state
                 synchronization is re-triggered for all LSPs from
                 the PCC. The rpc on the PCC will be ignored.";
        }
    }
} //rpc

} //module

<CODE ENDS>
```

10.2. ietf-pcep-stats module

```
<CODE BEGINS> file "ietf-pcep-stats@2018-01-05.yang"
module ietf-pcep-stats {

    yang-version 1.1;

    namespace "urn:ietf:params:xml:ns:yang:ietf-pcep-stats";

    prefix ps;

    import ietf-pcep {
        prefix p;
    }

    import ietf-yang-types {
        prefix "yang";
    }

    organization
```


"IETF PCE (Path Computation Element) Working Group";

contact

"WG Web: <<http://tools.ietf.org/wg/pce/>>
WG List: <<mailto:pce@ietf.org>>
WG Chair: JP Vasseur
<<mailto:jpv@cisco.com>>
WG Chair: Julien Meuric
<<mailto:julien.meuric@orange.com>>
WG Chair: Jonathan Hardwick
<<mailto:Jonathan.Hardwick@metaswitch.com>>
Editor: Dhruv Dhody
<<mailto:dhruv.ietf@gmail.com>>";

description

"The YANG module augments the PCEP yang operational
model with statistics, counters and telemetry data";

revision 2018-01-05 {

description "Initial revision.";

reference

"RFC XXXX: A YANG Data Model for Path Computation
Element Communications Protocol
(PCEP)";

}

/*

* Groupings

*/

grouping pcep-stats{

description

"This grouping defines statistics for PCEP. It is used
for both peer and current session.";

leaf avg-rsp-time{

when "../p:role = 'pce'" +
"or " +
"../p:role = 'pcc-and-pce'"

{

description

"Valid for PCEP Peer as PCE";

}

type uint32;

units "milliseconds";

description

"The average response time.


```
        If an average response time has not been
        calculated then this leaf has the value zero.";
    }

    leaf lwm-rsp-time{
        when "../..p:role = 'pce'" +
            "or " +
            "../..p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCE";
        }
        type uint32;
        units "milliseconds";

        description
            "The smallest (low-water mark) response time seen.
            If no responses have been received then this
            leaf has the value zero.";
    }

    leaf hwm-rsp-time{
        when "../..p:role = 'pce'" +
            "or " +
            "../..p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCE";
        }
        type uint32;
        units "milliseconds";

        description
            "The greatest (high-water mark) response time seen.
            If no responses have been received then this object
            has the value zero.";
    }

    leaf num-pcreq-sent{
        when "../..p:role = 'pce'" +
            "or " +
            "../..p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCE";
        }
        type yang:counter32;
        description
```



```
        "The number of PCReq messages sent.";
    }

    leaf num-pcreq-rcvd{
        when "../p:role = 'pcc'" +
            "or " +
            "../p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCC";
        }
        type yang:counter32;
        description
            "The number of PCReq messages received.";
    }

    leaf num-pcrep-sent{
        when "../p:role = 'pcc'" +
            "or " +
            "../p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCC";
        }

        type yang:counter32;
        description
            "The number of PCRep messages sent.";
    }

    leaf num-pcrep-rcvd{
        when "../p:role = 'pce'" +
            "or " +
            "../p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCE";
        }

        type yang:counter32;
        description
            "The number of PCRep messages received.";
    }

    leaf num-pcerr-sent{
        type yang:counter32;
        description
            "The number of PCErr messages sent.";
```



```
}

leaf num-pcerr-rcvd{
  type yang:counter32;
  description
    "The number of PCErr messages received.";
}

leaf num-pcntf-sent{
  type yang:counter32;
  description
    "The number of PCNtf messages sent.";
}

leaf num-pcntf-rcvd{
  type yang:counter32;
  description
    "The number of PCNtf messages received.";
}

leaf num-keepalive-sent{
  type yang:counter32;
  description
    "The number of Keepalive messages sent.";
}

leaf num-keepalive-rcvd{
  type yang:counter32;
  description
    "The number of Keepalive messages received.";
}

leaf num-unknown-rcvd{
  type yang:counter32;
  description
    "The number of unknown messages received.";
}

leaf num-corrupt-rcvd{
  type yang:counter32;
  description
    "The number of corrupted PCEP message received.";
}

leaf num-req-sent{
  when "../p:role = 'pce'" +
    "or " +
    "../p:role = 'pcc-and-pce'"
}
```



```
{
    description
        "Valid for PCEP Peer as PCE";
}
type yang:counter32;
description
    "The number of requests sent. A request corresponds
    1:1 with an RP object in a PCReq message. This might
    be greater than num-pcreq-sent because multiple
    requests can be batched into a single PCReq
    message.";
}

leaf num-req-sent-pend-rep{
    when "../..p:role = 'pce'" +
        "or " +
        "../..p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of requests that have been sent for
        which a response is still pending.";
}

leaf num-req-sent-ero-rcvd{
    when "../..p:role = 'pce'" +
        "or " +
        "../..p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of requests that have been sent for
        which a response with an ERO object was received.
        Such responses indicate that a path was
        successfully computed by the peer.";
}

leaf num-req-sent-nopath-rcvd{
    when "../..p:role = 'pce'" +
        "or " +
        "../..p:role = 'pcc-and-pce'"
    {
```



```
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of requests that have been sent for
        which a response with a NO-PATH object was
        received. Such responses indicate that the peer
        could not find a path to satisfy the
        request.";
}

leaf num-req-sent-cancel-rcvd{
    when "../..//p:role = 'pce'" +
        "or " +
        "../..//p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of requests that were cancelled with
        a PCNtf message.
        This might be different than num-pcntf-rcvd because
        not all PCNtf messages are used to cancel requests,
        and a single PCNtf message can cancel multiple
        requests.";
}

leaf num-req-sent-error-rcvd{
    when "../..//p:role = 'pce'" +
        "or " +
        "../..//p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of requests that were rejected with a
        PCErr message.
        This might be different than num-pcerr-rcvd because
        not all PCErr messages are used to reject requests,
        and a single PCErr message can reject multiple
        requests.";
}
```



```
leaf num-req-sent-timeout{
  when "../p:role = 'pce'" +
    "or " +
    "../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of requests that have been sent to a peer
    and have been abandoned because the peer has taken too
    long to respond to them.";
}

leaf num-req-sent-cancel-sent{
  when "../p:role = 'pce'" +
    "or " +
    "../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of requests that were sent to the peer and
    explicitly cancelled by the local PCEP entity sending
    a PCNtf.";
}

leaf num-req-rcvd{
  when "../p:role = 'pcc'" +
    "or " +
    "../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests received. A request
    corresponds 1:1 with an RP object in a PCReq
    message.
    This might be greater than num-pcreq-rcvd because
    multiple requests can be batched into a single
    PCReq message.";
}
```



```
leaf num-req-rcvd-pend-rep{
  when "../p:role = 'pcc'" +
    "or " +
    "../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests that have been received for
    which a response is still pending.";
}

leaf num-req-rcvd-ero-sent{
  when "../p:role = 'pcc'" +
    "or " +
    "../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests that have been received for
    which a response with an ERO object was sent. Such
    responses indicate that a path was successfully
    computed by the local PCEP entity.";
}

leaf num-req-rcvd-nopath-sent{
  when "../p:role = 'pcc'" +
    "or " +
    "../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests that have been received for
    which a response with a NO-PATH object was sent. Such
    responses indicate that the local PCEP entity could
    not find a path to satisfy the request.";
}

leaf num-req-rcvd-cancel-sent{
  when "../p:role = 'pcc'" +
```



```
        "or " +
        ".../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of requests received that were cancelled
        by the local PCEP entity sending a PCNtf message.
        This might be different than num-pcntf-sent because
        not all PCNtf messages are used to cancel requests,
        and a single PCNtf message can cancel multiple
        requests.";
}

leaf num-req-rcvd-error-sent{
    when ".../p:role = 'pcc'" +
        "or " +
        ".../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of requests received that were cancelled
        by the local PCEP entity sending a PCErr message.
        This might be different than num-pcerr-sent because
        not all PCErr messages are used to cancel requests,
        and a single PCErr message can cancel multiple
        requests.";
}

leaf num-req-rcvd-cancel-rcvd{
    when ".../p:role = 'pcc'" +
        "or " +
        ".../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of requests that were received from the
        peer and explicitly cancelled by the peer sending
        a PCNtf.";
}
```



```
leaf num-rep-rcvd-unknown{
  when "../..//p:role = 'pce'" +
    "or " +
    "../..//p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of responses to unknown requests
    received. A response to an unknown request is a
    response whose RP object does not contain the
    request ID of any request that is currently
    outstanding on the session.";
}

leaf num-req-rcvd-unknown{
  when "../..//p:role = 'pcc'" +
    "or " +
    "../..//p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of unknown requests that have been
    received. An unknown request is a request
    whose RP object contains a request ID of
    zero.";
}

container svec{
  if-feature p:svec;
  description
    "If synchronized path computation is supported";
  leaf num-svec-sent{
    when "../...//p:role = 'pce'" +
      "or " +
      "../...//p:role = 'pcc-and-pce'"
    {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of SVEC objects sent in PCReq messages.
```



```
        An SVEC object represents a set of synchronized
        requests.";
    }

    leaf num-svec-req-sent{
        when "../.../p:role = 'pce'" +
            "or " +
            "../.../p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCE";
        }
        type yang:counter32;
        description
            "The number of requests sent that appeared in one
            or more SVEC objects.";
    }

    leaf num-svec-rcvd{
        when "../.../p:role = 'pcc'" +
            "or " +
            "../.../p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCC";
        }
        type yang:counter32;
        description
            "The number of SVEC objects received in PCReq
            messages. An SVEC object represents a set of
            synchronized requests.";
    }

    leaf num-svec-req-rcvd{
        when "../.../p:role = 'pcc'" +
            "or " +
            "../.../p:role = 'pcc-and-pce'"
        {
            description
                "Valid for PCEP Peer as PCC";
        }
        type yang:counter32;
        description
            "The number of requests received that appeared
            in one or more SVEC objects.";
    }
}

container stateful{
```



```
if-feature p:stateful;
description
  "Stateful PCE related statistics";
leaf num-pcrpt-sent{
  when "../.../p:role = 'pce'" +
    "or " +
    "../.../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of PCRpt messages sent.";
}

leaf num-pcrpt-rcvd{
  when "../.../p:role = 'pcc'" +
    "or " +
    "../.../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of PCRpt messages received.";
}

leaf num-pcupd-sent{
  when "../.../p:role = 'pcc'" +
    "or " +
    "../.../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of PCUpd messages sent.";
}

leaf num-pcupd-rcvd{
  when "../.../p:role = 'pce'" +
    "or " +
    "../.../p:role = 'pcc-and-pce'"
  {
    description
```



```
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of PCUpd messages received.";
}

leaf num-rpt-sent{
    when "../.../p:role = 'pce'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of LSP Reports sent. A LSP report
        corresponds 1:1 with an LSP object in a PCRpt
        message. This might be greater than
        num-pcrpt-sent because multiple reports can
        be batched into a single PCRpt message.";
}

leaf num-rpt-rcvd{
    when "../.../p:role = 'pcc'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of LSP Reports received. A LSP report
        corresponds 1:1 with an LSP object in a PCRpt
        message.
        This might be greater than num-pcrpt-rcvd because
        multiple reports can be batched into a single
        PCRpt message.";
}

leaf num-rpt-rcvd-error-sent{
    when "../.../p:role = 'pcc'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
    {
        description
```



```
        "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of reports of LSPs received that were
        responded by the local PCEP entity by sending a
        PCErr message.";
}

leaf num-upd-sent{
    when "../.../p:role = 'pcc'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of LSP updates sent. A LSP update
        corresponds 1:1 with an LSP object in a PCUpd
        message. This might be greater than
        num-pcupd-sent because multiple updates can
        be batched into a single PCUpd message.";
}

leaf num-upd-rcvd{
    when "../.../p:role = 'pce'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of LSP Updates received. A LSP update
        corresponds 1:1 with an LSP object in a PCUpd
        message.
        This might be greater than num-pcupd-rcvd because
        multiple updates can be batched into a single
        PCUpd message.";
}

leaf num-upd-rcvd-unknown{
    when "../.../p:role = 'pce'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
}
```



```
{
    description
        "Valid for PCEP Peer as PCE";
}
type yang:counter32;
description
    "The number of updates to unknown LSPs
    received. An update to an unknown LSP is a
    update whose LSP object does not contain the
    PLSP-ID of any LSP that is currently
    present.";
}

leaf num-upd-rcvd-undellegated{
    when "../.../p:role = 'pce'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of updates to not delegated LSPs
        received. An update to an undellegated LSP is a
        update whose LSP object does not contain the
        PLSP-ID of any LSP that is currently
        delegated to current PCEP session.";
}

leaf num-upd-rcvd-error-sent{
    when "../.../p:role = 'pce'" +
        "or " +
        "../.../p:role = 'pcc-and-pce'"
    {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of updates to LSPs received that were
        responded by the local PCEP entity by sending a
        PCErr message.";
}
container initiation {
    if-feature p:pce-initiated;
    description
        "PCE-Initiated related statistics";
```



```
leaf num-pcinitiate-sent{
  when "../.../.../p:role = 'pcc'" +
    "or " +
    "../.../.../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of PCInitiate messages sent.";
}

leaf num-pcinitiate-rcvd{
  when "../.../.../p:role = 'pce'" +
    "or " +
    "../.../.../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of PCInitiate messages received.";
}

leaf num-initiate-sent{
  when "../.../.../p:role = 'pcc'" +
    "or " +
    "../.../.../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of LSP Initiation sent via PCE.
    A LSP initiation corresponds 1:1 with an LSP
    object in a PCInitiate message. This might be
    greater than num-pcinitiate-sent because
    multiple initiations can be batched into a
    single PCInitiate message.";
}

leaf num-initiate-rcvd{
  when "../.../.../p:role = 'pce'" +
    "or " +
    "../.../.../p:role = 'pcc-and-pce'"
```



```
    {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of LSP Initiation received from
      PCE. A LSP initiation corresponds 1:1 with
      an LSP object in a PCInitiate message. This
      might be greater than num-pcinitiate-rcvd
      because multiple initiations can be batched
      into a single PCInitiate message.";
  }

  leaf num-initiate-rcvd-error-sent{
    when "../.../.../p:role = 'pce'" +
      "or " +
      "../.../.../p:role = 'pcc-and-pce'"
    {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of initiations of LSPs received
      that were responded by the local PCEP entity
      by sending a PCErr message.";
  }
}

container path-key {
  when "../.../p:role = 'pcc'" +
    "or " +
    "../.../p:role = 'pcc-and-pce'"
  {
    description
      "Valid for PCEP Peer as PCC";
  }
  if-feature p:path-key;
  description
    "If Path-Key is supported";
  leaf num-unknown-path-key{
    type yang:counter32;
    description
      "The number of attempts to expand an unknown
      path-key.";
  }
  leaf num-exp-path-key{
```



```
        type yang:counter32;
        description
            "The number of attempts to expand an expired
            path-key.";
    }
    leaf num-dup-path-key{
        type yang:counter32;
        description
            "The number of duplicate attempts to expand same
            path-key.";
    }
    leaf num-path-key-no-attempt{
        type yang:counter32;
        description
            "The number of expired path-keys with no attempt to
            expand it.";
    }
}
} //pcep-stats

/*
 * Augment modules to add statistics
 */

augment "/p:pcep/p:entity/p:peers/p:peer" {
    description
        "Augmenting the statistics";
    leaf num-sess-setup-ok{
        type yang:counter32;
        config false;
        description
            "The number of PCEP sessions successfully
            successfully established with the peer,
            including any current session. This
            counter is incremented each time a
            session with this peer is successfully
            established.";
    }

    leaf num-sess-setup-fail{
        type yang:counter32;
        config false;
        description
            "The number of PCEP sessions with the peer
            that have been attempted but failed
            before being fully established. This
            counter is incremented each time a
            session retry to this peer fails.";
```



```
}
container pcep-stats {
  config false;
  description
    "The container for all statistics at peer
    level.";
  uses pcep-stats{
    description
      "Since PCEP sessions can be
      ephemeral, the peer statistics tracks
      a peer even when no PCEP session
      currently exists to that peer. The
      statistics contained are an aggregate
      of the statistics for all successive
      sessions to that peer.";
  }

  leaf num-req-sent-closed{
    when "../p:role = 'pce'" +
      "or " +
      "../p:role = 'pcc-and-pce'"
    {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of requests that were
      sent to the peer and implicitly
      cancelled when the session they were
      sent over was closed.";
  }

  leaf num-req-rcvd-closed{
    when "../p:role = 'pcc'" +
      "or " +
      "../p:role = 'pcc-and-pce'"
    {
      description
        "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
      "The number of requests that were
      received from the peer and
      implicitly cancelled when the
      session they were received over
      was closed.";
```



```
        }
    }//pcep-stats
}//augment

augment "/p:pcep/p:entity/p:peers/p:peer/" +
    "p:sessions/p:session" {
    description
        "Augmenting the statistics";
    container pcep-stats {
        description
            "The container for all statistics
            at session level.";
        uses pcep-stats{
            description
                "The statistics contained are
                for the current sessions to
                that peer. These are lost
                when the session goes down.
                ";
        }
    }//pcep-stats
}//augment

}//module

<CODE ENDS>
```

11. Security Considerations

The YANG module defined in this document is designed to be accessed via network management protocol such as NETCONF [[RFC6241](#)] or RESTCONF [[RFC8040](#)]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [[RFC6242](#)]. The lowest RESTCONF layer is HTTPS, and the mandatory-to-implement secure transport is TLS [[RFC5246](#)]

The NETCONF access control model [[RFC6536](#)] provides the means to restrict access for particular NETCONF or RESTCONF users to a pre-configured subset of all available NETCONF or RESTCONF protocol operations and content.

There are a number of data nodes defined in the YANG module which are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., <edit-config>) to these data nodes without proper protection can have a negative effect on network operations. These are the subtrees and data nodes and their sensitivity/vulnerability:

/pcep/entity/ - configure local parameters, capabilities etc.

/pcep/entity/peers - configure remote peers to setup PCEP session.

Unauthorized access to above list can adversely affect the PCEP session between the local entity and the peers. This may lead to inability to compute new paths, stateful operations on the delegated as well as PCE-initiated LSPs.

Some of the readable data nodes in this YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via get, get-config, or notification) to these data nodes. These are the subtrees and data nodes and their sensitivity/vulnerability:

/pcep/lsp-db - All the LSPs in the network. Unauthorized access to this could provide the all path and network usage information.

/pcep/path-keys/ - The Confidential Path Segments (CPS) are hidden using path-keys. Unauthorized access to this could leak confidential path information.

Some of the RPC operations in this YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control access to these operations. These are the operations and their sensitivity/vulnerability:

trigger-resync - trigger resynchronization with the PCE.
Unauthorized access to this could force a PCEP session into continuous state synchronization.

12. IANA Considerations

This document registers a URI in the "IETF XML Registry" [[RFC3688](#)]. Following the format in [RFC 3688](#), the following registration has been made.

URI: urn:ietf:params:xml:ns:yang:ietf-pcep

Registrant Contact: The PCE WG of the IETF.

XML: N/A; the requested URI is an XML namespace.

This document registers a YANG module in the "YANG Module Names" registry [[RFC6020](#)].

Name: ietf-pcep
Namespace: urn:ietf:params:xml:ns:yang:ietf-pcep
Prefix: pcep
Reference: This I-D

13. Acknowledgements

The initial document is based on the PCEP MIB [[RFC7420](#)]. We would like to thank the authors of aforementioned documents.

14. References

14.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC5440] Vasseur, JP., Ed. and JL. Le Roux, Ed., "Path Computation Element (PCE) Communication Protocol (PCEP)", [RFC 5440](#), DOI 10.17487/RFC5440, March 2009, <<https://www.rfc-editor.org/info/rfc5440>>.
- [RFC5246] Dierks, T. and E. Rescorla, "The Transport Layer Security (TLS) Protocol Version 1.2", [RFC 5246](#), DOI 10.17487/RFC5246, August 2008, <<https://www.rfc-editor.org/info/rfc5246>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.

- [RFC6536] Bierman, A. and M. Bjorklund, "Network Configuration Protocol (NETCONF) Access Control Model", [RFC 6536](#), DOI 10.17487/RFC6536, March 2012, <<https://www.rfc-editor.org/info/rfc6536>>.
- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", [RFC 6991](#), DOI 10.17487/RFC6991, July 2013, <<https://www.rfc-editor.org/info/rfc6991>>.
- [RFC8177] Lindem, A., Ed., Qu, Y., Yeung, D., Chen, I., and J. Zhang, "YANG Data Model for Key Chains", [RFC 8177](#), DOI 10.17487/RFC8177, June 2017, <<https://www.rfc-editor.org/info/rfc8177>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [RFC 8040](#), DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8231] Crabbe, E., Minei, I., Medved, J., and R. Varga, "Path Computation Element Communication Protocol (PCEP) Extensions for Stateful PCE", [RFC 8231](#), DOI 10.17487/RFC8231, September 2017, <<https://www.rfc-editor.org/info/rfc8231>>.
- [RFC8281] Crabbe, E., Minei, I., Sivabalan, S., and R. Varga, "Path Computation Element Communication Protocol (PCEP) Extensions for PCE-Initiated LSP Setup in a Stateful PCE Model", [RFC 8281](#), DOI 10.17487/RFC8281, December 2017, <<https://www.rfc-editor.org/info/rfc8281>>.
- [I-D.ietf-pce-lsp-setup-type]
Sivabalan, S., Tantsura, J., Minei, I., Varga, R., and J. Hardwick, "Conveying path setup type in PCEP messages", [draft-ietf-pce-lsp-setup-type-07](#) (work in progress), December 2017.
- [I-D.ietf-pce-segment-routing]
Sivabalan, S., Filsfils, C., Tantsura, J., Henderickx, W., and J. Hardwick, "PCEP Extensions for Segment Routing", [draft-ietf-pce-segment-routing-11](#) (work in progress), November 2017.
- [I-D.ietf-teas-yang-te]
Saad, T., Gandhi, R., Liu, X., Beeram, V., Shah, H., and I. Bryskin, "A YANG Data Model for Traffic Engineering Tunnels and Interfaces", [draft-ietf-teas-yang-te-10](#) (work in progress), December 2017.

[I-D.ietf-netconf-tls-client-server]


Watsen, K. and G. Wu, "YANG Groupings for TLS Clients and TLS Servers", [draft-ietf-netconf-tls-client-server-05](#) (work in progress), October 2017.

14.2. Informative References

- [RFC4655] Farrel, A., Vasseur, J., and J. Ash, "A Path Computation Element (PCE)-Based Architecture", [RFC 4655](#), DOI 10.17487/RFC4655, August 2006, <<https://www.rfc-editor.org/info/rfc4655>>.
- [RFC7420] Koushik, A., Stephan, E., Zhao, Q., King, D., and J. Hardwick, "Path Computation Element Communication Protocol (PCEP) Management Information Base (MIB) Module", [RFC 7420](#), DOI 10.17487/RFC7420, December 2014, <<https://www.rfc-editor.org/info/rfc7420>>.
- [RFC8253] Lopez, D., Gonzalez de Dios, O., Wu, Q., and D. Dhody, "PCEPS: Usage of TLS to Provide a Secure Transport for the Path Computation Element Communication Protocol (PCEP)", [RFC 8253](#), DOI 10.17487/RFC8253, October 2017, <<https://www.rfc-editor.org/info/rfc8253>>.
- [I-D.ietf-netmod-yang-tree-diagrams] Bjorklund, M. and L. Berger, "YANG Tree Diagrams", [draft-ietf-netmod-yang-tree-diagrams-04](#) (work in progress), December 2017.
- [I-D.ietf-netmod-revised-datastores] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture", [draft-ietf-netmod-revised-datastores-09](#) (work in progress), December 2017.

Appendix A. Example

The example below provide an overview of PCEP peer session informations and LSP-DB in the Yang Module.

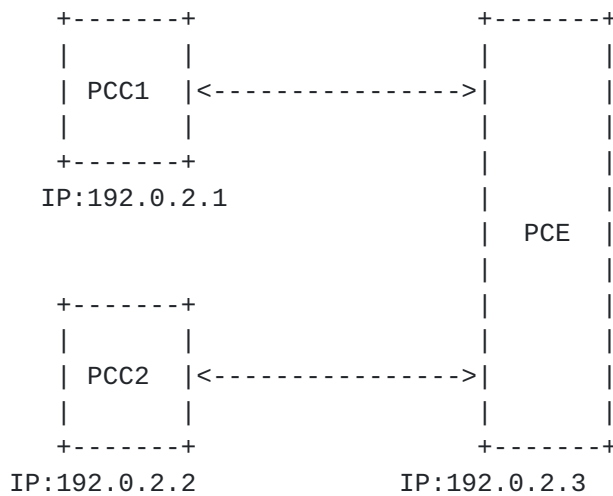

at PCE:

```

{
  "entity": [
    {
      "addr": "192.0.2.3",
      "oper-status": "oper-status-up",
      "role": "pce",
      "capability": {
        "stateful": {
          "enabled": true
        }
      }
    }
  ],
  "lsp-db" : [
    {
      "lsp" : {
        "plsp-id": 3,
        "pcc-id" : "192.0.2.1",
        "lsp-ref" : {
          "source": "192.0.2.1",
          "destination": "192.0.2.4",
          "tunnel-id": 16,
          "lsp-id": 3,
          "extended-tunnel-id": 0
        },
        "oper-status": "oper-status-up",
        "delegated": true,
        "symbolic-path-name": "iewauh",
      }
    }
  ]
}

```



```
    },
    "lsp" : {
      "plsp-id": 4,
      "pcc-id" : "192.0.2.2",
      "lsp-ref" : {
        "source": "192.0.2.2",
        "destination": "192.0.2.5"
        "tunnel-id": 17,
        "lsp-id": 4
      }
      "extended-tunnel-id": 0
    },
    "oper-status": "oper-status-up",
    "delegated": true,
    "symbolic-path-name": "iewauhiewauh",
    "extended-tunnel-id": 0
  }
]
"peers": [
  {
    "peer": {
      "addr": "192.0.2.1",
      "role": "pcc",

      "capability": {
        "stateful" : {
          "enabled": true,
          "active": yes,
        }
      }
    }
    "sessions": [
      {
        "session": {
          "initiator": "remote",
          "role": "pcc",
        }
      }
    ]
  }
]
},
{
  "peer": {
    "addr": "192.0.2.2",
    "role": "pcc",

    "capability": {
      "stateful" : {
        "enabled": true,
        "active": true,
```



```
    }  
  }  
  "sessions": [  
    {  
      "session": {  
        "initiator": "remote",  
        "role": "pcc",  
      }  
    }  
  ]  
}  
}
```

[Appendix B.](#) Contributor Addresses

Rohit Pobbathi
Huawei Technologies
Divyashree Techno Park, Whitefield
Bangalore, Karnataka 560066
India

EMail: rohit.pobbathi@huawei.com

Vinod KumarS
Huawei Technologies
Divyashree Techno Park, Whitefield
Bangalore, Karnataka 560066
India

EMail: vinods.kumar@huawei.com

Zafar Ali
Cisco Systems
Canada

EMail: zali@cisco.com

Xufeng Liu
Jabil
8281 Greensboro Drive, Suite 200
McLean VA 22102
USA

EMail: Xufeng_Liu@jabil.com

Young Lee
Huawei Technologies
5340 Legacy Drive, Building 3
Plano, TX 75023, USA

Phone: (469) 277-5838
EMail: leeyoung@huawei.com

Udayasree Palle
Huawei Technologies
Divyashree Techno Park, Whitefield
Bangalore, Karnataka 560066
India

EMail: udayasreereddy@gmail.com

Xian Zhang
Huawei Technologies
Bantian, Longgang District
Shenzhen 518129
P.R.China

EMail: zhang.xian@huawei.com

Avantika
Huawei Technologies
Divyashree Techno Park, Whitefield
Bangalore, Karnataka 560066
India

EMail: s.avantika.avantika@gmail.com

Shashikanth
Huawei Technologies
Divyashree Techno Park, Whitefield
Bangalore, Karnataka 560066
India

EMail: shashikanth.vh@huawei.com

Authors' Addresses

Dhruv Dhody (editor)
Huawei Technologies
Divyashree Techno Park, Whitefield
Bangalore, Karnataka 560066
India

E-Mail: dhruv.ietf@gmail.com

Jonathan Hardwick
Metaswitch
100 Church Street
Enfield EN2 6BQ
UK

E-Mail: jonathan.hardwick@metaswitch.com

Vishnu Pavan Beeram
Juniper Networks
USA

E-Mail: vbeeram@juniper.net

Jeff Tantsura
USA

E-Mail: jefftant@gmail.com

