

PCE Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: May 3, 2020

D. Dhody, Ed.  
Huawei Technologies  
J. Hardwick  
Metaswitch  
V. Beeram  
Juniper Networks  
J. Tantsura  
October 31, 2019

**A YANG Data Model for Path Computation Element Communications Protocol  
(PCEP)  
draft-ietf-pce-pcep-yang-13**

**Abstract**

This document defines a YANG data model for the management of Path Computation Element communications Protocol (PCEP) for communications between a Path Computation Client (PCC) and a Path Computation Element (PCE), or between two PCEs. The data model includes configuration and state data.

**Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 3, 2020.

**Copyright Notice**

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Requirements Language</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">Terminology and Notation</a>	<a href="#">3</a>
<a href="#">3.1.</a>	<a href="#">Tree Diagrams</a>	<a href="#">5</a>
<a href="#">3.2.</a>	<a href="#">Prefixes in Data Node Names</a>	<a href="#">5</a>
<a href="#">3.3.</a>	<a href="#">References in the Model</a>	<a href="#">5</a>
<a href="#">4.</a>	<a href="#">Objectives</a>	<a href="#">7</a>
<a href="#">5.</a>	<a href="#">The Design of PCEP Data Model</a>	<a href="#">8</a>
<a href="#">5.1.</a>	<a href="#">The Overview of PCEP Data Model</a>	<a href="#">8</a>
<a href="#">5.2.</a>	<a href="#">The Entity</a>	<a href="#">9</a>
<a href="#">5.3.</a>	<a href="#">The Peer Lists</a>	<a href="#">13</a>
<a href="#">5.4.</a>	<a href="#">The Session Lists</a>	<a href="#">15</a>
<a href="#">5.5.</a>	<a href="#">Notifications</a>	<a href="#">17</a>
<a href="#">5.6.</a>	<a href="#">RPC</a>	<a href="#">17</a>
<a href="#">5.7.</a>	<a href="#">The Full PCEP Data Model</a>	<a href="#">18</a>
<a href="#">6.</a>	<a href="#">The Design of PCEP Statistics Data Model</a>	<a href="#">24</a>
<a href="#">7.</a>	<a href="#">Advanced PCE Features</a>	<a href="#">27</a>
<a href="#">7.1.</a>	<a href="#">Stateful PCE's LSP-DB</a>	<a href="#">28</a>
<a href="#">8.</a>	<a href="#">Open Issues and Next Step</a>	<a href="#">28</a>
<a href="#">8.1.</a>	<a href="#">The PCE-Initiated LSP</a>	<a href="#">28</a>
<a href="#">9.</a>	<a href="#">Other Considerations</a>	<a href="#">28</a>
<a href="#">9.1.</a>	<a href="#">PCEP over TLS (PCEPS)</a>	<a href="#">28</a>
<a href="#">10.</a>	<a href="#">PCEP YANG Modules</a>	<a href="#">29</a>
<a href="#">10.1.</a>	<a href="#">ietf-pcep module</a>	<a href="#">29</a>
<a href="#">10.2.</a>	<a href="#">ietf-pcep-stats module</a>	<a href="#">83</a>
<a href="#">11.</a>	<a href="#">Security Considerations</a>	<a href="#">101</a>
<a href="#">12.</a>	<a href="#">IANA Considerations</a>	<a href="#">103</a>
<a href="#">13.</a>	<a href="#">Implementation Status</a>	<a href="#">103</a>
<a href="#">14.</a>	<a href="#">Acknowledgements</a>	<a href="#">104</a>
<a href="#">15.</a>	<a href="#">References</a>	<a href="#">104</a>
<a href="#">15.1.</a>	<a href="#">Normative References</a>	<a href="#">104</a>
<a href="#">15.2.</a>	<a href="#">Informative References</a>	<a href="#">108</a>
<a href="#">Appendix A.</a>	<a href="#">Example</a>	<a href="#">109</a>
<a href="#">Appendix B.</a>	<a href="#">Contributor Addresses</a>	<a href="#">112</a>
<a href="#">Authors' Addresses</a>		<a href="#">113</a>



## 1. Introduction

The Path Computation Element (PCE) defined in [\[RFC4655\]](#) is an entity that is capable of computing a network path or route based on a network graph, and applying computational constraints. A Path Computation Client (PCC) may make requests to a PCE for paths to be computed.

PCEP is the communication protocol between a PCC and PCE and is defined in [\[RFC5440\]](#). PCEP interactions include path computation requests and path computation replies as well as notifications of specific states related to the use of a PCE in the context of Multiprotocol Label Switching (MPLS) and Generalized MPLS (GMPLS) Traffic Engineering (TE). [\[RFC8231\]](#) specifies extensions to PCEP to enable stateful control of MPLS TE LSPs.

This document defines a YANG [\[RFC7950\]](#) data model for the management of PCEP speakers. It is important to establish a common data model for how PCEP speakers are identified, configured, and monitored. The data model includes configuration data and state data.

This document contains a specification of the PCEP YANG module, "ietf-pcep" which provides the PCEP [\[RFC5440\]](#) data model.

The PCEP operational state is included in the same tree as the PCEP configuration consistent with Network Management Datastore Architecture [\[RFC8342\]](#). The origin of the data is indicated as per the origin metadata annotation.

## 2. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [\[RFC2119\]](#) [\[RFC8174\]](#) when, and only when, they appear in all capitals, as shown here.

## 3. Terminology and Notation

This document uses the terminology defined in [\[RFC4655\]](#) and [\[RFC5440\]](#). In particular, it uses the following acronyms.

- o Path Computation Request message (PCReq).
- o Path Computation Reply message (PCRep).
- o Notification message (PCNtf).



- o Error message (PCErr).
- o Request Parameters object (RP).
- o Synchronization Vector object (SVEC).
- o Explicit Route object (ERO).

This document also uses the following terms defined in [[RFC7420](#)]:

- o PCEP entity: a local PCEP speaker.
- o PCEP peer: to refer to a remote PCEP speaker.
- o PCEP speaker: where it is not necessary to distinguish between local and remote.

Further, this document also uses the following terms defined in [[RFC8231](#)] :

- o Stateful PCE, Passive Stateful PCE, Active Stateful PCE
- o Delegation, Revocation, Redelegation
- o LSP State Report, Path Computation Report message (PCRpt).
- o LSP State Update, Path Computation Update message (PCUpd).

[RFC8281] :

- o PCE-initiated LSP, Path Computation LSP Initiate Message (PCInitiate).

[RFC8408] :

- o Path Setup Type (PST).

[I-D.ietf-pce-segment-routing] :

- o Segment Routing (SR).

[RFC6241] :

- o Configuration data.
- o State data.



### 3.1. Tree Diagrams

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams is defined in [\[RFC8340\]](#).

### 3.2. Prefixes in Data Node Names

In this document, names of data nodes and other data model objects are often used without a prefix, as long as it is clear from the context in which YANG module each name is defined. Otherwise, names are prefixed using the standard prefix associated with the corresponding YANG module, as shown in Table 1.

Prefix	YANG module	Reference
yang	ietf-yang-types	<a href="#">[RFC6991]</a>
inet	ietf-inet-types	<a href="#">[RFC6991]</a>
te	ietf-te	<a href="#">[I-D.ietf-teas-yang-te]</a>
te-types	ietf-te-types	<a href="#">[I-D.ietf-teas-yang-te]</a>
key-chain	ietf-key-chain	<a href="#">[RFC8177]</a>
nacm	ietf-netconf-acm	<a href="#">[RFC8341]</a>
tlss	ietf-tls-server	<a href="#">[I-D.ietf-netconf-tls-client-server]</a>
		<a href="#">[I-D.ietf-netconf-tls-client-server]</a>
tlsc	ietf-tls-client	<a href="#">[I-D.ietf-netconf-tls-client-server]</a>
		<a href="#">[I-D.ietf-netconf-tls-client-server]</a>
ospf	ietf-ospf	<a href="#">[I-D.ietf-ospf-yang]</a>
isis	ietf-isis	<a href="#">[I-D.ietf-isis-yang-isis-cfg]</a>

Table 1: Prefixes and corresponding YANG modules

### 3.3. References in the Model

Following documents are referenced in the model defined in this document -

Documents	Reference
RSVP-TE: Extensions to	<a href="#">[RFC3209]</a>
RSVP for LSP Tunnels	
OSPF Protocol Extensions	<a href="#">[RFC5088]</a>
for Path Computation	
Element (PCE) Discovery	
IS-IS Protocol Extensions	<a href="#">[RFC5089]</a>





for Path Computation		
Element (PCE) Discovery		
Path Computation Element	<a href="#">[RFC5440]</a>	
(PCE) Communication		
Protocol (PCEP)		
Preserving Topology	<a href="#">[RFC5520]</a>	
Confidentiality in Inter-		
Domain Path Computation		
Using a Path-Key-Based		
Mechanism		
Encoding of Objective	<a href="#">[RFC5541]</a>	
Functions in the Path		
Computation Element		
Communication Protocol		
(PCEP)		
Path Computation Element	<a href="#">[RFC5557]</a>	
Communication Protocol		
(PCEP) Requirements and		
Protocol Extensions in		
Support of Global		
Concurrent Optimization		
Common YANG Data Types	<a href="#">[RFC6991]</a>	
YANG Data Model for Key	<a href="#">[RFC8177]</a>	
Chains		
Path Computation Element	<a href="#">[RFC8231]</a>	
Communication Protocol		
(PCEP) Extensions for		
Stateful PCE		
Optimizations of Label	<a href="#">[RFC8232]</a>	
Switched Path State		
Synchronization Procedures		
for a Stateful PCE		
PCEPS: Usage of TLS to	<a href="#">[RFC8253]</a>	
Provide a Secure Transport		
for the Path Computation		
Element Communication		
Protocol (PCEP)		
Path Computation Element	<a href="#">[RFC8281]</a>	
Communication Protocol		
(PCEP) Extensions for PCE-		
Initiated LSP Setup in a		
Stateful PCE Model		
Extensions to the Path	<a href="#">[RFC8306]</a>	
Computation Element		
Communication Protocol		
(PCEP) for Point-to-		
Multipoint Traffic		
Engineering Label Switched		



Paths		
Network Configuration		<a href="#">[RFC8341]</a>
Access Control Model		
Conveying Path Setup Type		<a href="#">[RFC8408]</a>
in PCE Communication		
Protocol (PCEP) Messages		
Traffic Engineering Common		<a href="#">[I-D.ietf-teas-yang-te-types]</a>
YANG Types		
A YANG Data Model for		<a href="#">[I-D.ietf-teas-yang-te]</a>
Traffic Engineering		
Tunnels and Interfaces		
YANG Groupings for TLS		<a href="#">[I-D.ietf-netconf-tls-client-server]</a>
Clients and TLS Servers		
PCEP Extensions for		<a href="#">[I-D.ietf-pce-segment-routing]</a>
Segment Routing		
PCEP Extensions for		<a href="#">[I-D.ietf-pce-association-group]</a>
Establishing Relationships		
Between Sets of LSPs		
YANG Data Model for OSPF		<a href="#">[I-D.ietf-ospf-yang]</a>
Protocol		
YANG Data Model for IS-IS		<a href="#">[I-D.ietf-isis-yang-isis-cfg]</a>
Protocol		
PCEP extensions for GMPLS		<a href="#">[I-D.ietf-pce-gmpls-pcep-extensions]</a>
+-----+-----+		

Table 2: References in the YANG modules

#### 4. Objectives

This section describes some of the design objectives for the model:

- o In case of existing implementations, it needs to map the data model defined in this document to their proprietary native data model. To facilitate such mappings, the data model should be simple.
- o The data model should be suitable for new implementations to use as is.
- o Mapping to the PCEP MIB Module should be clear.
- o The data model should allow for static configurations of peers.
- o The data model should include read-only counters in order to gather statistics for sent and received PCEP messages, received messages with errors, and messages that could not be sent due to errors. This could be in a separate model which augments the base data model.



- o It should be fairly straightforward to augment the base data model for advanced PCE features.

## 5. The Design of PCEP Data Model

### 5.1. The Overview of PCEP Data Model

The PCEP YANG module defined in this document has all the common building blocks for the PCEP protocol.

```

module: ietf-pcep
  +--rw pcep!
    +--rw entity
      +--rw addr inet:ip-address
      +--rw enabled? boolean
      +--rw role pcep-role
      +--rw description? string
      +--rw speaker-entity-id? string
      | {stateful-sync-opt}?
      +--rw admin-status? pcep-admin-status
      +--ro index? uint32
      +--ro oper-status? pcep-oper-status
      +--rw domain
      | +--rw domain* [domain-type domain]
      | ...
      +--rw capability
      | ...
      +--rw pce-info
      | +--rw scope
      | | ...
      | +--rw neigh-domains
      | | ...
      | +--rw path-key {path-key}?
      | ...
      +--ro lsp-db {stateful}?
      | +--ro db-ver? uint64
      | | {stateful-sync-opt}?
      | +--ro association-list*
      | | [id source global-source extended-id]
      | | ...
      | +--ro lsp* [plsp-id pcc-id lsp-id]
      | ...
      +--ro path-keys {path-key}?
      | +--ro path-keys* [path-key]
      | ...
      +--rw peers

```



```

    +--rw peer* [addr]

    +--ro sessions
      +--ro session* [initiator]
      ...

rpcs:
  +---x trigger-resync {stateful,stateful-sync-opt}?
    +---w input
      +---w pcc?    -> /pcep/entity/peers/peer/addr

notifications:
  +---n pcep-session-up
  | ...
  +---n pcep-session-down
  | ...
  +---n pcep-session-local-overload
  | ...
  +---n pcep-session-local-overload-clear
  | ...
  +---n pcep-session-peer-overload
  | ...
  +---n pcep-session-peer-overload-clear
  ...

```

## 5.2. The Entity

The PCEP yang module may contain status information for the local PCEP entity.

The entity has an IP address (using ietf-inet-types [[RFC6991](#)]) and a "role" leaf (the local entity PCEP role) as mandatory.

Note that, the PCEP MIB module [[RFC7420](#)] uses an entity list and a system generated entity index as a primary index to the read only entity table. If the device implements the PCEP MIB, the "index" leaf MUST contain the value of the corresponding pcePcepEntityIndex and only one entity is assumed.

The various information related to this entity such as its domain, capabilities etc. Further incase when the entity is PCE it could also have path-key and the LSP-DB information.

```

module: ietf-pcep
  +--rw pcep!
    +--rw entity
      +--rw addr                               inet:ip-address
      +--rw enabled?                           boolean

```





```

+--rw role                                pcep-role
+--rw description?                        string
+--rw speaker-entity-id?                 string {sync-opt}?
+--rw admin-status?                      boolean
+--ro index?                             uint32
+--ro oper-status?                       pcep-oper-status
+--rw domain
| +--rw domain* [domain-type domain]
|   +--rw domain-type    domain-type
|   +--rw domain         domain
+--rw capability
| +--rw capability?      bits
| +--rw pce-initiated?   boolean {pce-initiated}?
| +--rw include-db-ver?  boolean
| |   {stateful,sync-opt}?
| +--rw trigger-resync?  boolean
| |   {stateful,sync-opt}?
| +--rw trigger-initial-sync?  boolean
| |   {stateful,sync-opt}?
| +--rw incremental-sync?  boolean
| |   {stateful,sync-opt}?
| +--rw sr {sr}?
|   +--rw enabled?        boolean
|   +--rw msd-limit?      boolean
|   +--rw nai?            boolean
+--rw msd?                                uint8 {sr}?
+--rw pce-info
| +--rw scope
| | +--rw path-scope?      bits
| | +--rw intra-area-pref? uint8
| | +--rw inter-area-pref? uint8
| | +--rw inter-as-pref?   uint8
| | +--rw inter-layer-pref? uint8
| +--rw neigh-domains
| | +--rw domain* [domain-type domain]
| |   +--rw domain-type    domain-type
| |   +--rw domain         domain
| +--rw path-key {path-key}?
|   +--rw enabled?         boolean
|   +--rw discard-timer?   uint32
|   +--rw reuse-time?      uint32
|   +--rw pce-id?          inet:ip-address
+--rw connect-timer?        uint16
+--rw connect-max-retry?    uint32
+--rw init-backoff-timer?   uint16
+--rw max-backoff-timer?    uint32
+--rw open-wait-timer?      uint16
+--rw keep-wait-timer?      uint16

```



```

+--rw keep-alive-timer?          uint8
+--rw dead-timer?                uint8
+--rw allow-negotiation?         boolean
+--rw max-keep-alive-timer?      uint8
+--rw max-dead-timer?            uint8
+--rw min-keep-alive-timer?      uint8
+--rw min-dead-timer?            uint8
+--rw sync-timer?                uint16 {svec}?
+--rw request-timer?             uint16
+--rw max-sessions?              uint32
+--rw max-unknown-reqs?          uint32
+--rw max-unknown-msgs?          uint32
+--rw pcep-notification-max-rate uint32
+--rw stateful-parameter {stateful}?
| +--rw state-timeout?           uint32
| +--rw redelegation-timeout?    uint32
| +--rw rpt-non-pcep-lsp?        boolean
+--rw of-list {objective-function}?
| +--rw objective-function* [of]
|   +--rw of identityref
+--ro lsp-db {stateful}?
| +--ro db-ver?                  uint64 {sync-opt}?
| +--ro association-list*
| |   [type id source global-source extended-id]
| |   {association}?
| |   +--ro type                identityref
| |   +--ro id                  uint16
| |   +--ro source              inet:ip-address
| |   +--ro global-source       uint32
| |   +--ro extended-id        string
| |   +--ro lsp* [plsp-id pcc-id lsp-id]
| |     +--ro plsp-id          -> /pcep/entity/lsp-db/lsp/plsp-id
| |     +--ro pcc-id           -> /pcep/entity/lsp-db/lsp/pcc-id
| |     +--ro lsp-id           -> /pcep/entity/lsp-db/lsp/lsp-id
| +--ro lsp* [plsp-id pcc-id lsp-id]
|   +--ro plsp-id               uint32
|   +--ro pcc-id                inet:ip-address
|   +--ro source?
|   |   -> /te:te/lsp-state/lsp/source
|   +--ro destination?
|   |   -> /te:te/lsp-state/lsp/destination
|   +--ro tunnel-id?
|   |   -> /te:te/lsp-state/lsp/tunnel-id
|   +--ro lsp-id
|   |   -> /te:te/lsp-state/lsp/lsp-id
|   +--ro extended-tunnel-id?
|   |   -> /te:te/lsp-state/lsp/extended-tunnel-id
|   +--ro admin-state?          boolean

```



```

|   +--ro operational-state?    operational-state
|   +--ro delegated
|   |   +--ro enabled?    boolean
|   |   +--ro peer?       -> /pcep/entity/peers/peer/addr
|   |   +--ro srp-id?     uint32
|   +--ro initiation {pce-initiated}?
|   |   +--ro enabled?    boolean
|   |   +--ro peer?       -> /pcep/entity/peers/peer/addr
|   +--ro symbolic-path-name?  string
|   +--ro last-error?          identityref
|   +--ro pst?                 identityref
|   +--ro association-list*
|   |   [type id source global-source extended-id]
|   |   {association}?
|   |   +--ro type
|   |   |   -> /pcep/entity/lsp-db/association-list/type
|   |   +--ro id
|   |   |   -> /pcep/entity/lsp-db/association-list/id
|   |   +--ro source          leafref
|   |   +--ro global-source    leafref
|   |   +--ro extended-id     leafref
+--ro path-keys {path-key}?
|   +--ro path-keys* [path-key]
|   |   +--ro path-key        uint16
|   |   +--ro cps
|   |   |   +--ro explicit-route-objects* [index]
|   |   |   |   +--ro index                                uint32
|   |   |   |   +--ro (type)?
|   |   |   |   |   +--:(numbered-node-hop)
|   |   |   |   |   |   +--ro numbered-node-hop
|   |   |   |   |   |   |   +--ro node-id        te-node-id
|   |   |   |   |   |   |   +--ro hop-type?      te-hop-type
|   |   |   |   |   +--:(numbered-link-hop)
|   |   |   |   |   |   +--ro numbered-link-hop
|   |   |   |   |   |   |   +--ro link-tp-id      te-tp-id
|   |   |   |   |   |   |   +--ro hop-type?      te-hop-type
|   |   |   |   |   |   |   +--ro direction?     te-link-direction
|   |   |   |   |   +--:(unnumbered-link-hop)
|   |   |   |   |   |   +--ro unnumbered-link-hop
|   |   |   |   |   |   |   +--ro link-tp-id      te-tp-id
|   |   |   |   |   |   |   +--ro node-id        te-node-id
|   |   |   |   |   |   |   +--ro hop-type?      te-hop-type
|   |   |   |   |   |   |   +--ro direction?     te-link-direction
|   |   |   |   |   +--:(as-number)
|   |   |   |   |   |   +--ro as-number-hop
|   |   |   |   |   |   |   +--ro as-number      inet:as-number
|   |   |   |   |   |   |   +--ro hop-type?      te-hop-type
|   |   |   |   |   +--:(label)

```



```

|      |      +--ro label-hop
|      |      +--ro te-label
|      |      +--ro (technology)?
|      |      |  +--:(generic)
|      |      |  ...
|      |      +--ro direction?
|      |      |      te-label-direction
|  +--ro pcc-original?  -> /pcep/entity/peers/peer/addr
|  +--ro req-id?        uint32
|  +--ro retrieved?     boolean
|  +--ro pcc-retrieved? -> /pcep/entity/peers/peer/addr
|  +--ro creation-time? yang:timestamp
|  +--ro discard-time?  uint32
|  +--ro reuse-time?    uint32
+--rw peers
   +--rw peer* [addr]
      ...

```

### 5.3. The Peer Lists

The peer list contains peer(s) that the local PCEP entity knows about. A PCEP speaker is identified by its IP address. If there is a PCEP speaker in the network that uses multiple IP addresses then it looks like multiple distinct peers to the other PCEP speakers in the network.

Since PCEP sessions can be ephemeral, the peer list tracks a peer even when no PCEP session currently exists to that peer. The statistics contained are an aggregate of the statistics for all successive sessions to that peer.

To limit the quantity of information that is stored, an implementation MAY choose to discard this information if and only if no PCEP session exists to the corresponding peer.

The data model for PCEP peer presented in this document uses a flat list of peers. Each peer in the list is identified by its IP address (addr-type, addr).

There is a list for static peer configuration and operational state of all peers (i.e. static as well as discovered)("/pcep/entity/peers"). The list is used to enable remote PCE configuration at PCC (or PCE) and has the operational state of these peers as well as the remote PCE peer which were discovered and PCC peers that have initiated session.

```

module: ietf-pcep
+--rw pcep!

```





```

+--rw entity
  ...
+--rw peers
  +--rw peer* [addr]
    +--rw addr                inet:ip-address
    +--rw role                pcep-role
    +--rw description?        string
    +--rw domain
      | +--rw domain* [domain-type domain]
      |   +--rw domain-type    domain-type
      |   +--rw domain         domain
    +--rw capability
      | +--rw capability?      bits
      | +--rw pce-initiated?   boolean
      | | {pce-initiated}?
      | +--rw include-db-ver?   boolean
      | | {stateful, sync-opt}?
      | +--rw trigger-resync?   boolean
      | | {stateful, sync-opt}?
      | +--rw trigger-initial-sync? boolean
      | | {stateful, sync-opt}?
      | +--rw incremental-sync? boolean
      | | {stateful, sync-opt}?
      | +--rw sr {sr}?
      |   +--rw enabled?        boolean
      |   +--rw msd-limit?      boolean
      |   +--rw nai?            boolean
    +--rw msd?                 uint8 {sr}?
  +--rw pce-info
    | +--rw scope
    | | +--rw path-scope?       bits
    | | +--rw intra-area-pref?  uint8
    | | +--rw inter-area-pref?  uint8
    | | +--rw inter-as-pref?    uint8
    | | +--rw inter-layer-pref? uint8
    | +--rw neigh-domains
    |   +--rw domain* [domain-type domain]
    |   +--rw domain-type      domain-type
    |   +--rw domain           domain
  +--rw delegation-pref?       uint8 {stateful}?
+--rw auth
  | +--rw (auth-type-selection)?
  | +--:(auth-key-chain)
  | | +--rw key-chain?
  | |   key-chain:key-chain-ref
  | +--:(auth-key)
  | | +--rw crypto-algorithm          identityref
  | | +--rw (key-string-style)?

```



```

|      |      +--:(keystring)
|      |      |  +--rw keystring?          string
|      |      +--:(hexadecimal)
|      |      |      {key-chain:hex-key-string}?
|      |      |      +--rw hexadecimal-string?
|      |      |      yang:hex-string
|      +--:(auth-tls) {tls}?
|      |      +--rw (role)?
|      |      +--:(server)
|      |      |      +--rw tls-server
|      |      |      ...
|      |      +--:(client)
|      |      |      +--rw tls-client
|      |      ...
+--ro discontinuity-time?      yang:timestamp
+--ro initiate-session?       boolean
+--ro session-exists?         boolean
+--ro session-up-time?        yang:timestamp
+--ro session-fail-time?      yang:timestamp
+--ro session-fail-up-time?   yang:timestamp
+--ro sessions
|      +--ro session* [initiator]
|      ...

```

#### 5.4. The Session Lists

The session list contains PCEP session that the PCEP entity (PCE or PCC) is currently participating in. The statistics in session are semantically different from those in peer since the former applies to the current session only, whereas the latter is the aggregate for all sessions that have existed to that peer.

Although [[RFC5440](#)] forbids more than one active PCEP session between a given pair of PCEP entities at any given time, there is a window during session establishment where two sessions may exist for a given pair, one representing a session initiated by the local PCEP entity and the other representing a session initiated by the peer. If either of these sessions reaches active state first, then the other is discarded.

The data model for PCEP session presented in this document uses a flat list of sessions. Each session in the list is identified by its initiator. This index allows two sessions to exist transiently for a given peer, as discussed above.



```

module: ietf-pcep
  +--rw pcep!
    +--rw entity
      ...
    +--rw peers
      +--rw peer* [addr]
        ...
      +--ro sessions
        +--ro session* [initiator]
          +--ro initiator                pcep-initiator
          +--ro role?
          |      -> /pcep/entity/role
          +--ro state-last-change?      yang:timestamp
          +--ro state?                  pcep-sess-state
          +--ro session-creation?       yang:timestamp
          +--ro connect-retry?          yang:counter32
          +--ro local-id?               uint8
          +--ro remote-id?              uint8
          +--ro keepalive-timer?        uint8
          +--ro peer-keepalive-timer?   uint8
          +--ro dead-timer?             uint8
          +--ro peer-dead-timer?        uint8
          +--ro ka-hold-time-rem?       uint8
          +--ro overloaded?             boolean
          +--ro overload-time?          uint32
          +--ro peer-overloaded?        boolean
          +--ro peer-overload-time?     uint32
          +--ro lspdb-sync?             sync-state
          |      {stateful}?
          +--ro recv-db-ver?            uint64
          |      {stateful, sync-opt}?
          +--ro of-list {objective-function}?
          |  +--ro objective-function* [of]
          |  +--ro of      identityref
          +--ro pst-list
          |  +--ro path-setup-type* [pst]
          |  +--ro pst      identityref
          +--ro assoc-type-list {association}?
          |  +--ro assoc-type* [at]
          |  +--ro at      identityref
          +--ro speaker-entity-id?     string {sync-opt}?
          +--ro discontinuity-time?     yang:timestamp

```



### 5.5. Notifications

This YANG model defines a list of notifications to inform client of important events detected during the protocol operation. The notifications defined cover the PCEP MIB notifications.

notifications:

```

+---n pcep-session-up
| +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
| +--ro session-initiator?
| |      -> /pcep/entity/peers/peer/sessions/session/initiator
| +--ro state-last-change?  yang:timestamp
| +--ro state?              pcep-sess-state
+---n pcep-session-down
| +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
| +--ro session-initiator?  pcep-initiator
| +--ro state-last-change?  yang:timestamp
| +--ro state?              pcep-sess-state
+---n pcep-session-local-overload
| +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
| +--ro session-initiator?
| |      -> /pcep/entity/peers/peer/sessions/session/initiator
| +--ro overloaded?         boolean
| +--ro overload-time?      uint32
+---n pcep-session-local-overload-clear
| +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
| +--ro overloaded?         boolean
+---n pcep-session-peer-overload
| +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
| +--ro session-initiator?
| |      -> /pcep/entity/peers/peer/sessions/session/initiator
| +--ro peer-overloaded?     boolean
| +--ro peer-overload-time?  uint32
+---n pcep-session-peer-overload-clear
| +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
| +--ro peer-overloaded?     boolean

```

### 5.6. RPC

This YANG model defines a RPC to trigger state resynchronization to a particular PCEP peer.

rpcs:

```

+---x trigger-resync {stateful, sync-opt}?
| +---w input
| | +---w pcc?  -> /pcep/entity/peers/peer/addr

```





### 5.7. The Full PCEP Data Model

The module, "ietf-pcep", defines the basic components of a PCE speaker. The tree depth in the tree is set to 10.

```

module: ietf-pcep
  +--rw pcep!
    +--rw entity
      +--rw addr inet:ip-address
      +--rw enabled? boolean
      +--rw role pcep-role
      +--rw description? string
      +--rw speaker-entity-id? string {sync-opt}?
      +--rw admin-status? boolean
      +--ro index? uint32
      +--ro oper-status? pcep-oper-status
      +--rw domain
        | +--rw domain* [domain-type domain]
        |   +--rw domain-type domain-type
        |   +--rw domain domain
      +--rw capability
        | +--rw capability? bits
        | +--rw pce-initiated? boolean {pce-initiated}?
        | +--rw include-db-ver? boolean
        | | {stateful,sync-opt}?
        | +--rw trigger-resync? boolean
        | | {stateful,sync-opt}?
        | +--rw trigger-initial-sync? boolean
        | | {stateful,sync-opt}?
        | +--rw incremental-sync? boolean
        | | {stateful,sync-opt}?
        | +--rw sr {sr}?
        |   +--rw enabled? boolean
        |   +--rw msd-limit? boolean
        |   +--rw nai? boolean
      +--rw msd? uint8 {sr}?
      +--rw pce-info
        | +--rw scope
        | | +--rw path-scope? bits
        | | +--rw intra-area-pref? uint8
        | | +--rw inter-area-pref? uint8
        | | +--rw inter-as-pref? uint8
        | | +--rw inter-layer-pref? uint8
        | +--rw neigh-domains
        | | +--rw domain* [domain-type domain]
        | |   +--rw domain-type domain-type
        | |   +--rw domain domain
        | +--rw path-key {path-key}?

```



```

|   +--rw enabled?          boolean
|   +--rw discard-timer?    uint32
|   +--rw reuse-time?       uint32
|   +--rw pce-id?           inet:ip-address
+--rw connect-timer?        uint16
+--rw connect-max-retry?    uint32
+--rw init-backoff-timer?   uint16
+--rw max-backoff-timer?    uint32
+--rw open-wait-timer?      uint16
+--rw keep-wait-timer?      uint16
+--rw keep-alive-timer?     uint8
+--rw dead-timer?          uint8
+--rw allow-negotiation?    boolean
+--rw max-keep-alive-timer? uint8
+--rw max-dead-timer?       uint8
+--rw min-keep-alive-timer? uint8
+--rw min-dead-timer?       uint8
+--rw sync-timer?          uint16 {svec}?
+--rw request-timer?        uint16
+--rw max-sessions?         uint32
+--rw max-unknown-reqs?     uint32
+--rw max-unknown-msgs?     uint32
+--rw pcep-notification-max-rate uint32
+--rw stateful-parameter {stateful}?
|   +--rw state-timeout?     uint32
|   +--rw redelegation-timeout? uint32
|   +--rw rpt-non-pcep-lsp?  boolean
+--rw of-list {objective-function}?
|   +--rw objective-function* [of]
|       +--rw of             identityref
+--ro lsp-db {stateful}?
|   +--ro db-ver?            uint64 {sync-opt}?
|   +--ro association-list*
|       |   [type id source global-source extended-id]
|       |   {association}?
|       |   +--ro type          identityref
|       |   +--ro id            uint16
|       |   +--ro source        inet:ip-address
|       |   +--ro global-source uint32
|       |   +--ro extended-id   string
|       |   +--ro lsp* [plsp-id pcc-id lsp-id]
|       |       +--ro plsp-id    -> /pcep/entity/lsp-db/lsp/plsp-id
|       |       +--ro pcc-id     -> /pcep/entity/lsp-db/lsp/pcc-id
|       |       +--ro lsp-id     -> /pcep/entity/lsp-db/lsp/lsp-id
|       +--ro lsp* [plsp-id pcc-id lsp-id]
|           +--ro plsp-id        uint32
|           +--ro pcc-id         inet:ip-address
|           +--ro source?

```



```

|         |         -> /te:te/lsp-state/lsp/source
| +--ro destination?
|         |         -> /te:te/lsp-state/lsp/destination
| +--ro tunnel-id?
|         |         -> /te:te/lsp-state/lsp/tunnel-id
| +--ro lsp-id
|         |         -> /te:te/lsp-state/lsp/lsp-id
| +--ro extended-tunnel-id?
|         |         -> /te:te/lsp-state/lsp/extended-tunnel-id
| +--ro admin-state?          boolean
| +--ro operational-state?    operational-state
| +--ro delegated
|   | +--ro enabled?    boolean
|   | +--ro peer?      -> /pcep/entity/peers/peer/addr
|   | +--ro srp-id?    uint32
| +--ro initiation {pce-initiated}?
|   | +--ro enabled?    boolean
|   | +--ro peer?      -> /pcep/entity/peers/peer/addr
| +--ro symbolic-path-name?    string
| +--ro last-error?            identityref
| +--ro pst?                   identityref
| +--ro association-list*
|   [type id source global-source extended-id]
|   {association}?
|   +--ro type
|   |   -> /pcep/entity/lsp-db/association-list/type
|   +--ro id
|   |   -> /pcep/entity/lsp-db/association-list/id
|   +--ro source          leafref
|   +--ro global-source   leafref
|   +--ro extended-id     leafref
+--ro path-keys {path-key}?
| +--ro path-keys* [path-key]
|   +--ro path-key          uint16
|   +--ro cps
|   | +--ro explicit-route-objects* [index]
|   | | +--ro index                      uint32
|   | | +--ro (type)?
|   | |   +--:(numbered-node-hop)
|   | |   | +--ro numbered-node-hop
|   | |   | | +--ro node-id      te-node-id
|   | |   | | +--ro hop-type?    te-hop-type
|   | |   +--:(numbered-link-hop)
|   | |   | +--ro numbered-link-hop
|   | |   | | +--ro link-tp-id    te-tp-id
|   | |   | | +--ro hop-type?     te-hop-type
|   | |   | | +--ro direction?    te-link-direction
|   | |   +--:(unnumbered-link-hop)

```



```

|         |         | +--ro unnumbered-link-hop
|         |         |   +--ro link-tp-id      te-tp-id
|         |         |   +--ro node-id        te-node-id
|         |         |   +--ro hop-type?      te-hop-type
|         |         |   +--ro direction?     te-link-direction
|         |         +---:(as-number)
|         |         |   +--ro as-number-hop
|         |         |   +--ro as-number      inet:as-number
|         |         |   +--ro hop-type?     te-hop-type
|         |         +---:(label)
|         |         |   +--ro label-hop
|         |         |   +--ro te-label
|         |         |   +--ro (technology)?
|         |         |   |   ...
|         |         |   +--ro direction?
|         |         |       te-label-direction
| +--ro pcc-original?  -> /pcep/entity/peers/peer/addr
| +--ro req-id?        uint32
| +--ro retrieved?     boolean
| +--ro pcc-retrieved? -> /pcep/entity/peers/peer/addr
| +--ro creation-time? yang:timestamp
| +--ro discard-time?  uint32
| +--ro reuse-time?    uint32
+--rw peers
  +--rw peer* [addr]
    +--rw addr                inet:ip-address
    +--rw role                 pcep-role
    +--rw description?        string
    +--rw domain
      +--rw domain* [domain-type domain]
        +--rw domain-type    domain-type
        +--rw domain         domain
    +--rw capability
      +--rw capability?      bits
      +--rw pce-initiated?   boolean
      |   {pce-initiated}?
      +--rw include-db-ver?  boolean
      |   {stateful, sync-opt}?
      +--rw trigger-resync?  boolean
      |   {stateful, sync-opt}?
      +--rw trigger-initial-sync? boolean
      |   {stateful, sync-opt}?
      +--rw incremental-sync? boolean
      |   {stateful, sync-opt}?
      +--rw sr {sr}?
        +--rw enabled?       boolean
        +--rw msd-limit?     boolean
        +--rw nai?           boolean

```





```

+--rw msd?                               uint8 {sr}?
+--rw pce-info
|   +--rw scope
|   |   +--rw path-scope?                bits
|   |   +--rw intra-area-pref?          uint8
|   |   +--rw inter-area-pref?          uint8
|   |   +--rw inter-as-pref?            uint8
|   |   +--rw inter-layer-pref?         uint8
|   +--rw neigh-domains
|       +--rw domain* [domain-type domain]
|           +--rw domain-type            domain-type
|           +--rw domain                 domain
+--rw delegation-pref?                    uint8 {stateful}?
+--rw auth
|   +--rw (auth-type-selection)?
|       +--:(auth-key-chain)
|       |   +--rw key-chain?
|       |       |   key-chain:key-chain-ref
|       +--:(auth-key)
|       |   +--rw crypto-algorithm        identityref
|       |   +--rw (key-string-style)?
|       |       +--:(keystring)
|       |       |   +--rw keystring?      string
|       |       +--:(hexadecimal)
|       |           {key-chain:hex-key-string}?
|       |           +--rw hexadecimal-string?
|       |               yang:hex-string
|       +--:(auth-tls) {tls}?
|           +--rw (role)?
|               +--:(server)
|               |   +--rw tls-server
|               |       +--rw server-identity
|               |       |   ...
|               |       +--rw client-authentication!
|               |       |   ...
|               |       +--rw hello-params
|               |           {tls-server-hello-params-config}?
|               |           ...
|               |       +--rw keepalives!
|               |           {tls-server-keepalives}?
|               |           ...
|               +--:(client)
|                   +--rw tls-client
|                   +--rw client-identity
|                   |   ...
|                   +--rw server-authentication
|                   |   ...
|                   +--rw hello-params

```



```

|           |           {tls-client-hello-params-config}?
|           |           ...
|           +--rw keepalives!
|           |           {tls-client-keepalives}?
|           |           ...
+--ro discontinuity-time?    yang:timestamp
+--ro initiate-session?     boolean
+--ro session-exists?       boolean
+--ro session-up-time?      yang:timestamp
+--ro session-fail-time?    yang:timestamp
+--ro session-fail-up-time? yang:timestamp
+--ro sessions
  +--ro session* [initiator]
    +--ro initiator          pcep-initiator
    +--ro role?
    |   -> /pcep/entity/role
    +--ro state-last-change? yang:timestamp
    +--ro state?             pcep-sess-state
    +--ro session-creation?  yang:timestamp
    +--ro connect-retry?     yang:counter32
    +--ro local-id?          uint8
    +--ro remote-id?         uint8
    +--ro keepalive-timer?   uint8
    +--ro peer-keepalive-timer? uint8
    +--ro dead-timer?        uint8
    +--ro peer-dead-timer?   uint8
    +--ro ka-hold-time-rem?  uint8
    +--ro overloaded?        boolean
    +--ro overload-time?     uint32
    +--ro peer-overloaded?   boolean
    +--ro peer-overload-time? uint32
    +--ro lspdb-sync?        sync-state
    |   {stateful}?
    +--ro recv-db-ver?       uint64
    |   {stateful, sync-opt}?
    +--ro of-list {objective-function}?
    |   +--ro objective-function* [of]
    |   |   +--ro of      identityref
    +--ro pst-list
    |   +--ro path-setup-type* [pst]
    |   |   +--ro pst      identityref
    +--ro assoc-type-list {association}?
    |   +--ro assoc-type* [at]
    |   |   +--ro at      identityref
    +--ro speaker-entity-id? string {sync-opt}?
    +--ro discontinuity-time? yang:timestamp

```

rpccs:



```

+---x trigger-resync {stateful, sync-opt}?
  +---w input
    +---w pcc?    -> /pcep/entity/peers/peer/addr

```

notifications:

```

+---n pcep-session-up
|  +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
|  +--ro session-initiator?
|  |      -> /pcep/entity/peers/peer/sessions/session/initiator
|  +--ro state-last-change?  yang:timestamp
|  +--ro state?              pcep-sess-state
+---n pcep-session-down
|  +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
|  +--ro session-initiator?  pcep-initiator
|  +--ro state-last-change?  yang:timestamp
|  +--ro state?              pcep-sess-state
+---n pcep-session-local-overload
|  +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
|  +--ro session-initiator?
|  |      -> /pcep/entity/peers/peer/sessions/session/initiator
|  +--ro overloaded?         boolean
|  +--ro overload-time?      uint32
+---n pcep-session-local-overload-clear
|  +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
|  +--ro overloaded?         boolean
+---n pcep-session-peer-overload
|  +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
|  +--ro session-initiator?
|  |      -> /pcep/entity/peers/peer/sessions/session/initiator
|  +--ro peer-overloaded?     boolean
|  +--ro peer-overload-time?  uint32
+---n pcep-session-peer-overload-clear
  +--ro peer-addr?          -> /pcep/entity/peers/peer/addr
  +--ro peer-overloaded?     boolean

```

## 6. The Design of PCEP Statistics Data Model

The module, "ietf-pcep-stats", augments the ietf-pcep module to include statistics at the PCEP peer and session level.

```

module: ietf-pcep-stats
  augment /pcep:pcep/pcep:entity/pcep:peers/pcep:peer:
    +--ro num-sess-setup-ok?    yang:counter32
    +--ro num-sess-setup-fail?  yang:counter32
    +--ro pcep-stats
      +--ro avg-rsp-time?       uint32

```



```

+--ro lwm-rsp-time?          uint32
+--ro hwm-rsp-time?          uint32
+--ro num-pcreq-sent?         yang:counter32
+--ro num-pcreq-rcvd?        yang:counter32
+--ro num-pcrep-sent?         yang:counter32
+--ro num-pcrep-rcvd?        yang:counter32
+--ro num-pcerr-sent?         yang:counter32
+--ro num-pcerr-rcvd?        yang:counter32
+--ro num-pcntf-sent?         yang:counter32
+--ro num-pcntf-rcvd?        yang:counter32
+--ro num-keepalive-sent?     yang:counter32
+--ro num-keepalive-rcvd?     yang:counter32
+--ro num-unknown-rcvd?       yang:counter32
+--ro num-corrupt-rcvd?       yang:counter32
+--ro num-req-sent?           yang:counter32
+--ro num-req-sent-pend-rep?  yang:counter32
+--ro num-req-sent-ero-rcvd?  yang:counter32
+--ro num-req-sent-nopath-rcvd? yang:counter32
+--ro num-req-sent-cancel-rcvd? yang:counter32
+--ro num-req-sent-error-rcvd? yang:counter32
+--ro num-req-sent-timeout?   yang:counter32
+--ro num-req-sent-cancel-sent? yang:counter32
+--ro num-req-rcvd?           yang:counter32
+--ro num-req-rcvd-pend-rep?  yang:counter32
+--ro num-req-rcvd-ero-sent?  yang:counter32
+--ro num-req-rcvd-nopath-sent? yang:counter32
+--ro num-req-rcvd-cancel-sent? yang:counter32
+--ro num-req-rcvd-error-sent? yang:counter32
+--ro num-req-rcvd-cancel-rcvd? yang:counter32
+--ro num-rep-rcvd-unknown?   yang:counter32
+--ro num-req-rcvd-unknown?   yang:counter32
+--ro svec {pcep:svec}?
|  +--ro num-svec-sent?       yang:counter32
|  +--ro num-svec-req-sent?   yang:counter32
|  +--ro num-svec-rcvd?       yang:counter32
|  +--ro num-svec-req-rcvd?   yang:counter32
+--ro stateful {pcep:stateful}?
|  +--ro num-pcrpt-sent?      yang:counter32
|  +--ro num-pcrpt-rcvd?      yang:counter32
|  +--ro num-pcupd-sent?      yang:counter32
|  +--ro num-pcupd-rcvd?      yang:counter32
|  +--ro num-rpt-sent?        yang:counter32
|  +--ro num-rpt-rcvd?        yang:counter32
|  +--ro num-rpt-rcvd-error-sent? yang:counter32
|  +--ro num-upd-sent?        yang:counter32
|  +--ro num-upd-rcvd?        yang:counter32
|  +--ro num-upd-rcvd-unknown? yang:counter32
|  +--ro num-upd-rcvd-undelagated? yang:counter32
```





```
| +--ro num-upd-rcvd-error-sent?    yang:counter32
| +--ro initiation {pcep:pce-initiated}?
|   +--ro num-pcinitiate-sent?      yang:counter32
|   +--ro num-pcinitiate-rcvd?      yang:counter32
|   +--ro num-initiate-sent?        yang:counter32
|   +--ro num-initiate-rcvd?        yang:counter32
|   +--ro num-initiate-rcvd-error-sent? yang:counter32
+--ro path-key {pcep:path-key}?
| +--ro num-unknown-path-key?      yang:counter32
| +--ro num-exp-path-key?          yang:counter32
| +--ro num-dup-path-key?          yang:counter32
| +--ro num-path-key-no-attempt?    yang:counter32
+--ro num-req-sent-closed?          yang:counter32
+--ro num-req-rcvd-closed?          yang:counter32
augment /pcep:pcep/pcep:entity/pcep:peers/pcep:peer/pcep:sessions
    /pcep:session:
+--ro pcep-stats
  +--ro avg-rsp-time?               uint32
  +--ro lwm-rsp-time?               uint32
  +--ro hwm-rsp-time?               uint32
  +--ro num-pcreq-sent?              yang:counter32
  +--ro num-pcreq-rcvd?              yang:counter32
  +--ro num-pcrep-sent?              yang:counter32
  +--ro num-pcrep-rcvd?              yang:counter32
  +--ro num-pcerr-sent?              yang:counter32
  +--ro num-pcerr-rcvd?              yang:counter32
  +--ro num-pcntf-sent?              yang:counter32
  +--ro num-pcntf-rcvd?              yang:counter32
  +--ro num-keepalive-sent?          yang:counter32
  +--ro num-keepalive-rcvd?          yang:counter32
  +--ro num-unknown-rcvd?            yang:counter32
  +--ro num-corrupt-rcvd?            yang:counter32
  +--ro num-req-sent?                yang:counter32
  +--ro num-req-sent-pend-rep?        yang:counter32
  +--ro num-req-sent-ero-rcvd?        yang:counter32
  +--ro num-req-sent-nopath-rcvd?     yang:counter32
  +--ro num-req-sent-cancel-rcvd?     yang:counter32
  +--ro num-req-sent-error-rcvd?      yang:counter32
  +--ro num-req-sent-timeout?         yang:counter32
  +--ro num-req-sent-cancel-sent?     yang:counter32
  +--ro num-req-rcvd?                yang:counter32
  +--ro num-req-rcvd-pend-rep?        yang:counter32
  +--ro num-req-rcvd-ero-sent?        yang:counter32
  +--ro num-req-rcvd-nopath-sent?     yang:counter32
  +--ro num-req-rcvd-cancel-sent?     yang:counter32
  +--ro num-req-rcvd-error-sent?      yang:counter32
  +--ro num-req-rcvd-cancel-rcvd?     yang:counter32
  +--ro num-rep-rcvd-unknown?         yang:counter32
```



```

+--ro num-req-rcvd-unknown?      yang:counter32
+--ro svec {pcep:svec}?
| +--ro num-svec-sent?           yang:counter32
| +--ro num-svec-req-sent?       yang:counter32
| +--ro num-svec-rcvd?           yang:counter32
| +--ro num-svec-req-rcvd?       yang:counter32
+--ro stateful {pcep:stateful}?
| +--ro num-pcrpt-sent?           yang:counter32
| +--ro num-pcrpt-rcvd?           yang:counter32
| +--ro num-pcupd-sent?           yang:counter32
| +--ro num-pcupd-rcvd?           yang:counter32
| +--ro num-rpt-sent?             yang:counter32
| +--ro num-rpt-rcvd?             yang:counter32
| +--ro num-rpt-rcvd-error-sent?  yang:counter32
| +--ro num-upd-sent?             yang:counter32
| +--ro num-upd-rcvd?             yang:counter32
| +--ro num-upd-rcvd-unknown?     yang:counter32
| +--ro num-upd-rcvd-undelgated?  yang:counter32
| +--ro num-upd-rcvd-error-sent?  yang:counter32
| +--ro initiation {pcep:pce-initiated}?
|   +--ro num-pcinitiate-sent?     yang:counter32
|   +--ro num-pcinitiate-rcvd?     yang:counter32
|   +--ro num-initiate-sent?       yang:counter32
|   +--ro num-initiate-rcvd?       yang:counter32
|   +--ro num-initiate-rcvd-error-sent? yang:counter32
+--ro path-key {pcep:path-key}?
  +--ro num-unknown-path-key?      yang:counter32
  +--ro num-exp-path-key?          yang:counter32
  +--ro num-dup-path-key?          yang:counter32
  +--ro num-path-key-no-attempt?   yang:counter32

```

## 7. Advanced PCE Features

This document contains a specification of the base PCEP YANG module, "ietf-pcep" which provides the basic PCEP [[RFC5440](#)] data model.

This document further handles advanced PCE features like -

- o Capability and Scope
- o Domain information (local/neighbour)
- o Path-Key
- o Objective Function (OF)
- o Global Concurrent Optimization (GCO)



- o P2MP
- o GMPLS
- o Inter-Layer
- o Stateful PCE
- o Segment Routing (SR)
- o Authentication including PCEPS (TLS)

### **7.1. Stateful PCE's LSP-DB**

In the operational state of PCEP which supports stateful PCE mode, the list of LSP state are maintained in LSP-DB. The key is the PLSP-ID and the PCC IP address.

The PCEP data model contains the operational state of LSPs (/pcep/entity/lsp-db/lsp/) with PCEP specific attributes. The generic TE attributes of the LSP are defined in [[I-D.ietf-teas-yang-te](#)]. A reference to LSP state in TE model is maintained.

## **8. Open Issues and Next Step**

This section is added so that open issues can be tracked. This section would be removed when the document is ready for publication.

### **8.1. The PCE-Initiated LSP**

The TE Model at [[I-D.ietf-teas-yang-te](#)] should support creating of tunnels at the controller (PCE) and marking them as PCE-Initiated. The LSP-DB in the PCEP Yang (/pcep/entity/lsp-db/lsp/initiation) also marks the LSPs which are PCE-initiated.

## **9. Other Considerations**

### **9.1. PCEP over TLS (PCEPS)**

[RFC8253] describe the use of TLS in PCEP. The peer acting as the PCEP client MUST act as the TLS client. The TLS client actively opens the TLS connection and the TLS server passively listens for the incoming TLS connections. The well-known TCP port number 4189 is used by PCEP servers to listen for TCP connections established by PCEP over TLS clients. The TLS client MUST send the TLS ClientHello message to begin the TLS handshake. The TLS server MUST send a CertificateRequest in order to request a certificate from the TLS



client. Once the TLS handshake has finished, the client and the server MAY begin to exchange PCEP messages. Client and server identity verification is done before the PCEP open message is sent. This means that the identity verification is completed before the PCEP session is started..

## **10. PCEP YANG Modules**

### **10.1. ietf-pcep module**

RFC Ed.: In this section, replace all occurrences of 'XXXX' with the actual RFC number and all occurrences of the revision date below with the date of RFC publication (and remove this note).

```
<CODE BEGINS> file "ietf-pcep@2019-10-31.yang"
module ietf-pcep {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-pcep";
  prefix pcep;

  import ietf-inet-types {
    prefix inet;
    reference
      "RFC 6991: Common YANG Data Types";
  }
  import ietf-yang-types {
    prefix yang;
    reference
      "RFC 6991: Common YANG Data Types";
  }
  import ietf-te {
    prefix te;
    reference
      "I-D.ietf-teas-yang-te: A YANG Data Model for Traffic
      Engineering Tunnels and Interfaces";
  }
  import ietf-te-types {
    prefix te-types;
    reference
      "I-D.ietf-teas-yang-te-types: Traffic Engineering Common YANG
      Types";
  }
  import ietf-key-chain {
    prefix key-chain;
    reference
      "RFC 8177: YANG Data Model for Key Chains";
  }
}
```





```
import ietf-netconf-acm {
  prefix nacm;
  reference
    "RFC 8341: Network Configuration Protocol (NETCONF) Access
    Control Model";
}
import ietf-tls-server {
  prefix tlss;
  reference
    "I-D.ietf-netconf-tls-client-server: YANG Groupings for TLS
    Clients and TLS Servers";
}
import ietf-tls-client {
  prefix tlsc;
  reference
    "I-D.ietf-netconf-tls-client-server: YANG Groupings for TLS
    Clients and TLS Servers";
}
import ietf-ospf {
  prefix ospf;
  reference
    "I-D.ietf-ospf-yang: YANG Data Model for OSPF Protocol";
}
import ietf-isis {
  prefix isis;
  reference
    "I-D.ietf-isis-yang-isis-cfg: YANG Data Model for IS-IS
    Protocol";
}

organization
  "IETF PCE (Path Computation Element) Working Group";
contact
  "WG Web:  <https://tools.ietf.org/wg/pce/>
  WG List:  <mailto:pce@ietf.org>
  Editor:    Dhruv Dhody
             <mailto:dhruv.ietf@gmail.com>";
description
  "The YANG module defines a generic configuration and
  operational model for PCEP.
```

Copyright (c) 2019 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Simplified BSD License set forth in [Section 4.c](#) of the IETF Trust's Legal Provisions



Relating to IETF Documents

(<https://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

```
revision 2019-10-31 {
  description
    "Initial revision.";
  reference
    "RFC XXXX: A YANG Data Model for Path Computation
    Element Communications Protocol (PCEP)";
}
```

```
/*
 * Typedefs
 */
```

```
typedef pcep-role {
  type enumeration {
    enum unknown {
      value 0;
      description
        "An unknown role";
    }
    enum pcc {
      value 1;
      description
        "The role of a Path Computation Client";
    }
    enum pce {
      value 2;
      description
        "The role of Path Computation Element";
    }
    enum pcc-and-pce {
      value 3;
      description
        "The role of both Path Computation Client and
        Path Computation Element";
    }
  }
}
description
  "The role of a PCEP speaker.
  Takes one of the following values
  - unknown(0): the role is not known.
  - pcc(1): the role is of a Path Computation
    Client (PCC)."
```



```
- pce(2): the role is of a Path Computation
  Server (PCE).
- pccAndPce(3): the role is of both a PCC and
  a PCE.";
}

typedef pcep-oper-status {
  type enumeration {
    enum oper-status-up {
      value 1;
      description
        "The PCEP entity is active";
    }
    enum oper-status-down {
      value 2;
      description
        "The PCEP entity is inactive";
    }
    enum oper-status-going-up {
      value 3;
      description
        "The PCEP entity is activating";
    }
    enum oper-status-going-down {
      value 4;
      description
        "The PCEP entity is deactivating";
    }
    enum oper-status-failed {
      value 5;
      description
        "The PCEP entity has failed and will recover
        when possible.";
    }
    enum oper-status-failed-perm {
      value 6;
      description
        "The PCEP entity has failed and will not recover
        without operator intervention";
    }
  }
}
description
  "The operational status of the PCEP entity.
  Takes one of the following values
  - oper-status-up(1): Active
  - oper-status-down(2): Inactive
  - oper-status-going-up(3): Activating
  - oper-status-going-down(4): Deactivating
```



```
- oper-status-failed(5): Failed
- oper-status-failed-perm(6): Failed Permanantly";
reference
  "RFC 5440: Path Computation Element (PCE) Communication
  Protocol (PCEP)";
}

typedef pcep-initiator {
  type enumeration {
    enum local {
      value 1;
      description
        "The local PCEP entity initiated the session";
    }
    enum remote {
      value 2;
      description
        "The remote PCEP peer initiated the session";
    }
  }
  description
    "The initiator of the session, that is, whether the TCP
    connection was initiated by the local PCEP entity or
    the remote peer.
    Takes one of the following values
    - local(1): Initiated locally
    - remote(2): Initiated remotely";
}

typedef pcep-sess-state {
  type enumeration {
    enum tcp-pending {
      value 1;
      description
        "The tcp-pending state of PCEP session.";
    }
    enum open-wait {
      value 2;
      description
        "The open-wait state of PCEP session.";
    }
    enum keep-wait {
      value 3;
      description
        "The keep-wait state of PCEP session.";
    }
    enum session-up {
      value 4;
```





```
        description
            "The session-up state of PCEP session.";
    }
}
description
    "The current state of the session.
    The set of possible states excludes the idle state
    since entries do not exist in the idle state.
    Takes one of the following values
    - tcp-pending(1): PCEP TCP Pending state
    - open-wait(2): PCEP Open Wait state
    - keep-wait(3): PCEP Keep Wait state
    - session-up(4): PCEP Session Up state";
reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}

typedef domain-type {
    type enumeration {
        enum ospf-area {
            value 1;
            description
                "The OSPF area.";
        }
        enum isis-area {
            value 2;
            description
                "The IS-IS area.";
        }
        enum as {
            value 3;
            description
                "The Autonomous System (AS).";
        }
    }
}
description
    "The PCE Domain Type";
}

typedef domain-ospf-area {
    type ospf:area-id-type;
    description
        "OSPF Area ID.";
    reference
        "I-D.ietf-ospf-yang: YANG Data Model for OSPF Protocol";
}
```



```
typedef domain-isis-area {  
    type isis:area-address;  
    description  
        "IS-IS Area ID.";   
    reference  
        "I-D.ietf-isis-yang-isis-cfg: YANG Data Model for IS-IS  
        Protocol";  
}
```

```
typedef domain-as {  
    type inet:as-number;  
    description  
        "Autonomous System number.";   
}
```

```
typedef domain {  
    type union {  
        type domain-ospf-area;  
        type domain-isis-area;  
        type domain-as;  
    }  
    description  
        "The Domain Information";  
}
```

```
typedef operational-state {  
    type enumeration {  
        enum down {  
            value 0;  
            description  
                "not active.";   
        }  
        enum up {  
            value 1;  
            description  
                "signalled.";   
        }  
        enum active {  
            value 2;  
            description  
                "up and carrying traffic.";   
        }  
        enum going-down {  
            value 3;  
            description  
                "LSP is being torn down, resources are  
                being released.";   
        }  
    }  
}
```



```
    enum going-up {
      value 4;
      description
        "LSP is being signalled.";
    }
  }
  description
    "The operational status of the LSP";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}

typedef sync-state {
  type enumeration {
    enum pending {
      value 0;
      description
        "The state synchronization
        has not started.";
    }
    enum ongoing {
      value 1;
      description
        "The state synchronization
        is ongoing.";
    }
    enum finished {
      value 2;
      description
        "The state synchronization
        is finished.";
    }
  }
}
description
  "The LSP-DB state synchronization operational
  status.";
reference
  "RFC 8231: Path Computation Element Communication Protocol
  (PCEP) Extensions for Stateful PCE";
}

/*
 * Features
 */

feature svec {
  description
```



```
    "Support synchronized path computation.";
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}

feature gmpls {
  description
    "Support GMPLS.";
  reference
    "I-D.ietf-pce-gmpls-pcep-extensions: PCEP extensions for
    GMPLS";
}

feature objective-function {
  description
    "Support OF as per RFC 5541.";
  reference
    "RFC 5541: Encoding of Objective Functions in the Path
    Computation Element Communication Protocol (PCEP)";
}

feature global-concurrent {
  description
    "Support GCO as per RFC 5557.";
  reference
    "RFC 5557: Path Computation Element Communication Protocol
    (PCEP) Requirements and Protocol Extensions in Support of
    Global Concurrent Optimization";
}

feature path-key {
  description
    "Support path-key as per RFC 5520.";
  reference
    "RFC 5520: Preserving Topology Confidentiality in Inter-
    Domain Path Computation Using a Path-Key-Based Mechanism";
}

feature p2mp {
  description
    "Support P2MP as per RFC 8306.";
  reference
    "RFC 8306: Extensions to the Path Computation Element
    Communication Protocol (PCEP) for Point-to-Multipoint
    Traffic Engineering Label Switched Paths";
}
```





```
feature stateful {
  description
    "Support stateful PCE as per RFC 8231.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}

feature sync-opt {
  description
    "Support stateful sync optimization
    as per RFC 8232";
  reference
    "RFC 8232: Optimizations of Label Switched Path State
    Synchronization Procedures for a Stateful PCE";
}

feature pce-initiated {
  description
    "Support PCE-Initiated LSP as per
    RFC 8281.";
  reference
    "RFC 8281: Path Computation Element Communication Protocol
    (PCEP) Extensions for PCE-Initiated LSP Setup in a Stateful
    PCE Model";
}

feature tls {
  description
    "Support PCEP over TLS as per
    RFC 8253.";
  reference
    "RFC 8253: PCEPS: Usage of TLS to Provide a Secure Transport
    for the Path Computation Element Communication Protocol
    (PCEP)";
}

feature sr {
  description
    "Support Segment Routing for PCE.";
  reference
    "I-D.ietf-pce-segment-routing: PCEP Extensions for Segment
    Routing";
}

feature association {
  description
    "Support Association in PCEP.";
```



```
    reference
      "I-D.ietf-pce-association-group: PCEP Extensions for
        Establishing Relationships Between Sets of LSPs";
  }

/*
 * Identities
 */

identity lsp-error {
  if-feature "stateful";
  description
    "Base LSP error";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
      (PCEP) Extensions for Stateful PCE";
}

identity no-error-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "No error, LSP is fine.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
      (PCEP) Extensions for Stateful PCE";
}

identity unknown-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "Unknown reason.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
      (PCEP) Extensions for Stateful PCE";
}

identity limit-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "Limit reached for PCE-controlled LSPs.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
      (PCEP) Extensions for Stateful PCE";
}
```



```
identity pending-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "Too many pending LSP update requests.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}

identity unacceptable-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "Unacceptable parameters.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}

identity internal-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "Internal error.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}

identity admin-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "LSP administratively brought down.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}

identity preempted-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "LSP preempted.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}
```



```
}

identity rsvp-lsp-error {
  if-feature "stateful";
  base lsp-error;
  description
    "RSVP signaling error.";
  reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}

/*
 * Groupings
 */

grouping pce-scope {
  description
    "This grouping defines PCE path computation scope
    information which maybe relevant to PCE selection.
    This information corresponds to PCE auto-discovery
    information.";
  reference
    "RFC 5088: OSPF Protocol Extensions for Path
    Computation Element (PCE) Discovery
    RFC 5089: IS-IS Protocol Extensions for Path
    Computation Element (PCE) Discovery";
  leaf path-scope {
    type bits {
      bit intra-area-scope {
        description
          "PCE can compute intra-area paths.";
      }
      bit inter-area-scope {
        description
          "PCE can compute inter-area paths.";
      }
      bit inter-area-scope-default {
        description
          "PCE can act as a default PCE for inter-area
          path computation.";
      }
      bit inter-as-scope {
        description
          "PCE can compute inter-AS paths.";
      }
      bit inter-as-scope-default {
        description

```





```
        "PCE can act as a default PCE for inter-AS
        path computation.";
    }
    bit inter-layer-scope {
        description
            "PCE can compute inter-layer paths.";
    }
}
description
    "The field corresponding to the path scope bits";
}
leaf intra-area-pref {
    type uint8 {
        range "0..7";
    }
    description
        "The PCE's preference for intra-area TE LSP
        computation.";
}
leaf inter-area-pref {
    type uint8 {
        range "0..7";
    }
    description
        "The PCE's preference for inter-area TE LSP
        computation.";
}
leaf inter-as-pref {
    type uint8 {
        range "0..7";
    }
    description
        "The PCE's preference for inter-AS TE LSP
        computation.";
}
leaf inter-layer-pref {
    type uint8 {
        range "0..7";
    }
    description
        "The PCE's preference for inter-layer TE LSP
        computation.";
}
}

//pce-scope

grouping domain {
```



```
description
  "This grouping specifies a Domain where the
  PCEP speaker has topology visibility.";
leaf domain-type {
  type domain-type;
  description
    "The domain type.";
}
leaf domain {
  type domain;
  description
    "The domain Information.";
}
}

//domain

grouping info {
  description
    "This grouping specifies all information which
    maybe relevant to both PCC and PCE.
    This information corresponds to PCE auto-discovery
    information.";
  container domain {
    description
      "The local domain for the PCEP entity";
    list domain {
      key "domain-type domain";
      description
        "The local domain.";
      uses domain {
        description
          "The local domain for the PCEP entity.";
      }
    }
  }
}
container capability {
  description
    "The PCEP entity capability information of local
    PCEP entity. This maybe relevant to PCE selection
    as well. This information corresponds to PCE auto-
    discovery information.";
  reference
    "RFC 5088: OSPF Protocol Extensions for Path
    Computation Element (PCE) Discovery
    RFC 5089: IS-IS Protocol Extensions for Path
    Computation Element (PCE) Discovery";
  leaf capability {
```



```
type bits {
  bit gmpls {
    if-feature "gmpls";
    description
      "Path computation with GMPLS link
       constraints.";
  }
  bit bi-dir {
    description
      "Bidirectional path computation.";
  }
  bit diverse {
    description
      "Diverse path computation.";
  }
  bit load-balance {
    description
      "Load-balanced path computation.";
  }
  bit synchronize {
    if-feature "svec";
    description
      "Synchronized paths computation.";
  }
  bit objective-function {
    if-feature "objective-function";
    description
      "Support for multiple objective functions.";
  }
  bit add-path-constraint {
    description
      "Support for additive path constraints (max
       hop count, etc.).";
  }
  bit prioritization {
    description
      "Support for request prioritization.";
  }
  bit multi-request {
    description
      "Support for multiple requests per message.";
  }
  bit global-concurrent {
    if-feature "global-concurrent";
    description
      "Support for Global Concurrent Optimization
       (GCO).";
  }
}
```



```
    bit p2mp {
      if-feature "p2mp";
      description
        "Support for P2MP path computation.";
    }
    bit active {
      if-feature "stateful";
      description
        "Support for active stateful PCE.";
    }
    bit passive {
      if-feature "stateful";
      description
        "Support for passive stateful PCE.";
    }
    bit p2mp-active {
      if-feature "stateful";
      if-feature "p2mp";
      description
        "Support for active stateful PCE for P2MP.";
    }
    bit p2mp-passive {
      if-feature "stateful";
      if-feature "p2mp";
      description
        "Support for passive stateful PCE for P2MP.";
    }
    bit p2mp-pce-initiated {
      if-feature "stateful";
      if-feature "pce-initiated";
      if-feature "p2mp";
      description
        "Support for PCE-initiated LSP for P2MP.";
    }
  }
  description
    "The bits string indicating the capabilities";
  reference
    "RFC 5088: OSPF Protocol Extensions for Path
      Computation Element (PCE) Discovery
    RFC 5089: IS-IS Protocol Extensions for Path
      Computation Element (PCE) Discovery";
}
leaf pce-initiated {
  if-feature "pce-initiated";
  type boolean;
  description
    "Set to true if PCE-initiated LSP capability is
```





```
        enabled.";
    reference
        "RFC 8281: Path Computation Element Communication
        Protocol (PCEP) Extensions for PCE-Initiated LSP
        Setup in a Stateful PCE Model";
}
leaf include-db-ver {
    if-feature "stateful";
    if-feature "sync-opt";
    type boolean;
    description
        "Support inclusion of LSP-DB-VERSION
        in LSP object";
    reference
        "RFC 8232: Optimizations of Label Switched Path State
        Synchronization Procedures for a Stateful PCE";
}
leaf trigger-resync {
    if-feature "stateful";
    if-feature "sync-opt";
    type boolean;
    description
        "Support PCE triggered re-synchronization";
    reference
        "RFC 8232: Optimizations of Label Switched Path State
        Synchronization Procedures for a Stateful PCE";
}
leaf trigger-initial-sync {
    if-feature "stateful";
    if-feature "sync-opt";
    type boolean;
    description
        "PCE triggered initial synchronization";
    reference
        "RFC 8232: Optimizations of Label Switched Path State
        Synchronization Procedures for a Stateful PCE";
}
leaf incremental-sync {
    if-feature "stateful";
    if-feature "sync-opt";
    type boolean;
    description
        "Support incremental (delta) sync";
    reference
        "RFC 8232: Optimizations of Label Switched Path State
        Synchronization Procedures for a Stateful PCE";
}
container sr {
```



```
    if-feature "sr";
    description
      "If segment routing is supported";
    reference
      "I-D.ietf-pce-segment-routing: PCEP Extensions for Segment
      Routing";
    leaf enabled {
      type boolean;
      description
        "Set to true if SR is enabled";
    }
    leaf msd-limit {
      type boolean;
      default "false";
      description
        "True indicates no limit on MSD, the
        leaf msd is ignored";
    }
    leaf nai {
      type boolean;
      default "false";
      description
        "True indicates capability to resolve NAI
        to SID";
    }
  }
  //sr
}
//capability
leaf msd {
  if-feature "sr";
  type uint8;
  description
    "Maximum SID Depth for SR";
  reference
    "I-D.ietf-pce-segment-routing: PCEP Extensions for Segment
    Routing";
}
}

//info

grouping pce-info {
  description
    "This grouping specifies all PCE information
    which maybe relevant to the PCE selection.
    This information corresponds to PCE auto-discovery
    information.";
```



```
    container scope {
      description
        "The path computation scope";
      uses pce-scope;
    }
    container neigh-domains {
      description
        "The list of neighbour PCE-Domain
        toward which a PCE can compute
        paths";
      list domain {
        key "domain-type domain";
        description
          "The neighbour domain.";
        uses domain {
          description
            "The PCE neighbour domain.";
        }
      }
    }
  }
}

//pce-info

grouping notification-instance-hdr {
  description
    "This group describes common instance specific data
    for notifications.";
  leaf peer-addr {
    type leafref {
      path "/pcep/entity/peers/peer/addr";
    }
    description
      "Reference to peer address";
  }
}

// notification-instance-hdr

grouping notification-session-hdr {
  description
    "This group describes common session instance specific
    data for notifications.";
  leaf session-initiator {
    type leafref {
      path "/pcep/entity/peers/peer/sessions/"
        + "session/initiator";
    }
  }
}
```



```
        description
            "Reference to pcep session initiator leaf";
    }
}

// notification-session-hdr

grouping of-list {
    description
        "List of OF";
    reference
        "RFC 5541: Encoding of Objective Functions in the Path
        Computation Element Communication Protocol (PCEP)";
    list objective-function {
        key "of";
        description
            "The list of authorized OF";
        leaf of {
            type identityref {
                base te-types:objective-function-type;
            }
            description
                "The OF authorized";
        }
    }
}

/*
 * Configuration data nodes
 */

container pcep {
    presence "The PCEP is enabled";
    description
        "Parameters for list of configured PCEP entities
        on the device.";
    container entity {
        description
            "The configured PCEP entity on the device.";
        leaf addr {
            type inet:ip-address;
            mandatory true;
            description
                "The local Internet address of this PCEP entity.
                If operating as a PCE server, the PCEP entity
                listens on this address. If operating as a PCC,
                the PCEP entity binds outgoing TCP connections
                to this address. It is possible for the PCEP entity
```





```
        to operate both as a PCC and a PCE Server, in which
        case it uses this address both to listen for incoming
        TCP connections and to bind outgoing TCP connections.";
    }
    leaf enabled {
        type boolean;
        default "true";
        description
            "The administrative status of this PCEP
            Entity.";
    }
    leaf role {
        type pcep-role;
        mandatory true;
        description
            "The role that this entity can play.
            Takes one of the following values.
            - unknown(0): this PCEP Entity role is not
            known.
            - pcc(1): this PCEP Entity is a PCC.
            - pce(2): this PCEP Entity is a PCE.
            - pcc-and-pce(3): this PCEP Entity is both
            a PCC and a PCE.";
    }
    leaf description {
        type string;
        description
            "Description of the PCEP entity configured
            by the user";
    }
    leaf speaker-entity-id {
        if-feature "sync-opt";
        type string;
        description
            "The Speaker Entity Identifier";
        reference
            "RFC 8232: Optimizations of Label Switched
            Path State Synchronization Procedures for
            a Stateful PCE";
    }
    leaf admin-status {
        type boolean;
        default "true";
        description
            "The administrative status of this PCEP Entity.
            The value true represents admin status as up.
            This is the desired operational status as
            currently set by an operator or by default in
```



```
        the implementation. The value of oper-status
        represents the current status of an attempt to
        reach this desired status.";
    }
    leaf index {
        type uint32;
        config false;
        description
            "The index of the operational PCEP entity";
    }
    leaf oper-status {
        type pcep-oper-status;
        config false;
        description
            "The operational status of the PCEP entity.
            Takes one of the following values.
            - oper-status-up(1): the PCEP entity is active.
            - oper-status-down(2): the PCEP entity is inactive.
            - oper-status-going-up(3): the PCEP entity is
            activating.
            - oper-status-going-down(4): the PCEP entity is
            deactivating.
            - oper-status-failed(5): the PCEP entity has
            failed and will recover when possible.
            - oper-status-failed-perm(6): the PCEP entity
            has failed and will not recover without
            operator intervention.";
    }
    uses info {
        description
            "Local PCEP entity information";
    }
    container pce-info {
        when "../role = 'pce'"
            + "or "
            + "../role = 'pcc-and-pce'" {
            description
                "These fields are applicable when the role is PCE.";
        }
        description
            "The Local PCE Entity PCE information";
        uses pce-info {
            description
                "Local PCE information";
        }
        container path-key {
            if-feature "path-key";
            description
```



```
    "Path-Key Configuration";
  reference
    "RFC 5520: Preserving Topology Confidentiality in Inter-
      Domain Path Computation Using a Path-Key-Based Mechanism";
  leaf enabled {
    type boolean;
    description
      "Enabled or Disabled";
  }
  leaf discard-timer {
    type uint32;
    units "minutes";
    default "10";
    description
      "A timer to discard unwanted path-keys";
  }
  leaf reuse-time {
    type uint32;
    units "minutes";
    default "30";
    description
      "A time after which the path-keys could be reused";
  }
  leaf pce-id {
    type inet:ip-address;
    description
      "PCE Address to be used in each Path-Key Subobject
        (PKS)";
  }
}
}
leaf connect-timer {
  type uint16 {
    range "1..65535";
  }
  units "seconds";
  default "60";
  description
    "The time in seconds that the PCEP entity will wait
      to establish a TCP connection with a peer. If a
      TCP connection is not established within this time
      then PCEP aborts the session setup attempt.";
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
      Protocol (PCEP)";
}
leaf connect-max-retry {
  type uint32;
```



```
    default "5";
    description
      "The maximum number of times the system tries to
       establish a TCP connection to a peer before the
       session with the peer transitions to the idle
       state.";
    reference
      "RFC 5440: Path Computation Element (PCE) Communication
       Protocol (PCEP)";
  }
  leaf init-backoff-timer {
    type uint16 {
      range "1..65535";
    }
    units "seconds";
    description
      "The initial back-off time in seconds for retrying
       a failed session setup attempt to a peer.
       The back-off time increases for each failed
       session setup attempt, until a maximum back-off
       time is reached. The maximum back-off time is
       max-backoff-timer.";
    reference
      "RFC 5440: Path Computation Element (PCE) Communication
       Protocol (PCEP)";
  }
  leaf max-backoff-timer {
    type uint32;
    units "seconds";
    description
      "The maximum back-off time in seconds for retrying
       a failed session setup attempt to a peer.
       The back-off time increases for each failed session
       setup attempt, until this maximum value is reached.
       Session setup attempts then repeat periodically
       without any further increase in back-off time.";
    reference
      "RFC 5440: Path Computation Element (PCE) Communication
       Protocol (PCEP)";
  }
  leaf open-wait-timer {
    type uint16 {
      range "1..65535";
    }
    units "seconds";
    default "60";
    description
      "The time in seconds that the PCEP entity will wait
```





```
    to receive an Open message from a peer after the
    TCP connection has come up.
    If no Open message is received within this time then
    PCEP terminates the TCP connection and deletes the
    associated sessions.";
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}
leaf keep-wait-timer {
  type uint16 {
    range "1..65535";
  }
  units "seconds";
  default "60";
  description
    "The time in seconds that the PCEP entity will wait
    to receive a Keepalive or PCErr message from a peer
    during session initialization after receiving an
    Open message. If no Keepalive or PCErr message is
    received within this time then PCEP terminates the
    TCP connection and deletes the associated
    sessions.";
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}
leaf keep-alive-timer {
  type uint8;
  units "seconds";
  default "30";
  description
    "The keep alive transmission timer that this PCEP
    entity will propose in the initial OPEN message of
    each session it is involved in. This is the
    maximum time between two consecutive messages sent
    to a peer. Zero means that the PCEP entity prefers
    not to send Keepalives at all.
    Note that the actual Keepalive transmission
    intervals, in either direction of an active PCEP
    session, are determined by negotiation between the
    peers as specified by RFC 5440, and so may differ
    from this configured value.";
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}
leaf dead-timer {
```



```
    type uint8;
    units "seconds";
    must '(. > ../keep-alive-timer)' {
        error-message "The dead timer must be "
            + "larger than the keep alive timer";
    }
    default "120";
    description
        "The dead timer that this PCEP entity will propose
        in the initial OPEN message of each session it is
        involved in. This is the time after which a peer
        should declare a session down if it does not
        receive any PCEP messages. Zero suggests that the
        peer does not run a dead timer at all.";
    reference
        "RFC 5440: Path Computation Element (PCE) Communication
        Protocol (PCEP)";
}
leaf allow-negotiation {
    type boolean;
    description
        "Whether the PCEP entity will permit negotiation of
        session parameters.";
}
leaf max-keep-alive-timer {
    type uint8;
    units "seconds";
    description
        "In PCEP session parameter negotiation in seconds,
        the maximum value that this PCEP entity will
        accept from a peer for the interval between
        Keepalive transmissions. Zero means that the PCEP
        entity will allow no Keepalive transmission at
        all.";
}
leaf max-dead-timer {
    type uint8;
    units "seconds";
    description
        "In PCEP session parameter negotiation in seconds,
        the maximum value that this PCEP entity will accept
        from a peer for the Dead timer. Zero means that
        the PCEP entity will allow not running a Dead
        timer.";
}
leaf min-keep-alive-timer {
    type uint8;
    units "seconds";
```



```
    description
      "In PCEP session parameter negotiation in seconds,
       the minimum value that this PCEP entity will
       accept for the interval between Keepalive
       transmissions. Zero means that the PCEP entity
       insists on no Keepalive transmission at all.";
  }
  leaf min-dead-timer {
    type uint8;
    units "seconds";
    description
      "In PCEP session parameter negotiation in
       seconds, the minimum value that this PCEP entity
       will accept for the Dead timer. Zero means that
       the PCEP entity insists on not running a Dead
       timer.";
  }
  leaf sync-timer {
    if-feature "svec";
    type uint16;
    units "seconds";
    default "60";
    description
      "The value of SyncTimer in seconds is used in the
       case of synchronized path computation request
       using the SVEC object. Consider the case where a
       PCReq message is received by a PCE that contains
       the SVEC object referring to M synchronized path
       computation requests. If after the expiration of
       the SyncTimer all the M path computation requests
       have not been, received a protocol error is
       triggered and the PCE MUST cancel the whole set
       of path computation requests.
       The aim of the SyncTimer is to avoid the storage
       of unused synchronized requests should one of
       them get lost for some reasons (for example, a
       misbehaving PCC).
       Zero means that the PCEP entity does not use the
       SyncTimer.";
    reference
      "RFC 5440: Path Computation Element (PCE)
       Communication Protocol (PCEP)";
  }
  leaf request-timer {
    type uint16 {
      range "1..65535";
    }
    units "seconds";
```



```
    description
      "The maximum time that the PCEP entity will wait
       for a response to a PCReq message.";
  }
  leaf max-sessions {
    type uint32;
    description
      "Maximum number of sessions involving this PCEP
       entity that can exist at any time.";
  }
  leaf max-unknown-reqs {
    type uint32;
    default "5";
    description
      "The maximum number of unrecognized requests and
       replies that any session on this PCEP entity is
       willing to accept per minute before terminating
       the session.
       A PCRep message contains an unrecognized reply
       if it contains an RP object whose request ID
       does not correspond to any in-progress request
       sent by this PCEP entity.
       A PCReq message contains an unrecognized request
       if it contains an RP object whose request ID is
       zero.";
    reference
      "RFC 5440: Path Computation Element (PCE)
       Communication Protocol (PCEP)";
  }
  leaf max-unknown-msgs {
    type uint32;
    default "5";
    description
      "The maximum number of unknown messages that any
       session on this PCEP entity is willing to accept
       per minute before terminating the session.";
    reference
      "RFC 5440: Path Computation Element (PCE)
       Communication Protocol (PCEP)";
  }
  leaf pcep-notification-max-rate {
    type uint32;
    mandatory true;
    description
      "This variable indicates the maximum number of
       notifications issued per second. If events
       occur more rapidly, the implementation may
       simply fail to emit these notifications during
```





```
        that period, or may queue them until an
        appropriate time. A value of 0 means no
        notifications are emitted and all should be
        discarded (that is, not queued).";
    }
    container stateful-parameter {
        if-feature "stateful";
        description
            "The configured stateful PCE parameters";
        leaf state-timeout {
            type uint32;
            units "seconds";
            description
                "When a PCEP session is terminated, a PCC
                waits for this time period before flushing
                LSP state associated with that PCEP session
                and reverting to operator-defined default
                parameters or behaviours.";
        }
        leaf redelegation-timeout {
            when "../role = 'pcc'"
                + "or "
                + "../role = 'pcc-and-pce'" {
                description
                    "This field is applicable when the role is
                    PCC";
            }
            type uint32;
            units "seconds";
            description
                "When a PCEP session is terminated, a PCC
                waits for this time period before revoking
                LSP delegation to a PCE and attempting to
                redelegate LSPs associated with the
                terminated PCEP session to an alternate
                PCE.";
        }
    }
    leaf rpt-non-pcep-lsp {
        when "../role = 'pcc'"
            + "or "
            + "../role = 'pcc-and-pce'" {
            description
                "This field is applicable when the role is
                PCC";
        }
        type boolean;
        default "true";
        description
```



```
        "If set, a PCC reports LSPs that are not
        controlled by any PCE (for example, LSPs
        that are statically configured at the
        PCC). ";
    }
    reference
    "RFC 8231: Path Computation Element Communication Protocol
    (PCEP) Extensions for Stateful PCE";
}
container of-list {
    when "../role = 'pce'"
    + "or "
    + "../role = 'pcc-and-pce'" {
        description
        "These field are applicable when the role is
        PCE";
    }
    if-feature "objective-function";
    uses of-list;
    description
    "The authorized OF-List at PCE for all peers";
}
container lsp-db {
    if-feature "stateful";
    config false;
    description
    "The LSP-DB";
    leaf db-ver {
        when "../role = 'pcc'"
        + "or "
        + "../role = 'pcc-and-pce'" {
            description
            "This field is applicable when the role is
            PCC";
        }
        if-feature "sync-opt";
        type uint64;
        description
        "The LSP State Database Version Number";
    }
}
list association-list {
    if-feature "association";
    key "type id source global-source extended-id";
    description
    "List of all PCEP associations";
    reference
    "I-D.ietf-pce-association-group: PCEP
    Extensions for Establishing Relationships
```



```
    Between Sets of LSPs";
  leaf type {
    type identityref {
      base te-types:association-type;
    }
    description
      "The PCEP association type";
  }
  leaf id {
    type uint16;
    description
      "PCEP Association ID";
  }
  leaf source {
    type inet:ip-address;
    description
      "PCEP Association Source.";
  }
  leaf global-source {
    type uint32;
    description
      "PCEP Association Global Source.";
  }
  leaf extended-id {
    type string;
    description
      "Additional information to support unique
       identification.";
  }
  list lsp {
    key "plsp-id pcc-id lsp-id";
    description
      "List of all LSP in this association";
    leaf plsp-id {
      type leafref {
        path "/pcep/entity/lsp-db/"
          + "lsp/plsp-id";
      }
      description
        "Reference to PLSP-ID in LSP-DB";
    }
    leaf pcc-id {
      type leafref {
        path "/pcep/entity/lsp-db/"
          + "lsp/pcc-id";
      }
      description
        "Reference to PCC-ID in LSP-DB";
    }
  }
}
```



```
    }
    leaf lsp-id {
      type leafref {
        path "/pcep/entity/lsp-db/"
          + "lsp/lsp-id";
      }
      description
        "Reference to LSP ID in LSP-DB";
    }
  }
}
list lsp {
  key "plsp-id pcc-id lsp-id";
  description
    "List of all LSPs in LSP-DB";
  leaf plsp-id {
    type uint32 {
      range "1..1048575";
    }
    description
      "A PCEP-specific identifier for the LSP. A PCC
        creates a unique PLSP-ID for each LSP that is
        constant for the lifetime of a PCEP session.
        PLSP-ID is 20 bits with 0 and 0xFFFFF are
        reserved";
  }
  leaf pcc-id {
    type inet:ip-address;
    description
      "The local internet address of the PCC, that
        generated the PLSP-ID.";
  }
  leaf source {
    type leafref {
      path "/te:te/te:lsps-state/te:lsp/te:source";
    }
    description
      "Tunnel sender address extracted from
        SENDER_TEMPLATE object";
    reference
      "RFC 3209: RSVP-TE: Extensions to RSVP for
        LSP Tunnels";
  }
  leaf destination {
    type leafref {
      path "/te:te/te:lsps-state/te:lsp/te:"
        + "destination";
    }
  }
}
```





```
    description
      "Tunnel endpoint address extracted from
      SESSION object";
    reference
      "RFC 3209: RSVP-TE: Extensions to RSVP for
      LSP Tunnels";
  }
  leaf tunnel-id {
    type leafref {
      path "/te:te/te:lsps-state/te:lsp/te:tunnel-id";
    }
    description
      "Tunnel identifier used in the SESSION
      that remains constant over the life
      of the tunnel.";
    reference
      "RFC 3209: RSVP-TE: Extensions to RSVP for
      LSP Tunnels";
  }
  leaf lsp-id {
    type leafref {
      path "/te:te/te:lsps-state/te:lsp/te:lsp-id";
    }
    description
      "Identifier used in the SENDER_TEMPLATE
      and the FILTER_SPEC that can be changed
      to allow a sender to share resources with
      itself.";
    reference
      "RFC 3209: RSVP-TE: Extensions to RSVP for
      LSP Tunnels";
  }
  leaf extended-tunnel-id {
    type leafref {
      path "/te:te/te:lsps-state/te:lsp/te:"
        + "extended-tunnel-id";
    }
    description
      "Extended Tunnel ID of the LSP.";
    reference
      "RFC 3209: RSVP-TE: Extensions to RSVP for
      LSP Tunnels";
  }
  leaf admin-state {
    type boolean;
    description
      "The desired operational state";
  }
}
```



```
leaf operational-state {
  type operational-state;
  description
    "The operational status of the LSP";
}
container delegated {
  description
    "The delegation related parameters";
  leaf enabled {
    type boolean;
    description
      "LSP is delegated or not";
  }
  leaf peer {
    type leafref {
      path "/pcep/entity/peers/peer/addr";
    }
    must '(!../enabled = true())' {
      error-message "The LSP must be delegated";
    }
    description
      "At the PCC, the reference to the PCEP peer to
       which LSP is delegated; At the PCE, the
       reference to the PCEP peer which delegated this
       LSP";
  }
  leaf srp-id {
    type uint32;
    description
      "The last SRP-ID-number associated with this
       LSP.";
  }
}
container initiation {
  if-feature "pce-initiated";
  description
    "The PCE initiation related parameters";
  reference
    "RFC 8281: Path Computation Element Communication
     Protocol (PCEP) Extensions for PCE-Initiated LSP
     Setup in a Stateful PCE Model";
  leaf enabled {
    type boolean;
    description
      "Set to true if this LSP is initiated by a PCE";
  }
  leaf peer {
    type leafref {
```



```
        path "/pcep/entity/peers/peer/addr";
    }
    must '(!../enabled = true())' {
        error-message "The LSP must be PCE-Initiated";
    }
    description
        "At the PCC, the reference to the PCEP peer
        that initiated this LSP; At the PCE, the
        reference to the PCEP peer where the LSP
        is initiated";
    }
}
leaf symbolic-path-name {
    type string;
    description
        "The symbolic path name associated with the LSP.";
    reference
        "RFC 8231: Path Computation Element Communication
        Protocol (PCEP) Extensions for Stateful PCE";
}
leaf last-error {
    type identityref {
        base lsp-error;
    }
    description
        "The last error for the LSP.";
}
leaf pst {
    type identityref {
        base te-types:path-signaling-type;
    }
    default "te-types:path-setup-rsvp";
    description
        "The Path Setup Type";
    reference
        "RFC 8408: Conveying Path Setup Type in PCE
        Communication Protocol (PCEP) Messages";
}
list association-list {
    if-feature "association";
    key "type id source global-source extended-id";
    description
        "List of all PCEP associations";
    leaf type {
        type leafref {
            path "/pcep/entity/lsp-db/"
                + "association-list/type";
        }
    }
}
```



```
        description
            "PCEP Association Type";
    }
    leaf id {
        type leafref {
            path "/pcep/entity/lsp-db/"
                + "association-list/id";
        }
        description
            "PCEP Association ID";
    }
    leaf source {
        type leafref {
            path "/pcep/entity/lsp-db/"
                + "association-list/source";
        }
        description
            "PCEP Association Source.";
    }
    leaf global-source {
        type leafref {
            path "/pcep/entity/lsp-db/"
                + "association-list/global-source";
        }
        description
            "PCEP Association Global Source.";
    }
    leaf extended-id {
        type leafref {
            path "/pcep/entity/lsp-db/"
                + "association-list/extended-id";
        }
        description
            "Additional information to
            support unique identification.";
    }
    reference
        "I-D.ietf-pce-association-group: PCEP
        Extensions for Establishing Relationships
        Between Sets of LSPs";
}
}
}
container path-keys {
    when "../role = 'pce' or ../role = 'pcc-and-pce'" {
        description
            "These fields are applicable when the role is
            PCE";
    }
}
```





```
}
if-feature "path-key";
config false;
description
  "The path-keys generated by the PCE";
reference
  "RFC 5520: Preserving Topology Confidentiality
  in Inter-Domain Path Computation Using a Path-
  Key-Based Mechanism";
list path-keys {
  key "path-key";
  description
    "The list of path-keys generated by the PCE";
  leaf path-key {
    type uint16;
    description
      "The identifier, or token used to represent
      the Confidential Path Segment (CPS) within
      the context of the PCE";
  }
  container cps {
    description
      "The Confidential Path Segment (CPS)";
    list explicit-route-objects {
      key "index";
      description
        "List of explicit route objects";
      leaf index {
        type uint32;
        description
          "ERO subobject index";
      }
      uses te-types:explicit-route-hop;
    }
  }
}
leaf pcc-original {
  type leafref {
    path "/pcep/entity/peers/peer/addr";
  }
  description
    "Reference to PCC peer address of
    the original request";
}
leaf req-id {
  type uint32;
  description
    "The request ID of the original PCReq.";
}
```



```
    leaf retrieved {
      type boolean;
      description
        "If path-key has been retrieved yet";
    }
    leaf pcc-retrieved {
      type leafref {
        path "/pcep/entity/peers/peer/addr";
      }
      must '(!../retrieved = true())' {
        error-message "The Path-key should be retrieved";
      }
      description
        "Reference to PCC peer address which
         retrieved the path-key";
    }
    leaf creation-time {
      type yang:timestamp;
      description
        "The timestamp value at the time this Path-Key
         was created.";
    }
    leaf discard-time {
      type uint32;
      units "minutes";
      description
        "A time after which this path-keys will be
         discarded";
    }
    leaf reuse-time {
      type uint32;
      units "minutes";
      description
        "A time after which this path-keys could be
         reused";
    }
  }
}
container peers {
  description
    "The list of configured peers for the
     entity (remote PCE)";
  list peer {
    key "addr";
    description
      "The peer configured for the entity.
       (remote PCE)";
    leaf addr {
```



```
    type inet:ip-address;
    description
      "The local Internet address of this
       PCEP peer.";
  }
  leaf role {
    type pcep-role;
    mandatory true;
    description
      "The role of the PCEP Peer.
       Takes one of the following values.
       - unknown(0): this PCEP peer role is not
        known.
       - pcc(1): this PCEP peer is a PCC.
       - pce(2): this PCEP peer is a PCE.
       - pcc-and-pce(3): this PCEP peer
        is both a PCC and a PCE.";
  }
  leaf description {
    type string;
    description
      "Description of the PCEP peer
       configured by the user";
  }
  uses info {
    description
      "PCE Peer information";
  }
  container pce-info {
    uses pce-info {
      description
        "PCE Peer information";
    }
    description
      "The PCE Peer information";
  }
  leaf delegation-pref {
    if-feature "stateful";
    type uint8 {
      range "0..7";
    }
    description
      "The PCE peer delegation preference.";
  }
  container auth {
    description
      "The Authentication options";
    choice auth-type-selection {
```



```
description
  "Options for expressing authentication
  setting.";
case auth-key-chain {
  leaf key-chain {
    type key-chain:key-chain-ref;
    description
      "key-chain name.";
  }
}
case auth-key {
  leaf crypto-algorithm {
    type identityref {
      base key-chain:crypto-algorithm;
    }
    mandatory true;
    description
      "Cryptographic algorithm associated
      with key.";
  }
  choice key-string-style {
    description
      "Key string styles";
    case keystack {
      leaf keystack {
        nacm:default-deny-all;
        type string;
        description
          "Key string in ASCII format.";
      }
    }
    case hexadecimal {
      if-feature "key-chain:hex-key-string";
      leaf hexadecimal-string {
        nacm:default-deny-all;
        type yang:hex-string;
        description
          "Key in hexadecimal string format. When
          compared to ASCII, specification in
          hexadecimal affords greater key entropy
          with the same number of internal
          key-string octets. Additionally, it
          discourages usage of well-known words or
          numbers.";
      }
    }
  }
}
}
```





```
    case auth-tls {
      if-feature "tls";
      choice role {
        description
          "The role of the local entity";
        case server {
          container tls-server {
            uses tlss:tls-server-grouping {
              description
                "Server TLS information.";
            }
            description
              "TLS related information";
          }
        }
        case client {
          container tls-client {
            uses tlsc:tls-client-grouping {
              description
                "Client TLS information.";
            }
            description
              "TLS related information";
          }
        }
      }
    }
  }
}
leaf discontinuity-time {
  type yang:timestamp;
  config false;
  description
    "The timestamp of the time when the information and
    statistics were last reset.";
}
leaf initiate-session {
  type boolean;
  config false;
  description
    "Indicates whether the local PCEP entity initiates
    sessions to this peer, or waits for the peer to
    initiate a session.";
}
leaf session-exists {
  type boolean;
  config false;
  description
```



```
        "Indicates whether a session with
        this peer currently exists.";
    }
    leaf session-up-time {
        type yang:timestamp;
        config false;
        description
            "The timestamp value of the last time a
            session with this peer was successfully
            established.";
    }
    leaf session-fail-time {
        type yang:timestamp;
        config false;
        description
            "The timestamp value of the last time a
            session with this peer failed to be
            established.";
    }
    leaf session-fail-up-time {
        type yang:timestamp;
        config false;
        description
            "The timestamp value of the last time a
            session with this peer failed from
            active.";
    }
    container sessions {
        config false;
        description
            "This entry represents a single PCEP
            session in which the local PCEP entity participates.
            This entry exists only if the corresponding PCEP
            session has been initialized by some event, such as
            manual user configuration, auto-discovery of a peer,
            or an incoming TCP connection.";
    }
    list session {
        key "initiator";
        description
            "The list of sessions, note that for a time being
            two sessions may exist for a peer";
        leaf initiator {
            type pcep-initiator;
            description
                "The initiator of the session, that is, whether
                the TCP connection was initiated by the local
                PCEP entity or the peer.
                There is a window during session
```



```
        initialization where two sessions can exist
        between a pair of PCEP speakers, each
        initiated by one of the speakers. One of
        these sessions is always discarded before it
        leaves OpenWait state. However, before it is
        discarded, two sessions to the given peer
        appear transiently in this yang module. The
        sessions are distinguished by who initiated
        them, and so this field is the key.";
    }
    leaf role {
        type leafref {
            path "/pcep/entity/role";
        }
        description
            "The reference to peer role .";
    }
    leaf state-last-change {
        type yang:timestamp;
        description
            "The timestamp value at the time this
            session entered its current state as
            denoted by the state leaf.";
    }
    leaf state {
        type pcep-sess-state;
        description
            "The current state of the session.
            The set of possible states excludes the
            idle state since entries do not exist
            in the idle state.";
    }
    leaf session-creation {
        type yang:timestamp;
        description
            "The timestamp value at the time this
            session was created.";
    }
    leaf connect-retry {
        type yang:counter32;
        description
            "The number of times that the local PCEP
            entity has attempted to establish a TCP
            connection for this session without
            success. The PCEP entity gives up when
            this reaches connect-max-retry.";
    }
    leaf local-id {
```



```
type uint8;
description
  "The value of the PCEP session ID used by
  the local PCEP entity in the Open message
  for this session. If state is tcp-pending
  then this is the session ID that will be
  used in the Open message. Otherwise, this
  is the session ID that was sent in the
  Open message.";
reference
  "RFC 5440: Path Computation Element (PCE)
  Communication Protocol (PCEP)";
}
leaf remote-id {
  type uint8;
  must "((../state != 'tcp-pending'"
    + "and "
    + "../state != 'open-wait' )"
    + "or "
    + "((../state = 'tcp-pending'"
    + " or "
    + "../state = 'open-wait' )"
    + "and (. = 0)))" {
    error-message "Invalid remote-id";
  }
  description
    "If state is tcp-pending or open-wait then
    this leaf is not used and MUST be set to
    zero.";
}
description
  "The value of the PCEP session ID used by the
  peer in its Open message for this session.";
reference
  "RFC 5440: Path Computation Element (PCE)
  Communication Protocol (PCEP)";
}
leaf keepalive-timer {
  type uint8;
  units "seconds";
  must "(../state = 'session-up'"
    + "or "
    + "(../state != 'session-up'"
    + "and (. = 0)))" {
    error-message "Invalid keepalive timer";
  }
  description
    "This field is used if and only if state is
    session-up. Otherwise, it is not used and
    MUST be set to zero.";
```





```
    }
    description
      "The agreed maximum interval at which the local
       PCEP entity transmits PCEP messages on this PCEP
       session. Zero means that the local PCEP entity
       never sends Keepalives on this session.";
    reference
      "RFC 5440: Path Computation Element (PCE)
       Communication Protocol (PCEP)";
  }
  leaf peer-keepalive-timer {
    type uint8;
    units "seconds";
    must "(../state = 'session-up'"
      + "or "
      + "(../state != 'session-up'"
      + "and "
      + "(. = 0)))" {
      error-message "Invalid Peer keepalive timer";
      description
        "This field is used if and only if state is
         session-up. Otherwise, it is not used and MUST
         be set to zero.";
    }
    description
      "The agreed maximum interval at which the peer
       transmits PCEP messages on this PCEP session.
       Zero means that the peer never sends Keepalives
       on this session.";
    reference
      "RFC 5440: Path Computation Element (PCE)
       Communication Protocol (PCEP)";
  }
  leaf dead-timer {
    type uint8;
    units "seconds";
    description
      "The dead timer interval for this PCEP session.";
    reference
      "RFC 5440: Path Computation Element (PCE)
       Communication Protocol (PCEP)";
  }
  leaf peer-dead-timer {
    type uint8;
    units "seconds";
    must "((../state != 'tcp-pending'"
      + "and "
      + "../state != 'open-wait' )"

```



```
+ "or "
+ "((../state = 'tcp-pending'"
+ " or "
+ "../state = 'open-wait' )"
+ "and "
+ "(. = 0)))" {
error-message "Invalid Peer Dead timer";
description
  "If state is tcp-pending or open-wait then this
   leaf is not used and MUST be set to zero.";
}
description
  "The peer's dead-timer interval
   for this PCEP session.";
reference
  "RFC 5440: Path Computation Element (PCE)
   Communication Protocol (PCEP)";
}
leaf ka-hold-time-rem {
  type uint8;
  units "seconds";
  must "((../state != 'tcp-pending'"
    + "and "
    + "../state != 'open-wait' ) "
    + "or "
    + "((../state = 'tcp-pending'"
    + "or "
    + "../state = 'open-wait' )"
    + "and "
    + "(. = 0)))" {
error-message
  "Invalid Keepalive hold time remaining";
description
  "If state is tcp-pending or open-wait then this
   field is not used and MUST be set to zero.";
}
description
  "The keep alive hold time remaining for this
   session.";
}
leaf overloaded {
  type boolean;
  description
    "If the local PCEP entity has informed the peer that
     it is currently overloaded, then this is set to true.
     Otherwise, it is set to false.";
  reference
    "RFC 5440: Path Computation Element (PCE)";
```



```
        Communication Protocol (PCEP)";
    }
    leaf overload-time {
        type uint32;
        units "seconds";
        must '((../overloaded = true()) '
            + 'or ((../overloaded != true()) '
            + 'and (. = 0)))' {
            error-message "Invalid overload-time";
            description
                "This field is only used if overloaded is set to
                true. Otherwise, it is not used and MUST be set
                to zero.";
        }
        description
            "The interval of time that is remaining until the
            local PCEP entity will cease to be overloaded on
            this session.";
        reference
            "RFC 5440: Path Computation Element (PCE)
            Communication Protocol (PCEP)";
    }
    leaf peer-overloaded {
        type boolean;
        description
            "If the peer has informed the local PCEP entity
            that it is currently overloaded, then this is
            set to true. Otherwise, it is set to false.";
        reference
            "RFC 5440: Path Computation Element (PCE)
            Communication Protocol (PCEP)";
    }
    leaf peer-overload-time {
        type uint32;
        units "seconds";
        must '((../peer-overloaded = '
            + 'true()) or '
            + '((../peer-overloaded != '
            + 'true()))'
            + ' and '
            + '(. = 0)))' {
            error-message "Invalid peer overload time";
            description
                "This field is only used if peer-overloaded
                is set to true. Otherwise, it is not used
                and MUST be set to zero.";
        }
        description
    }
```



```
        "The interval of time that is remaining until
        the peer will cease to be overloaded. If it
        is not known how long the peer will stay in
        overloaded state, this leaf is set to zero.";
    reference
        "RFC 5440: Path Computation Element (PCE)
        Communication Protocol (PCEP)";
}
leaf lspdb-sync {
    if-feature "stateful";
    type sync-state;
    description
        "The LSP-DB state synchronization status.";
    reference
        "RFC 8231: Path Computation Element Communication
        Protocol (PCEP) Extensions for Stateful PCE";
}
leaf recv-db-ver {
    when "../role = 'pcc'"
        + "or "
        + "../role = 'pcc-and-pce'" {
        description
            "This field is applicable when the role is
            PCC";
    }
    if-feature "stateful";
    if-feature "sync-opt";
    type uint64;
    description
        "The last received LSP State Database Version
        Number";
    reference
        "RFC 8231: Path Computation Element Communication
        Protocol (PCEP) Extensions for Stateful PCE";
}
container of-list {
    when "../role = 'pce'"
        + "or "
        + "../role = 'pcc-and-pce'" {
        description
            "These fields are applicable when the role is
            PCE";
    }
    if-feature "objective-function";
    uses of-list;
    description
        "Indicate the list of supported OF on this
        session";
}
```





```
reference
  "RFC 5541: Encoding of Objective Functions in
  the Path Computation Element Communication
  Protocol (PCEP)";
}
container pst-list {
  when "../role = 'pce'"
    + "or "
    + "../role = 'pcc-and-pce'" {
    description
      "These fields are applicable when the role is
      PCE";
  }
  description
    "Indicate the list of supported
    PST on this session";
  reference
    "RFC 8408: Conveying Path Setup Type in PCE
    Communication Protocol (PCEP) Messages";
  list path-setup-type {
    key "pst";
    description
      "The list of authorized PST";
    leaf pst {
      type identityref {
        base te-types:path-signaling-type;
      }
      description
        "The PST authorized";
    }
  }
}
container assoc-type-list {
  if-feature "association";
  description
    "Indicate the list of supported association types
    on this session";
  reference
    "I-D.ietf-pce-association-group: PCEP
    Extensions for Establishing Relationships
    Between Sets of LSPs";
  list assoc-type {
    key "at";
    description
      "The list of authorized association types";
    leaf at {
      type identityref {
        base te-types:association-type;
      }
    }
  }
}
```



```
        }
        description
            "The association type authorized";
    }
}
}
leaf speaker-entity-id {
    if-feature "sync-opt";
    type string;
    description
        "The Speaker Entity Identifier";
    reference
        "RFC 8232: Optimizations of Label Switched
        Path State Synchronization Procedures for
        a Stateful PCE";
}
leaf discontinuity-time {
    type yang:timestamp;
    description
        "The timestamp value of the time when the
        statistics were last reset.";
}
}
// session
}
// sessions
}
//peer
}
//peers
}
//entity
}

//pcep
/*
 * Notifications
 */

notification pcep-session-up {
    description
        "This notification is sent when the value of
        '/pcep/peers/peer/sessions/session/state'
        enters the 'session-up' state.";
    uses notification-instance-hdr;
    uses notification-session-hdr;
    leaf state-last-change {
        type yang:timestamp;
```



```
    description
      "The timestamp value at the time this session
       entered its current state as denoted by the state
       leaf.";
  }
  leaf state {
    type pcep-sess-state;
    description
      "The current state of the session.
       The set of possible states excludes the idle state
       since entries do not exist in the idle state.";
  }
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
     Protocol (PCEP)";
}

//notification

notification pcep-session-down {
  description
    "This notification is sent when the value of
     '/pcep/peers/peer/sessions/session/state'
     leaves the 'session-up' state.";
  uses notification-instance-hdr;
  leaf session-initiator {
    type pcep-initiator;
    description
      "The initiator of the session.";
  }
  leaf state-last-change {
    type yang:timestamp;
    description
      "The timestamp value at the time this session
       entered its current state as denoted by the state
       leaf.";
  }
  leaf state {
    type pcep-sess-state;
    description
      "The current state of the session.
       The set of possible states excludes the idle state
       since entries do not exist in the idle state.";
  }
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
     Protocol (PCEP)";
}
```



```
//notification

notification pcep-session-local-overload {
  description
    "This notification is sent when the local PCEP entity
    enters overload state for a peer.";
  uses notification-instance-hdr;
  uses notification-session-hdr;
  leaf overloaded {
    type boolean;
    description
      "If the local PCEP entity has informed the peer
      that it is currently overloaded, then this is set
      to true. Otherwise, it is set to false.";
  }
  leaf overload-time {
    type uint32;
    units "seconds";
    description
      "The interval of time that is remaining until the
      local PCEP entity will cease to be overloaded on
      this session.";
  }
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}

//notification

notification pcep-session-local-overload-clear {
  description
    "This notification is sent when the local PCEP entity
    leaves overload state for a peer.";
  uses notification-instance-hdr;
  leaf overloaded {
    type boolean;
    description
      "If the local PCEP entity has informed the peer
      that it is currently overloaded, then this is set
      to true. Otherwise, it is set to false.";
  }
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}

//notification
```





```
notification pcep-session-peer-overload {
  description
    "This notification is sent when a peer enters overload
    state.";
  uses notification-instance-hdr;
  uses notification-session-hdr;
  leaf peer-overloaded {
    type boolean;
    description
      "If the peer has informed the local PCEP entity that
      it is currently overloaded, then this is set to
      true. Otherwise, it is set to false.";
  }
  leaf peer-overload-time {
    type uint32;
    units "seconds";
    description
      "The interval of time that is remaining until the
      peer will cease to be overloaded. If it is not
      known how long the peer will stay in overloaded
      state, this leaf is set to zero.";
  }
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}

//notification

notification pcep-session-peer-overload-clear {
  description
    "This notification is sent when a peer leaves overload
    state.";
  uses notification-instance-hdr;
  leaf peer-overloaded {
    type boolean;
    description
      "If the peer has informed the local PCEP entity that
      it is currently overloaded, then this is set to
      true. Otherwise, it is set to false.";
  }
  reference
    "RFC 5440: Path Computation Element (PCE) Communication
    Protocol (PCEP)";
}

//notification
/*
```



```
* RPC
*/

rpc trigger-resync {
  if-feature "stateful";
  if-feature "sync-opt";
  description
    "Trigger the resyncrinization at the PCE";
  reference
    "RFC 8232: Optimizations of Label Switched Path State
    Synchronization Procedures for a Stateful PCE";
  input {
    leaf pcc {
      type leafref {
        path "/pcep/entity/peers/peer/addr";
      }
      description
        "The IP address to identify the PCC. The state
        synchronization is re-triggered for all LSPs from
        the PCC. The rpc on the PCC will be ignored.";
    }
  }
  //input
}

//rpc
}
```

<CODE ENDS>

## [10.2.](#) ietf-pcep-stats module

```
<CODE BEGINS> file "ietf-pcep-stats@2019-10-31.yang"
module ietf-pcep-stats {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-pcep-stats";
  prefix pcep-stats;

  import ietf-pcep {
    prefix pcep;
    reference
      "RFC XXXX: A YANG Data Model for Path Computation
      Element Communications Protocol (PCEP)";
  }
  import ietf-yang-types {
    prefix yang;
    reference
```



```
    "RFC 6991: Common YANG Data Types";
}

organization
  "IETF PCE (Path Computation Element) Working Group";
contact
  "WG Web:  <https://tools.ietf.org/wg/pce/>
  WG List:  <mailto:pce@ietf.org>
  Editor:    Dhruv Dhody
             <mailto:dhruv.ietf@gmail.com>";
description
  "The YANG module augments the PCEP yang operational
  model with statistics, counters and telemetry data.

  Copyright (c) 2019 IETF Trust and the persons identified as
  authors of the code.  All rights reserved.

  Redistribution and use in source and binary forms, with or
  without modification, is permitted pursuant to, and subject
  to the license terms contained in, the Simplified BSD License
  set forth in Section 4.c of the IETF Trust's Legal Provisions
  Relating to IETF Documents
  (https://trustee.ietf.org/license-info).

  This version of this YANG module is part of RFC XXXX; see the
  RFC itself for full legal notices.";

revision 2019-10-31 {
  description
    "Initial revision.";
  reference
    "RFC XXXX:  A YANG Data Model for Path Computation
    Element Communications Protocol (PCEP)";
}

/*
 * Groupings
 */

grouping pcep-stats {
  description
    "This grouping defines statistics for PCEP. It is used
    for both peer and current session.";
  leaf avg-rsp-time {
    when "../pcep:role = 'pce'"
      + "or "
      + "../pcep:role = 'pcc-and-pce'" {
      description
```



```
        "Valid for PCEP Peer as PCE";
    }
    type uint32;
    units "milliseconds";
    description
        "The average response time. If an average response time
        has not been calculated then this leaf has the value
        zero.";
}
leaf lwm-rsp-time {
    when "../..//pcep:role = 'pce'"
        + "or "
        + "../..//pcep:role = 'pcc-and-pce'" {
        description
            "Valid for PCEP Peer as PCE";
    }
    type uint32;
    units "milliseconds";
    description
        "The smallest (low-water mark) response time seen.
        If no responses have been received then this leaf has
        the value zero.";
}
leaf hwm-rsp-time {
    when "../..//pcep:role = 'pce'"
        + "or "
        + "../..//pcep:role = 'pcc-and-pce'" {
        description
            "Valid for PCEP Peer as PCE";
    }
    type uint32;
    units "milliseconds";
    description
        "The greatest (high-water mark) response time seen.
        If no responses have been received then this object
        has the value zero.";
}
leaf num-pcreq-sent {
    when "../..//pcep:role = 'pce'"
        + "or "
        + "../..//pcep:role = 'pcc-and-pce'" {
        description
            "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of PCReq messages sent.";
}
```





```
leaf num-pcreq-rcvd {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of PCReq messages received.";
}
leaf num-pcrep-sent {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of PCRep messages sent.";
}
leaf num-pcrep-rcvd {
  when "../..//pcep:role = 'pce'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of PCRep messages received.";
}
leaf num-pcerr-sent {
  type yang:counter32;
  description
    "The number of PCErr messages sent.";
}
leaf num-pcerr-rcvd {
  type yang:counter32;
  description
    "The number of PCErr messages received.";
}
leaf num-pcntf-sent {
  type yang:counter32;
  description
    "The number of PCNtf messages sent.";
}
```



```
leaf num-pcntf-rcvd {
  type yang:counter32;
  description
    "The number of PCNtf messages received.";
}
leaf num-keepalive-sent {
  type yang:counter32;
  description
    "The number of Keepalive messages sent.";
}
leaf num-keepalive-rcvd {
  type yang:counter32;
  description
    "The number of Keepalive messages received.";
}
leaf num-unknown-rcvd {
  type yang:counter32;
  description
    "The number of unknown messages received.";
}
leaf num-corrupt-rcvd {
  type yang:counter32;
  description
    "The number of corrupted PCEP message received.";
}
leaf num-req-sent {
  when "../..//pcep:role = 'pce'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of requests sent. A request corresponds
    1:1 with an RP object in a PCReq message. This might
    be greater than num-pcreq-sent because multiple
    requests can be batched into a single PCReq
    message.";
}
leaf num-req-sent-pend-rep {
  when "../..//pcep:role = 'pce'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
```



```
    description
      "The number of requests that have been sent for
        which a response is still pending.";
  }
  leaf num-req-sent-ero-rcvd {
    when "../..//pcep:role = 'pce'"
      + "or "
      + "../..//pcep:role = 'pcc-and-pce'" {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of requests that have been sent for
        which a response with an ERO object was received.
        Such responses indicate that a path was
        successfully computed by the peer.";
  }
  leaf num-req-sent-nopath-rcvd {
    when "../..//pcep:role = 'pce'"
      + "or "
      + "../..//pcep:role = 'pcc-and-pce'" {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of requests that have been sent for
        which a response with a NO-PATH object was
        received. Such responses indicate that the peer
        could not find a path to satisfy the
        request.";
  }
  leaf num-req-sent-cancel-rcvd {
    when "../..//pcep:role = 'pce'"
      + "or "
      + "../..//pcep:role = 'pcc-and-pce'" {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of requests that were cancelled with
        a PCNtf message. This might be different than
        num-pcntf-rcvd because not all PCNtf messages are
        used to cancel requests, and a single PCNtf message
        can cancel multiple requests.";
  }
}
```



```
leaf num-req-sent-error-rcvd {
  when "../..//pcep:role = 'pce'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of requests that were rejected with a
    PCErr message. This might be different than
    num-pcerr-rcvd because not all PCErr messages are
    used to reject requests, and a single PCErr message
    can reject multiple requests.";
}
leaf num-req-sent-timeout {
  when "../..//pcep:role = 'pce'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of requests that have been sent to a peer
    and have been abandoned because the peer has taken too
    long to respond to them.";
}
leaf num-req-sent-cancel-sent {
  when "../..//pcep:role = 'pce'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of requests that were sent to the peer and
    explicitly cancelled by the local PCEP entity sending
    a PCNtf.";
}
leaf num-req-rcvd {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
}
```





```
type yang:counter32;
description
  "The number of requests received. A request
  corresponds 1:1 with an RP object in a PCReq
  message.
  This might be greater than num-pcreq-rcvd because
  multiple requests can be batched into a single
  PCReq message.";
}
leaf num-req-rcvd-pend-rep {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests that have been received for
    which a response is still pending.";
}
leaf num-req-rcvd-ero-sent {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests that have been received for
    which a response with an ERO object was sent. Such
    responses indicate that a path was successfully
    computed by the local PCEP entity.";
}
leaf num-req-rcvd-nopath-sent {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests that have been received for
    which a response with a NO-PATH object was sent. Such
    responses indicate that the local PCEP entity could
    not find a path to satisfy the request.";
```



```
}
leaf num-req-rcvd-cancel-sent {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests received that were cancelled
    by the local PCEP entity sending a PCNtf message.
    This might be different than num-pcntf-sent because
    not all PCNtf messages are used to cancel requests,
    and a single PCNtf message can cancel multiple
    requests.";
}
leaf num-req-rcvd-error-sent {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests received that were cancelled
    by the local PCEP entity sending a PCErr message.
    This might be different than num-pcerr-sent because
    not all PCErr messages are used to cancel requests,
    and a single PCErr message can cancel multiple
    requests.";
}
leaf num-req-rcvd-cancel-rcvd {
  when "../..//pcep:role = 'pcc'"
    + "or "
    + "../..//pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of requests that were received from the
    peer and explicitly cancelled by the peer sending
    a PCNtf.";
}
leaf num-rep-rcvd-unknown {
  when "../..//pcep:role = 'pce'"
```



```
    + "or "
    + "../../../pcep:role = 'pcc-and-pce'" {
description
    "Valid for PCEP Peer as PCE";
}
type yang:counter32;
description
    "The number of responses to unknown requests
    received. A response to an unknown request is a
    response whose RP object does not contain the
    request ID of any request that is currently
    outstanding on the session.";
}
leaf num-req-rcvd-unknown {
    when "../../../pcep:role = 'pcc'"
        + "or "
        + "../../../pcep:role = 'pcc-and-pce'" {
description
    "Valid for PCEP Peer as PCC";
}
type yang:counter32;
description
    "The number of unknown requests that have been
    received. An unknown request is a request
    whose RP object contains a request ID of zero.";
}
container svec {
    if-feature "pcep:svec";
description
    "If synchronized path computation is supported";
    leaf num-svec-sent {
        when "../../../pcep:role = 'pce'"
            + "or "
            + "../../../pcep:role = 'pcc-and-pce'" {
description
    "Valid for PCEP Peer as PCE";
}
type yang:counter32;
description
    "The number of SVEC objects sent in PCReq messages.
    An SVEC object represents a set of synchronized
    requests.";
}
    leaf num-svec-req-sent {
        when "../../../pcep:role = 'pce'"
            + "or "
            + "../../../pcep:role = 'pcc-and-pce'" {
description
```



```
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of requests sent that appeared in one
        or more SVEC objects.";
}
leaf num-svec-rcvd {
    when "../.../pcep:role = 'pcc'"
        + "or "
        + "../.../pcep:role = 'pcc-and-pce'" {
        description
            "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of SVEC objects received in PCReq
        messages. An SVEC object represents a set of
        synchronized requests.";
}
leaf num-svec-req-rcvd {
    when "../.../pcep:role = 'pcc'"
        + "or "
        + "../.../pcep:role = 'pcc-and-pce'" {
        description
            "Valid for PCEP Peer as PCC";
    }
    type yang:counter32;
    description
        "The number of requests received that appeared
        in one or more SVEC objects.";
}
}
//svec
container stateful {
    if-feature "pcep:stateful";
    description
        "Stateful PCE related statistics";
    leaf num-pcrpt-sent {
        when "../.../pcep:role = 'pce'"
            + "or "
            + "../.../pcep:role = 'pcc-and-pce'" {
            description
                "Valid for PCEP Peer as PCE";
        }
        type yang:counter32;
        description
            "The number of PCRpt messages sent.";
```





```
}
leaf num-pcrpt-rcvd {
  when "../.../pcep:role = 'pcc'"
    + "or "
    + "../.../pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of PCRpt messages received.";
}
leaf num-pcupd-sent {
  when "../.../pcep:role = 'pcc'"
    + "or "
    + "../.../pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of PCUpd messages sent.";
}
leaf num-pcupd-rcvd {
  when "../.../pcep:role = 'pce'"
    + "or "
    + "../.../pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of PCUpd messages received.";
}
leaf num-rpt-sent {
  when "../.../pcep:role = 'pce'"
    + "or "
    + "../.../pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCE";
  }
  type yang:counter32;
  description
    "The number of LSP Reports sent. A LSP report
    corresponds 1:1 with an LSP object in a PCRpt
    message. This might be greater than
    num-pcrpt-sent because multiple reports can
    be batched into a single PCRpt message.";
}
```



```
}
leaf num-rpt-rcvd {
  when "../.../pcep:role = 'pcc'"
    + "or "
    + "../.../pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of LSP Reports received. A LSP report
    corresponds 1:1 with an LSP object in a PCRpt
    message.
    This might be greater than num-pcrpt-rcvd because
    multiple reports can be batched into a single
    PCRpt message.";
}
leaf num-rpt-rcvd-error-sent {
  when "../.../pcep:role = 'pcc'"
    + "or "
    + "../.../pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of reports of LSPs received that were
    responded by the local PCEP entity by sending a
    PCErr message.";
}
leaf num-upd-sent {
  when "../.../pcep:role = 'pcc'"
    + "or "
    + "../.../pcep:role = 'pcc-and-pce'" {
    description
      "Valid for PCEP Peer as PCC";
  }
  type yang:counter32;
  description
    "The number of LSP updates sent. A LSP update
    corresponds 1:1 with an LSP object in a PCUpd
    message. This might be greater than
    num-pcupd-sent because multiple updates can
    be batched into a single PCUpd message.";
}
leaf num-upd-rcvd {
  when "../.../pcep:role = 'pce'"
    + "or "
```



```
    + "../../../pcep:role = 'pcc-and-pce'" {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of LSP Updates received. A LSP update
       corresponds 1:1 with an LSP object in a PCUpd
       message.
       This might be greater than num-pcupd-rcvd because
       multiple updates can be batched into a single
       PCUpd message.";
  }
  leaf num-upd-rcvd-unknown {
    when "../../../pcep:role = 'pce'"
      + "or "
      + "../../../pcep:role = 'pcc-and-pce'" {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of updates to unknown LSPs
       received. An update to an unknown LSP is a
       update whose LSP object does not contain the
       PLSP-ID of any LSP that is currently
       present.";
  }
  leaf num-upd-rcvd-undellegated {
    when "../../../pcep:role = 'pce'"
      + "or "
      + "../../../pcep:role = 'pcc-and-pce'" {
      description
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
      "The number of updates to not delegated LSPs
       received. An update to an undellegated LSP is a
       update whose LSP object does not contain the
       PLSP-ID of any LSP that is currently
       delegated to current PCEP session.";
  }
  leaf num-upd-rcvd-error-sent {
    when "../../../pcep:role = 'pce'"
      + "or "
      + "../../../pcep:role = 'pcc-and-pce'" {
      description
```



```
        "Valid for PCEP Peer as PCE";
    }
    type yang:counter32;
    description
        "The number of updates to LSPs received that were
        responded by the local PCEP entity by sending a
        PCErr message.";
}
container initiation {
    if-feature "pcep:pce-initiated";
    description
        "PCE-Initiated related statistics";
    leaf num-pcinitiate-sent {
        when "../.../.../pcep:role = 'pcc'"
            + "or "
            + "../.../.../pcep:role = 'pcc-and-pce'" {
            description
                "Valid for PCEP Peer as PCC";
        }
        type yang:counter32;
        description
            "The number of PCInitiate messages sent.";
    }
    leaf num-pcinitiate-rcvd {
        when "../.../.../pcep:role = 'pce'"
            + "or "
            + "../.../.../pcep:role = 'pcc-and-pce'" {
            description
                "Valid for PCEP Peer as PCE";
        }
        type yang:counter32;
        description
            "The number of PCInitiate messages received.";
    }
    leaf num-initiate-sent {
        when "../.../.../pcep:role = 'pcc'"
            + "or "
            + "../.../.../pcep:role = 'pcc-and-pce'" {
            description
                "Valid for PCEP Peer as PCC";
        }
        type yang:counter32;
        description
            "The number of LSP Initiation sent via PCE.
            A LSP initiation corresponds 1:1 with an LSP
            object in a PCInitiate message. This might be
            greater than num-pcinitiate-sent because
            multiple initiations can be batched into a
```





```
        single PCInitiate message.";
    }
    leaf num-initiate-rcvd {
        when "../../../pcep:role = 'pce'"
            + "or "
            + "../../../pcep:role = 'pcc-and-pce'" {
            description
                "Valid for PCEP Peer as PCE";
        }
        type yang:counter32;
        description
            "The number of LSP Initiation received from
             PCE. A LSP initiation corresponds 1:1 with
             an LSP object in a PCInitiate message. This
             might be greater than num-pcinitiate-rcvd
             because multiple initiations can be batched
             into a single PCInitiate message.";
    }
    leaf num-initiate-rcvd-error-sent {
        when "../../../pcep:role = 'pce'"
            + "or "
            + "../../../pcep:role = 'pcc-and-pce'" {
            description
                "Valid for PCEP Peer as PCE";
        }
        type yang:counter32;
        description
            "The number of initiations of LSPs received
             that were responded by the local PCEP entity
             by sending a PCErr message.";
    }
}
//initiation
}
//stateful
container path-key {
    when "../../../pcep:role = 'pcc'"
        + "or "
        + "../../../pcep:role = 'pcc-and-pce'" {
        description
            "Valid for PCEP Peer as PCC";
    }
    if-feature "pcep:path-key";
    description
        "If Path-Key is supported";
    leaf num-unknown-path-key {
        type yang:counter32;
        description
```



```
        "The number of attempts to expand an unknown
          path-key.";
    }
    leaf num-exp-path-key {
        type yang:counter32;
        description
            "The number of attempts to expand an expired
              path-key.";
    }
    leaf num-dup-path-key {
        type yang:counter32;
        description
            "The number of duplicate attempts to expand same
              path-key.";
    }
    leaf num-path-key-no-attempt {
        type yang:counter32;
        description
            "The number of expired path-keys with no attempt to
              expand it.";
    }
}
//path-key
}

//pcep-stats
/*
 * Augment modules to add statistics
 */

augment "/pcep:pcep/pcep:entity/pcep:peers/pcep:peer" {
    description
        "Augmenting the statistics";
    leaf num-sess-setup-ok {
        type yang:counter32;
        config false;
        description
            "The number of PCEP sessions successfully established with
              the peer, including any current session. This counter is
              incremented each time a session with this peer is
              successfully established.";
    }
    leaf num-sess-setup-fail {
        type yang:counter32;
        config false;
        description
            "The number of PCEP sessions with the peer
              that have been attempted but failed";
    }
}
```



```
        before being fully established. This
        counter is incremented each time a
        session retry to this peer fails.";
    }
    container pcep-stats {
        config false;
        description
            "The container for all statistics at peer level.";
        uses pcep-stats {
            description
                "Since PCEP sessions can be ephemeral, the peer statistics
                tracks a peer even when no PCEP session currently exists
                to that peer. The statistics contained are an aggregate of
                the statistics for all successive sessions to that peer.";
        }
        leaf num-req-sent-closed {
            when "../pcep:role = 'pce'"
                + "or "
                + "../pcep:role = 'pcc-and-pce'" {
                description
                    "Valid for PCEP Peer as PCE";
            }
            type yang:counter32;
            description
                "The number of requests that were sent to the peer and
                implicitly cancelled when the session they were sent
                over was closed.";
        }
        leaf num-req-rcvd-closed {
            when "../pcep:role = 'pcc'"
                + "or "
                + "../pcep:role = 'pcc-and-pce'" {
                description
                    "Valid for PCEP Peer as PCC";
            }
            type yang:counter32;
            description
                "The number of requests that were received from the peer
                and implicitly cancelled when the session they were
                received over was closed.";
        }
    }
    //pcep-stats
}

//augment
augment "/pcep:pcep/pcep:entity/pcep:peers/pcep:peer/"
```



```
    + "pcep:sessions/pcep:session" {
description
  "Augmenting the statistics";
container pcep-stats {
  description
    "The container for all statistics at session level.";
  uses pcep-stats {
    description
      "The statistics contained are for the current sessions to
        that peer. These are lost when the session goes down.";
  }
}
//pcep-stats
}

//augment
}

<CODE ENDS>
```

## **11. Security Considerations**

The YANG modules defined in this document is designed to be accessed via network management protocol such as NETCONF [[RFC6241](#)] or RESTCONF [[RFC8040](#)]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [[RFC6242](#)]. The lowest RESTCONF layer is HTTPS, and the mandatory-to-implement secure transport is TLS [[RFC8446](#)].

The NETCONF access control model [[RFC8341](#)] provides the means to restrict access for particular NETCONF or RESTCONF users to a pre-configured subset of all available NETCONF or RESTCONF protocol operations and content.

There are a number of data nodes defined in the ietf-pcep YANG module which are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., <edit-config>) to these data nodes without proper protection can have a negative effect on network operations. These are the subtrees and data nodes and their sensitivity/vulnerability:

/pcep/entity/ - configure local parameters, capabilities etc.

/pcep/entity/peers - configure remote peers to setup PCEP session.

Unauthorized access to above list can adversely affect the PCEP session between the local entity and the peers. This may lead to





inability to compute new paths, stateful operations on the delegated as well as PCE-initiated LSPs.

Some of the readable data nodes in the ietf-pcep YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via get, get-config, or notification) to these data nodes. These are the subtrees and data nodes and their sensitivity/vulnerability:

/pcep/lsp-db - All the LSPs in the network. Unauthorized access to this could provide the all path and network usage information.

/pcep/path-keys/ - The Confidential Path Segments (CPS) are hidden using path-keys. Unauthorized access to this could leak confidential path information.

Some of the RPC operations in the ietf-pcep YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control access to these operations. These are the operations and their sensitivity/vulnerability:

trigger-resync - trigger resynchronization with the PCE.  
Unauthorized access to this could force a PCEP session into continuous state synchronization.

Further, this document also include another YANG module (called ietf-pcep-stats) for maintaining the statistics by augmenting the ietf-pcep YANG module. There are no data nodes defined in this module which are writable/creatable/deletable (i.e., config true). The readable data nodes in this YANG module may be considered sensitive or vulnerable in some network environments. The statistics could provide information related to the current usage patterns of the network. It is thus important to control read access (e.g., via get, get-config, or notification).

The actual authentication key data (whether locally specified or part of a key-chain) is sensitive and needs to be kept secret from unauthorized parties; compromise of the key data would allow an attacker to forge PCEP traffic that would be accepted as authentic, potentially compromising the TE domain.

The model describes several notifications, implementations must rate-limit the generation of these notifications to avoid creating significant notification load. Otherwise, this notification load may have some side effects on the system stability and may be exploited as an attack vector.



## 12. IANA Considerations

This document request the IANA to register two URIs in the "IETF XML Registry" [[RFC3688](#)]. Following the format in [RFC 3688](#), the following registrations are requested -

URI: urn:ietf:params:xml:ns:yang:ietf-pcep  
Registrant Contact: The IESG  
XML: N/A; the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-pcep-stats  
Registrant Contact: The IESG  
XML: N/A; the requested URI is an XML namespace.

This document request the IANA to register two YANG modules in the "YANG Module Names" registry [[RFC6020](#)], as follows -

Name: ietf-pcep  
Namespace: urn:ietf:params:xml:ns:yang:ietf-pcep  
Prefix: pcep  
Reference: [This.I-D]

Name: ietf-pcep-stats  
Namespace: urn:ietf:params:xml:ns:yang:ietf-pcep-stats  
Prefix: pcep-stats  
Reference: [This.I-D]

## 13. Implementation Status

[Note to the RFC Editor - remove this section before publication, as well as remove the reference to [RFC 7942](#).]

This section records the status of known implementations of the protocol defined by this specification at the time of posting of this Internet-Draft, and is based on a proposal described in [[RFC7942](#)]. The description of implementations in this section is intended to assist the IETF in its decision processes in progressing drafts to RFCs. Please note that the listing of any individual implementation here does not imply endorsement by the IETF. Furthermore, no effort has been spent to verify the information presented here that was supplied by IETF contributors. This is not intended as, and must not be construed to be, a catalog of available implementations or their features. Readers are advised to note that other implementations may exist.



According to [RFC7942], "this will allow reviewers and working groups to assign due consideration to documents that have the benefit of running code, which may serve as evidence of valuable experimentation and feedback that have made the implemented protocols more mature. It is up to the individual working groups to use this information as they see fit".

Currently, there are no known implementations of the YANG Module as specified.

## **14. Acknowledgements**

The initial document is based on the PCEP MIB [RFC7420]. We would like to thank the authors of aforementioned documents.

Thanks to Mahesh Jethmalani for the Yang Doctor review.

Thanks to Martin Bjorklund and Tom Petch for providing guidance regarding the Yang guidelines.

## **15. References**

### **15.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), DOI 10.17487/RFC3209, December 2001, <<https://www.rfc-editor.org/info/rfc3209>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC5088] Le Roux, JL., Ed., Vasseur, JP., Ed., Ikejiri, Y., and R. Zhang, "OSPF Protocol Extensions for Path Computation Element (PCE) Discovery", [RFC 5088](#), DOI 10.17487/RFC5088, January 2008, <<https://www.rfc-editor.org/info/rfc5088>>.
- [RFC5089] Le Roux, JL., Ed., Vasseur, JP., Ed., Ikejiri, Y., and R. Zhang, "IS-IS Protocol Extensions for Path Computation Element (PCE) Discovery", [RFC 5089](#), DOI 10.17487/RFC5089, January 2008, <<https://www.rfc-editor.org/info/rfc5089>>.



- [RFC5440] Vasseur, JP., Ed. and JL. Le Roux, Ed., "Path Computation Element (PCE) Communication Protocol (PCEP)", [RFC 5440](#), DOI 10.17487/RFC5440, March 2009, <<https://www.rfc-editor.org/info/rfc5440>>.
- [RFC5520] Bradford, R., Ed., Vasseur, JP., and A. Farrel, "Preserving Topology Confidentiality in Inter-Domain Path Computation Using a Path-Key-Based Mechanism", [RFC 5520](#), DOI 10.17487/RFC5520, April 2009, <<https://www.rfc-editor.org/info/rfc5520>>.
- [RFC5541] Le Roux, JL., Vasseur, JP., and Y. Lee, "Encoding of Objective Functions in the Path Computation Element Communication Protocol (PCEP)", [RFC 5541](#), DOI 10.17487/RFC5541, June 2009, <<https://www.rfc-editor.org/info/rfc5541>>.
- [RFC5557] Lee, Y., Le Roux, JL., King, D., and E. Oki, "Path Computation Element Communication Protocol (PCEP) Requirements and Protocol Extensions in Support of Global Concurrent Optimization", [RFC 5557](#), DOI 10.17487/RFC5557, July 2009, <<https://www.rfc-editor.org/info/rfc5557>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.
- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", [RFC 6991](#), DOI 10.17487/RFC6991, July 2013, <<https://www.rfc-editor.org/info/rfc6991>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", [RFC 7950](#), DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.





- [RFC8177] Lindem, A., Ed., Qu, Y., Yeung, D., Chen, I., and J. Zhang, "YANG Data Model for Key Chains", [RFC 8177](#), DOI 10.17487/RFC8177, June 2017, <<https://www.rfc-editor.org/info/rfc8177>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [RFC 8040](#), DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8231] Crabbe, E., Minei, I., Medved, J., and R. Varga, "Path Computation Element Communication Protocol (PCEP) Extensions for Stateful PCE", [RFC 8231](#), DOI 10.17487/RFC8231, September 2017, <<https://www.rfc-editor.org/info/rfc8231>>.
- [RFC8232] Crabbe, E., Minei, I., Medved, J., Varga, R., Zhang, X., and D. Dhody, "Optimizations of Label Switched Path State Synchronization Procedures for a Stateful PCE", [RFC 8232](#), DOI 10.17487/RFC8232, September 2017, <<https://www.rfc-editor.org/info/rfc8232>>.
- [RFC8253] Lopez, D., Gonzalez de Dios, O., Wu, Q., and D. Dhody, "PCEPS: Usage of TLS to Provide a Secure Transport for the Path Computation Element Communication Protocol (PCEP)", [RFC 8253](#), DOI 10.17487/RFC8253, October 2017, <<https://www.rfc-editor.org/info/rfc8253>>.
- [RFC8281] Crabbe, E., Minei, I., Sivabalan, S., and R. Varga, "Path Computation Element Communication Protocol (PCEP) Extensions for PCE-Initiated LSP Setup in a Stateful PCE Model", [RFC 8281](#), DOI 10.17487/RFC8281, December 2017, <<https://www.rfc-editor.org/info/rfc8281>>.
- [RFC8306] Zhao, Q., Dhody, D., Ed., Palletti, R., and D. King, "Extensions to the Path Computation Element Communication Protocol (PCEP) for Point-to-Multipoint Traffic Engineering Label Switched Paths", [RFC 8306](#), DOI 10.17487/RFC8306, November 2017, <<https://www.rfc-editor.org/info/rfc8306>>.
- [RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", [BCP 215](#), [RFC 8340](#), DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/info/rfc8340>>.



- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, [RFC 8341](#), DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/info/rfc8341>>.
- [RFC8408] Sivabalan, S., Tantsura, J., Minei, I., Varga, R., and J. Hardwick, "Conveying Path Setup Type in PCE Communication Protocol (PCEP) Messages", [RFC 8408](#), DOI 10.17487/RFC8408, July 2018, <<https://www.rfc-editor.org/info/rfc8408>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", [RFC 8446](#), DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [I-D.ietf-teas-yang-te]  
Saad, T., Gandhi, R., Liu, X., Beeram, V., and I. Bryskin, "A YANG Data Model for Traffic Engineering Tunnels and Interfaces", [draft-ietf-teas-yang-te-21](#) (work in progress), April 2019.
- [I-D.ietf-teas-yang-te-types]  
Saad, T., Gandhi, R., Liu, X., Beeram, V., and I. Bryskin, "Traffic Engineering Common YANG Types", [draft-ietf-teas-yang-te-types-11](#) (work in progress), October 2019.
- [I-D.ietf-netconf-tls-client-server]  
Watsen, K., Wu, G., and L. Xia, "YANG Groupings for TLS Clients and TLS Servers", [draft-ietf-netconf-tls-client-server-15](#) (work in progress), October 2019.
- [I-D.ietf-pce-association-group]  
Minei, I., Crabbe, E., Sivabalan, S., Ananthakrishnan, H., Dhody, D., and Y. Tanaka, "Path Computation Element Communication Protocol (PCEP) Extensions for Establishing Relationships Between Sets of Label Switched Paths (LSPs)", [draft-ietf-pce-association-group-10](#) (work in progress), August 2019.
- [I-D.ietf-pce-segment-routing]  
Sivabalan, S., Filsfils, C., Tantsura, J., Henderickx, W., and J. Hardwick, "PCEP Extensions for Segment Routing", [draft-ietf-pce-segment-routing-16](#) (work in progress), March 2019.
- [I-D.ietf-isis-yang-isis-cfg]  
Litkowski, S., Yeung, D., Lindem, A., Zhang, Z., and L. Lhotka, "YANG Data Model for IS-IS Protocol", [draft-ietf-isis-yang-isis-cfg-42](#) (work in progress), October 2019.



[I-D.ietf-ospf-yang]

Yeung, D., Qu, Y., Zhang, Z., Chen, I., and A. Lindem,  
"YANG Data Model for OSPF Protocol", [draft-ietf-ospf-yang-29](#) (work in progress), October 2019.

[I-D.ietf-pce-gmpls-pcep-extensions]

Margaria, C., Dios, O., and F. Zhang, "PCEP extensions for  
GMPLS", [draft-ietf-pce-gmpls-pcep-extensions-15](#) (work in  
progress), October 2019.


## **[15.2.](#) Informative References**

- [RFC4655] Farrel, A., Vasseur, J., and J. Ash, "A Path Computation  
Element (PCE)-Based Architecture", [RFC 4655](#),  
DOI 10.17487/RFC4655, August 2006,  
<<https://www.rfc-editor.org/info/rfc4655>>.
- [RFC7420] Koushik, A., Stephan, E., Zhao, Q., King, D., and J.  
Hardwick, "Path Computation Element Communication Protocol  
(PCEP) Management Information Base (MIB) Module",  
[RFC 7420](#), DOI 10.17487/RFC7420, December 2014,  
<<https://www.rfc-editor.org/info/rfc7420>>.
- [RFC7942] Sheffer, Y. and A. Farrel, "Improving Awareness of Running  
Code: The Implementation Status Section", [BCP 205](#),  
[RFC 7942](#), DOI 10.17487/RFC7942, July 2016,  
<<https://www.rfc-editor.org/info/rfc7942>>.
- [RFC8342] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K.,  
and R. Wilton, "Network Management Datastore Architecture  
(NMDA)", [RFC 8342](#), DOI 10.17487/RFC8342, March 2018,  
<<https://www.rfc-editor.org/info/rfc8342>>.



**Appendix A. Example**

The example below provide an overview of PCEP peer session informations and LSP-DB in the Yang Module.

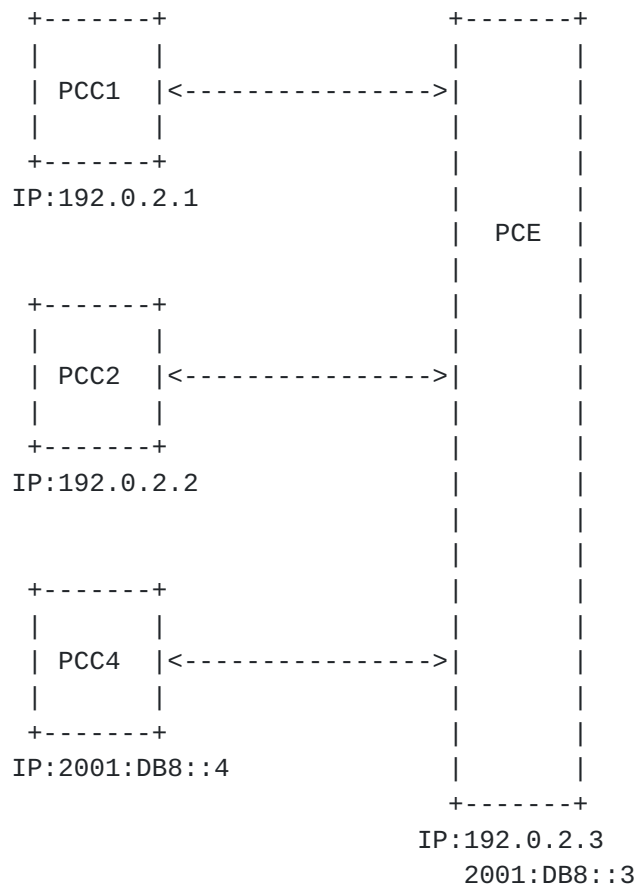

at PCE:

```

{
  "entity": [
    {
      "addr": "192.0.2.3",
      "oper-status": "oper-status-up",
      "role": "pce",
      "capability" : {
        "stateful": {
          "enabled": true
        }
      }
    }
  ]
  "lsp-db" : [
    "lsp" : {
      "plsp-id": 3,
    }
  ]
}
  
```





```
        "pcc-id" : "192.0.2.1",
        "source": "192.0.2.1",
        "destination": "192.0.2.4"
        "tunnel-id": 16,
        "lsp-id": 3,
        "extended-tunnel-id": 0,
        "oper-status": "oper-status-up",
        "delegated": true,
        "symbolic-path-name": "iewauh",
    },
    "lsp" : {
        "plsp-id": 4,
        "pcc-id" : "192.0.2.2",
        "source": "192.0.2.2",
        "destination": "192.0.2.5"
        "tunnel-id": 17,
        "lsp-id": 4
        "extended-tunnel-id": 0,
        "oper-status": "oper-status-up",
        "delegated": true,
        "symbolic-path-name": "iewauhiewauh",
        "extended-tunnel-id": 0
    }
]
"peers": [
    {
        "peer": {
            "addr": "192.0.2.1",
            "role": "pcc",

            "capability": {
                "stateful" : {
                    "enabled": true,
                    "active": yes,
                }
            }
        }
        "sessions": [
            {
                "session": {
                    "initiator": "remote",
                    "role": "pcc",
                }
            }
        ]
    }
],
{
    "peer": {
```



```
        "addr": "192.0.2.2",
        "role": "pcc",

        "capability": {
            "stateful" : {
                "enabled": true,
                "active": true,
            }
        }
    }
    "sessions": [
        {
            "session": {
                "initiator": "remote",
                "role": "pcc",
            }
        }
    ]
}

],
},
{
    "addr": "2001:DB8::3",
    "oper-status": "oper-status-up",
    "role": "pce",
    "peers": [
        {
            "peer": {
                "addr": "2001:DB8::4",
                "role": "pcc",
                "sessions": [
                    {
                        "session": {
                            "initiator": "remote",
                            "role": "pcc",
                        }
                    }
                ]
            }
        }
    ]
}
}
```



**Appendix B. Contributor Addresses**

Rohit Pobbathi  
Huawei Technologies  
Divyashree Techno Park, Whitefield  
Bangalore, Karnataka 560066  
India

EMail: rohit.pobbathi@huawei.com

Vinod KumarS  
Huawei Technologies  
Divyashree Techno Park, Whitefield  
Bangalore, Karnataka 560066  
India

EMail: vinods.kumar@huawei.com

Zafar Ali  
Cisco Systems  
Canada

EMail: zali@cisco.com

Xufeng Liu  
Volta Networks

EMail: xufeng.liu.ietf@gmail.com

Young Lee  
Futurewei  
5340 Legacy Drive, Building 3  
Plano, TX 75023  
USA

EMail: younglee.tx@gmail.com

Udayasree Palle

EMail: udayasreereddy@gmail.com

Xian Zhang  
Huawei Technologies  
Bantian, Longgang District  
Shenzhen 518129  
P.R.China

EMail: zhang.xian@huawei.com



Avantika  
ECI Telecom  
India

EMail: avantika.srm@gmail.com

Shashikanth  
Huawei Technologies  
Divyashree Techno Park, Whitefield  
Bangalore, Karnataka 560066  
India

EMail: shashikanth.vh@huawei.com

#### Authors' Addresses

Dhruv Dhody (editor)  
Huawei Technologies  
Divyashree Techno Park, Whitefield  
Bangalore, Karnataka 560066  
India

EMail: dhruv.ietf@gmail.com

Jonathan Hardwick  
Metaswitch  
100 Church Street  
Enfield EN2 6BQ  
UK

EMail: jonathan.hardwick@metaswitch.com

Vishnu Pavan Beeram  
Juniper Networks  
USA

EMail: vbeeram@juniper.net

Jeff Tantsura  
USA

EMail: jefftant@gmail.com



